Task 1

Label the diagram of the Bunsen burner.

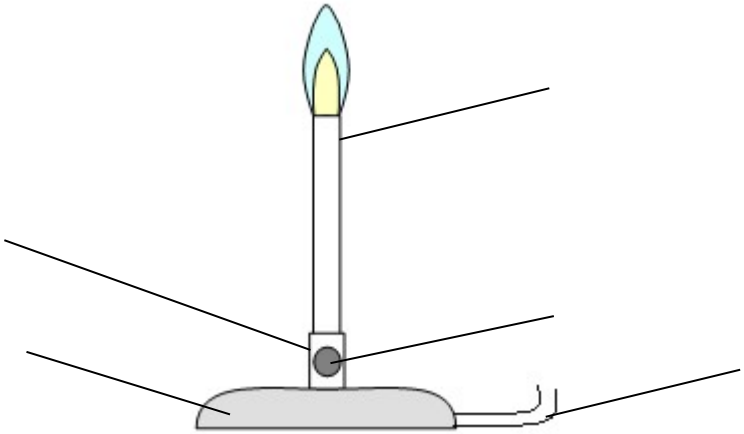

Task 2

Using the words and phrases in the box, complete the sentences below. Some of the words and phrases may be used more than once.

1. The height of a Bunsen burner flame can be altered by .....
2. The temperature of the flame can be altered by .....
3. The jet allows a ..... stream of gas to enter the burner.
4. The inlet tube is where the ..... enters the burner.
5. The flame is quiet, flickering and luminous when the air hole is .....
6. The very hot flame burns a mixture of ..... and .....
7. To heat substances, you should use the flame with the air hole .....
8. The hottest part of the flame (with the air hole open) is .....
9. When lighting a Bunsen burner, you should make sure that the air hole is ....
10. A Bunsen burner should always be placed on a .....

just above the blue cone	**open**	**gas**
air	**turning the collar**	**narrow**
closed	**safety mat**	**adjusting the gas tap**

Answers

Task 1

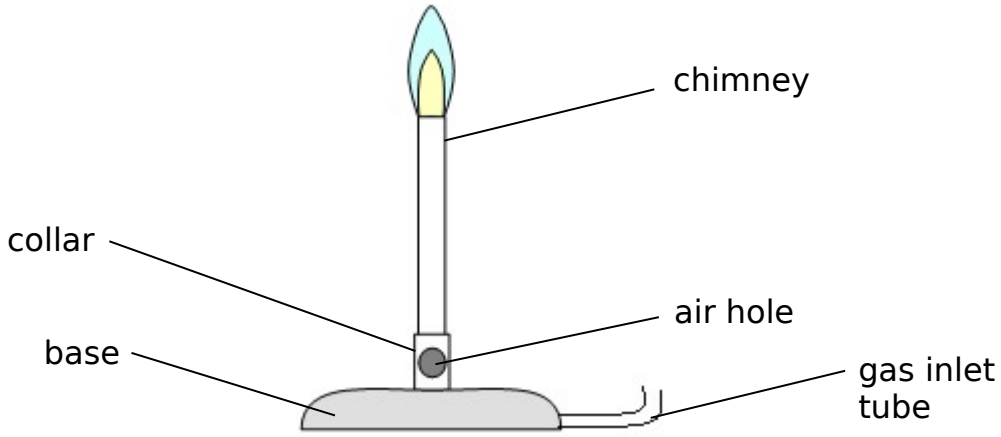

Task 2

1. The height of a Bunsen burner flame can be altered by adjusting the gas tap.
2. The hotness of the flame can be altered by turning the collar.
3. The jet allows a narrow stream of gas to enter the burner.
4. The inlet tube is where the gas enters the burner.
5. The flame is quiet, flickering and luminous when the air hole is closed.
6. The very hot flame burns a mixture of gas and air.
7. To heat substances you should use the flame with the air hole open.
8. The hottest part of the flame (with the air hole open) is just above the blue cone.
9. When lighting a Bunsen burner you should make sure that the air hole is closed.
10. A Bunsen burner should always be placed on a safety mat.