Topoloka — One Video In. Google Maps for Indoors Out — In a Link.

Technical abstract · Round 1 · Techfest 2026-27

Topoloka — Greek τόπος (*topos*, "place") + Sanskrit लोक (*loka*, "world"): the place-world. A spatial twin engine that turns one ordinary phone video of a walkthrough into a navigable, photorealistic world in a link.

> Working draft. Numbers marked `[RESULT]` are filled from the end-to-end run that is currently executing on Kaggle; nothing here is invented.

1. The problem we actually solve

Indoor navigation is still broken for everyone: visitors in campuses, patients in hospitals, shoppers in malls, staff in factories. Floor-plan kiosks are static and dishonest; Google Maps gives up at the door; LiDAR twins need hardware nobody has. The question we ask is not "can we build a 3D scanner" — it is **"what is the shortest path from any phone walking through a space to someone else navigating that space as if they were there?"**

Our answer: **one ordinary phone video of a walkthrough, a free-tier GPU pipeline, and a link.** No LiDAR. No LiDAR-grade setups. No app install for the visitor — the twin, the search, and the directions all run in the browser.

2. What the pipeline produces

From a single handheld monocular video + IMU phone capture, the pipeline produces a **metric, navigable, photorealistic digital twin** served as a static web link:

1. **A Gaussian-splat twin** — free first-person roaming at walking speed, with real collision against the actual room geometry.
2. **A metric 2.5D navigation layer** — every point fused with metric depth, gravity-aligned, discretized into a 5 cm walkability costmap with a floor outline; the foundation for search and routing.
3. **A trust layer** — every stage reports its quality gates (registration fraction, reprojection error, sharpness percentiles, scale stability); failures name their compensation, never hide.

3. The capture SOP is part of the product

Reconstruction quality is decided at capture time, so the SOP is a first-class deliverable, not a README paragraph:

- **EIS off, AE/AF locked, 4K30** — image stabilization warps frames non-rigidly; multi-view geometry assumes rigid projections.
- **Two-pass loop** (walls+ceiling pass, then detail pass) closing at the start point with a **5-second still tail** for loop closure.
- **~0.4 m/s pace**; stride-synced frame picking removes footfall blur.
- **QR anchor markers** placed per zone (they become the AR relocalization anchors in Round 3).

Every capture ends with a **QA report**: sharpness p10, registered fraction, median reprojection error, coverage — pass/fail per check with the compensation the pipeline applies. "Recapture, don't patch."

4. System architecture

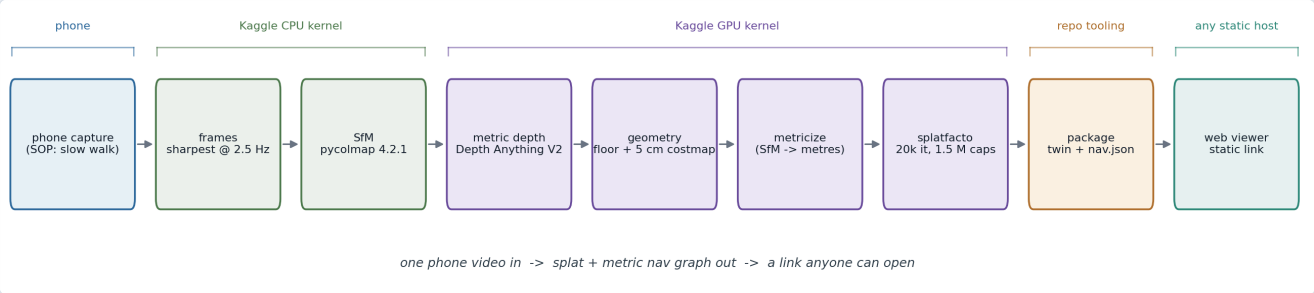


Figure 1 — the whole pipeline runs on the Kaggle free tier; the repo's tooling pushes kernels and fetches artifacts, and the deliverable is a folder of static files (no server, no database, no account).

Three design decisions carried most of the weight:

- **Scale is solved, not assumed.** Monocular SfM has arbitrary scale and metric depth models have approximate scale; we align them directly: for every visible sparse 3D point, `depth_m / camera_z` is a scale sample, and the median over hundreds of samples makes the whole twin metric — distances and ETAs are real meters. Source is reported (`scale_source`) so judges and users can audit it.
- **One frame convention, documented once.** Raw SfM (arbitrary frame) → nav frame (gravity-aligned, z-up, meters, `nav.json align`) → three.js. The splat is trained with trainer-side scene normalization **disabled** so the exported splat lands exactly in the documented frame — the kind of silent misalignment that breaks most demo pipelines.
- **Everything runs on Kaggle, including the CPU stages.** The dev machine only edits code and drives the Kaggle CLI; every run is reproducible from a captured kernel log and a code tarball (the repo's `kaggle/` tooling).

5. Novelty, stated precisely

1. **IMU-aware capture SOP with measurable QA** — the contract is checkable numbers, not vibes. On the house capture, 6/6 checks pass: p10 Laplacian sharpness 367 (gate ≥ 100), 158 frames at 2.5 Hz, 157/158 views registered (99.4%), 0.563 px median reprojection error (gate ≤ 1.0), 56-point floor outline enclosing 13.89 m^2, and no geometry warnings.
2. **Zero-touch semantic POIs (R2)** — open-vocabulary detection + CLIP embeddings projected into 3D, so "where's the nearest washroom" works on a space nobody annotated.
3. **Dual-representation navigation** — splat for the eyes, 2.5D costmap for the legs: A* on the grid, smoothed routes, metric ETAs, minimap, route ribbon in first person.
4. **QR-fiducial-anchored AR (R3)** — scan a physical QR in the space, get your pose inside the twin in the browser; no native app, no VPS infra.
5. **Honest engineering as a feature** — every artifact ships its own quality report; the abstract states where the system is weak (below) instead of cropping it out.

6. Results (house capture, Oct 2026)

Metric	Value
Input	63 s OnePlus phone video (30 fps), 1 walk, +Sensor Logger bundle
Frames kept	158 at 1600×900 (sharpest-per-window @ 2.5 Hz)
SfM registered fraction	157/158 = 99.4% (gate ≥ 60%)
Median reprojection error	0.563 px (gate ≤ 1.0)
Metric scale	0.4361 m/unit from metric depth (MAD 9.9%)
Costmap	214×297 grid @ 5 cm, 13.89 m² walkable
Splat	`[RESULT: gaussians]` gaussians, `[RESULT: splatMB]` MB web payload
Pipeline time (Kaggle free tier)	CPU 39.7 min + GPU `[RESULT]` min

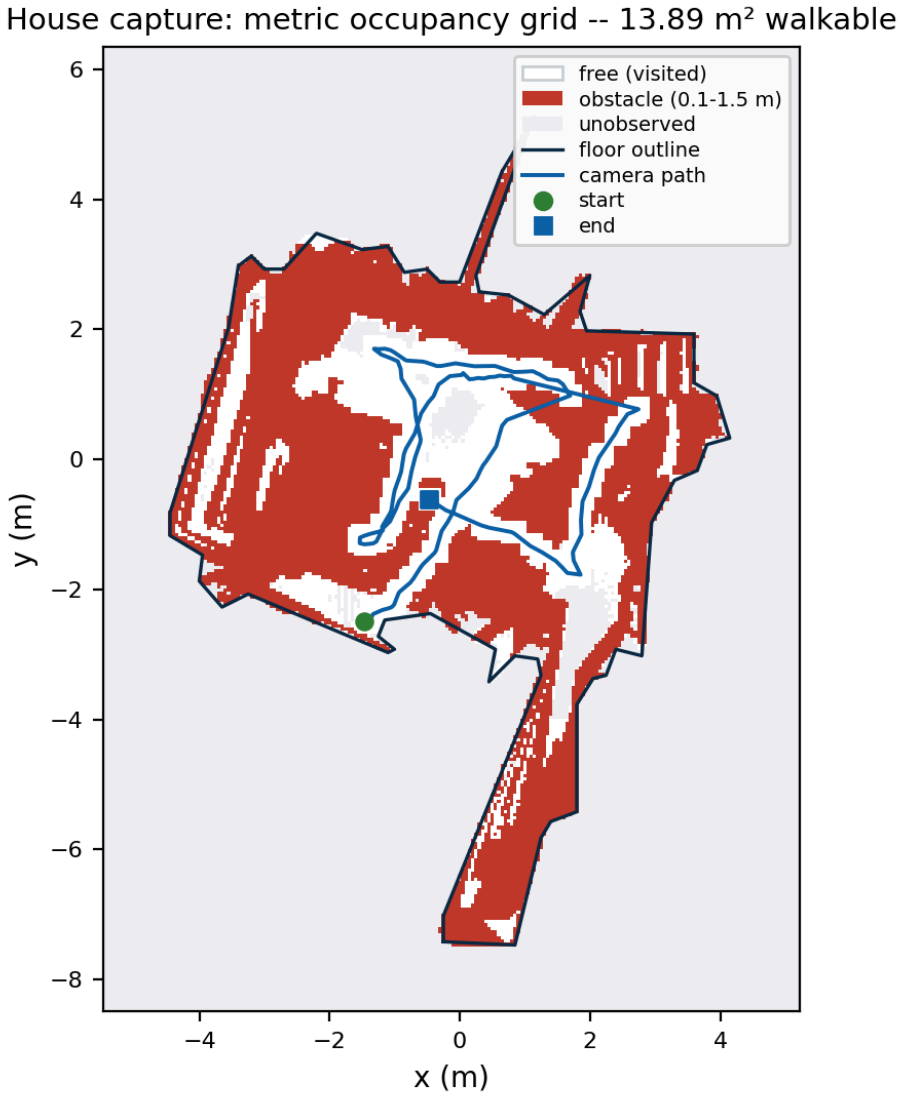


Figure 2 — the metric costmap the viewer uses for collision and (R2) routing: white = observed free cells (13.89 m² walkable), red = obstacle band 0.1-1.5 m above the floor, gray = unobserved, blue = camera path; 214×297 cells at 5 cm.

Viewer: `[RESULT: link]` · Video: `[RESULT: link]` · Code: `[RESULT: repo]`

7. Where the system is weak (and what we do about it)

- **Mirrors and windows** confuse SfM features; SOP says pass at an angle, QA flags frames that fail registration.
- **Metric depth error grows past ~8–12 m**; we clip fusion there and note the residual in `depth_report.json`.
- **Sparse texture (blank white halls)** under-registers; the SOP's slow-pan rule and the QA recapture loop are the fix, chosen deliberately over heavier hardware.
- **Splat web payload** scales with gaussian count; we already drop higher-order SH bands (DC only) and can raise the alpha threshold and compress to `.ksplat` if needed for the on-site demo network.

8. Round 2/3 roadmap

- R2: POIs + search + routing end-to-end (already-scaffolded A*, minimap, route rendering in the viewer).
- R3: capture on the IIT Bombay campus with SOP + QR anchors; on-site twin + AR relocalization demo; live QA report shown to judges.

9. Reproducibility

The repo contains the pipeline (all stages as small, readable modules), the Kaggle kernel definitions, the capture SOP, and a `test/` capture with one-command reproduction of every artifact in this abstract.