PDF-XChange Click to buy NOW! www.docu-track.com

9 Package information

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a lead-free second level interconnect. The category of second Level Interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK® is an ST trademark.

ECOPACK® specifications are available at: www.st.com.

Figure 28. LGA-16 mechanical data and package dimensions

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A1		0.92	1			0.0394
A2			0.7			0.0276
A3	0.180	0.220	0.260	0.0071	0.0087	0.0102
D1	4.250	4.400	4.550	0.1673	0.1732	0.1791
E1	7.350	7.500	7.650	0.2894	0.2953	0.3012
e		1.0			0.0394	
d		0.3			0.0118	
L1		5.000			0.1969	
N		2.5			0.0984	
N1		1.2			0.0472	
P1	0.965	0.975	0.985	0.0380	0.0384	0.0388
P2	0.64	0.65	0.66	0.0252	0.0256	0.0260
T1	0.75	0.8	0.85	0.0295	0.0315	0.0335
T2	0.45	0.5	0.55	0.0177	0.0197	0.0217
R	1.200		1.600	0.0472		0.0630
h		0.150			0.0059	
k		0.050			0.0020	
i		0.100			0.0039	
s		0.100			0.0039	

OUTLINE AND MECHANICAL DATA


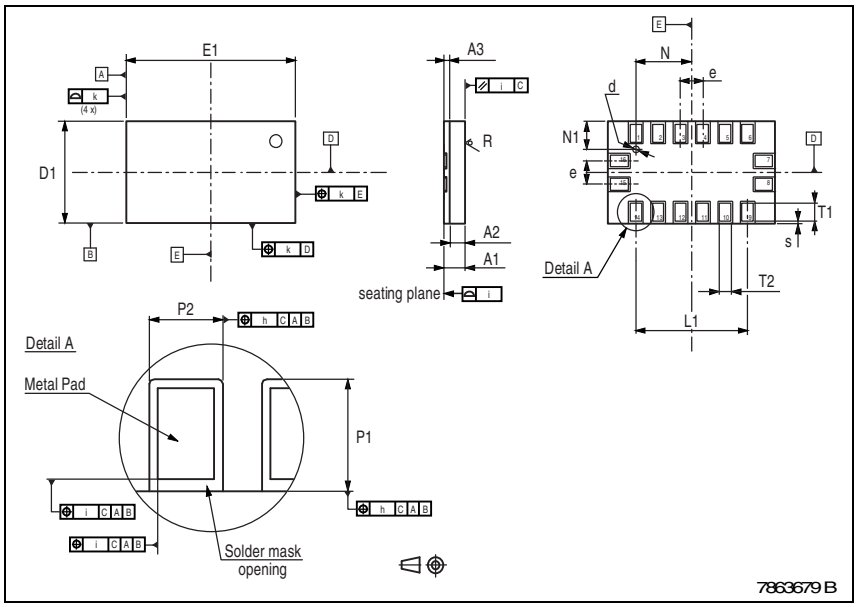
LGA16 (4.4x7.5x1mm)
Land Grid Array Package