SHINHAN ELECTRONICS

承 认 书

SPECIFICATION FOR APPROVAL

客户名称Customer:_____

产品型号Model : SHF-G3361AW

承认书编号NO.: DD-CR-1707-002

制作日期 Date : 2017-07-21

附产品规格书Enclosure is the specification

SHINHAN ELECTRONICS			
生产部 Production Dept.	品质部 Quality Dept.	工程部 Engineering Dept.	市场部 Marketing Dept.

客户确认签名 APPROVED SIGNATURES			

SHF-G3361AW


1. Revision Record

NO.	Date	Page	Description
01	2017-07-21		New spec

2. Features


- Low current operation.
- Excelent character appearance.
- Easy mounting on P.C.boards or sockets.
- RoHS compliant.
- Electrostatic sensitive devices.

3. Package Dimensions

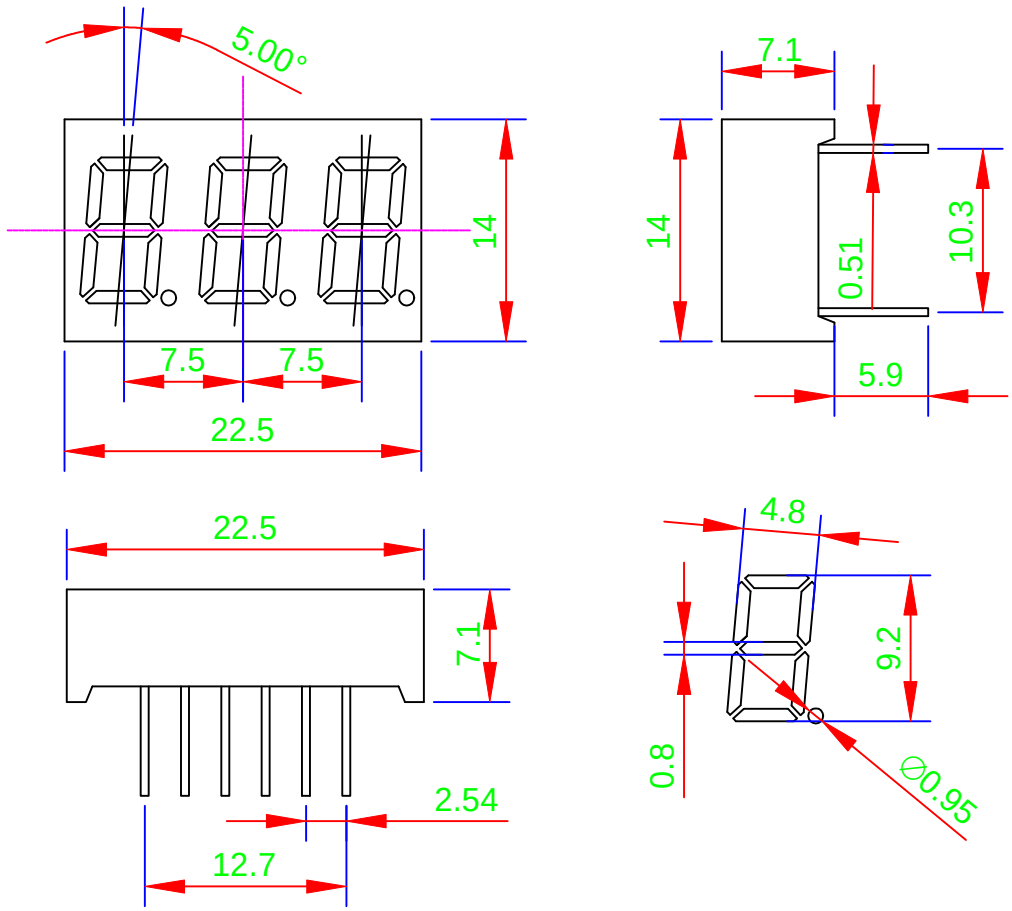



NOTES:
1. All Dimensions are in millimeters.
2. Tolerance is ±0.25mm unless otherwise noted.

4. All Light On Segments Feature & Pin Position

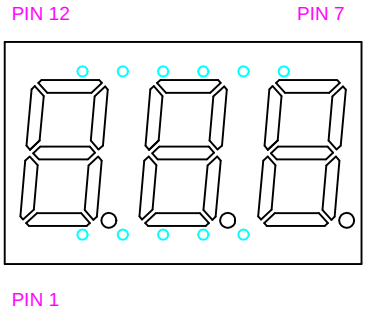

5. Internal Circuit Diagram



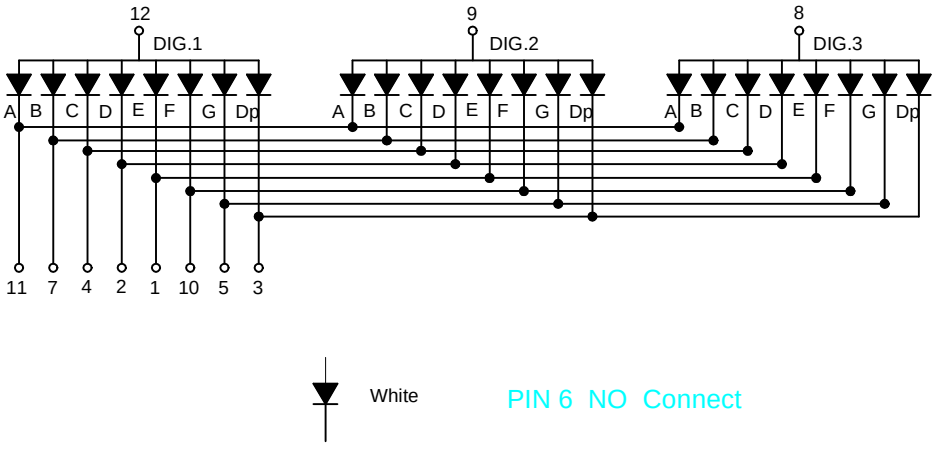

6. General Information

Part NO.	Chip Material	Emitting Color	Lens Type	Description
GYXS-3361AW	GaN	White	Phospher epoxy type	Common Anode

7. Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Maximum Rating	Unit
Power Dissipation	Pd	110	mW
Forward Current	IF	30	mA
Reverse Voltage	VR	5	V
Peak Forward Current（1）	IF	90	mA
Operating Temperature	Topr	-35℃/+85℃	
Storage Temperature	Tstg	-35℃/+85℃	
Lead Solder Temperature（2）	Tsol	260ºC for 3 seconds	

8. Electrical/Optical Characteristics at Ta=25°C

Parameter	Colour	Symbol	Min.	Typ.	Max.	Unit	Conditions
Luminous Intensity	White	IV	-	26	-	mW	IF=20mA
Forward Voltage	White	VF	2.8	-	3.8	V	IF=20mA
Reverse Current	White	IR	-	-	30	uA	Vr=5V
Wavelengh	White	λD	-	-	-	nm	IF=20mA
Chromaticity Coorinates	White	X	-	0.296	-	-	IF=20mA
		Y	-	0.254	-		

DISPLAY SPECIFICATION RELIABILITY TEST

9. Reliability test items and conditions

NO.	Test item	Test conditions	Test time	Number	Ac/Re	Result
1	Life Test	IF=10mA Ta=25°C for 168hours	168H	11	0/1	0/11
2	High Temperature/High Humidity	Ta=40°C RH=95%(Air type) Ta=65°C RH=95%(Epoxy type)	500H	11	0/1	0/11
3	Temperature Cycle	-20°C*30mins~25°C*10mins 75°C*30mins~25°C*10mins	100 cycle	11	0/1	0/11
4	Thermal Shock	-25°C to 65°C(Air type) -20°C to 75°C(Epoxy type) 20mins./Temp.Transfer5Sec.	100 cycle	11	0/1	0/11
5	High Temperature storage	Ta=65°C(Air type) Ta=85°C(Epoxy type)	500H	11	0/1	0/11
6	Low Temperature storage	Ta=-25°C(Air type) Ta=-25°C(Epoxy type)	500H	11	0/1	0/11
7	Solder Heat	Ta=260°C±5°C RH=55±20%	3±1 second	11	0/1	0/11

Measuring item	Symbol	Measuring conditions	Judgement criteria for failure
Forward voltage	VF	IF=20mA	OVER V*120% OR 80%
Reverse current	IR	VR=5V	Over H*2
Luminous intensity	IV	IF=20mA	L*0.5
Dominant wavelength	λD	nm	Over ±3nm(W)

Note:

1.V and H means the upper limit of specified characteristics.L and W means initial value.

2.Measurment shall be taken between 2 hours and after the test pieces have been returned to normal ambient conditions after completion of each test.

DISPLAY PACKAGE BOX DIMENSIONS SPECIFICATON

10. Package Type

DIMENSIONS ITEM	SYMBOL	DIMENSIONS SPECIFICATION	
		MIN.(mm)	MAX.(mm)
Overall length	L		
Overall width	W		
Overall thickness	H		

OUTER BOX

