
PD3220 Series Datasheet

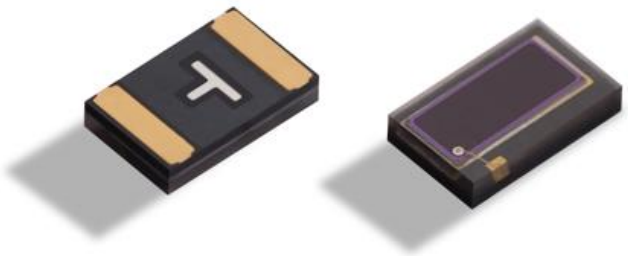

Features & Benefits

- Package:3.2*2.0*0.6 mm
- Luminous surface appearance: Water Clear
- High sensitivity
- High reliability
- Soldering methods: ALL SMT assembly methods
- Comply RoHS standard

Typical Application:

- Infrared applied system
- Medical Sensor
- General use

Copyright ©2021 Jufei Optoelectronics All Rights Reserved

Table of Contents

1. Absolute Maximum Ratings(Ta=25°C) 3
2. Electrical-optical characteristics(Ta=25°C) 3
3. Package Outline Dimension 4
4. Typical Electrical/Optical/Characteristics Curves 5

Copyright ©2021 Jufei Optoelectronics All Rights Reserved

1. Absolute Maximum Ratings(Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	32	V
Operating Temperature	T_{opr}	-40°C ~ +85	℃
Storage Temperature	T_{stg}	-40°C ~ +85°C	℃
Soldering Temperature *1	T_{sol}	260	℃
Power Dissipation at (or below) 25℃ Free Air Temperature	P_c	100	mW
ESD	HBM	Min.2000	V


*1:Soldering time ≤5seconds

2. Electrical-optical characteristics(Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Photodiode						
Rang Of Spectral Bandwidth	$\lambda_{0.1}$	350	--	1100	nm	10% of λ_P
Wavelength Of Peak Sensitivity	λ_p	--	940	--	nm	--
Open-Circuit Voltage	V_{OC}	--	0.4	--	V	Ee=1mW /cm^2 λ_P =940nm
Short-Circuit Current	I_{SC}	--	14.3	--	uA	Ee=1mW /cm^2 λ_P =940nm, V_R=0V
Reverse Breakdown Voltage	B_{VR}	60	--	--	V	Ee=0mW /cm^2 I_R=100μA
Total Capacitance	C_T	--	6.5	--	pF	Ee=0mW/cm^2 f=1MHZ, V_R=5V
		--	24.5		pF	Ee=0mW/cm^2 f=1MHZ, V_R=0V
Reverse Light Current	I_L	--	11.5	--	uA	Ee=1mW /cm^2 λ_P =525nm,V_R=5V
		--	14.5	--		Ee=1mW /cm^2 λ_P =660nm,V_R=5V
		--	14.6	--		Ee=1mW /cm^2 λ_P =940nm, V_R=5V
Dark Reverse Current	I_D	--	--	10	nA	Ee=0mW /cm^2 V_R=10V
View Angle	$2\theta_{1/2}$	--	130	--	deg	V_R=1V

Copyright ©2021 Jufei Optoelectronics All Rights Reserved

3. Package Outline Dimension

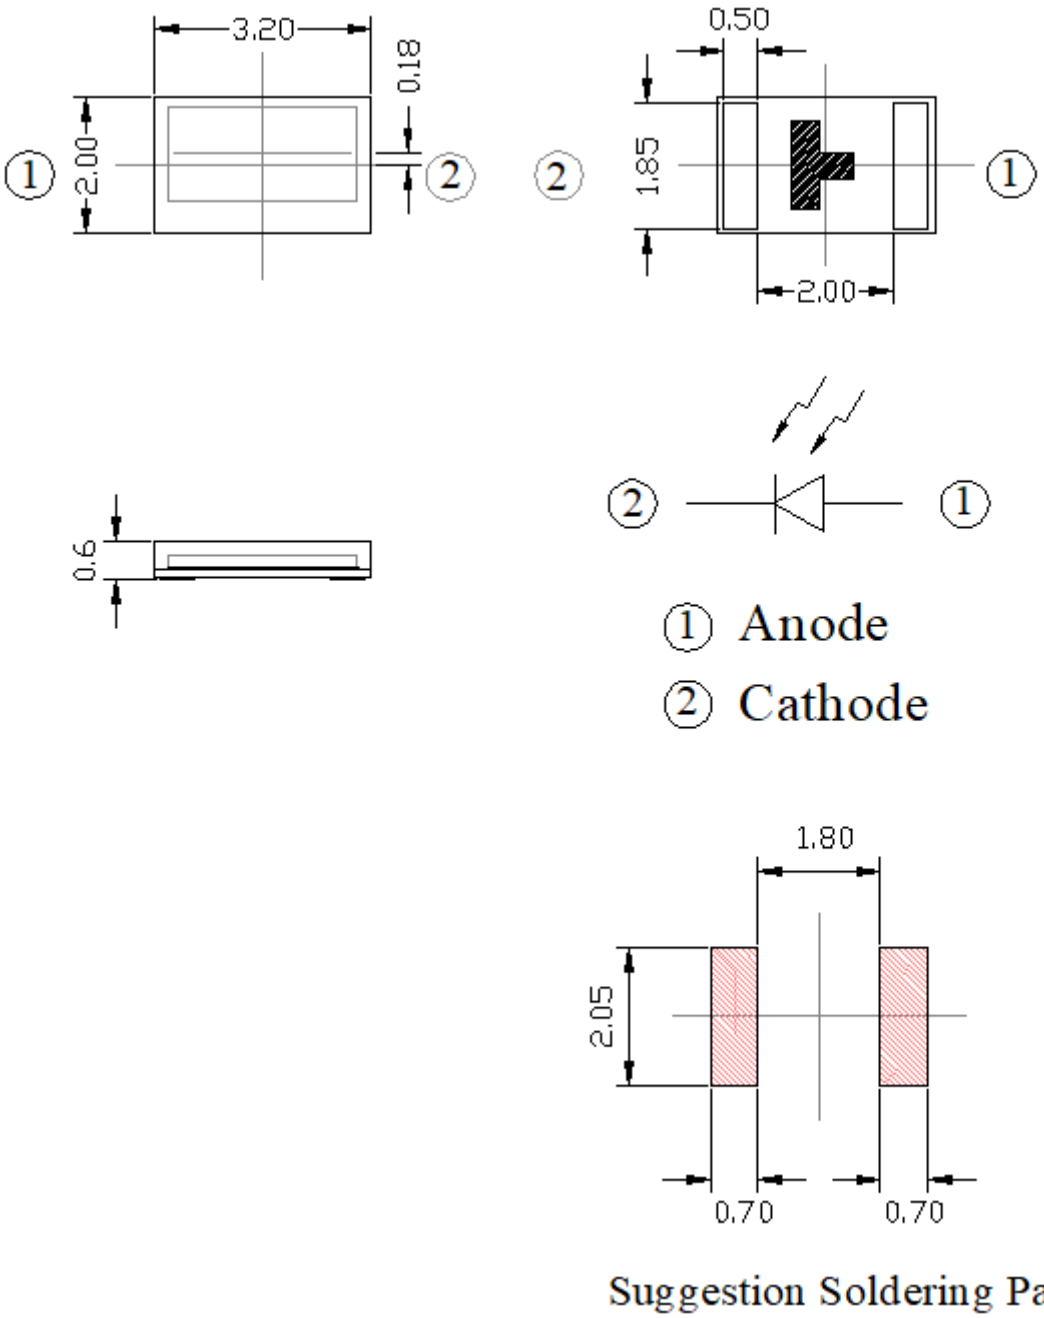

Notes:


❶ All dimensions are in millimeters (inches).

❷ Tolerance is ±0.1mm unless otherwise specified.

Copyright ©2021 Jufei Optoelectronics All Rights Reserved

4.Typical Electrical/Optical/Characteristics Curves

Terminal Capacitance vs. Reverse Voltage

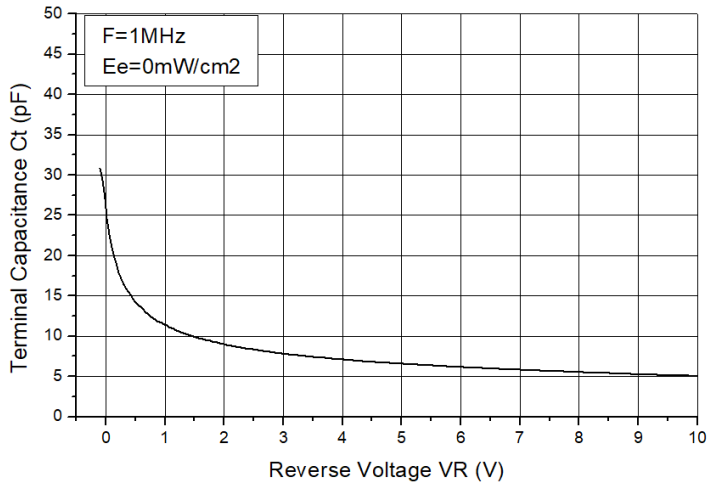

Copyright ©2021 Jufei Optoelectronics All Rights Reserved

Revision History

Version: RD3

Created by：

Version	Subjects(major change in previous version)	Date of change
RD0	The first edition	Mar.01.2021
RD1	The Second edition	Mar.27.2021
RD2	Change the structure diagram	May.17.2021
RD3	The third edition	Nov.11.19

About Jufei@

The company production plant to the implementation of 10,000 purification, temperature and humidity, anti-static, the company introduced the most advanced SMD LED automatic production equipment, strict real integrated management system of ISO9001/TS16949, QC080000, ISO14001, OHSAS18001, and passed the CQC third-party certification; products by SGS, fully comply with the ROHS / REACH / halogen-free product environmental requirements. Jufei cost photoelectric LED products, widely recognized by the customers, has become the top ten brands of Chinese LED industry market customer satisfaction, and received the title of "Shenzhen Top Brand".

Address:No.4, Eling Industrial Area, Egongling Community, Pinghu Street, Longgang District, Shenzhen

Web：http://www.jfled.com.cn

Tel：0755-29632280/29632290

Fax：0755-29632282/29632285

Copyright ©2021 Jufei Optoelectronics All Rights Reserved