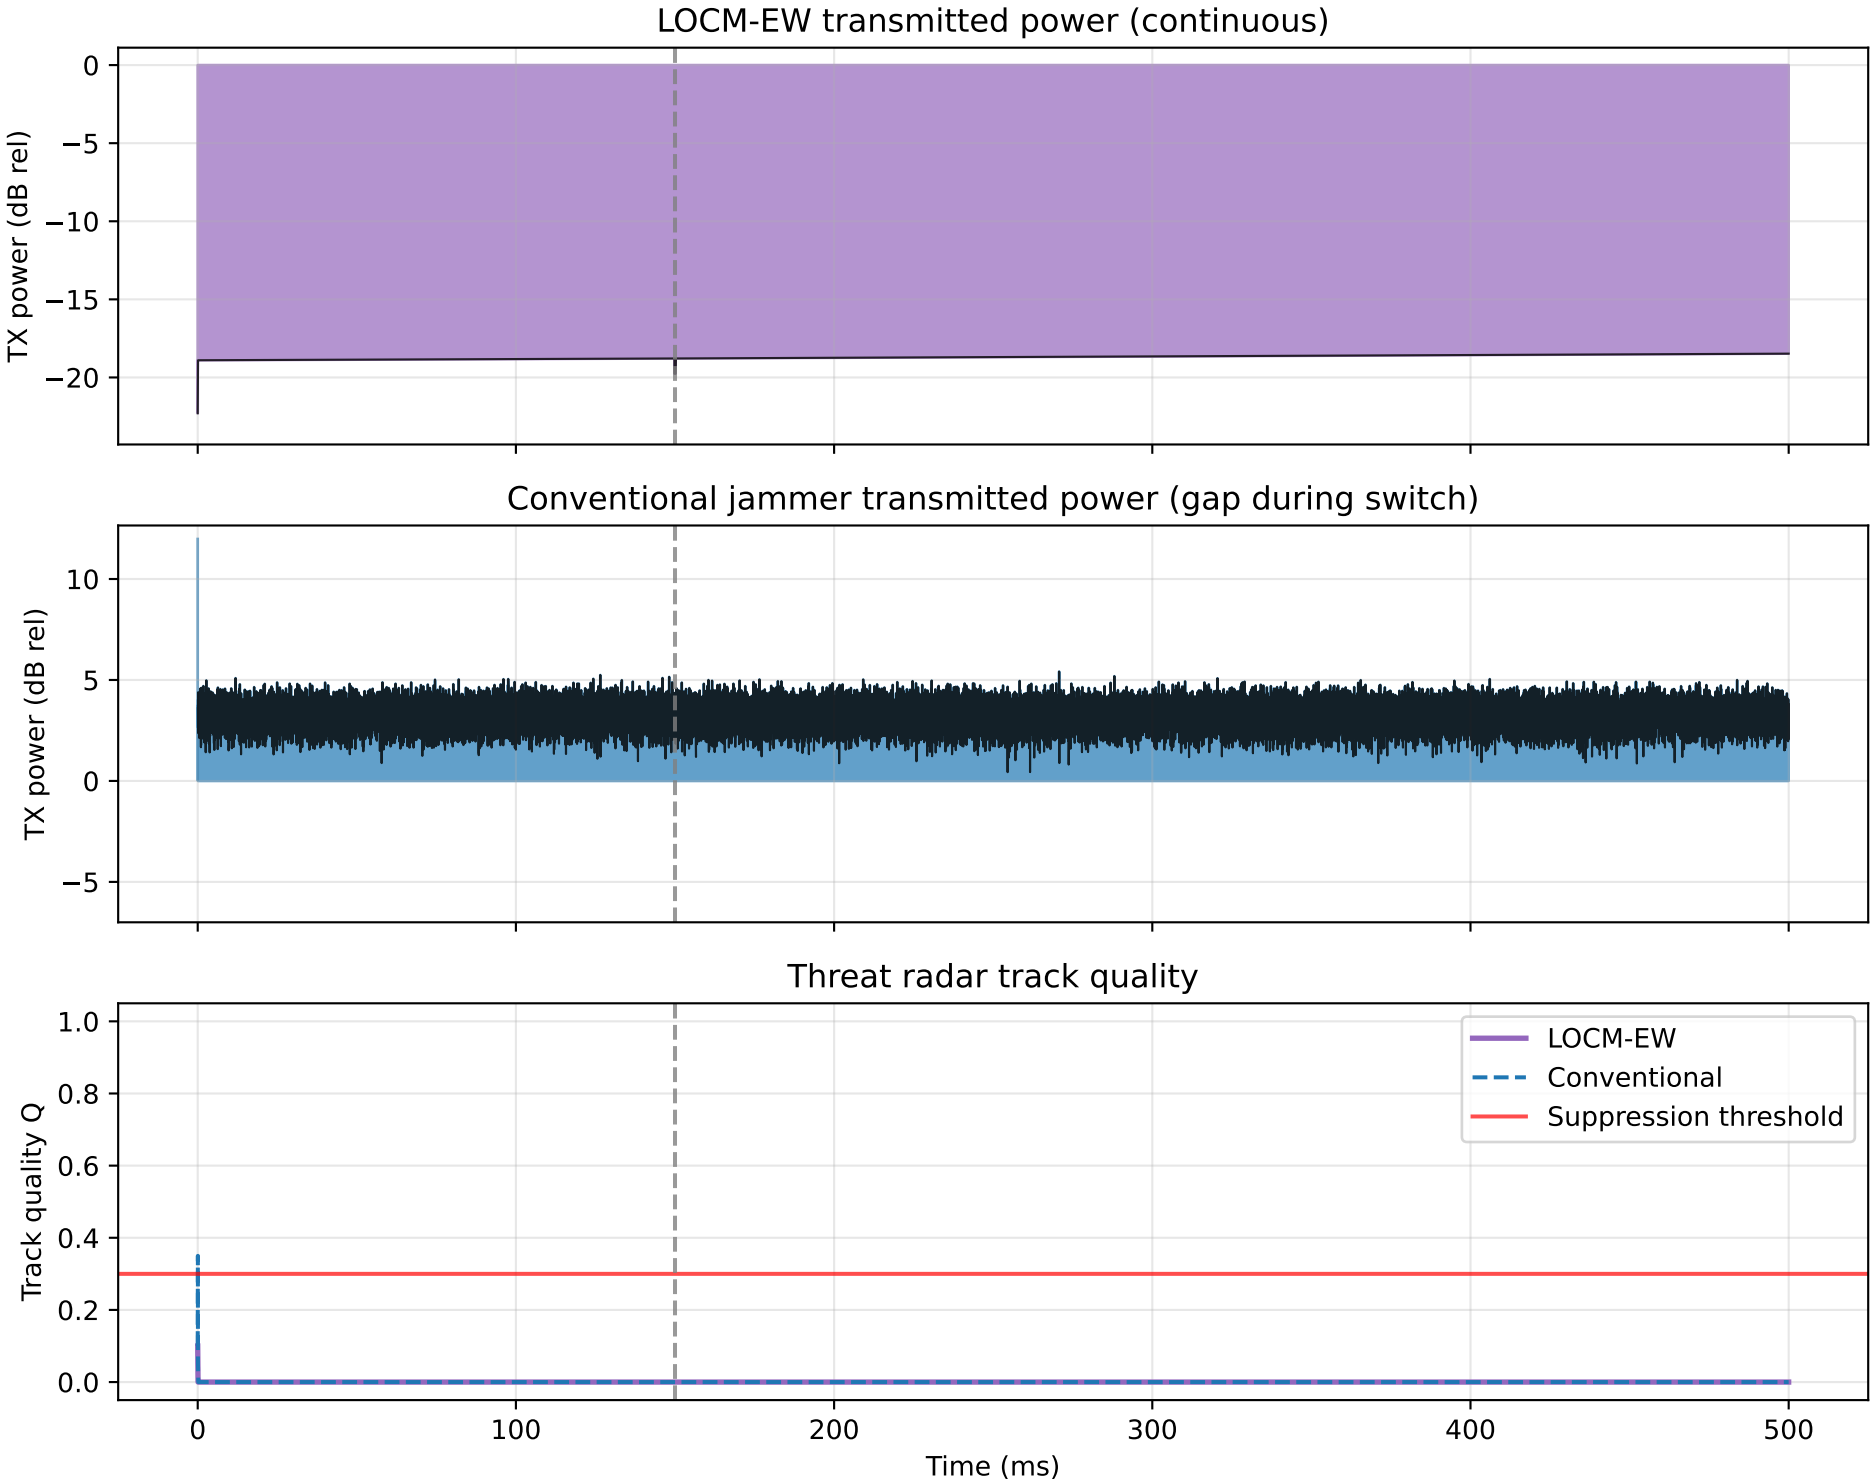
LOCM-EW transmitted power (continuous)
TX power (dB rel)
0
−5
−10
−15
−20
Conventional jammer transmitted power (gap during switch)
TX power (dB rel)
10
5
0
−5
Threat radar track quality
Track quality Q
1.0
0.8
0.6
0.4
0.2
0.0
LOCM-EW
Conventional
Suppression threshold
0
100
200
300
400
500
Time (ms)