HYTEK Linear Truss - full-truss simplifier diff (ENGINEERING REVIEW)

Job 2603191 ROCKVILLE TH-TYPE-A1-LT | plan GF-LIN-89.075 | truss TN2-1 | profile 89x41 lipped C 0.75mm AZ150

Legend: ==== chord ==== web ---- Box piece o bolt hole (orig) o bolt hole (simp) [+] dimple (orig) [+] dimple (simp) . notch . swage

FrameCAD ORIGINAL

offset-based BOLT HOLES - produced by FrameCAD Structure (BEFORE simplification)

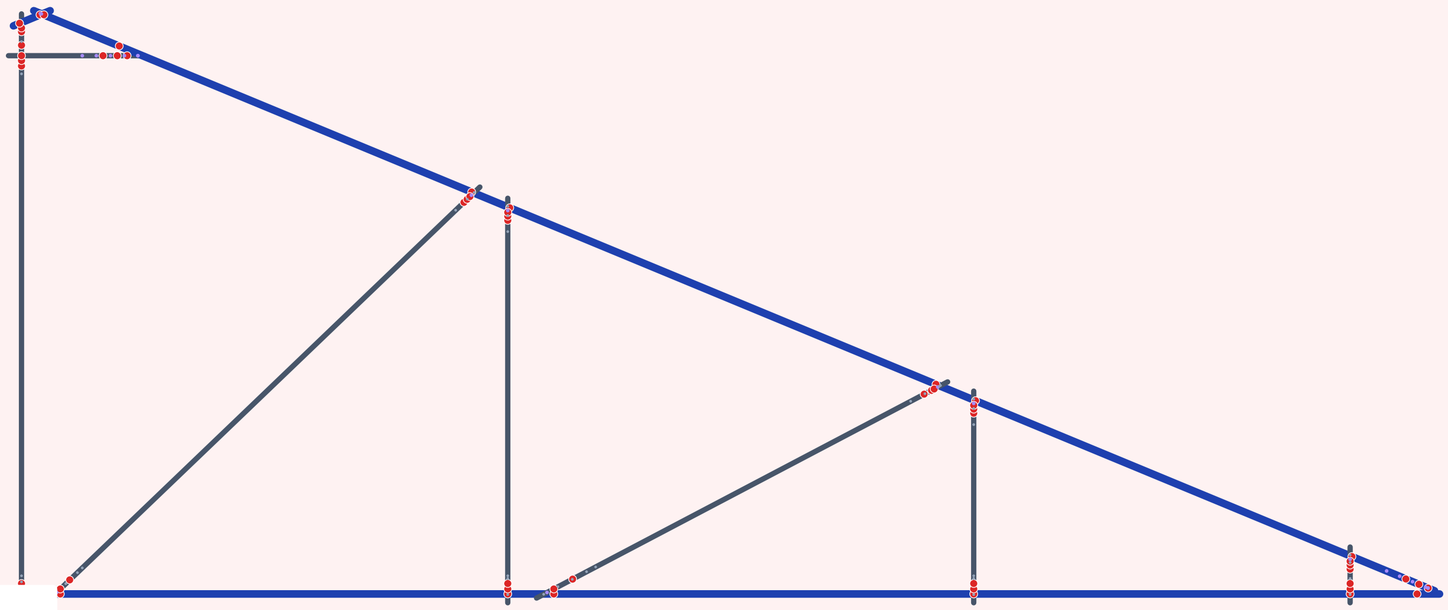

Sticks: 10 | Bolt holes: 55 | Dimples: 0 | Notches: 21 | Swages: 40

SIMPLIFIED OUTPUT

centreline-rule WEB HOLES at every chord-web junction | normalised dimples (15mm margin, 900mm max gap) | W-W skipped

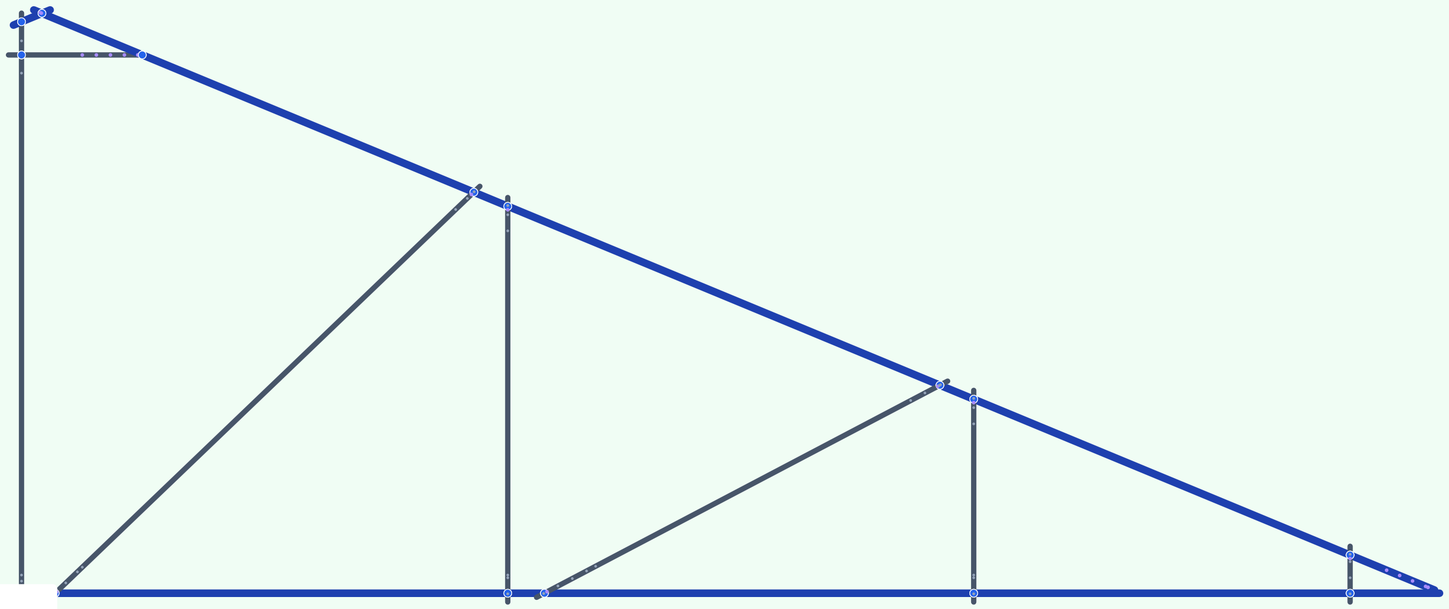

Sticks: 10 | Bolt holes: 30 | Dimples: 0 | Notches: 21 | Swages: 40

DIFF SUMMARY · TN2-1

Bolt holes: 55 -> 30 (-25) | Dimples: 0 -> 0 (+0) | Sticks: 10 -> 10 | Physical-fit ops (notches/swages/chamfers) preserved exactly

HYTEK Linear Truss - full-truss simplifier diff (ENGINEERING REVIEW)

Job 2603191 ROCKVILLE TH-TYPE-A1-LT | plan GF-LIN-89.075 | truss TN2-2 | profile 89x41 lipped C 0.75mm AZ150

Legend: ==== chord ==== web ---- Box piece o bolt hole (orig) o bolt hole (simp) [+] dimple (orig) [+] dimple (simp) . notch . swage

FrameCAD ORIGINAL

offset-based BOLT HOLES - produced by FrameCAD Structure (BEFORE simplification)

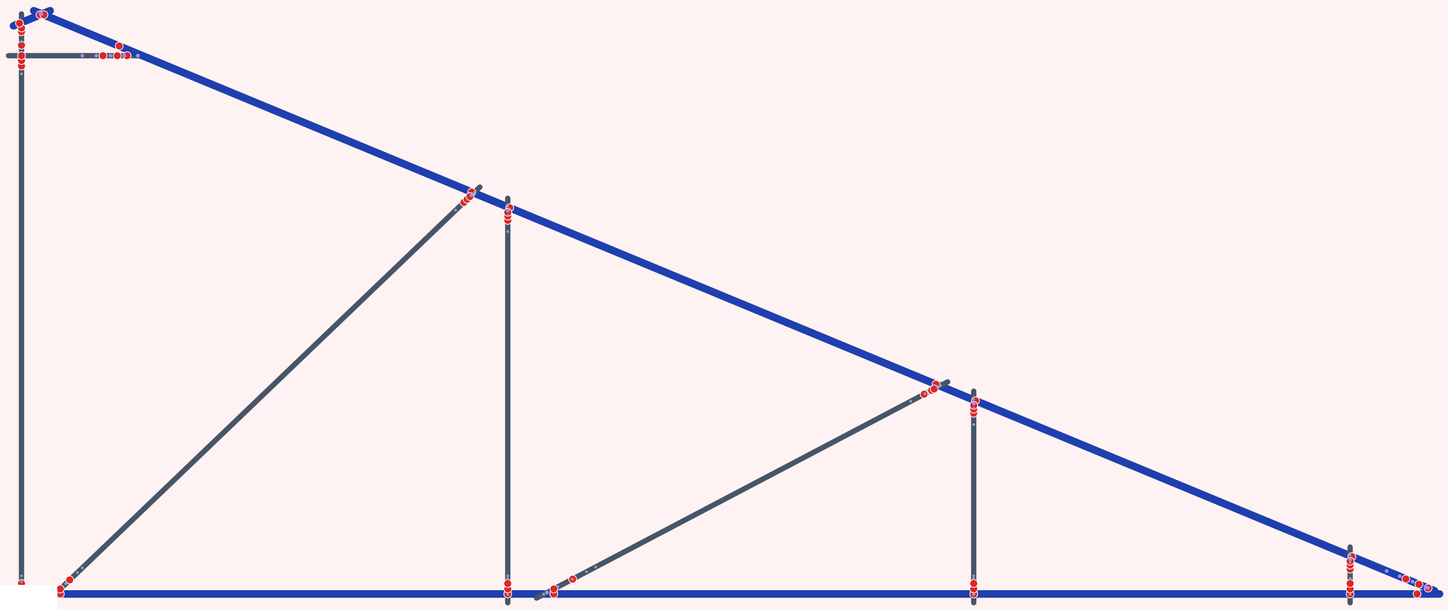

Sticks: 10 | Bolt holes: 55 | Dimples: 0 | Notches: 21 | Swages: 40

SIMPLIFIED OUTPUT

centreline-rule WEB HOLES at every chord-web junction | normalised dimples (15mm margin, 900mm max gap) | W-W skipped

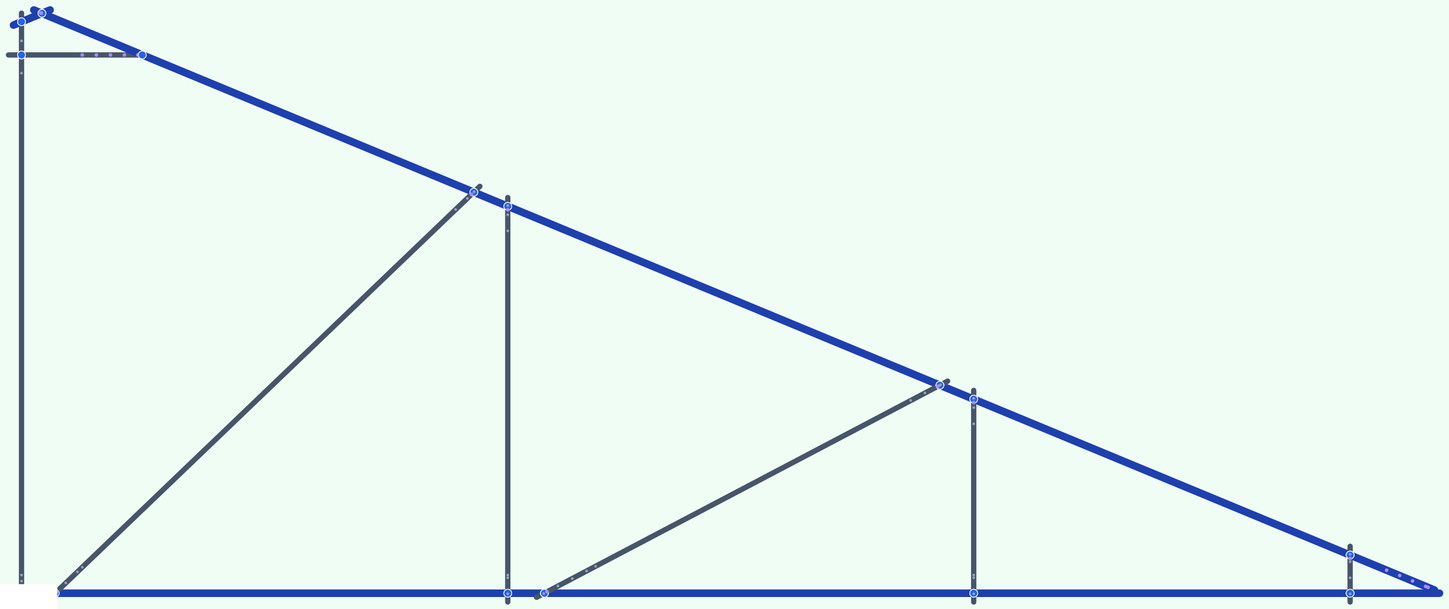

Sticks: 10 | Bolt holes: 30 | Dimples: 0 | Notches: 21 | Swages: 40

DIFF SUMMARY · TN2-2

Bolt holes: 55 -> 30 (-25) | Dimples: 0 -> 0 (+0) | Sticks: 10 -> 10 | Physical-fit ops (notches/swages/chamfers) preserved exactly

HYTEK Linear Truss - full-truss simplifier diff (ENGINEERING REVIEW)

Job 2603191 ROCKVILLE TH-TYPE-A1-LT | plan GF-LIN-89.075 | truss TN2-3 | profile 89x41 lipped C 0.75mm AZ150

Legend: ==== chord ==== web ---- Box piece o bolt hole (orig) o bolt hole (simp) [+] dimple (orig) [+] dimple (simp) . notch . swage

FrameCAD ORIGINAL

offset-based BOLT HOLES - produced by FrameCAD Structure (BEFORE simplification)

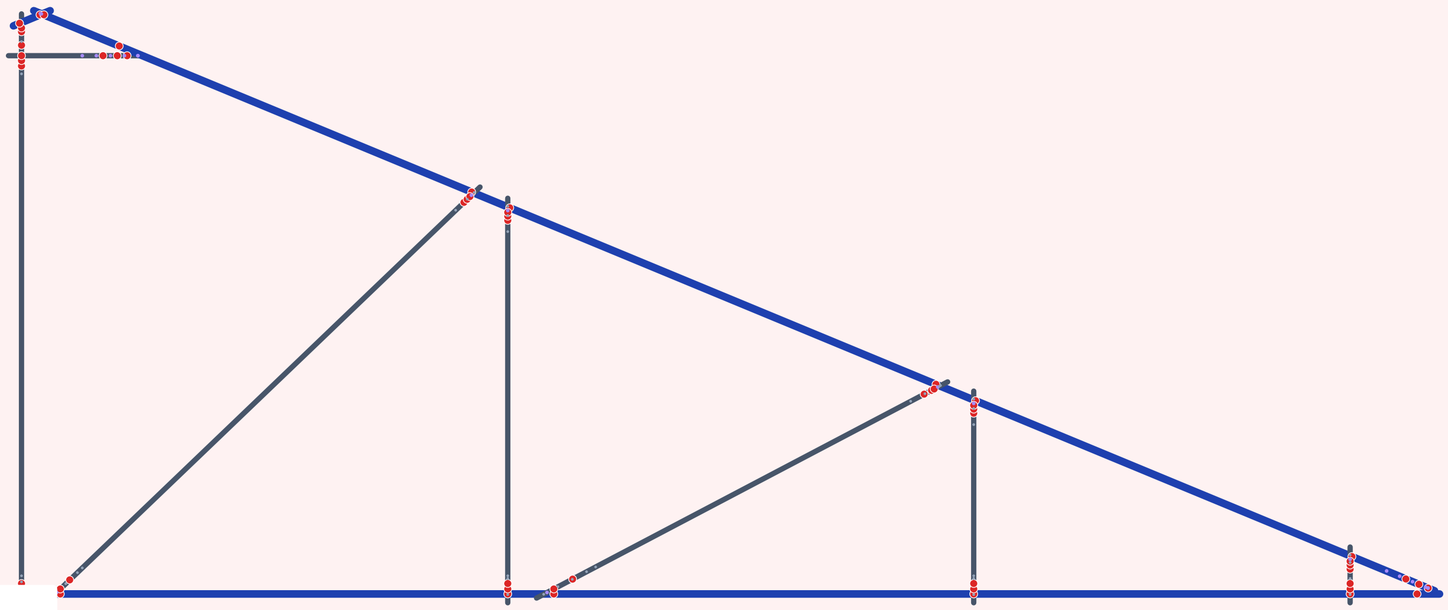

Sticks: 10 | Bolt holes: 55 | Dimples: 0 | Notches: 21 | Swages: 40

SIMPLIFIED OUTPUT

centreline-rule WEB HOLES at every chord-web junction | normalised dimples (15mm margin, 900mm max gap) | W-W skipped

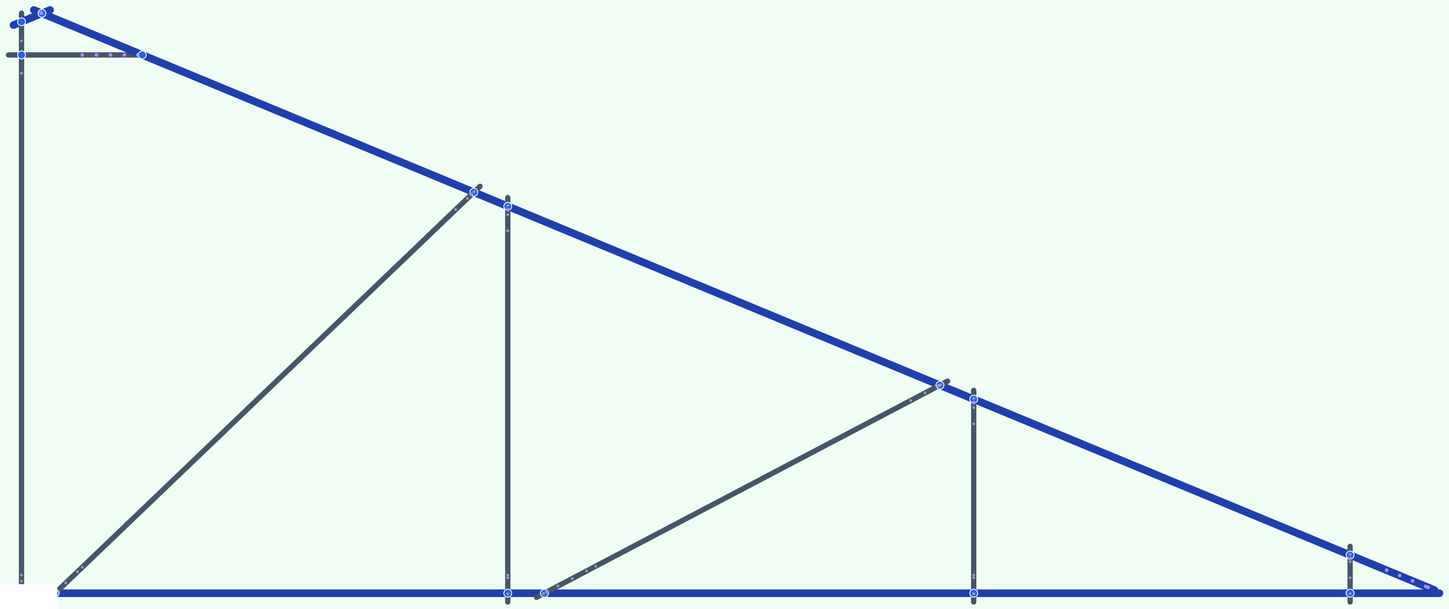

Sticks: 10 | Bolt holes: 30 | Dimples: 0 | Notches: 21 | Swages: 40

DIFF SUMMARY · TN2-3

Bolt holes: 55 -> 30 (-25) | Dimples: 0 -> 0 (+0) | Sticks: 10 -> 10 | Physical-fit ops (notches/swages/chamfers) preserved exactly

HYTEK Linear Truss - full-truss simplifier diff (ENGINEERING REVIEW)

Job 2603191 ROCKVILLE TH-TYPE-A1-LT | plan GF-LIN-89.075 | truss TN2-4 | profile 89x41 lipped C 0.75mm AZ150

Legend: ==== chord ==== web ---- Box piece o bolt hole (orig) o bolt hole (simp) [+] dimple (orig) [+] dimple (simp) . notch . swage

FrameCAD ORIGINAL

offset-based BOLT HOLES - produced by FrameCAD Structure (BEFORE simplification)

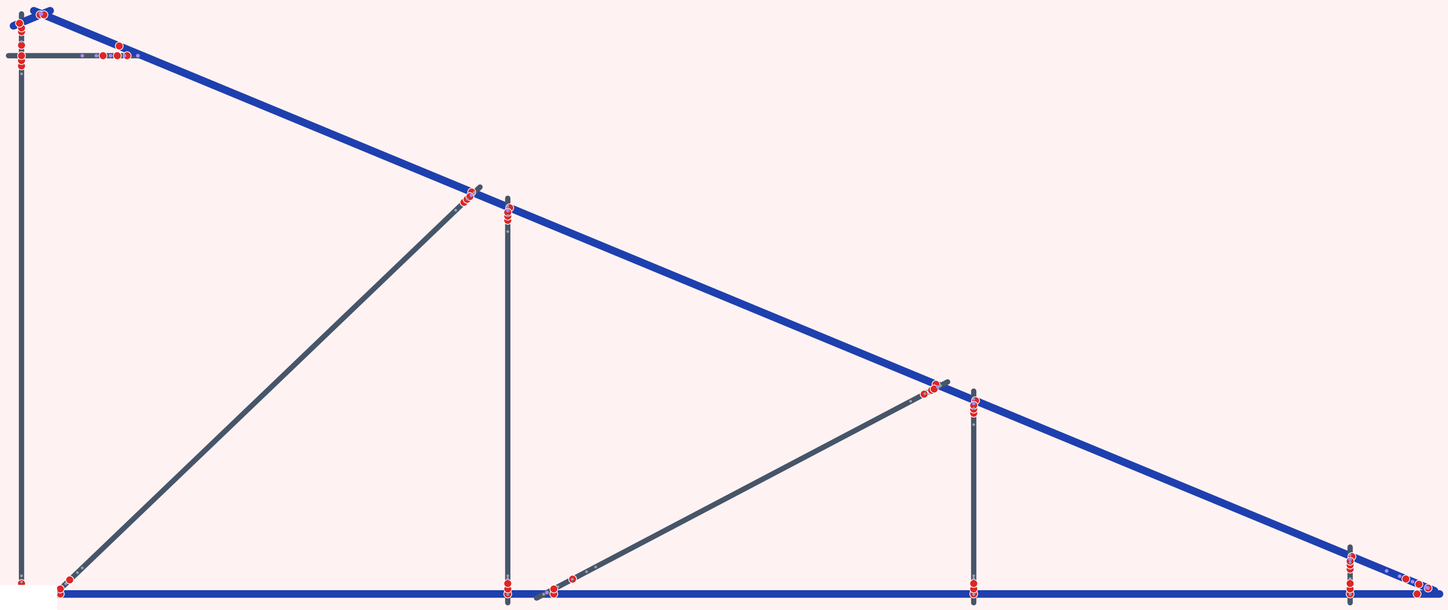

Sticks: 10 | Bolt holes: 55 | Dimples: 0 | Notches: 21 | Swages: 40

SIMPLIFIED OUTPUT

centreline-rule WEB HOLES at every chord-web junction | normalised dimples (15mm margin, 900mm max gap) | W-W skipped

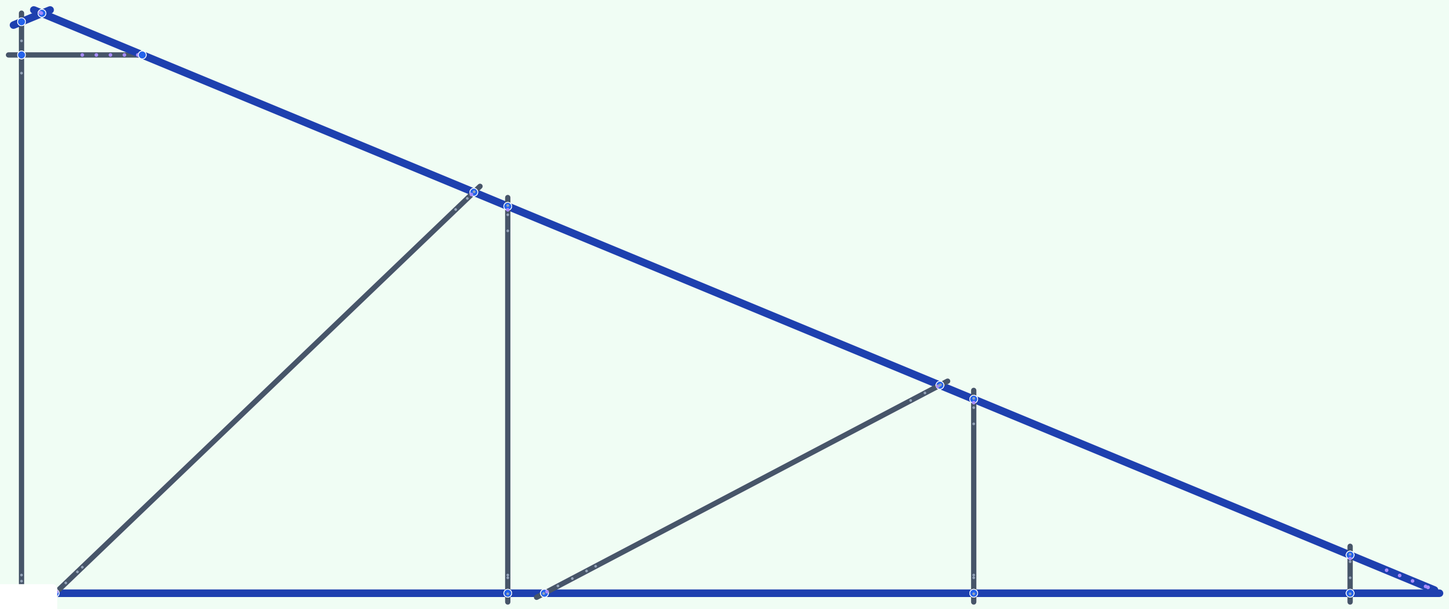

Sticks: 10 | Bolt holes: 30 | Dimples: 0 | Notches: 21 | Swages: 40

DIFF SUMMARY · TN2-4

Bolt holes: 55 -> 30 (-25) | Dimples: 0 -> 0 (+0) | Sticks: 10 -> 10 | Physical-fit ops (notches/swages/chamfers) preserved exactly

HYTEK Linear Truss - full-truss simplifier diff (ENGINEERING REVIEW)

Job 2603191 ROCKVILLE TH-TYPE-A1-LT | plan GF-LIN-89.075 | truss TN2-5 | profile 89x41 lipped C 0.75mm AZ150

Legend: ==== chord ==== web ---- Box piece o bolt hole (orig) o bolt hole (simp) [+] dimple (orig) [+] dimple (simp) . notch . swage

FrameCAD ORIGINAL

offset-based BOLT HOLES - produced by FrameCAD Structure (BEFORE simplification)

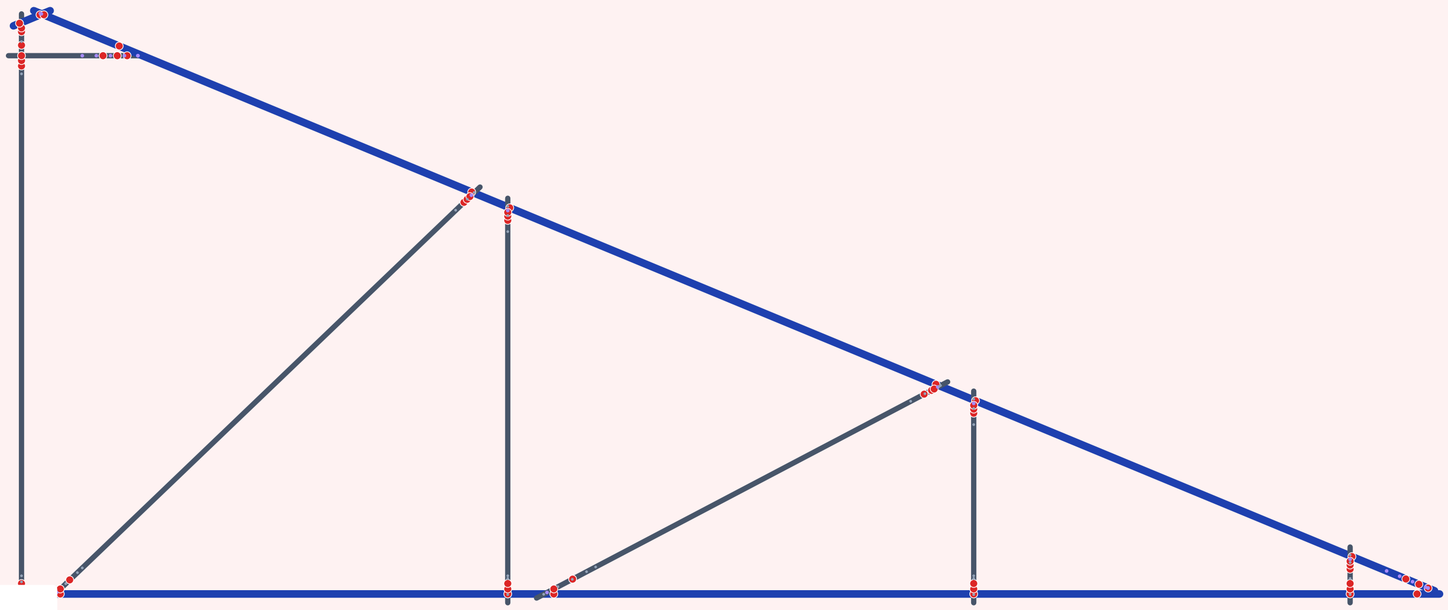

Sticks: 10 | Bolt holes: 55 | Dimples: 0 | Notches: 21 | Swages: 40

SIMPLIFIED OUTPUT

centreline-rule WEB HOLES at every chord-web junction | normalised dimples (15mm margin, 900mm max gap) | W-W skipped

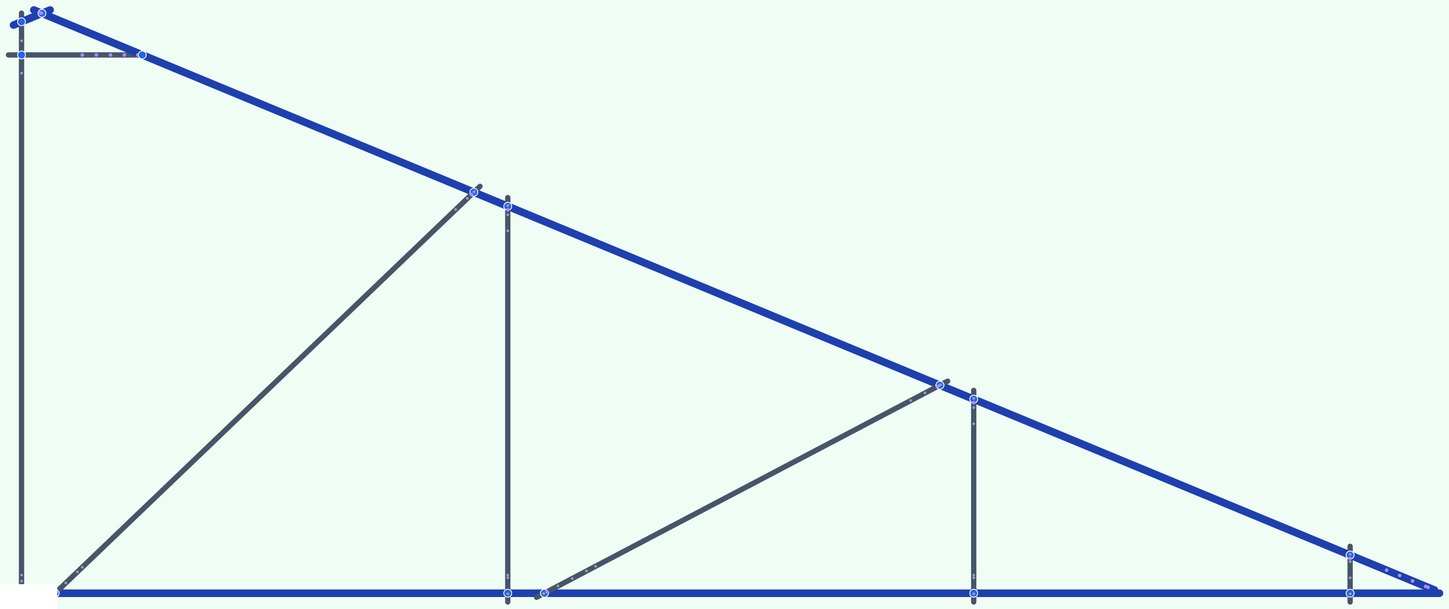

Sticks: 10 | Bolt holes: 30 | Dimples: 0 | Notches: 21 | Swages: 40

DIFF SUMMARY · TN2-5

Bolt holes: 55 -> 30 (-25) | Dimples: 0 -> 0 (+0) | Sticks: 10 -> 10 | Physical-fit ops (notches/swages/chamfers) preserved exactly

HYTEK Linear Truss - full-truss simplifier diff (ENGINEERING REVIEW)

Job 2603191 ROCKVILLE TH-TYPE-A1-LT | plan GF-LIN-89.075 | truss TN2-6 | profile 89x41 lipped C 0.75mm AZ150

Legend: ==== chord ==== web ---- Box piece o bolt hole (orig) o bolt hole (simp) [+] dimple (orig) [+] dimple (simp) . notch . swage

FrameCAD ORIGINAL

offset-based BOLT HOLES - produced by FrameCAD Structure (BEFORE simplification)

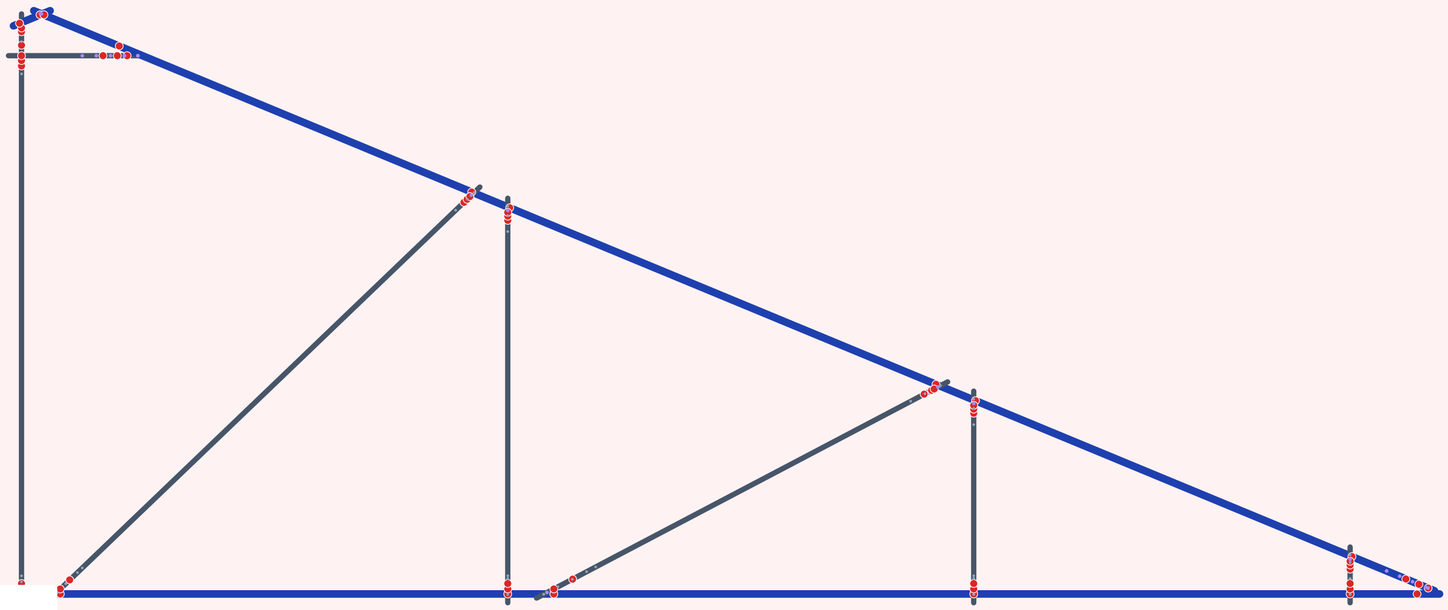

Sticks: 10 | Bolt holes: 55 | Dimples: 0 | Notches: 21 | Swages: 40

SIMPLIFIED OUTPUT

centreline-rule WEB HOLES at every chord-web junction | normalised dimples (15mm margin, 900mm max gap) | W-W skipped

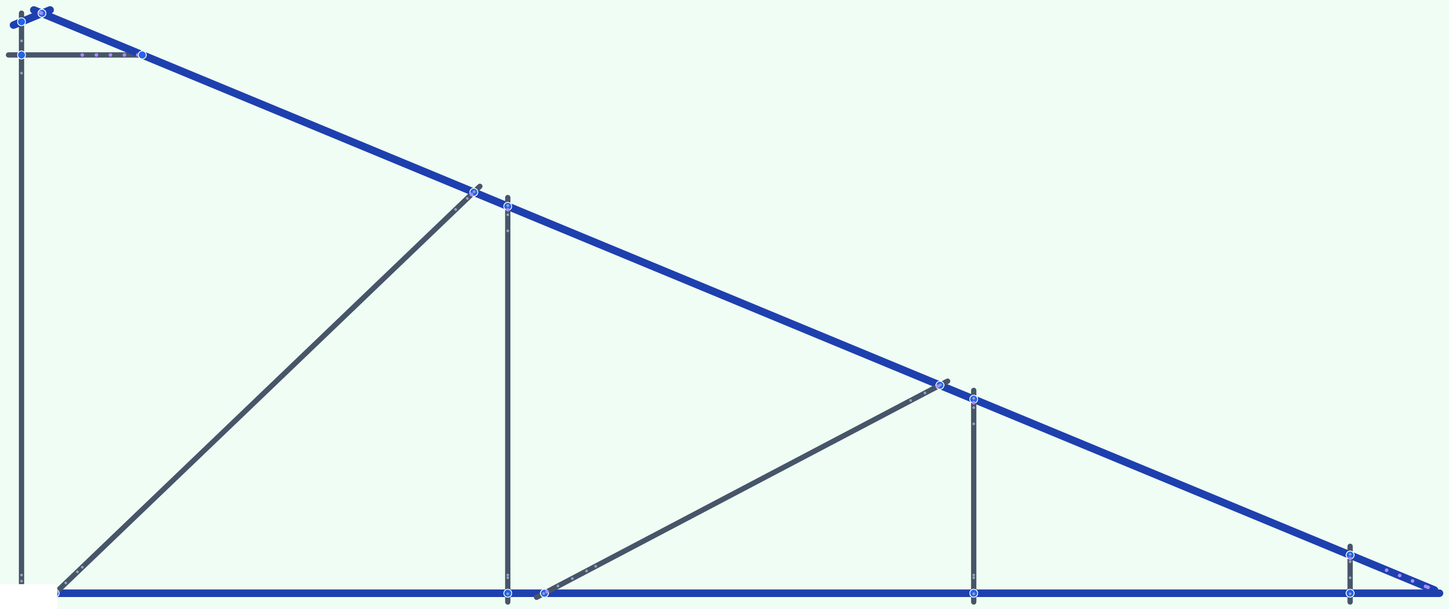

Sticks: 10 | Bolt holes: 30 | Dimples: 0 | Notches: 21 | Swages: 40

DIFF SUMMARY · TN2-6

Bolt holes: 55 -> 30 (-25) | Dimples: 0 -> 0 (+0) | Sticks: 10 -> 10 | Physical-fit ops (notches/swages/chamfers) preserved exactly

HYTEK Linear Truss - full-truss simplifier diff (ENGINEERING REVIEW)

Job 2603191 ROCKVILLE TH-TYPE-A1-LT | plan GF-LIN-89.075 | truss TN1-1 | profile 89x41 lipped C 0.75mm AZ150

Legend: ==== chord ==== web ---- Box piece o bolt hole (orig) o bolt hole (simp) [+] dimple (orig) [+] dimple (simp) . notch . swage

FrameCAD ORIGINAL

offset-based BOLT HOLES - produced by FrameCAD Structure (BEFORE simplification)

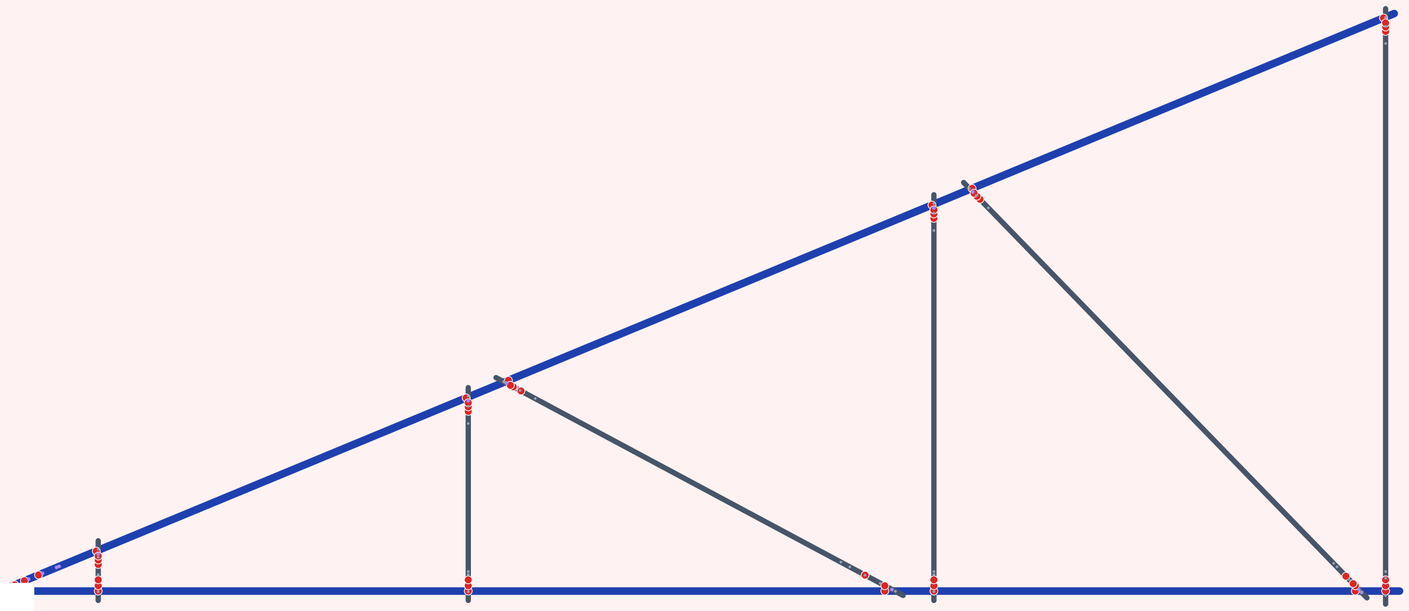

Sticks: 8 | Bolt holes: 47 | Dimples: 0 | Notches: 14 | Swages: 38

SIMPLIFIED OUTPUT

centreline-rule WEB HOLES at every chord-web junction | normalised dimples (15mm margin, 900mm max gap) | W-W skipped

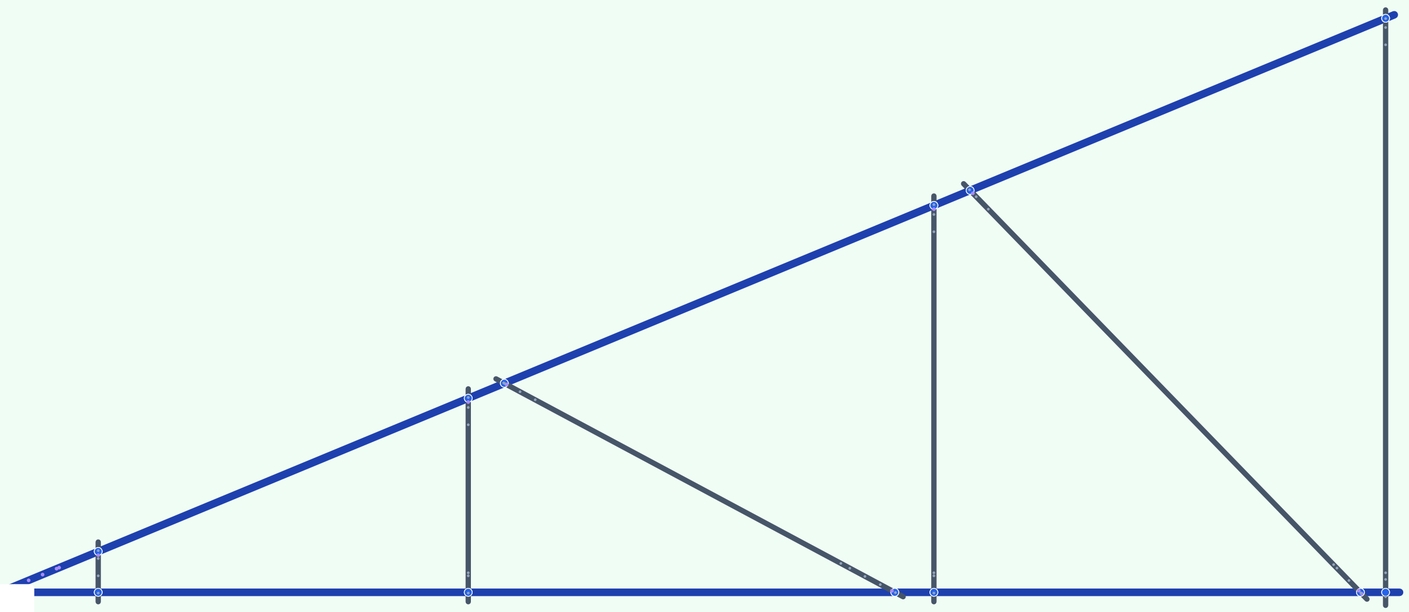

Sticks: 8 | Bolt holes: 24 | Dimples: 0 | Notches: 14 | Swages: 38

DIFF SUMMARY · TN1-1

Bolt holes: 47 -> 24 (-23) | Dimples: 0 -> 0 (+0) | Sticks: 8 -> 8 | Physical-fit ops (notches/swages/chamfers) preserved exactly

HYTEK Linear Truss - full-truss simplifier diff (ENGINEERING REVIEW)

Job 2603191 ROCKVILLE TH-TYPE-A1-LT | plan GF-LIN-89.075 | truss TN1-2 | profile 89x41 lipped C 0.75mm AZ150

Legend: ==== chord ==== web ---- Box piece o bolt hole (orig) o bolt hole (simp) [+] dimple (orig) [+] dimple (simp) . notch . swage

FrameCAD ORIGINAL

offset-based BOLT HOLES - produced by FrameCAD Structure (BEFORE simplification)

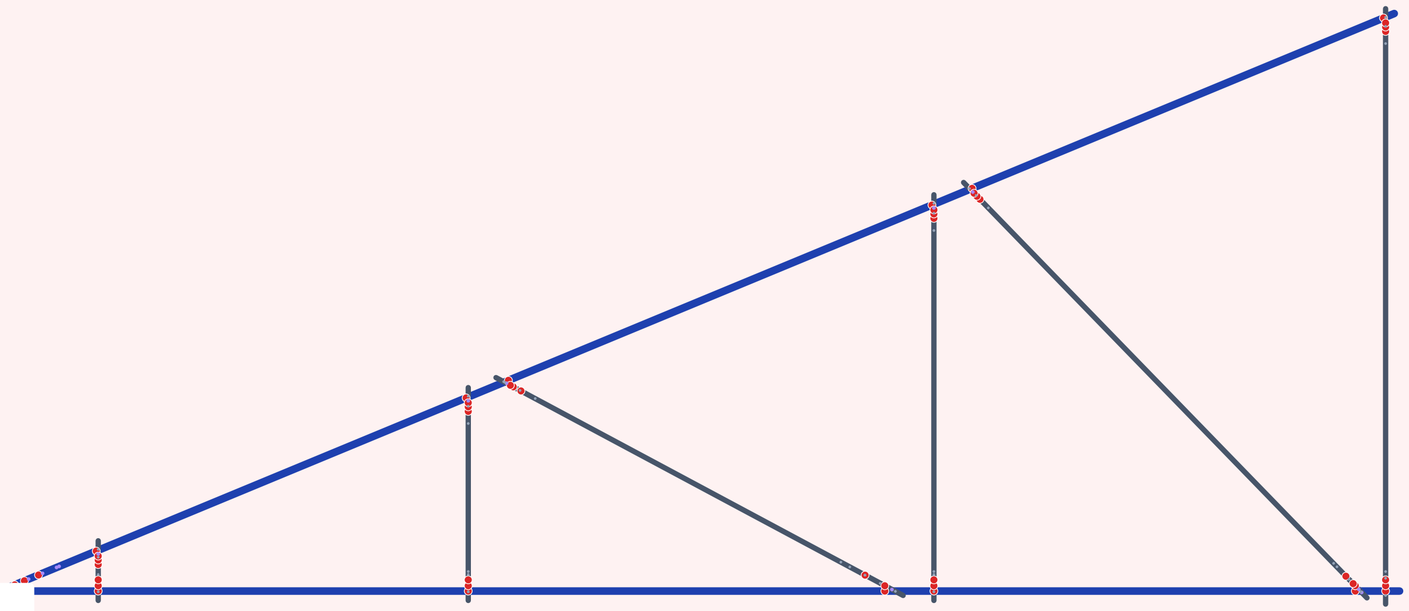

Sticks: 8 | Bolt holes: 47 | Dimples: 0 | Notches: 14 | Swages: 38

SIMPLIFIED OUTPUT

centreline-rule WEB HOLES at every chord-web junction | normalised dimples (15mm margin, 900mm max gap) | W-W skipped

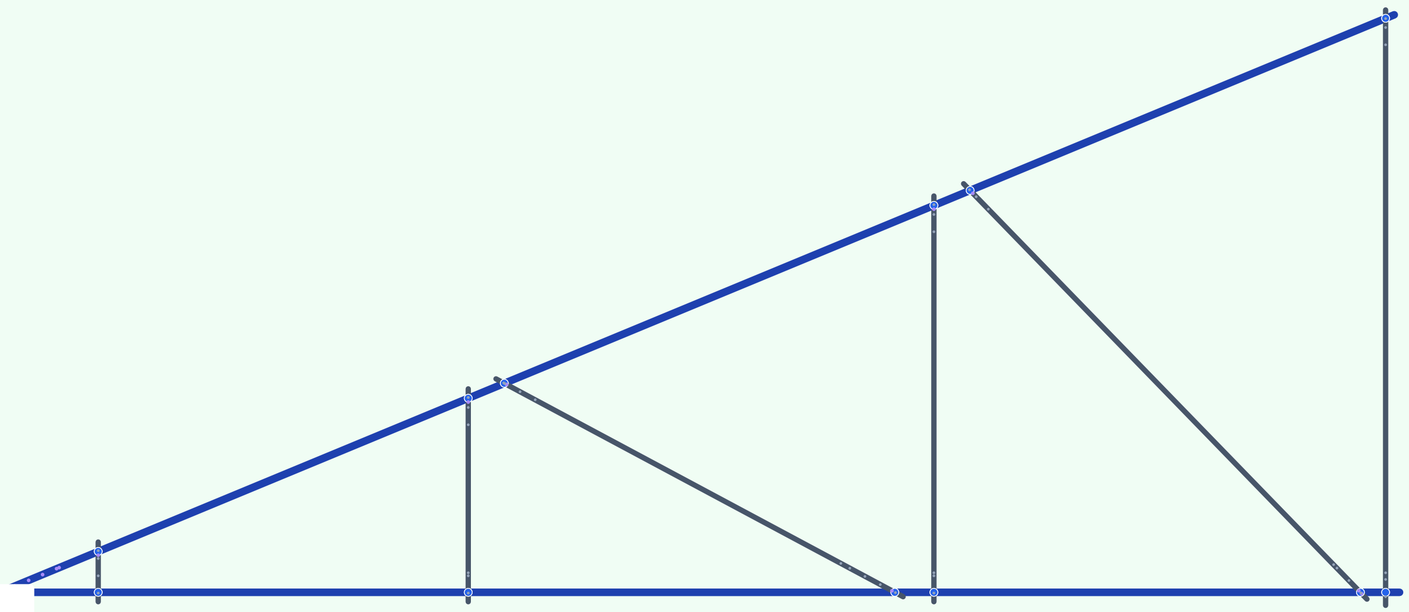

Sticks: 8 | Bolt holes: 24 | Dimples: 0 | Notches: 14 | Swages: 38

DIFF SUMMARY · TN1-2

Bolt holes: 47 -> 24 (-23) | Dimples: 0 -> 0 (+0) | Sticks: 8 -> 8 | Physical-fit ops (notches/swages/chamfers) preserved exactly

HYTEK Linear Truss - full-truss simplifier diff (ENGINEERING REVIEW)

Job 2603191 ROCKVILLE TH-TYPE-A1-LT | plan GF-LIN-89.075 | truss TN1-3 | profile 89x41 lipped C 0.75mm AZ150

Legend: ==== chord ==== web ---- Box piece o bolt hole (orig) o bolt hole (simp) [+] dimple (orig) [+] dimple (simp) . notch . swage

FrameCAD ORIGINAL

offset-based BOLT HOLES - produced by FrameCAD Structure (BEFORE simplification)

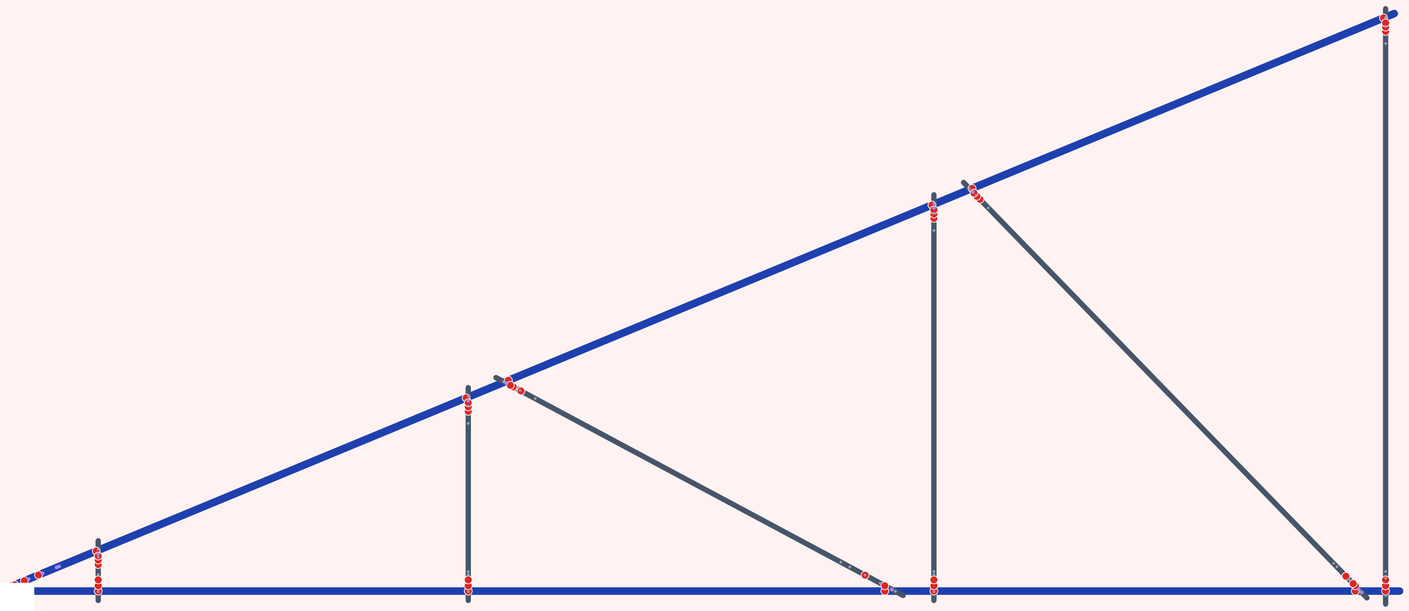

Sticks: 8 | Bolt holes: 47 | Dimples: 0 | Notches: 14 | Swages: 38

SIMPLIFIED OUTPUT

centreline-rule WEB HOLES at every chord-web junction | normalised dimples (15mm margin, 900mm max gap) | W-W skipped

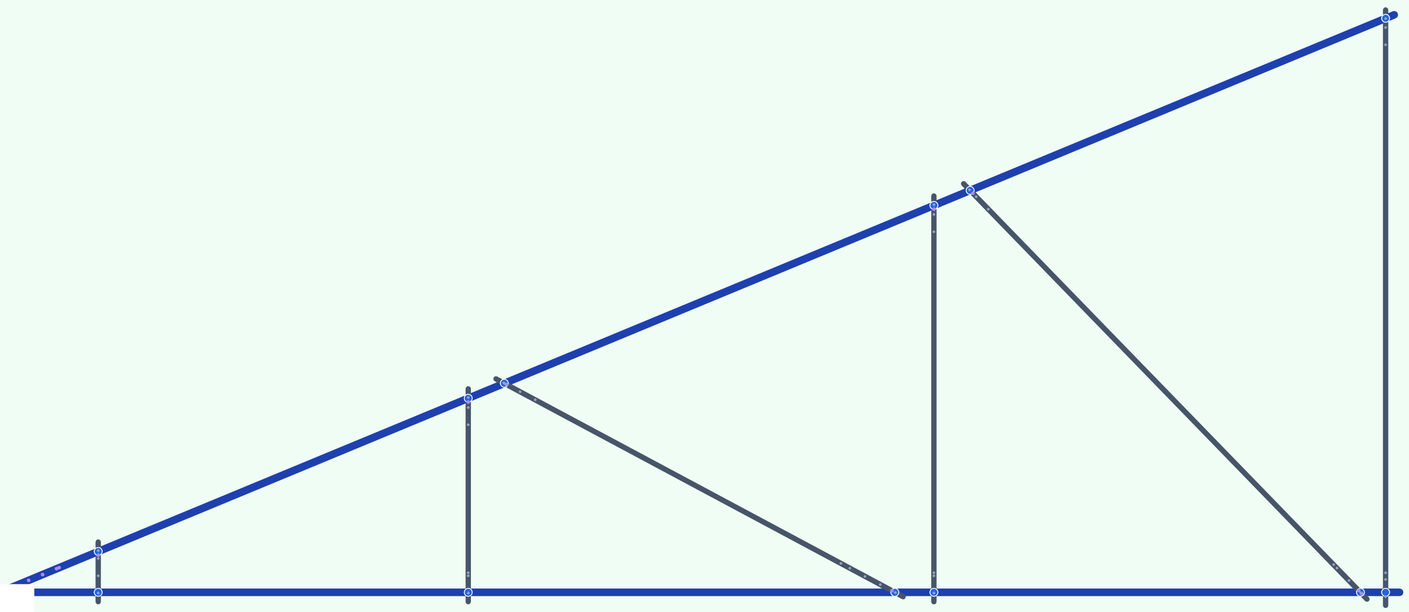

Sticks: 8 | Bolt holes: 24 | Dimples: 0 | Notches: 14 | Swages: 38

DIFF SUMMARY · TN1-3

Bolt holes: 47 -> 24 (-23) | Dimples: 0 -> 0 (+0) | Sticks: 8 -> 8 | Physical-fit ops (notches/swages/chamfers) preserved exactly

HYTEK Linear Truss - full-truss simplifier diff (ENGINEERING REVIEW)

Job 2603191 ROCKVILLE TH-TYPE-A1-LT | plan GF-LIN-89.075 | truss TN1-4 | profile 89x41 lipped C 0.75mm AZ150

Legend: ==== chord ==== web ---- Box piece o bolt hole (orig) o bolt hole (simp) [+] dimple (orig) [+] dimple (simp) . notch . swage

FrameCAD ORIGINAL

offset-based BOLT HOLES - produced by FrameCAD Structure (BEFORE simplification)

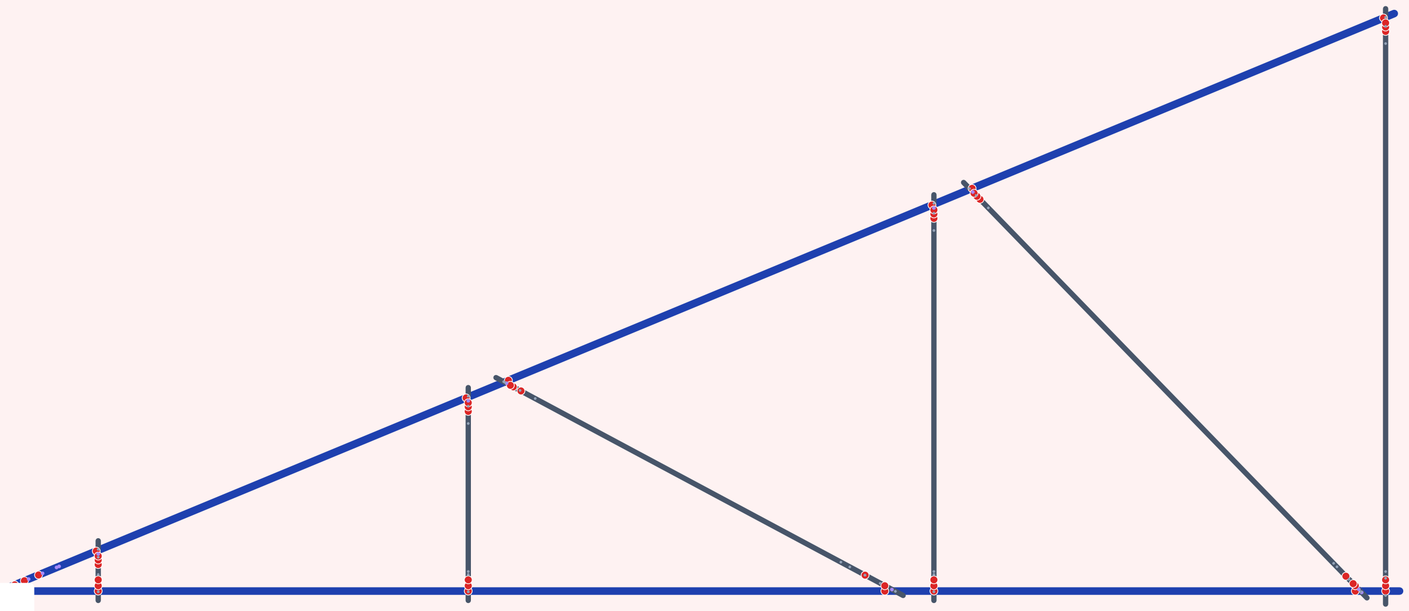

Sticks: 8 | Bolt holes: 47 | Dimples: 0 | Notches: 14 | Swages: 38

SIMPLIFIED OUTPUT

centreline-rule WEB HOLES at every chord-web junction | normalised dimples (15mm margin, 900mm max gap) | W-W skipped

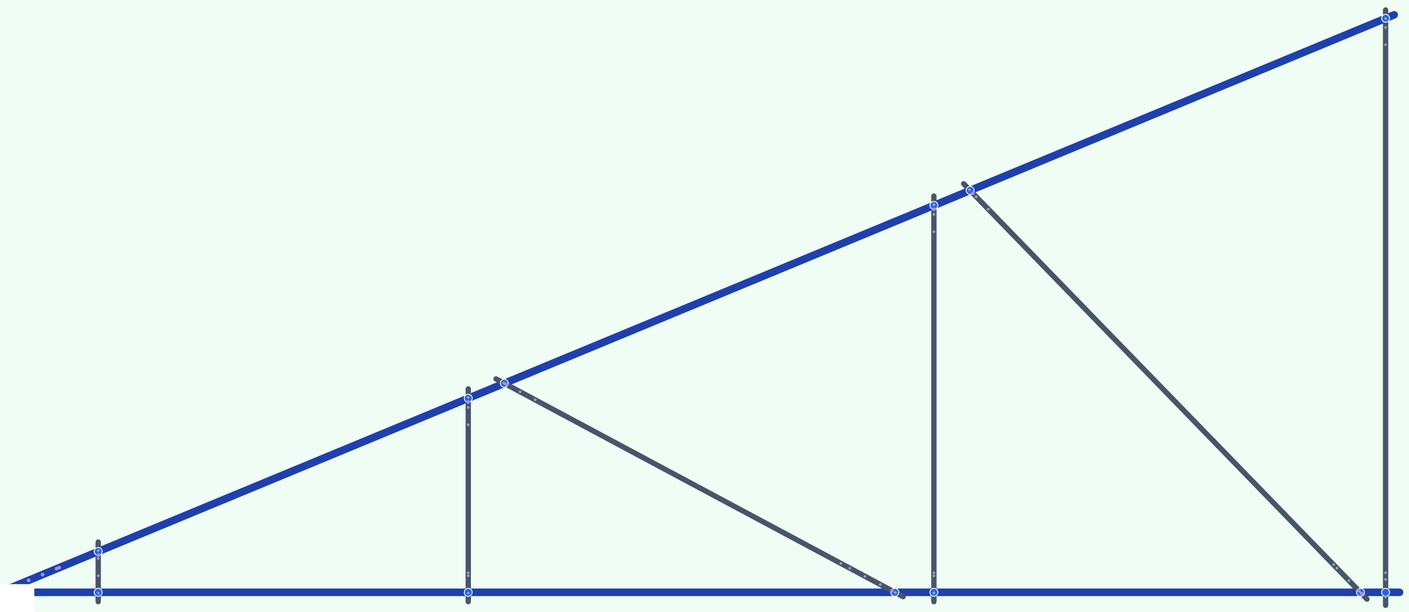

Sticks: 8 | Bolt holes: 24 | Dimples: 0 | Notches: 14 | Swages: 38

DIFF SUMMARY · TN1-4

Bolt holes: 47 -> 24 (-23) | Dimples: 0 -> 0 (+0) | Sticks: 8 -> 8 | Physical-fit ops (notches/swages/chamfers) preserved exactly

HYTEK Linear Truss - full-truss simplifier diff (ENGINEERING REVIEW)

Job 2603191 ROCKVILLE TH-TYPE-A1-LT | plan GF-LIN-89.075 | truss TN1-5 | profile 89x41 lipped C 0.75mm AZ150

Legend: ==== chord ==== web ---- Box piece o bolt hole (orig) o bolt hole (simp) [+] dimple (orig) [+] dimple (simp) . notch . swage

FrameCAD ORIGINAL

offset-based BOLT HOLES - produced by FrameCAD Structure (BEFORE simplification)

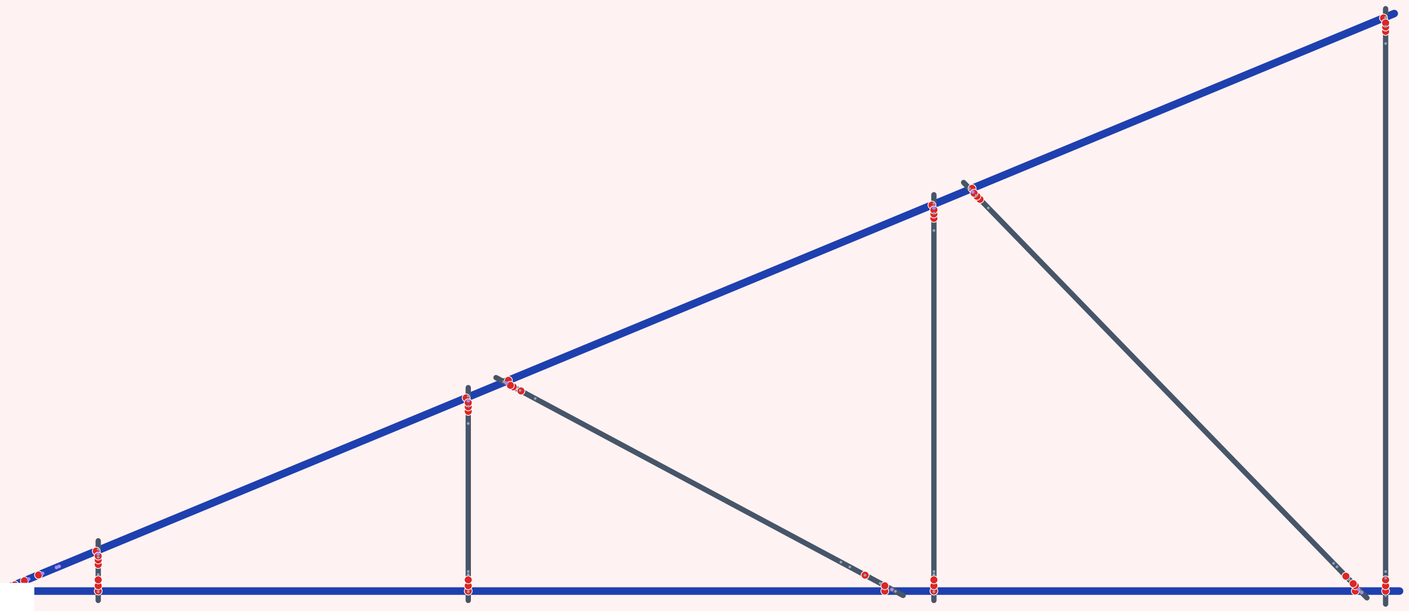

Sticks: 8 | Bolt holes: 47 | Dimples: 0 | Notches: 14 | Swages: 38

SIMPLIFIED OUTPUT

centreline-rule WEB HOLES at every chord-web junction | normalised dimples (15mm margin, 900mm max gap) | W-W skipped

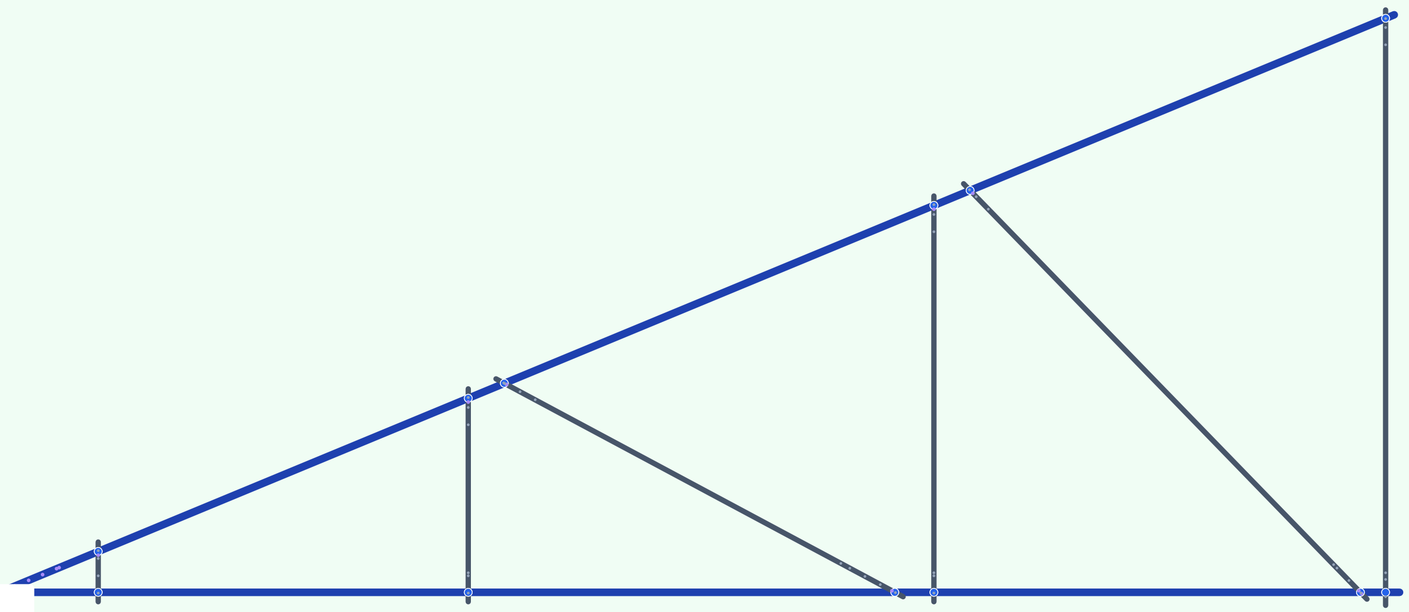

Sticks: 8 | Bolt holes: 24 | Dimples: 0 | Notches: 14 | Swages: 38

DIFF SUMMARY · TN1-5

Bolt holes: 47 -> 24 (-23) | Dimples: 0 -> 0 (+0) | Sticks: 8 -> 8 | Physical-fit ops (notches/swages/chamfers) preserved exactly

HYTEK Linear Truss - full-truss simplifier diff (ENGINEERING REVIEW)

Job 2603191 ROCKVILLE TH-TYPE-A1-LT | plan GF-LIN-89.075 | truss TN1-6 | profile 89x41 lipped C 0.75mm AZ150

Legend: ==== chord ==== web ---- Box piece o bolt hole (orig) o bolt hole (simp) [+] dimple (orig) [+] dimple (simp) . notch . swage

FrameCAD ORIGINAL

offset-based BOLT HOLES - produced by FrameCAD Structure (BEFORE simplification)

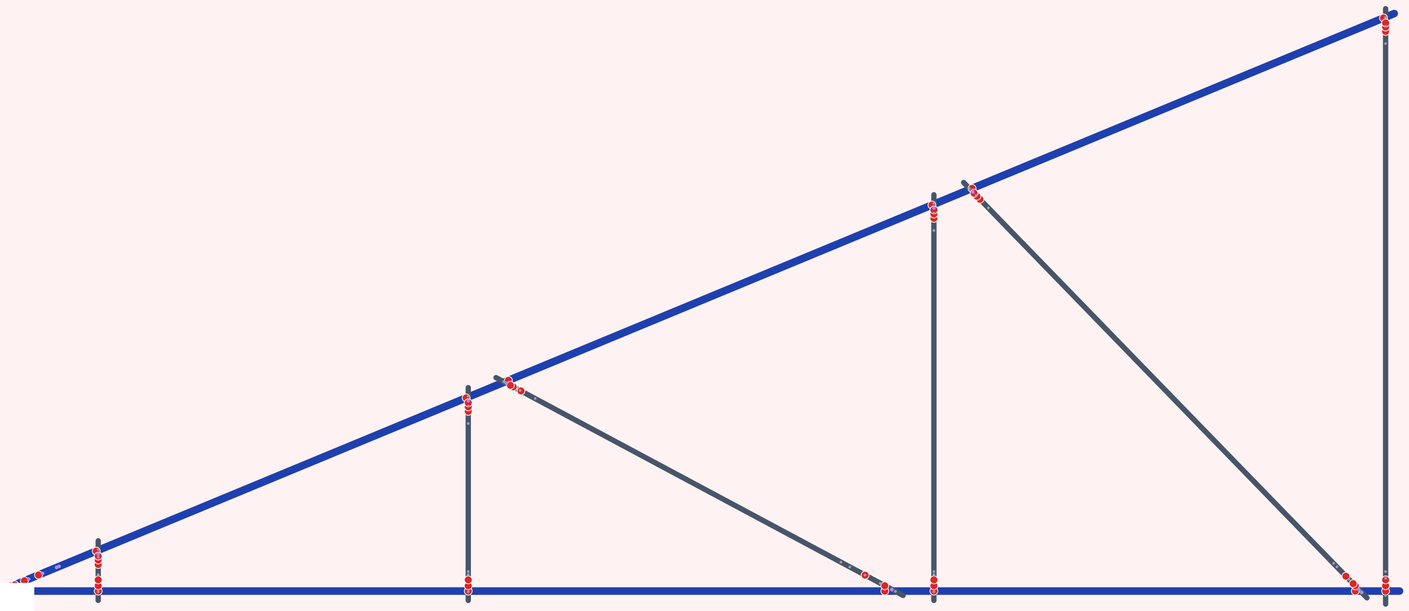

Sticks: 8 | Bolt holes: 47 | Dimples: 0 | Notches: 14 | Swages: 38

SIMPLIFIED OUTPUT

centreline-rule WEB HOLES at every chord-web junction | normalised dimples (15mm margin, 900mm max gap) | W-W skipped

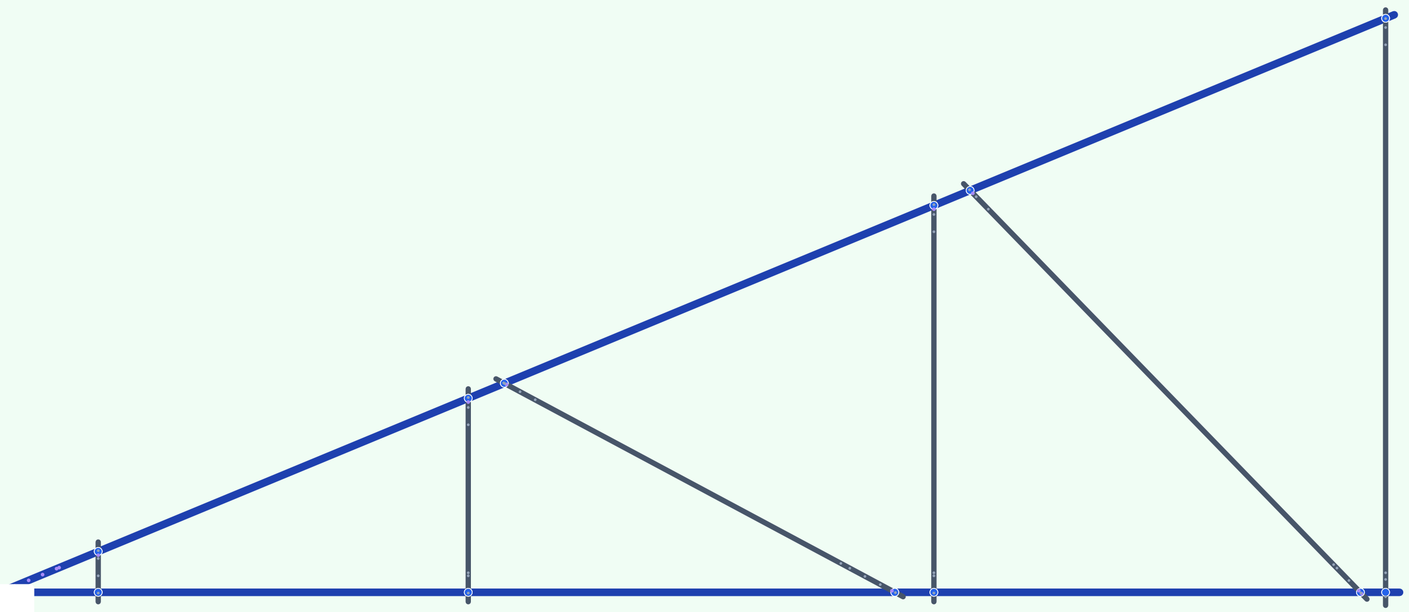

Sticks: 8 | Bolt holes: 24 | Dimples: 0 | Notches: 14 | Swages: 38

DIFF SUMMARY · TN1-6

Bolt holes: 47 -> 24 (-23) | Dimples: 0 -> 0 (+0) | Sticks: 8 -> 8 | Physical-fit ops (notches/swages/chamfers) preserved exactly

HYTEK Linear Truss - full-truss simplifier diff (ENGINEERING REVIEW)

Job 2603191 ROCKVILLE TH-TYPE-A1-LT | plan GF-LIN-89.075 | truss TN1-7 | profile 89x41 lipped C 0.75mm AZ150

Legend: ==== chord ==== web ---- Box piece o bolt hole (orig) o bolt hole (simp) [+] dimple (orig) [+] dimple (simp) . notch . swage

FrameCAD ORIGINAL

offset-based BOLT HOLES - produced by FrameCAD Structure (BEFORE simplification)

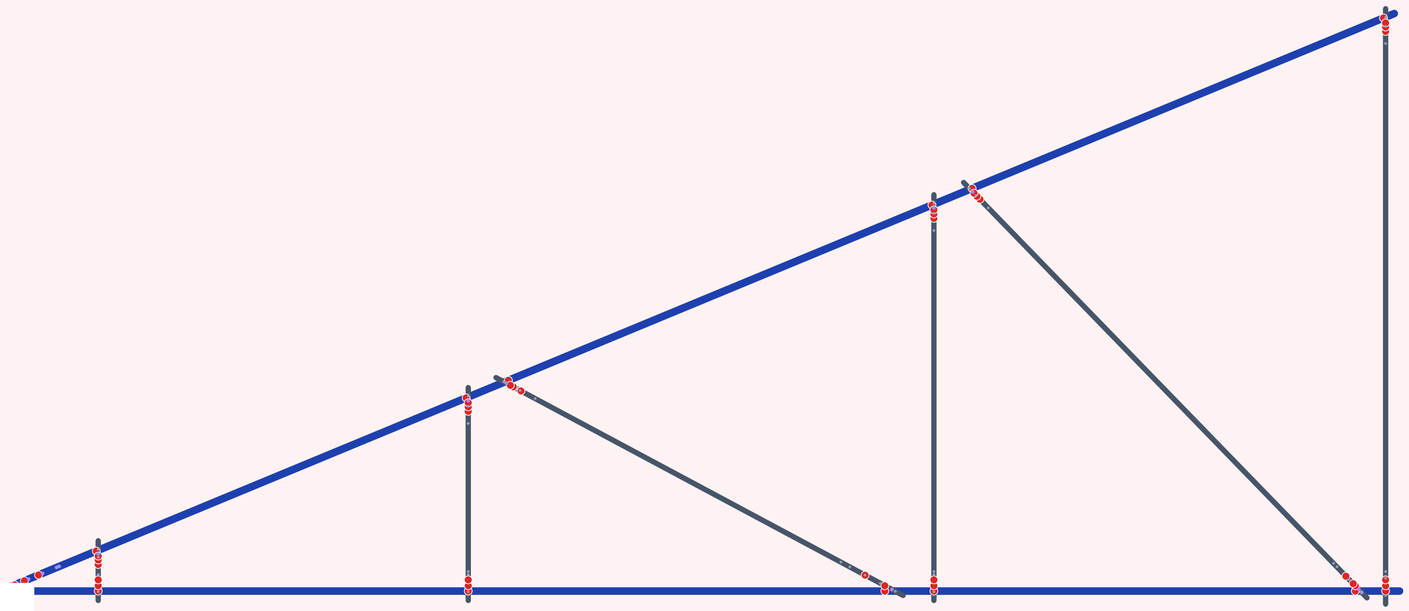

Sticks: 8 | Bolt holes: 47 | Dimples: 0 | Notches: 14 | Swages: 38

SIMPLIFIED OUTPUT

centreline-rule WEB HOLES at every chord-web junction | normalised dimples (15mm margin, 900mm max gap) | W-W skipped

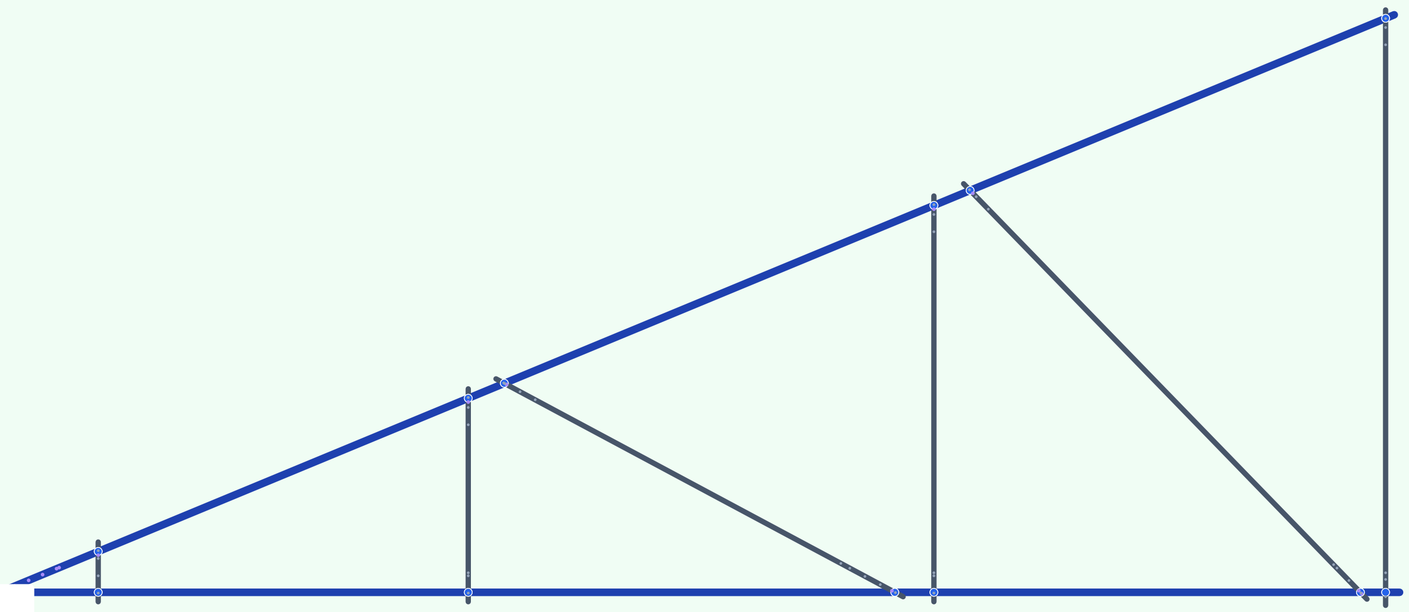

Sticks: 8 | Bolt holes: 24 | Dimples: 0 | Notches: 14 | Swages: 38

DIFF SUMMARY · TN1-7

Bolt holes: 47 -> 24 (-23) | Dimples: 0 -> 0 (+0) | Sticks: 8 -> 8 | Physical-fit ops (notches/swages/chamfers) preserved exactly

HYTEK Linear Truss - full-truss simplifier diff (ENGINEERING REVIEW)

Job 2603191 ROCKVILLE TH-TYPE-A1-LT | plan GF-LIN-89.075 | truss TN1-8 | profile 89x41 lipped C 0.75mm AZ150

Legend: ==== chord ==== web ---- Box piece o bolt hole (orig) o bolt hole (simp) [+] dimple (orig) [+] dimple (simp) . notch . swage

FrameCAD ORIGINAL

offset-based BOLT HOLES - produced by FrameCAD Structure (BEFORE simplification)

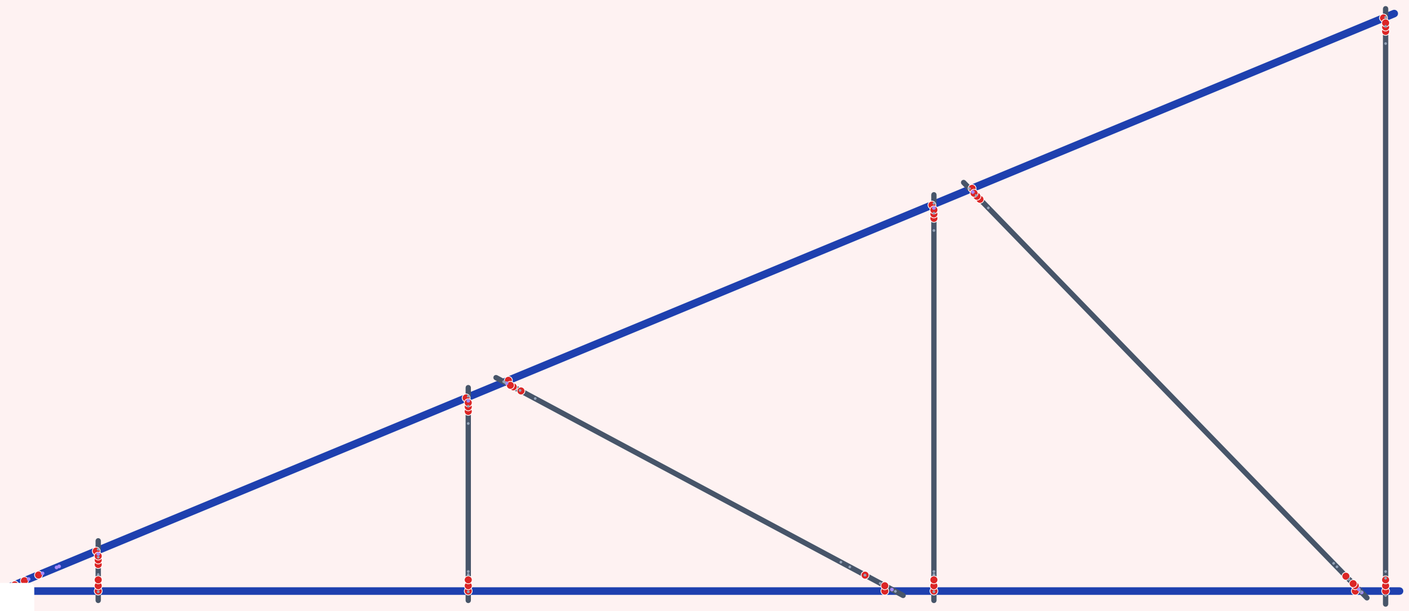

Sticks: 8 | Bolt holes: 47 | Dimples: 0 | Notches: 14 | Swages: 38

SIMPLIFIED OUTPUT

centreline-rule WEB HOLES at every chord-web junction | normalised dimples (15mm margin, 900mm max gap) | W-W skipped

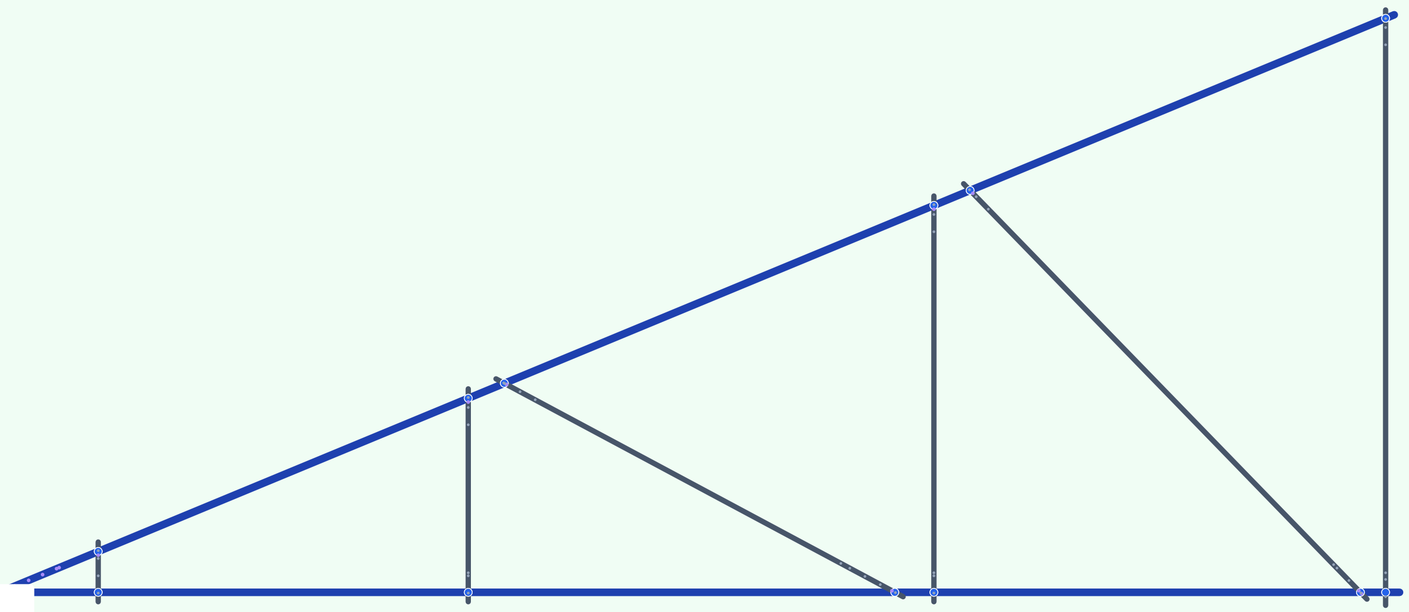

Sticks: 8 | Bolt holes: 24 | Dimples: 0 | Notches: 14 | Swages: 38

DIFF SUMMARY · TN1-8

Bolt holes: 47 -> 24 (-23) | Dimples: 0 -> 0 (+0) | Sticks: 8 -> 8 | Physical-fit ops (notches/swages/chamfers) preserved exactly

HYTEK Linear Truss - full-truss simplifier diff (ENGINEERING REVIEW)

Job 2603191 ROCKVILLE TH-TYPE-A1-LT | plan GF-LIN-89.075 | truss TT2-1 | profile 89x41 lipped C 0.75mm AZ150

Legend: ==== chord ==== web ---- Box piece o bolt hole (orig) o bolt hole (simp) [+] dimple (orig) [+] dimple (simp) . notch . swage

FrameCAD ORIGINAL

offset-based BOLT HOLES - produced by FrameCAD Structure (BEFORE simplification)

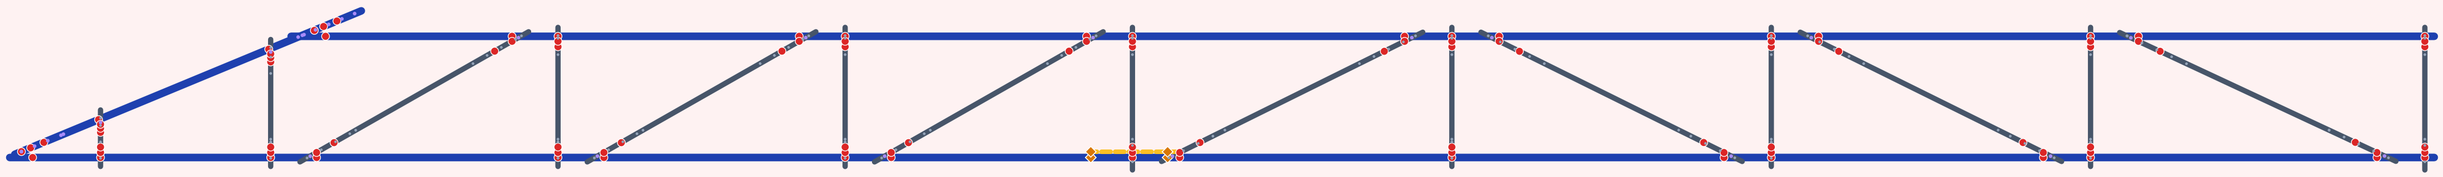

Sticks: 20 | Bolt holes: 106 | Dimples: 4 | Notches: 29 | Swages: 124

SIMPLIFIED OUTPUT

centreline-rule WEB HOLES at every chord-web junction | normalised dimples (15mm margin, 900mm max gap) | W-W skipped

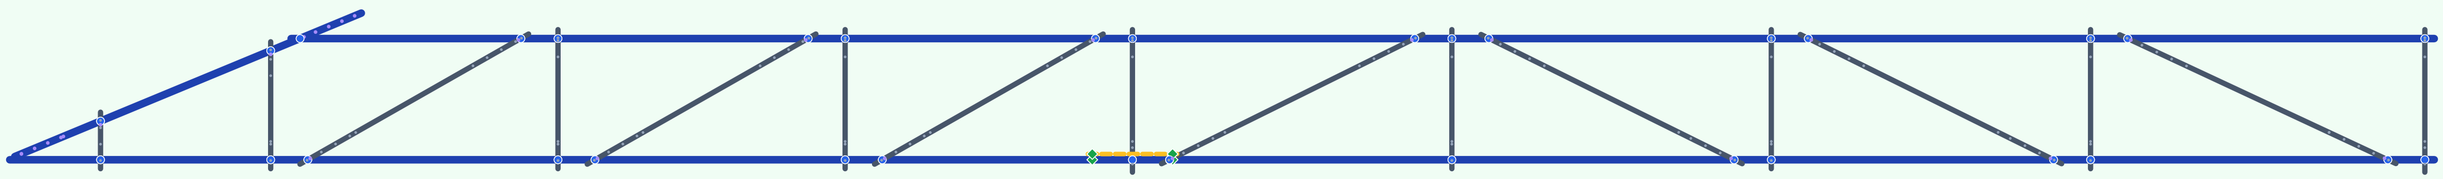

Sticks: 20 | Bolt holes: 68 | Dimples: 4 | Notches: 29 | Swages: 124

DIFF SUMMARY · TT2-1

Bolt holes: 106 -> 68 (-38) | Dimples: 4 -> 4 (+0) | Sticks: 20 -> 20 | Physical-fit ops (notches/swages/chamfers) preserved exactly

HYTEK Linear Truss - full-truss simplifier diff (ENGINEERING REVIEW)

Job 2603191 ROCKVILLE TH-TYPE-A1-LT | plan GF-LIN-89.075 | truss TT3-1 | profile 89x41 lipped C 0.75mm AZ150

Legend: ==== chord ==== web ---- Box piece o bolt hole (orig) o bolt hole (simp) [+] dimple (orig) [+] dimple (simp) . notch . swage

FrameCAD ORIGINAL

offset-based BOLT HOLES - produced by FrameCAD Structure (BEFORE simplification)

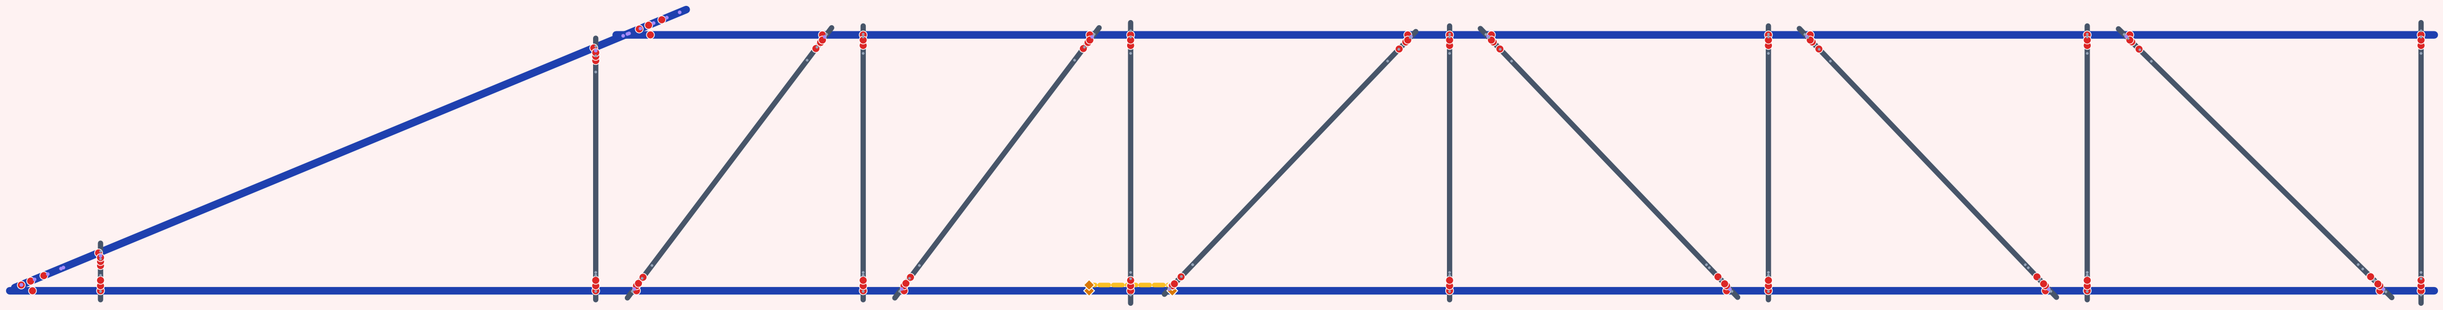

Sticks: 18 | Bolt holes: 106 | Dimples: 4 | Notches: 27 | Swages: 90

SIMPLIFIED OUTPUT

centreline-rule WEB HOLES at every chord-web junction | normalised dimples (15mm margin, 900mm max gap) | W-W skipped

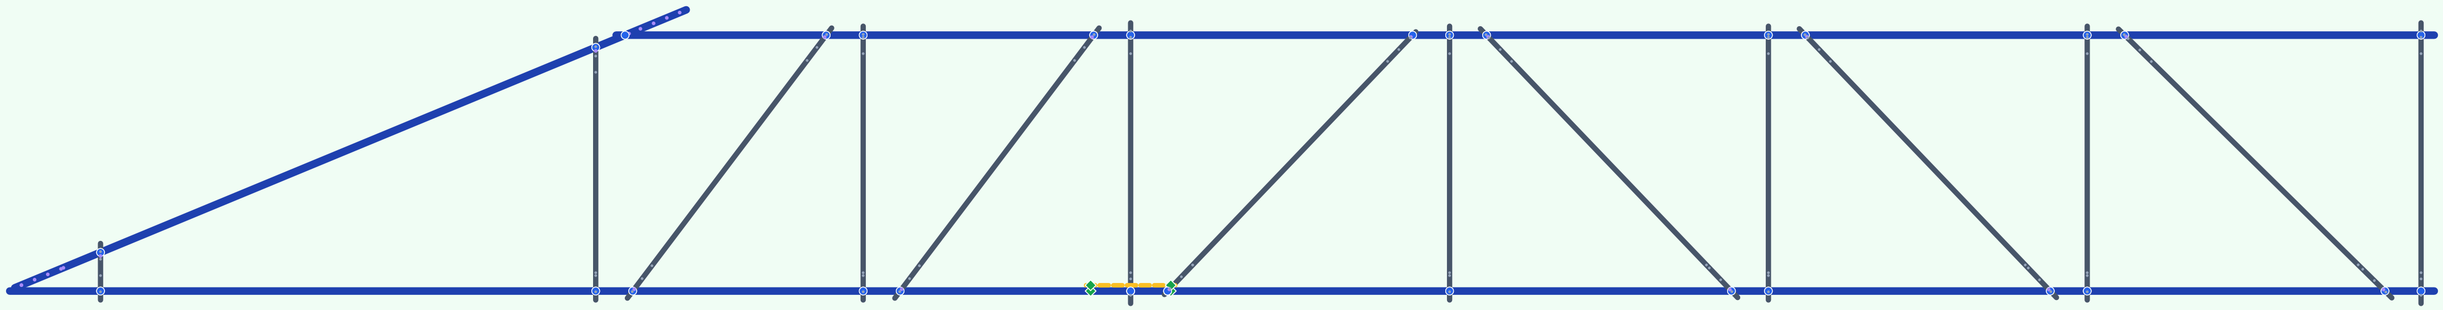

Sticks: 18 | Bolt holes: 60 | Dimples: 4 | Notches: 27 | Swages: 90

DIFF SUMMARY · TT3-1

Bolt holes: 106 -> 60 (-46) | Dimples: 4 -> 4 (+0) | Sticks: 18 -> 18 | Physical-fit ops (notches/swages/chamfers) preserved exactly

HYTEK Linear Truss - full-truss simplifier diff (ENGINEERING REVIEW)

Job 2603191 ROCKVILLE TH-TYPE-A1-LT | plan GF-LIN-89.075 | truss TT4-1 | profile 89x41 lipped C 0.75mm AZ150

Legend: ==== chord ==== web ---- Box piece o bolt hole (orig) o bolt hole (simp) [+] dimple (orig) [+] dimple (simp) . notch . swage

FrameCAD ORIGINAL

offset-based BOLT HOLES - produced by FrameCAD Structure (BEFORE simplification)

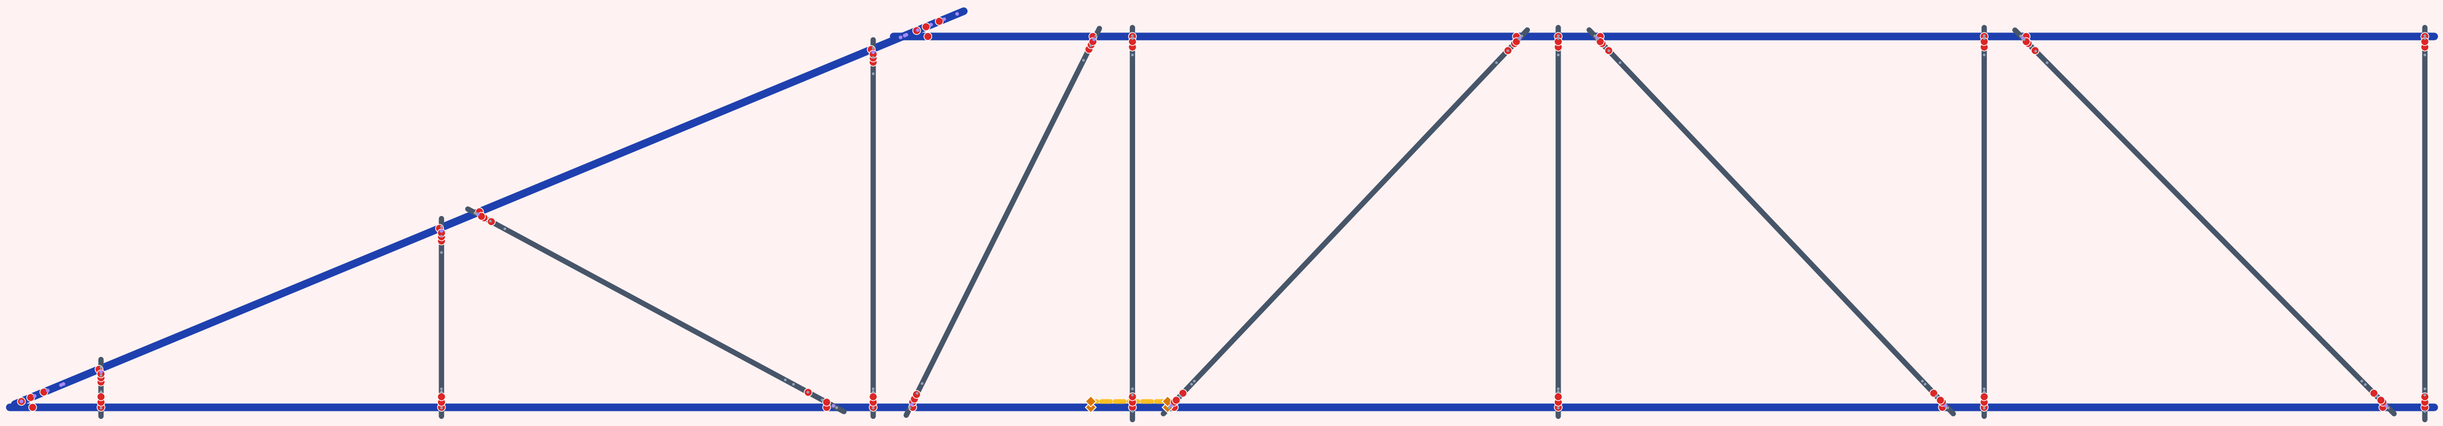

Sticks: 16 | Bolt holes: 92 | Dimples: 4 | Notches: 26 | Swages: 79

SIMPLIFIED OUTPUT

centreline-rule WEB HOLES at every chord-web junction | normalised dimples (15mm margin, 900mm max gap) | W-W skipped

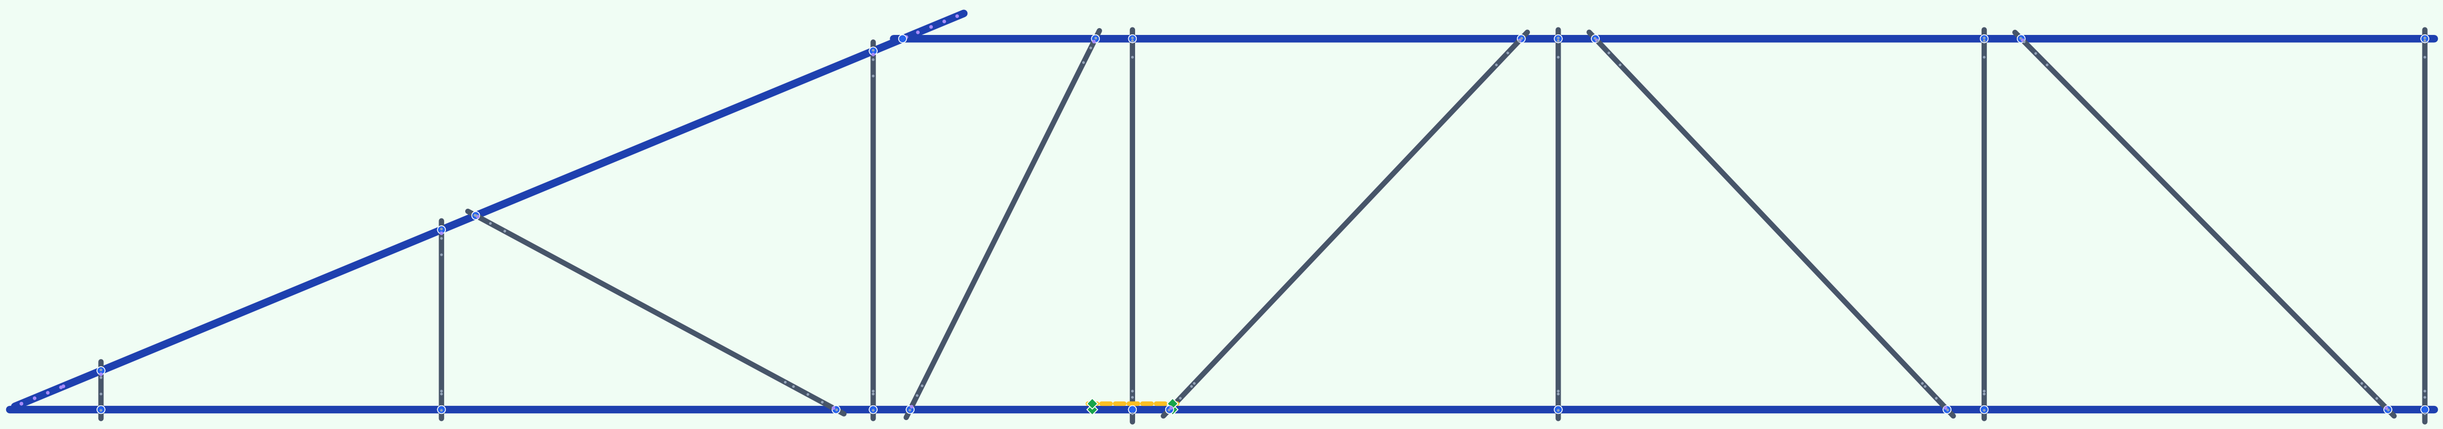

Sticks: 16 | Bolt holes: 52 | Dimples: 4 | Notches: 26 | Swages: 79

DIFF SUMMARY · TT4-1

Bolt holes: 92 -> 52 (-40) | Dimples: 4 -> 4 (+0) | Sticks: 16 -> 16 | Physical-fit ops (notches/swages/chamfers) preserved exactly

HYTEK Linear Truss - full-truss simplifier diff (ENGINEERING REVIEW)

Job 2603191 ROCKVILLE TH-TYPE-A1-LT | plan GF-LIN-89.075 | truss TT1-1 | profile 89x41 lipped C 0.75mm AZ150

Legend: ==== chord ==== web ---- Box piece o bolt hole (orig) o bolt hole (simp) [+] dimple (orig) [+] dimple (simp) . notch . swage

FrameCAD ORIGINAL

offset-based BOLT HOLES - produced by FrameCAD Structure (BEFORE simplification)

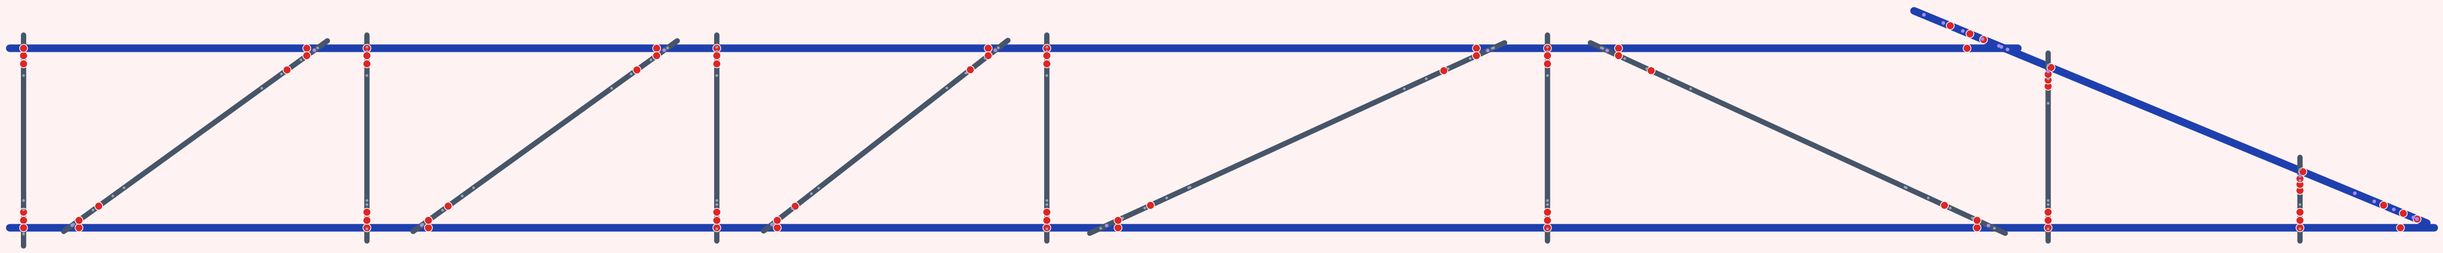

Sticks: 15 | Bolt holes: 82 | Dimples: 0 | Notches: 25 | Swages: 88

SIMPLIFIED OUTPUT

centreline-rule WEB HOLES at every chord-web junction | normalised dimples (15mm margin, 900mm max gap) | W-W skipped

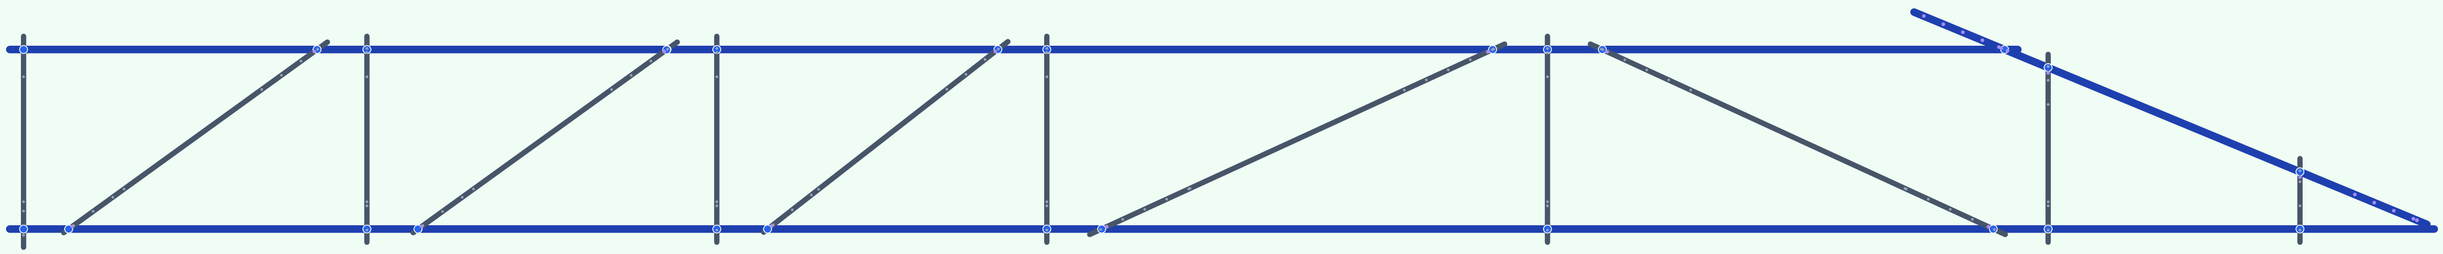

Sticks: 15 | Bolt holes: 50 | Dimples: 0 | Notches: 25 | Swages: 88

DIFF SUMMARY · TT1-1

Bolt holes: 82 -> 50 (-32) | Dimples: 0 -> 0 (+0) | Sticks: 15 -> 15 | Physical-fit ops (notches/swages/chamfers) preserved exactly

HYTEK Linear Truss - full-truss simplifier diff (ENGINEERING REVIEW)

Job 2603191 ROCKVILLE TH-TYPE-A1-LT | plan GF-LIN-89.075 | truss U2-1 | profile 89x41 lipped C 0.75mm AZ150

Legend: ==== chord ==== web ---- Box piece o bolt hole (orig) o bolt hole (simp) [+] dimple (orig) [+] dimple (simp) . notch . swage

FrameCAD ORIGINAL

offset-based BOLT HOLES - produced by FrameCAD Structure (BEFORE simplification)

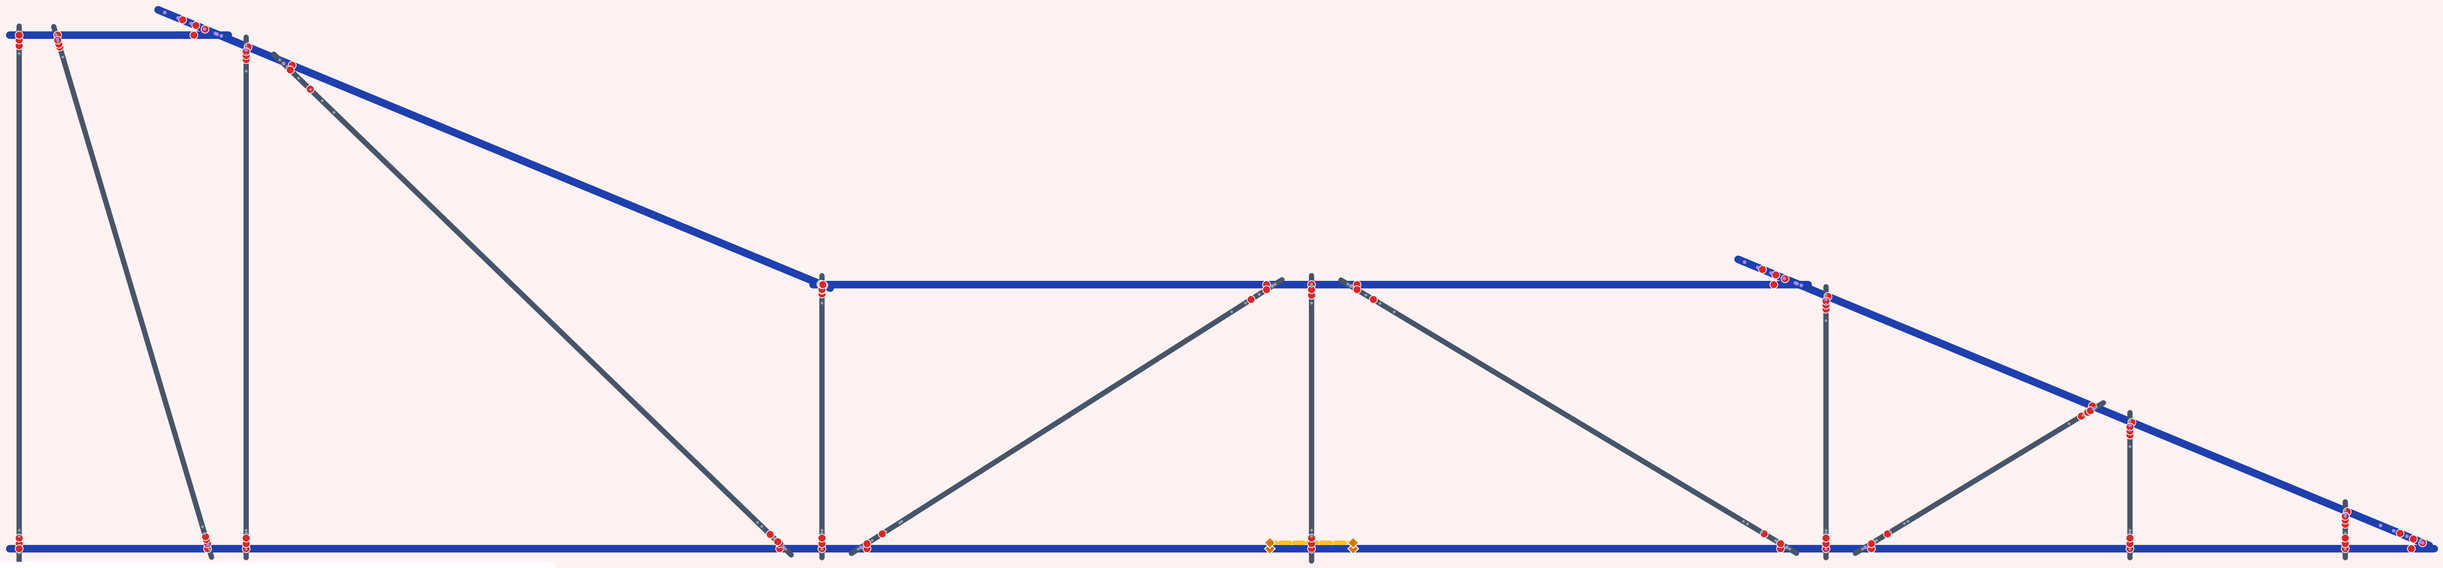

Sticks: 18 | Bolt holes: 96 | Dimples: 4 | Notches: 35 | Swages: 84

SIMPLIFIED OUTPUT

centreline-rule WEB HOLES at every chord-web junction | normalised dimples (15mm margin, 900mm max gap) | W-W skipped

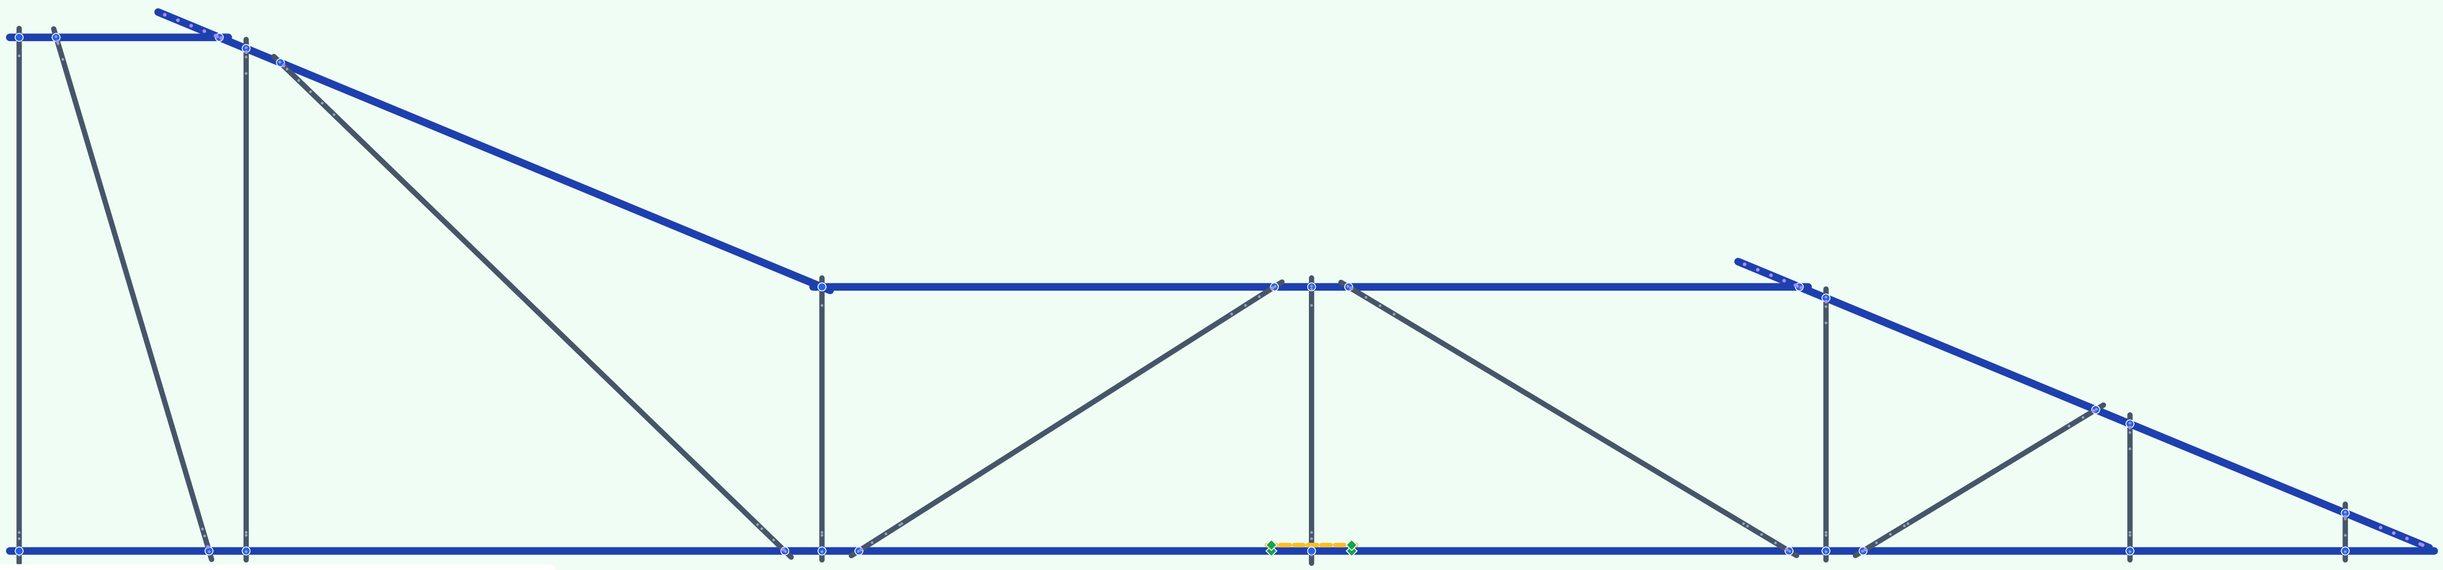

Sticks: 18 | Bolt holes: 54 | Dimples: 4 | Notches: 35 | Swages: 84

DIFF SUMMARY · U2-1

Bolt holes: 96 -> 54 (-42) | Dimples: 4 -> 4 (+0) | Sticks: 18 -> 18 | Physical-fit ops (notches/swages/chamfers) preserved exactly

HYTEK Linear Truss - full-truss simplifier diff (ENGINEERING REVIEW)

Job 2603191 ROCKVILLE TH-TYPE-A1-LT | plan GF-LIN-89.075 | truss U3-1 | profile 89x41 lipped C 0.75mm AZ150

Legend: ==== chord ==== web ---- Box piece o bolt hole (orig) o bolt hole (simp) [+] dimple (orig) [+] dimple (simp) . notch . swage

FrameCAD ORIGINAL

offset-based BOLT HOLES - produced by FrameCAD Structure (BEFORE simplification)

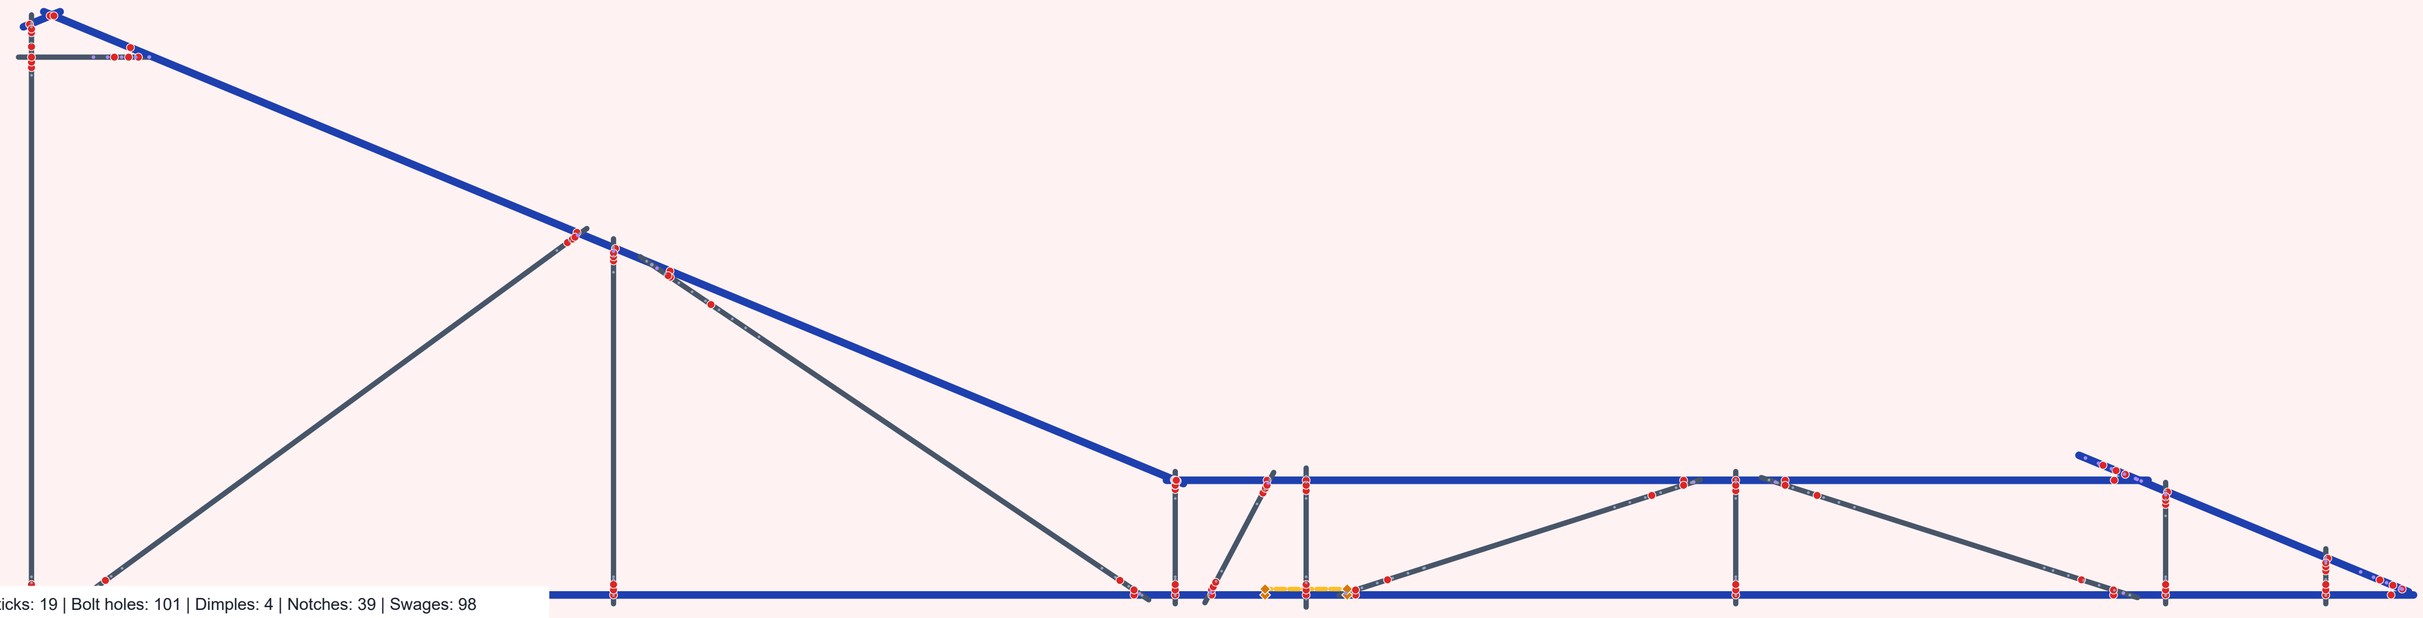

Sticks: 19 | Bolt holes: 101 | Dimples: 4 | Notches: 39 | Swages: 98

SIMPLIFIED OUTPUT

centreline-rule WEB HOLES at every chord-web junction | normalised dimples (15mm margin, 900mm max gap) | W-W skipped

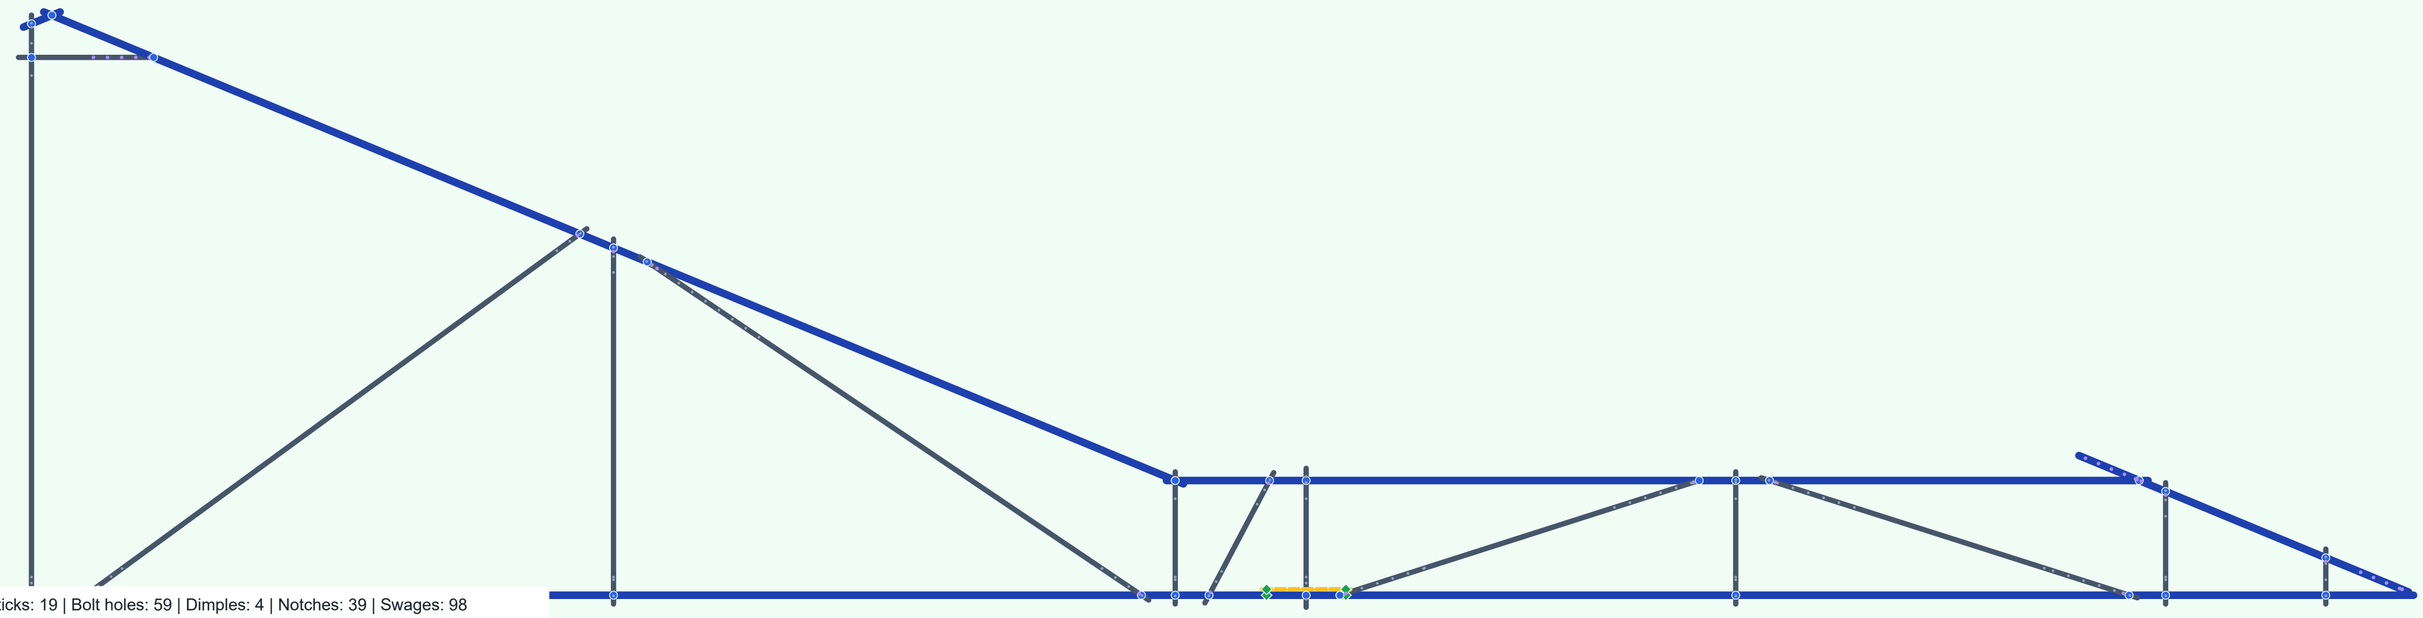

Sticks: 19 | Bolt holes: 59 | Dimples: 4 | Notches: 39 | Swages: 98

DIFF SUMMARY · U3-1

Bolt holes: 101 -> 59 (-42) | Dimples: 4 -> 4 (+0) | Sticks: 19 -> 19 | Physical-fit ops (notches/swages/chamfers) preserved exactly

HYTEK Linear Truss - full-truss simplifier diff (ENGINEERING REVIEW)

Job 2603191 ROCKVILLE TH-TYPE-A1-LT | plan GF-LIN-89.075 | truss U4-1 | profile 89x41 lipped C 0.75mm AZ150

Legend: ==== chord ==== web ---- Box piece o bolt hole (orig) o bolt hole (simp) [+] dimple (orig) [+] dimple (simp) . notch . swage

FrameCAD ORIGINAL

offset-based BOLT HOLES - produced by FrameCAD Structure (BEFORE simplification)

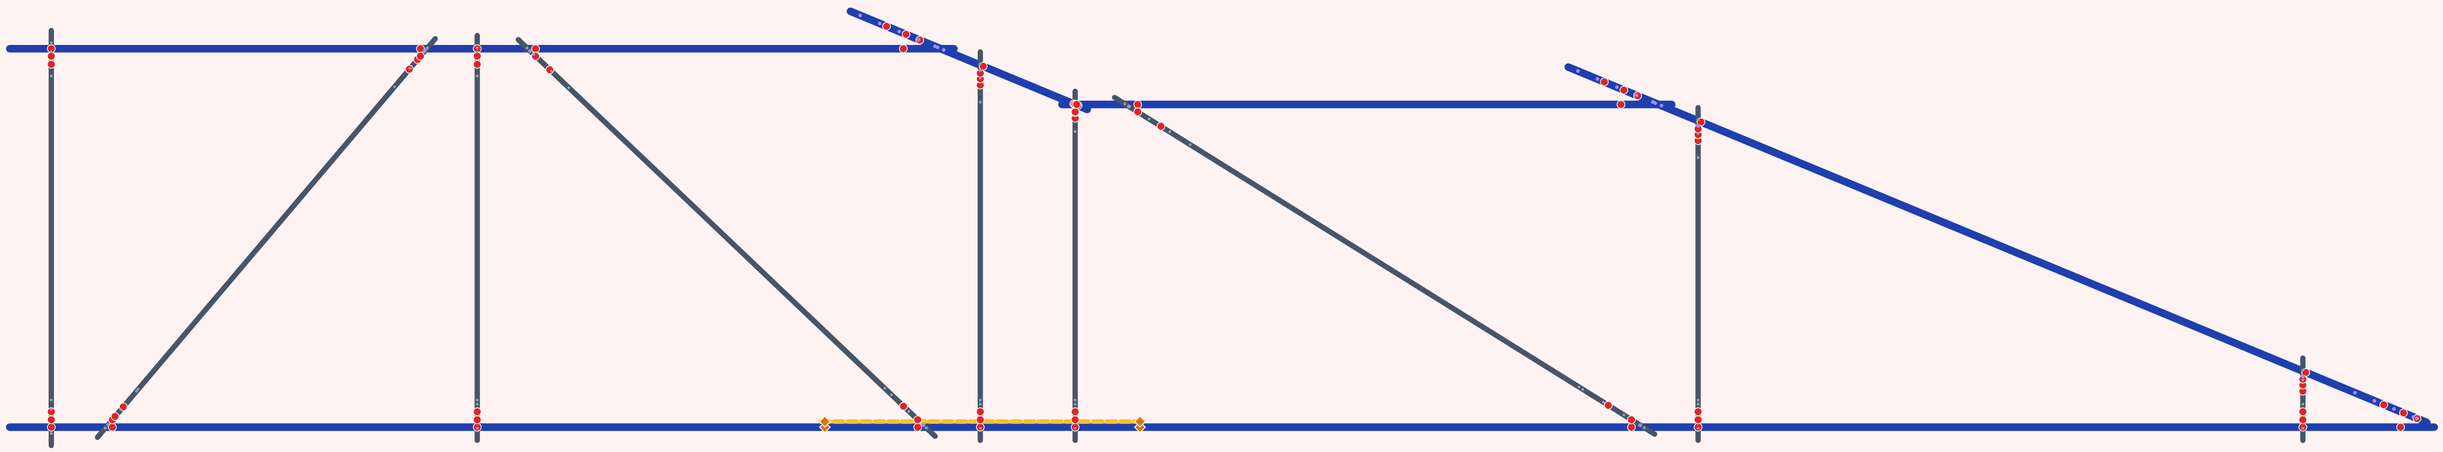

Sticks: 15 | Bolt holes: 75 | Dimples: 4 | Notches: 30 | Swages: 60

SIMPLIFIED OUTPUT

centreline-rule WEB HOLES at every chord-web junction | normalised dimples (15mm margin, 900mm max gap) | W-W skipped

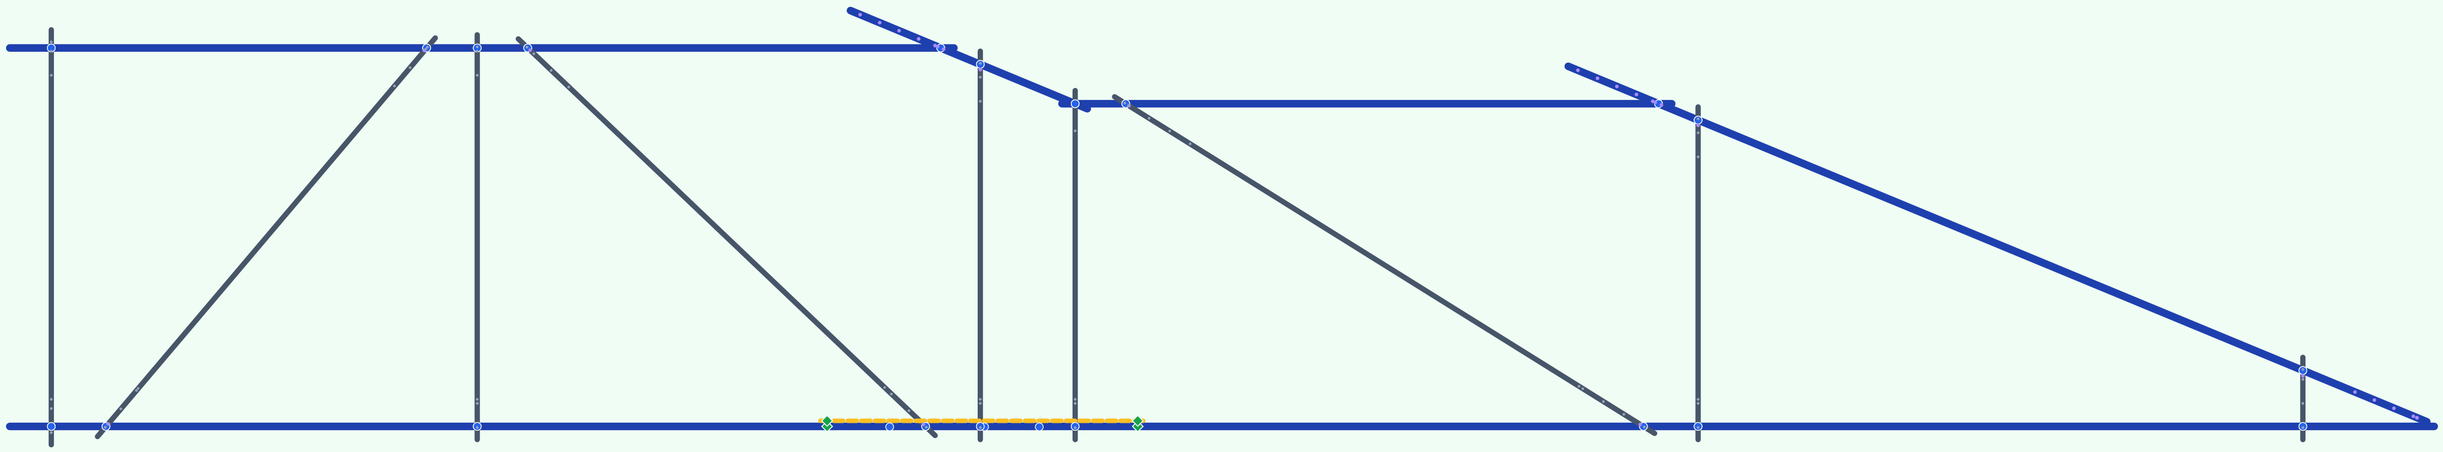

Sticks: 15 | Bolt holes: 44 | Dimples: 4 | Notches: 30 | Swages: 60

DIFF SUMMARY · U4-1

Bolt holes: 75 -> 44 (-31) | Dimples: 4 -> 4 (+0) | Sticks: 15 -> 15 | Physical-fit ops (notches/swages/chamfers) preserved exactly

HYTEK Linear Truss - full-truss simplifier diff (ENGINEERING REVIEW)

Job 2603191 ROCKVILLE TH-TYPE-A1-LT | plan GF-LIN-89.075 | truss U1-1 | profile 89x41 lipped C 0.75mm AZ150

Legend: ==== chord ==== web ---- Box piece o bolt hole (orig) o bolt hole (simp) [+] dimple (orig) [+] dimple (simp) . notch . swage

FrameCAD ORIGINAL

offset-based BOLT HOLES - produced by FrameCAD Structure (BEFORE simplification)

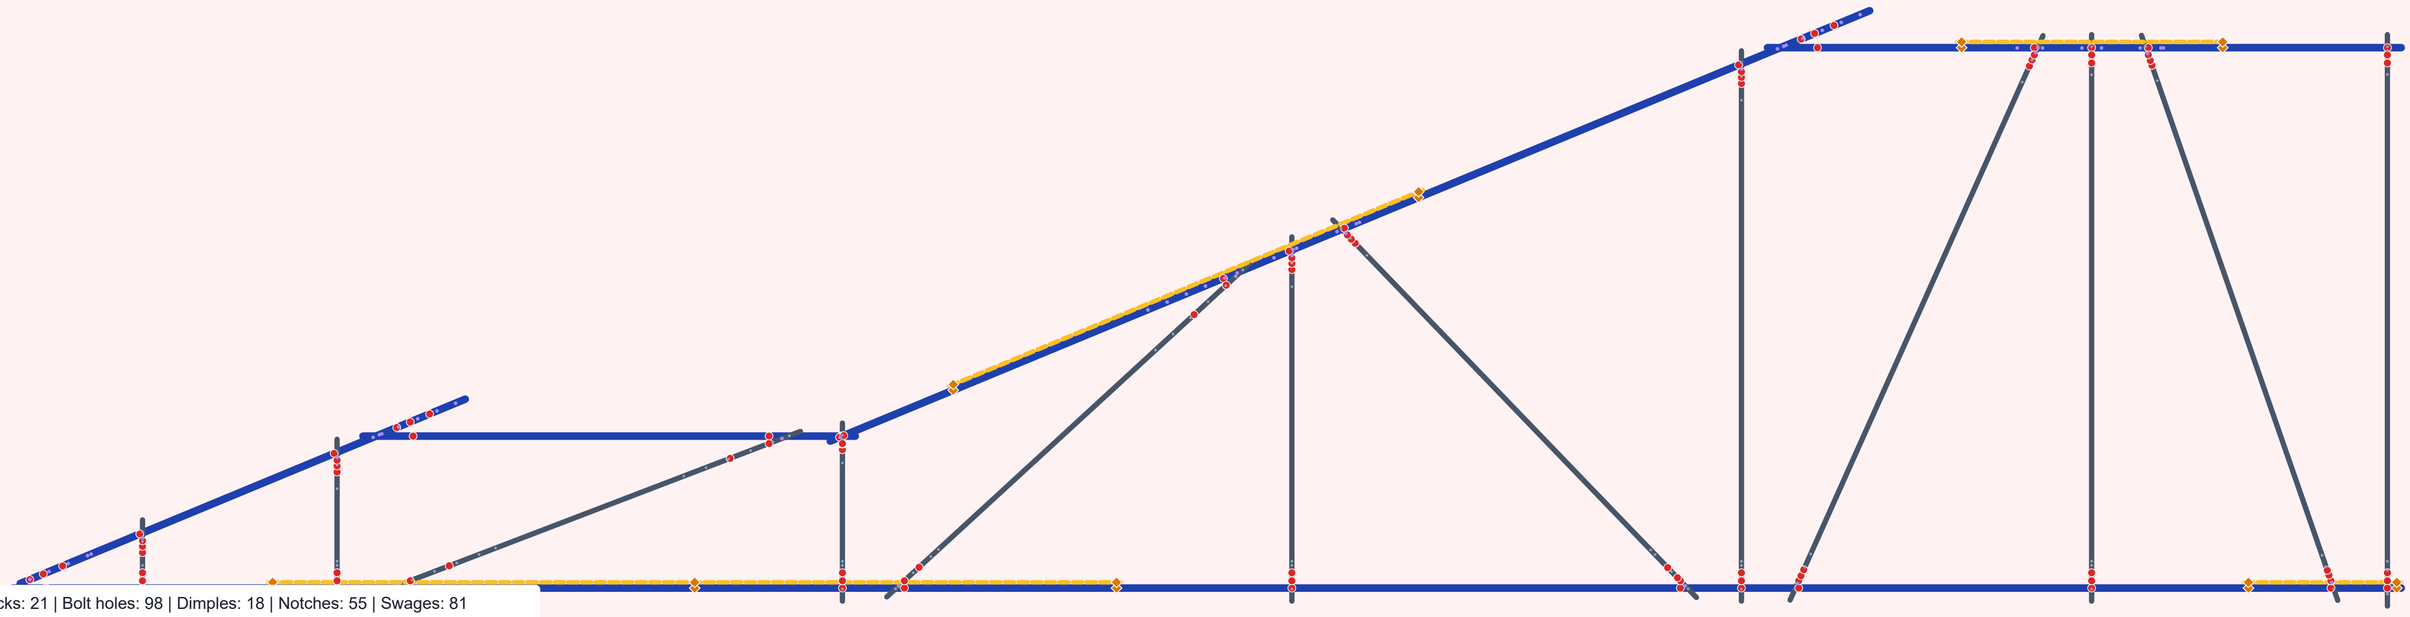

Sticks: 21 | Bolt holes: 98 | Dimples: 18 | Notches: 55 | Swages: 81

SIMPLIFIED OUTPUT

centreline-rule WEB HOLES at every chord-web junction | normalised dimples (15mm margin, 900mm max gap) | W-W skipped

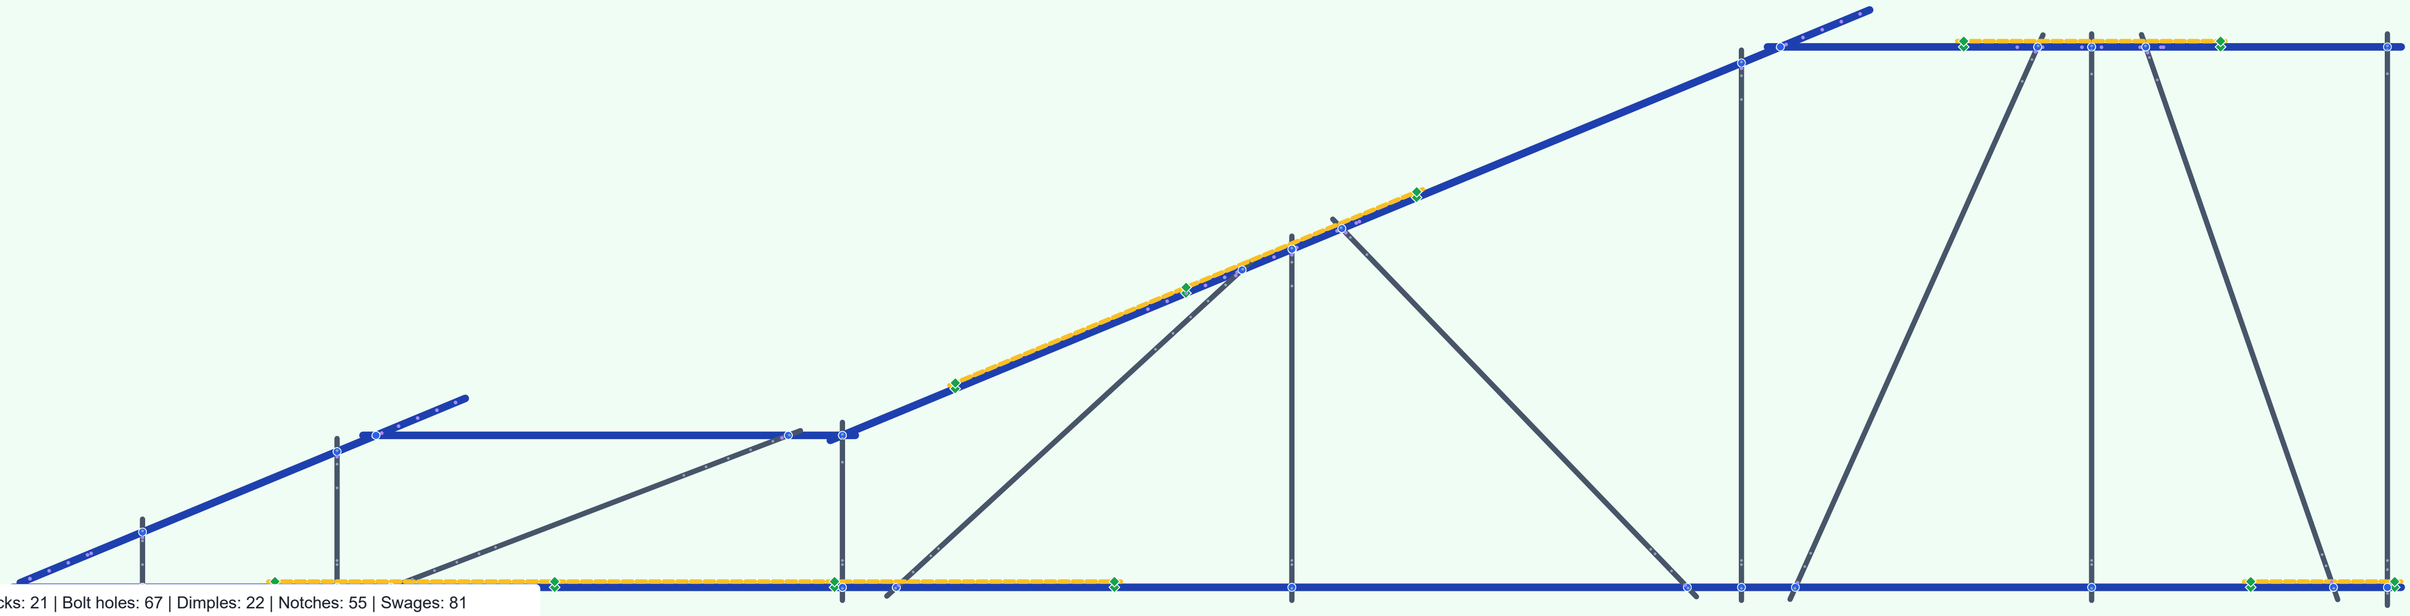

Sticks: 21 | Bolt holes: 67 | Dimples: 22 | Notches: 55 | Swages: 81

DIFF SUMMARY · U1-1

Bolt holes: 98 -> 67 (-31) | Dimples: 18 -> 22 (+4) | Sticks: 21 -> 21 | Physical-fit ops (notches/swages/chamfers) preserved exactly