




SOCKET TEST FOR LEADED PACKAGES
5253-050/-100 SERIES
 AND
5254-050/-100 SERIES
 (LOW PROFILE VERSION)

12/03

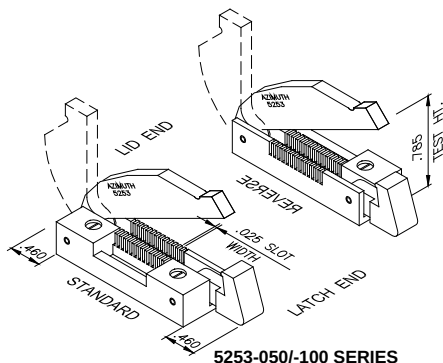

SPECIFICATIONS:

INSULATOR: PPS (POLYPHENYLENE SULFIDE)
 CONTACT: BeCu., SPRING TEMPERED 30u GOLD OVER 30u NICKEL
 THERMAL RANGE: -55°C/+155°C



FEATURES:

ACCOMMODATES I/C FLAT PACKS WITH .024 WIDE (MAX)
 BY .012 THICK (MAX) BY .160 LONG (MIN) LEADS ON
 .050 OR .100 CENTERS.

USE STANDARD AND REVERSE SOCKET FOR DOUBLE SIDED FLAT PACKS.

AVAILABLE ON G-10 MOUNTING BOARDS OR PRINTED CIRCUIT BOARDS
 CUSTOM BOARD AND SOCKET DESIGN SERVICES AVAILABLE.

REPAIRABLE.

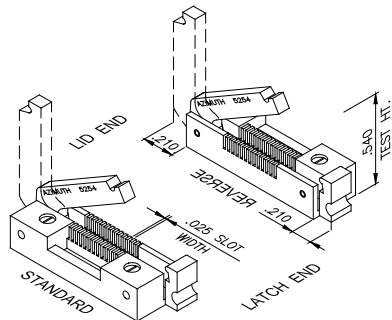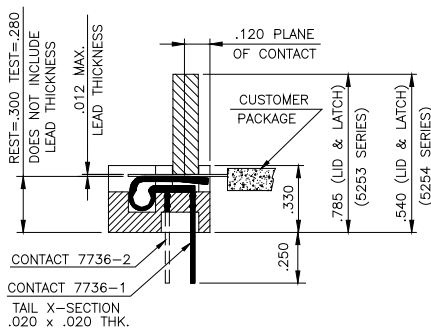

5254-050/-100 SERIES
 (LOW PROFILE VERSION)

REPLACEMENT PART NUMBERS:

CONTACT: 7736-1 AND 7736-2
 LATCH: 7727-1 (5253); 71393 (5254)

LID : 7835 or 71240-XXX-N

STANDARD LID	LOW PROFILE LID	NUMBER OF LEADS PER SIDE	CONTACT SPACING (.050 OR .100)
--------------	-----------------	--------------------------	--------------------------------

ORDERING INFORMATION:

5253 or 5254 - XXX - N F

BASIC PART No.
 5253-REGULAR or
 5254-LOW PROFILE

CENTER-TO-CENTER
 (.050 OR .100)

FOOTPRINT OPTION (SEE LAYOUT)
 S, R (FOR .050 & .100 c/c)
 S1, R1, S2, R2 (FOR .100 c/c ONLY)

NUMBER OF CONTACTS PER SIDE
 5254-100-26 (max)
 5254-050-51 (max)

FOOTPRINT (ODD)
(SOCKET SIDE OF BOARD)


STANDARD

REVERSE

Dimensions and labels for the footprint:

- Overall width: .500
- Top left corner: .125
- Top right corner: .085
- Top edge: .450
- Bottom edge: .450
- Left edge: .100
- Right edge: .050 REF
- Internal dimensions: .200 (twice)
- Labels: LID END, START HERE, (+), (4) - ϕ .093 (#2-56 RD. HD)


A = (.050)(N-1) WHERE N = NUMBER OF CONTACTS PER SIDE

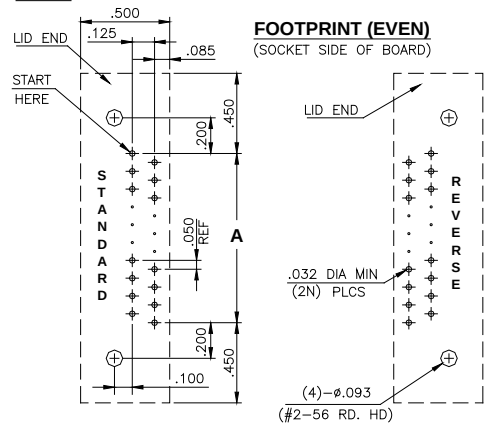

FOOTPRINT (ODD)
(SOCKET SIDE OF BOARD)

The diagram shows two views of a footprint: STANDARD and REVERSE. The STANDARD view includes dimensions: .500 (total width), .125 (left margin), .085 (right margin), .450 (total height), .200 (top margin), .100 (center margin), and .200 (bottom margin). A 'START HERE' arrow points to the top-left corner. The REVERSE view shows a .032 DIA MIN (2N) PLCS dimension and a (4)-Ø.093 dimension. A (#2-56 RD. HD) dimension is also indicated.

A = (.100)(N-1) WHERE N = NUMBER OF CONTACTS PER SIDE

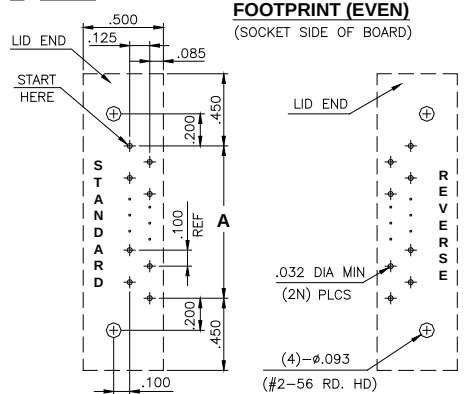

A = (.100)(N-1) WHERE N = NUMBER OF CONTACTS PER SIDE

