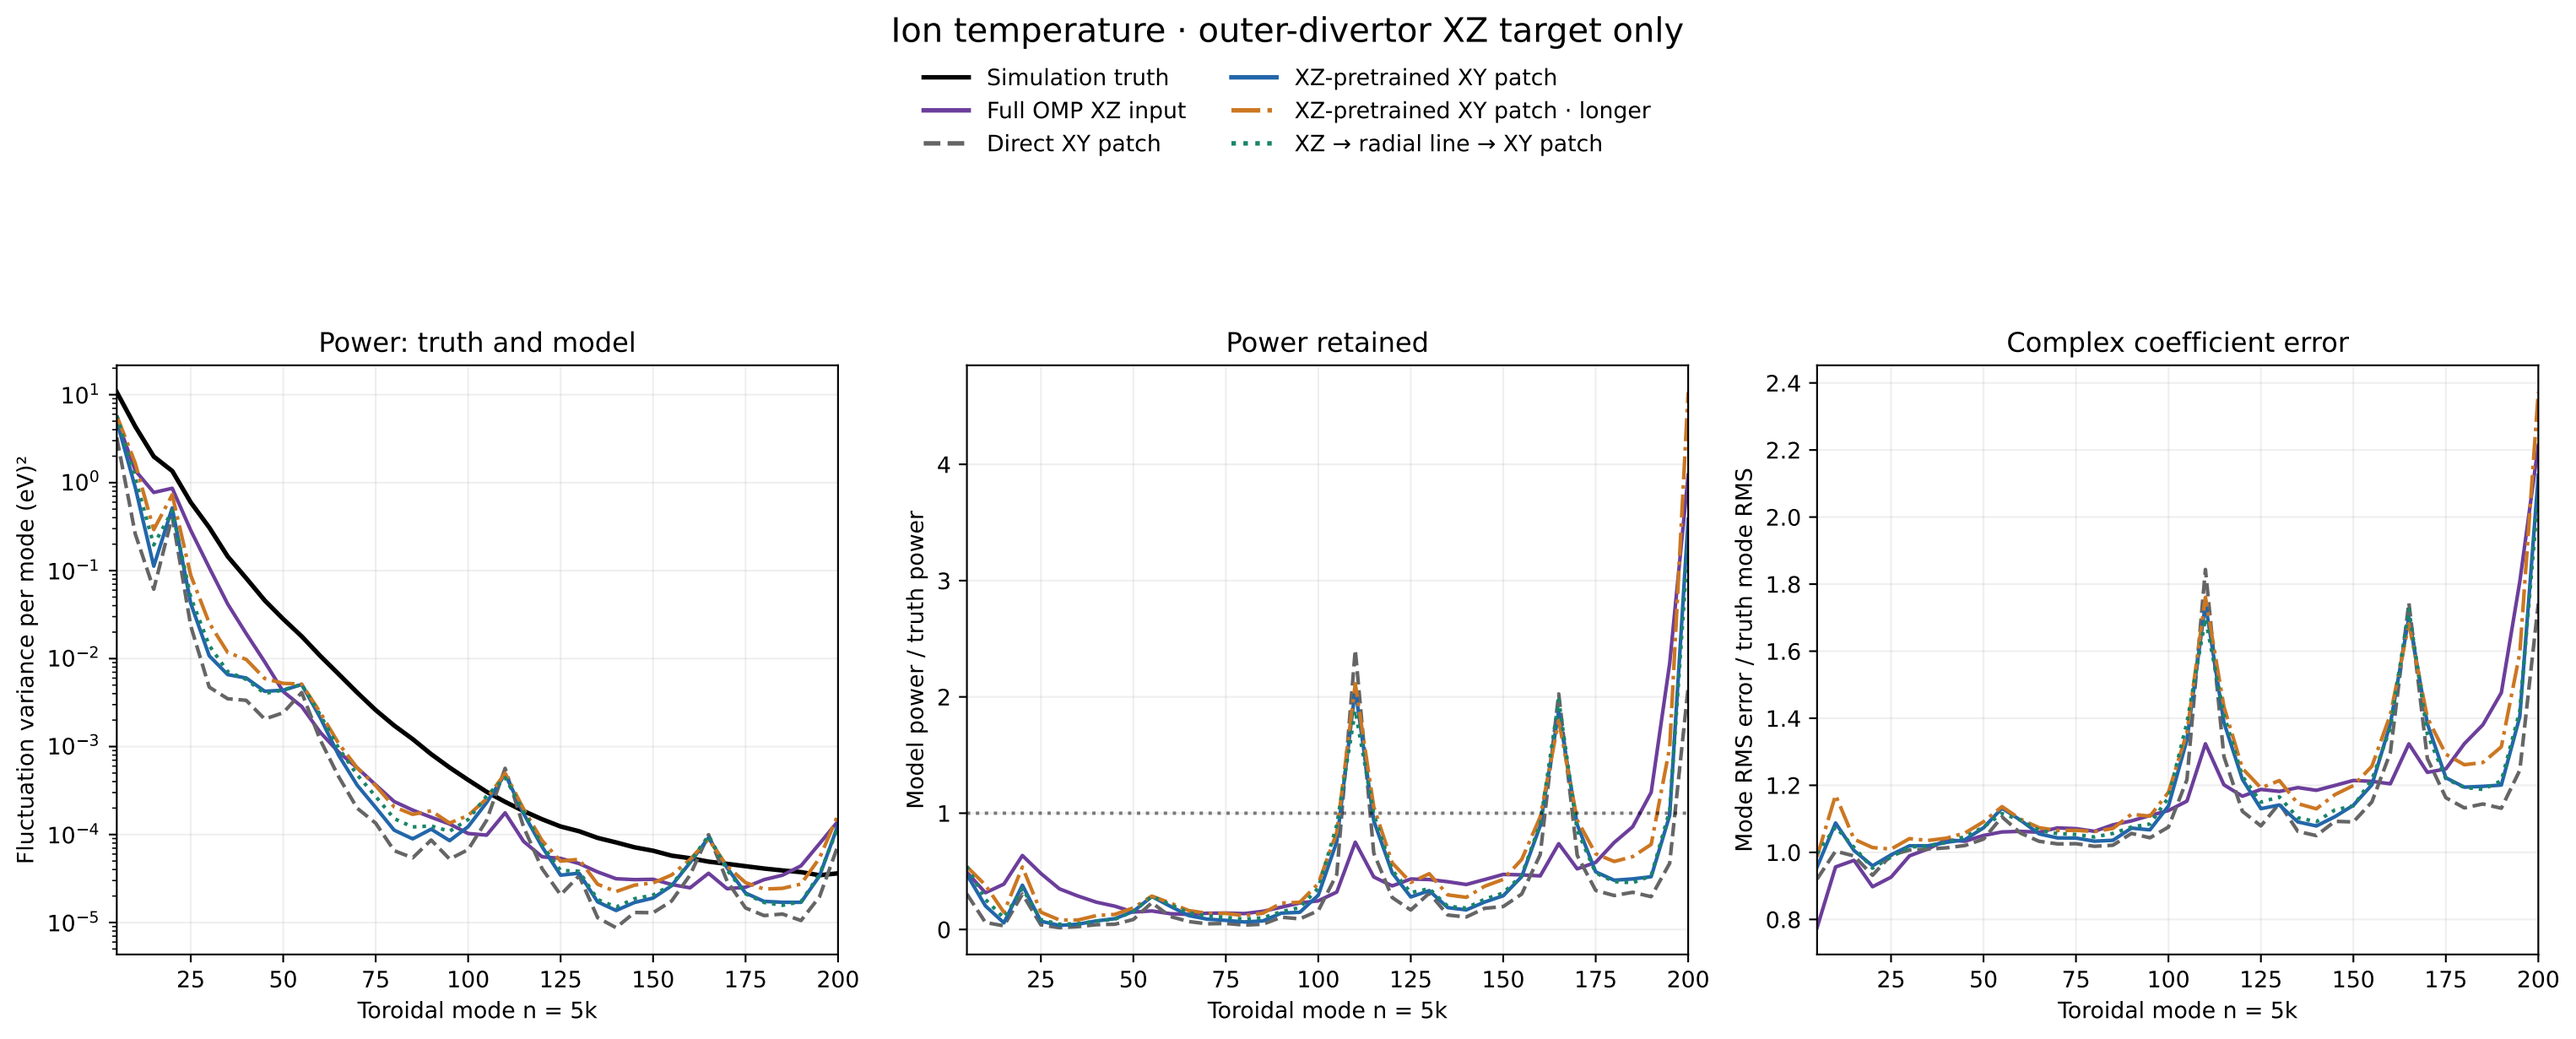
Ion temperature · outer-divertor XZ target only
Simulation truth
Full OMP XZ input
Direct XY patch
XZ-pretrained XY patch
XZ-pretrained XY patch · longer
XZ → radial line → XY patch
Power: truth and model
Fluctuation variance per mode (eV)²
Toroidal mode n = 5k
Power retained
Model power / truth power
Toroidal mode n = 5k
Complex coefficient error
Mode RMS error / truth mode RMS
Toroidal mode n = 5k