BOSS X Civilnet 3.0

Installation Manual

(Read all document carefully before installation of BOSS X)

(Back up Your Existing Data before Installation)

1. Introduction

This manual helps you to install **BOSS X (Army Civilnet 3.0)** on desktops and laptops. The installation system is flexible enough to use even if you have no previous knowledge of Linux or computer networks. If you select default options, BOSS X Civilnet 3.0 provides a complete desktop operating system, including productivity applications, Internet utilities, and desktop tools.

1.1 System Requirements

To install BOSS X Civilnet 3.0 you need minimum system configurations. The hardware requirement details are as follows:-

Hard Disk – Min 100 GB or More.

RAM – Min 4 GB. Recommended RAM – 8 GB.

Processor – Min i3 (8th Gen). Recommended – i5 (8th Gen and above)

To install the BOSS X Civilnet 3.0 from disc, you need the installation medium and DVD.

Currently, the OS supports the *x86_64* architecture.

1.2 Download ISO

Download/Get the ISO Image from BOSS X ISOC Portal.

Verifying Checksum procedure

(a) Download/Get the md5sum checksum file from BOSS X ISOC Portal.

(b) Generate md5sum for the downloaded ISO with following command :

(c) Open the terminal and run: -

- (i) **sudo md5sum "ISO file path"**
- (ii) **verify the checksum**.

1.3 Create a Bootable DVD

(a) Insert a DVD into existing BOSS 8.0 PC.

(b) Open "**Brasero/K3B**".

(c) Select "**Burn Image**" option.

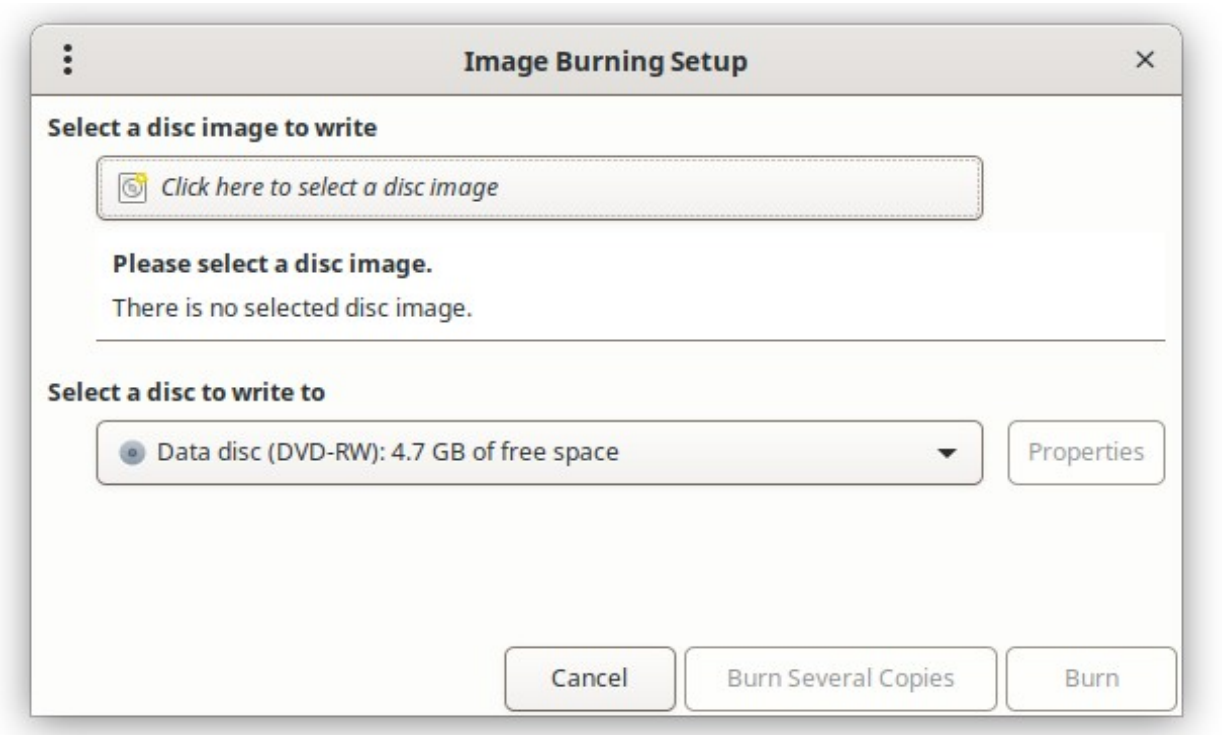

(d) Click on **"Click here to select a disc image"** and select the downloaded BOSS X OS **iso** file from downloads.

(e) Click on "**Burn**" to start burning of BOSS X OS iso file.

Installation Procedure

1. **BIOS Setup:-**

   1. Set up the **boot Order** to DVD drive.
   2. Disable **Secure boot** option.
   3. Enable **AHCI** Mode.
   4. Select **UEFI** mode, if not work try with **Legacy** mode

To boot your computer from CD/DVD disc:

1. Switch on the computer.
2. Insert the BOSS X Civilnet 3.0 bootable DVD into the drive and Boot the installation system.
3. A screen appears to ask for a booting option.,

   1) *BOSS Live*

   2) Graphical Install

   3) Install

   4) Advance options

   5) Accessible dark contract Installer Menu

   6) Install with speech synthesis

2. Select Graphical Install to proceed the installation:

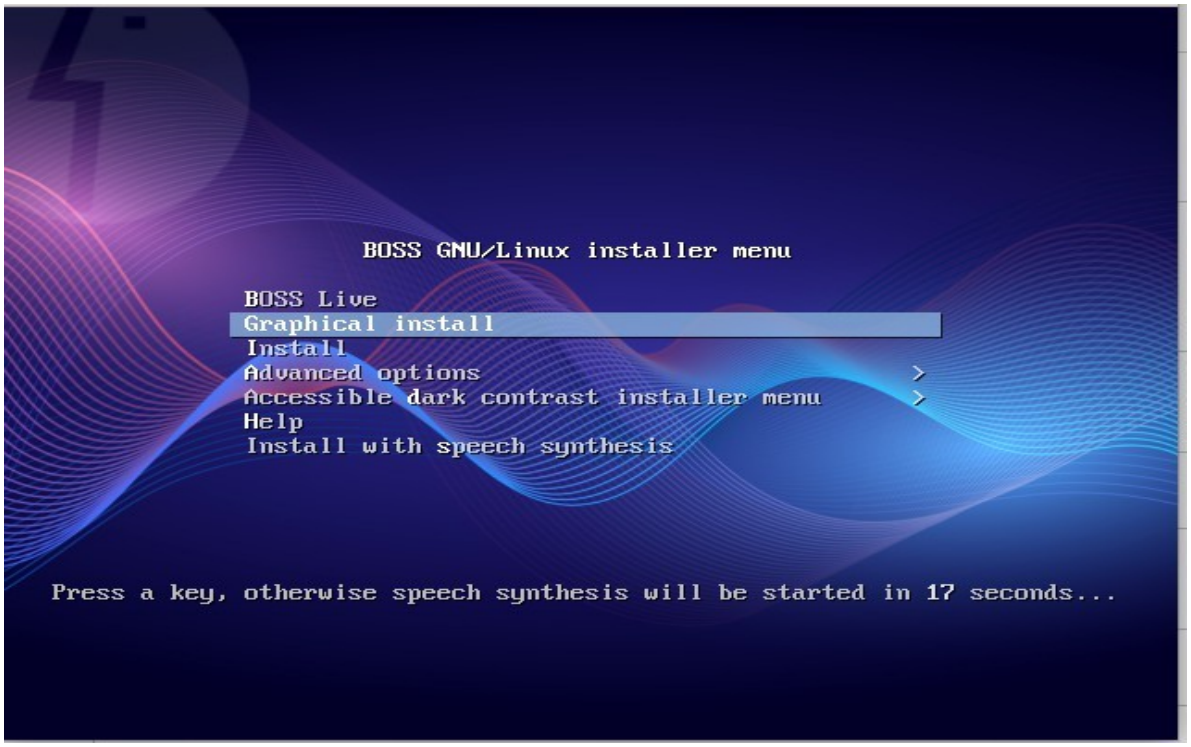

Figure. Boot Screen

3. Language Selection:

The installation program displays a list of languages which are supported by BOSS GNU/Linux. Select the Language as “English” / “Tamil” / “Hindi” (or any other). Click “Continue” to proceed.

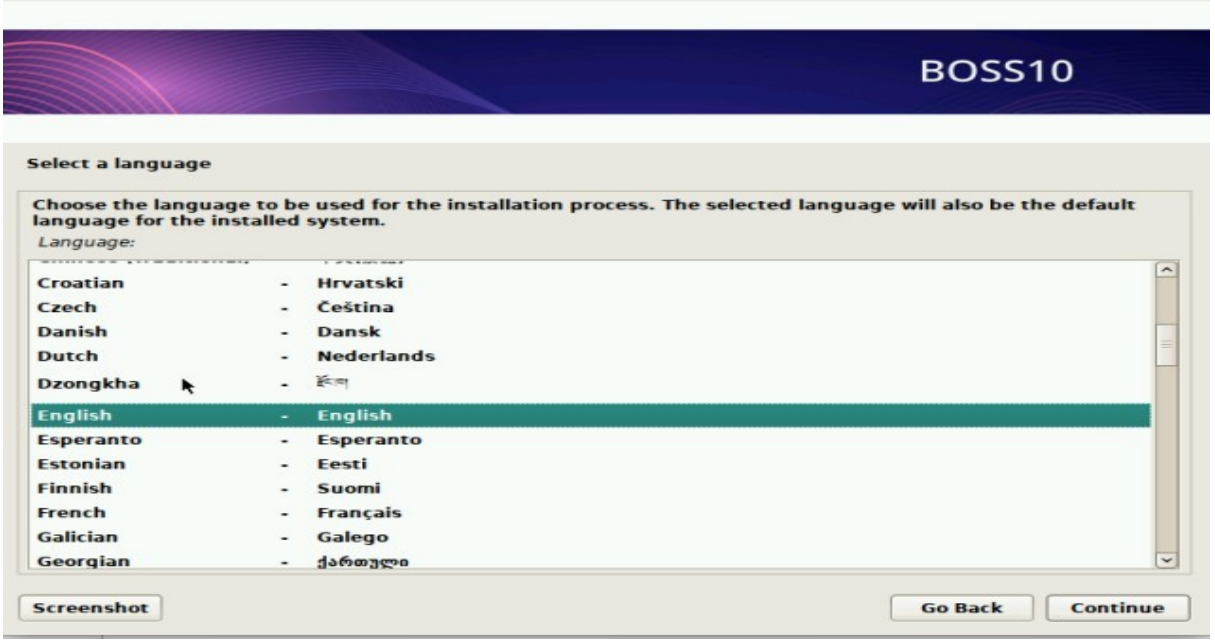

Figure. Language Selection Screen

4. Country Selection:

Next the country selection screen appears. Select the appropriate country from the list. Click “Continue” and proceed further

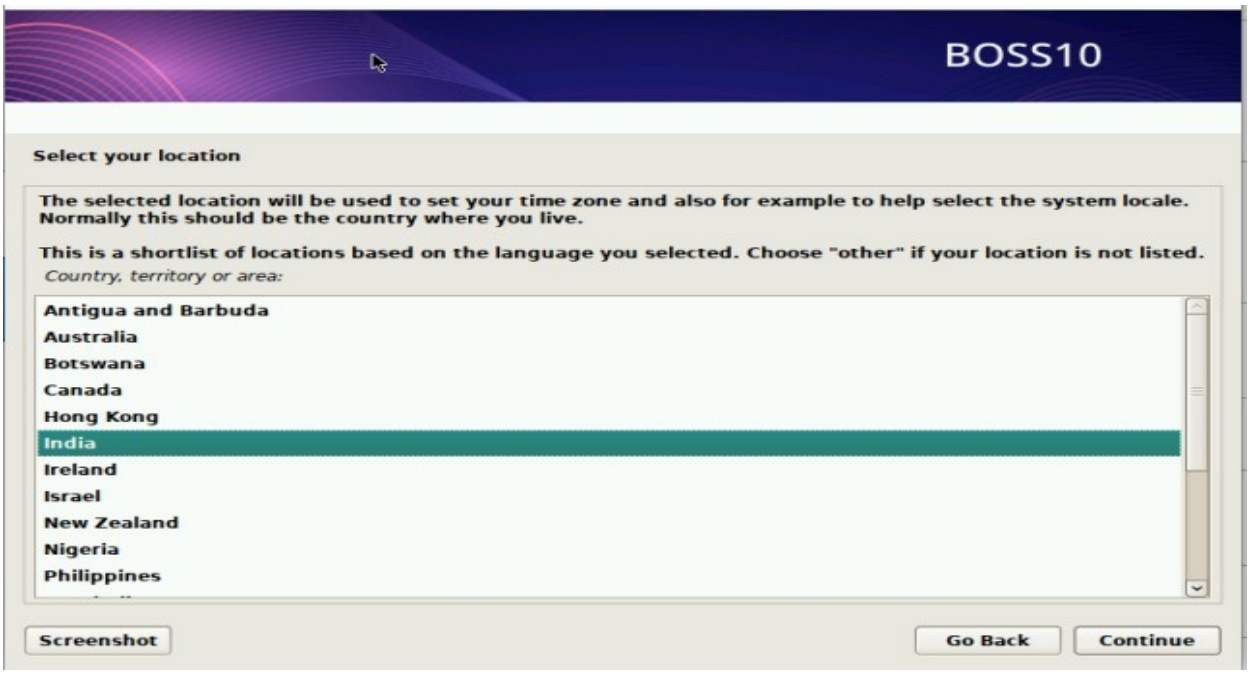

Figure. Country Selection Screen

5. Keyboard Configuration:

The installation program displays a list of the keyboard layouts supported by BOSS OS. Highlight the correct layout on the list, and select “Continue”.

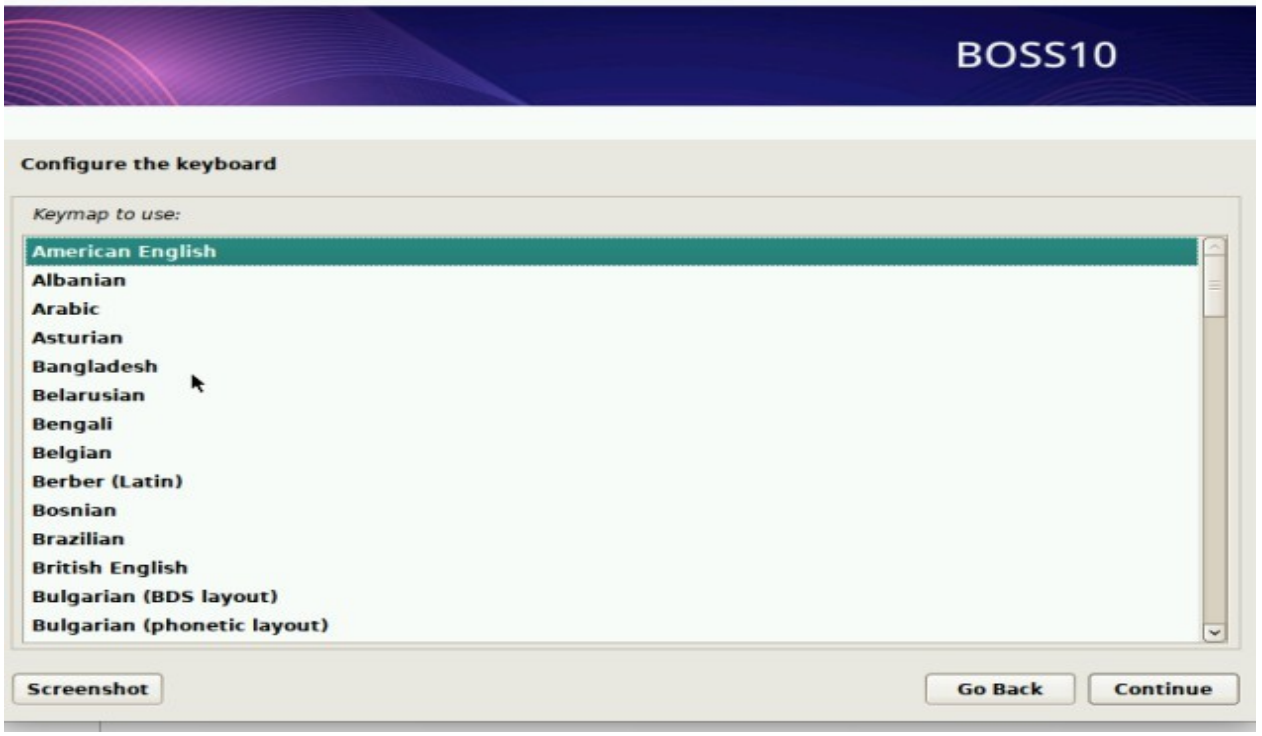

Figure. Keyboard Configuration Screen

6. Configure the Network Hostname for this system:

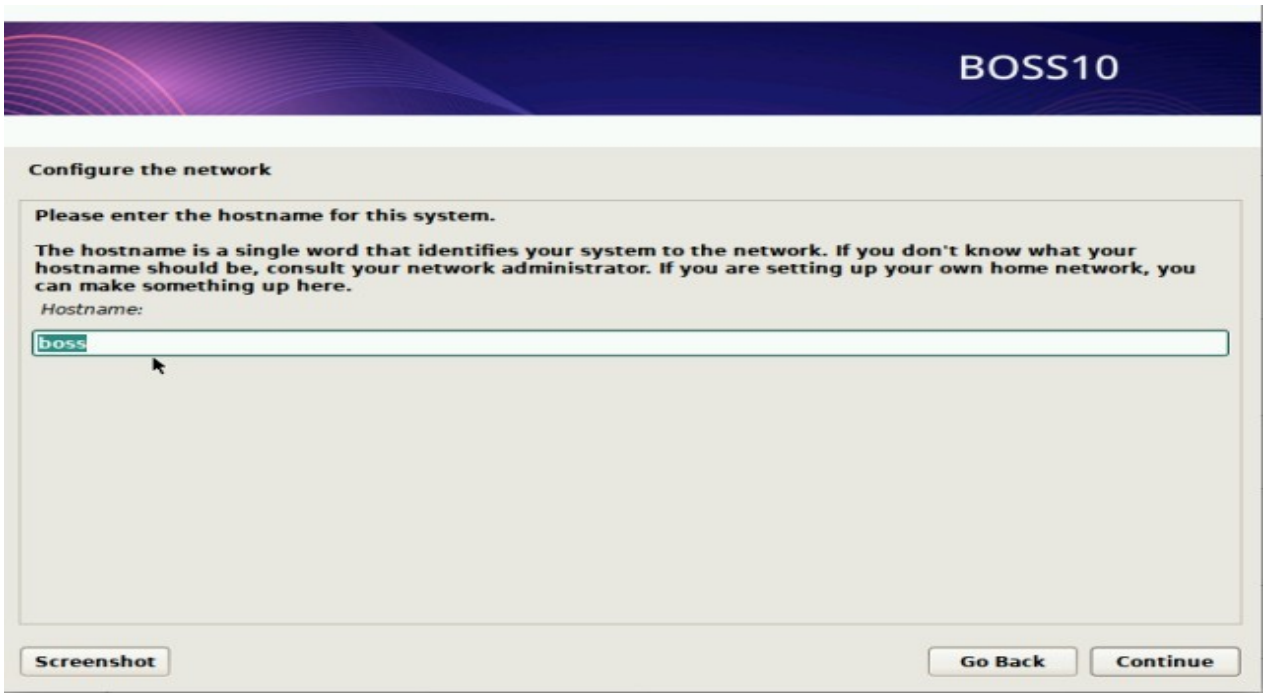

Figure. Network Configuration Screen

Click on “Continue” to proceed

7. Set up Administrator User Name:

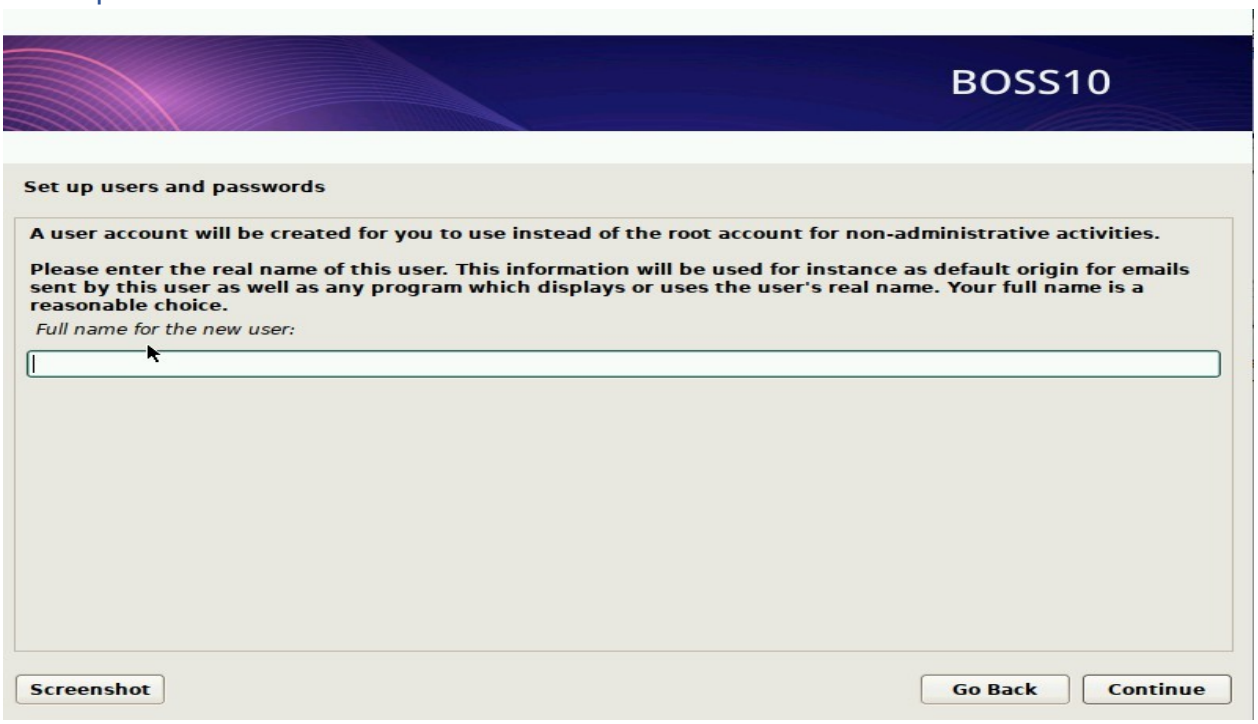

Figure. Set Up Admin User Name Screen

Enter the **Administrator User Name** and Click on “Continue” to proceed

8. LVM Encrypted Disk:

1. After all this information, system is prompting for you need to write the changes to disk. For this select “Yes” in the following screen and then click “Continue”.

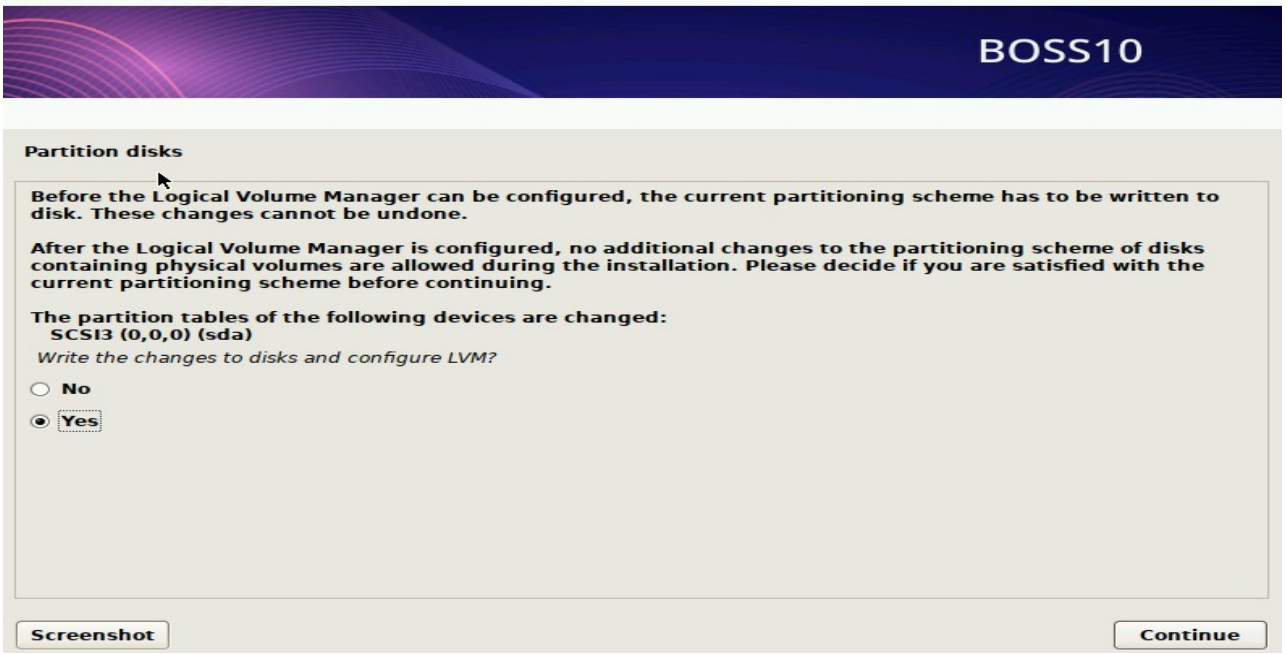

Figure. Partition Disk Screen

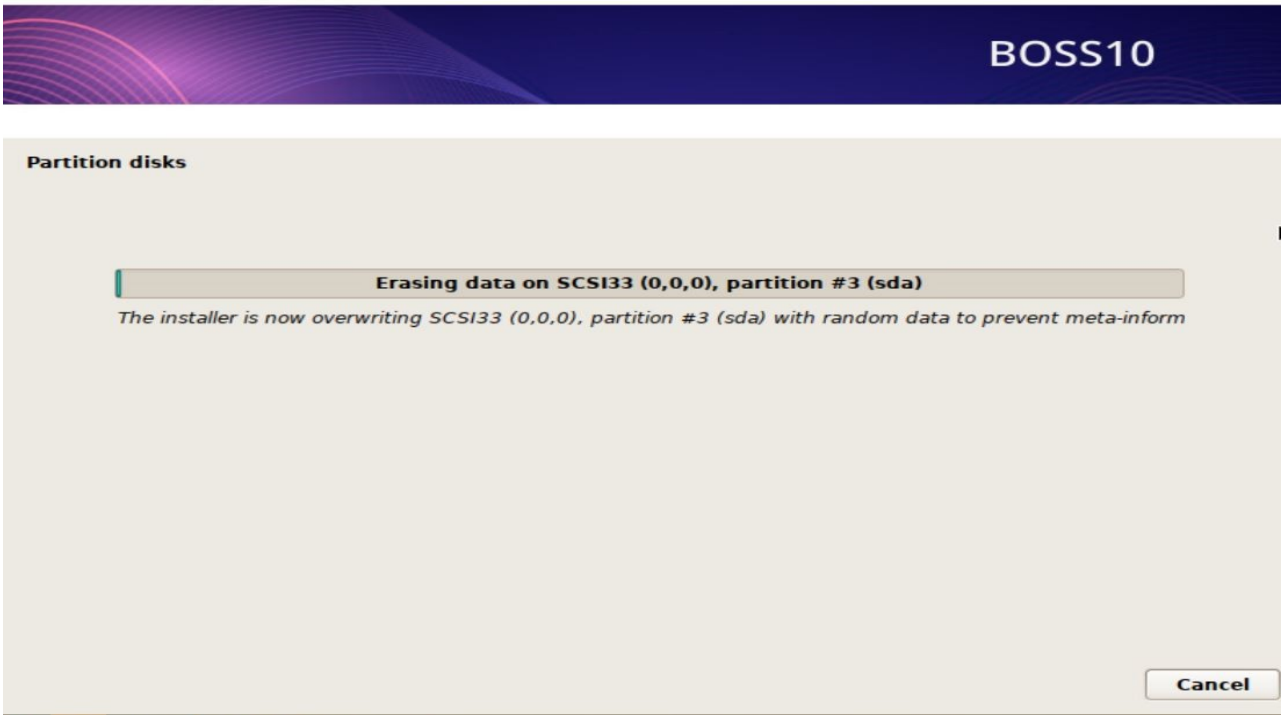

Figure. Finishing Partition Disk Screen

9. Set the Encryption password setup (Crypt Password):

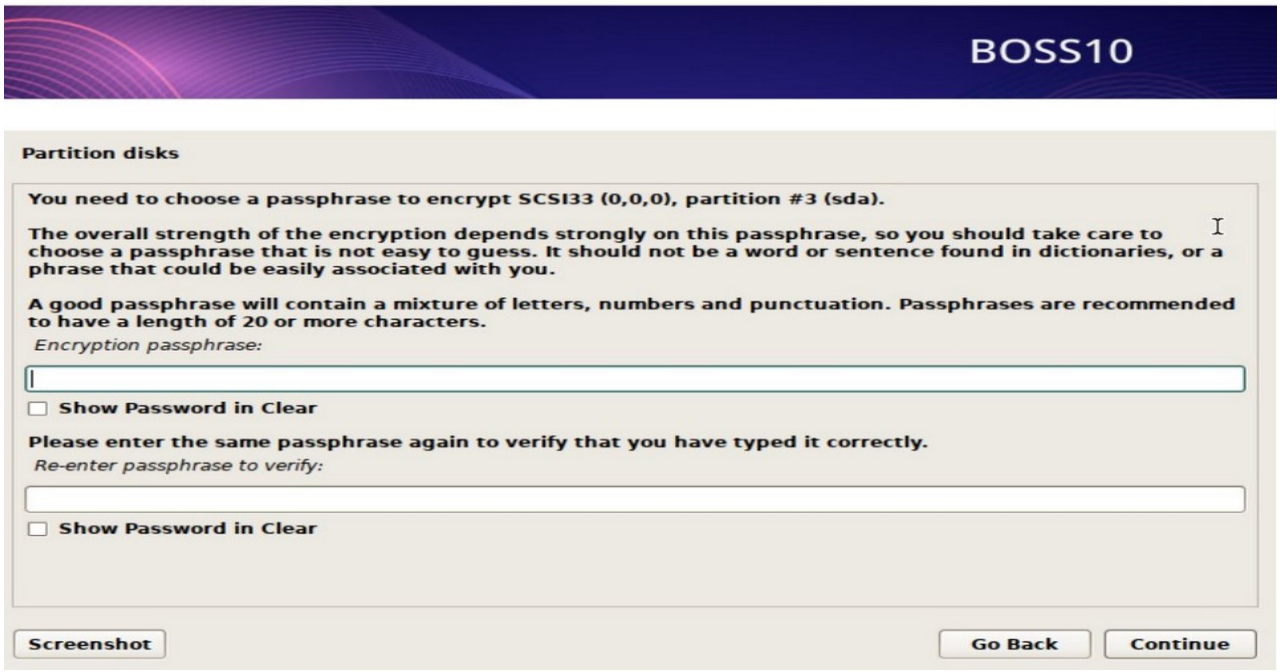

Figure. Set the Encryption Password Screen

Passwords to be kept safely in written form.

Note:-

1. **Maintaining Record of Encryption passphrase of responsibility of Respective IT Cell of Dte/Br/Unit/Coy**

2. **If Encryption passphrase not available with IT Cell, it cannot be recovered , only re-installation of BOSS OS is solution**

10 .GRUB Boot loader Installation:

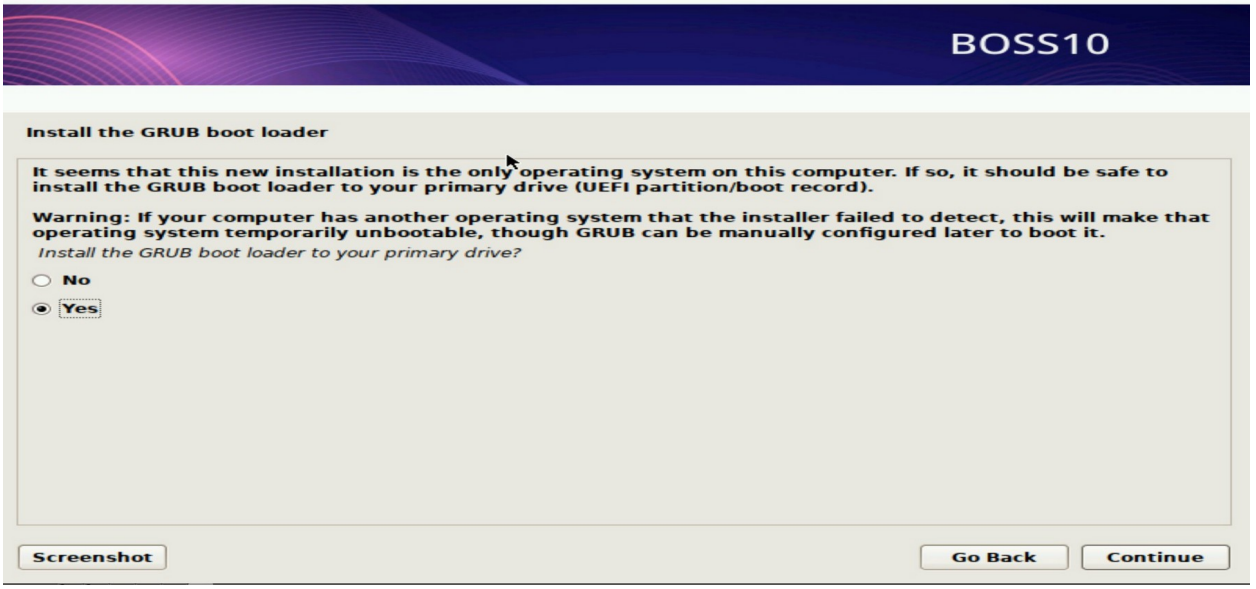

Figure. Grub Installation Screen

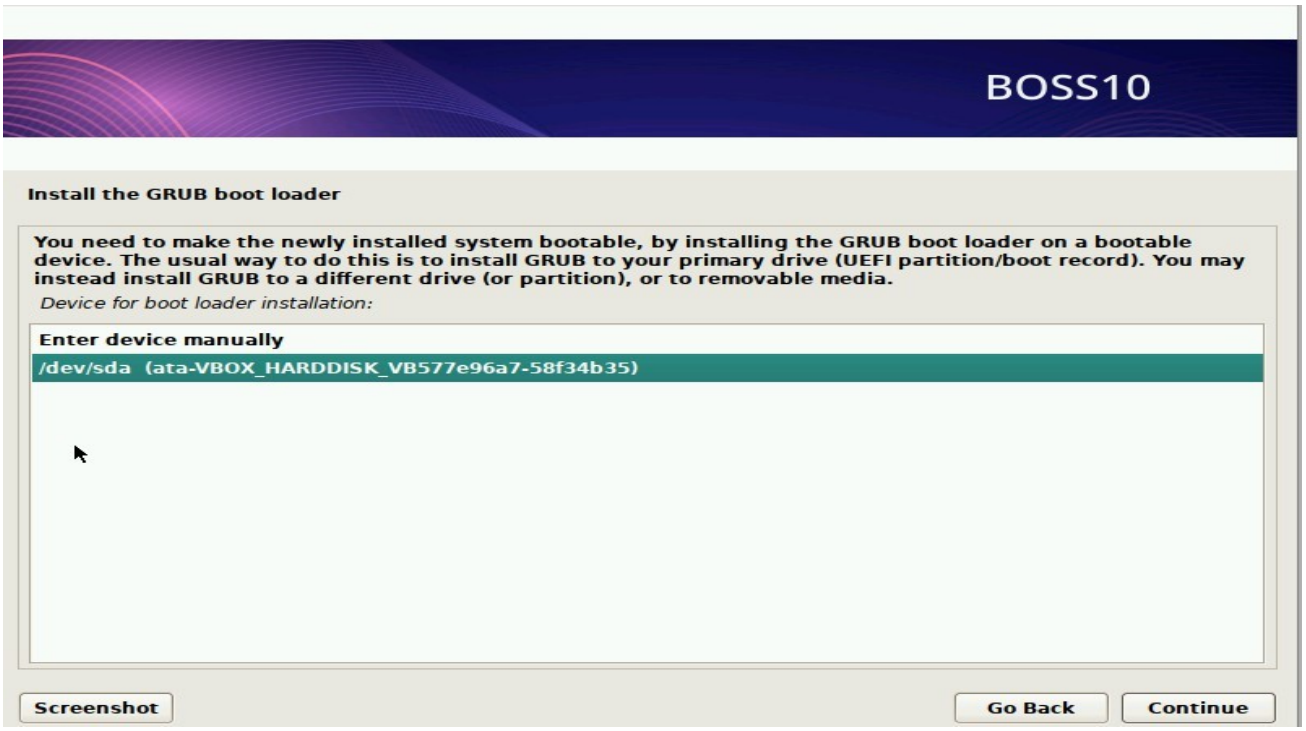

click on continue and Proceed.

11. Finishing The Installation

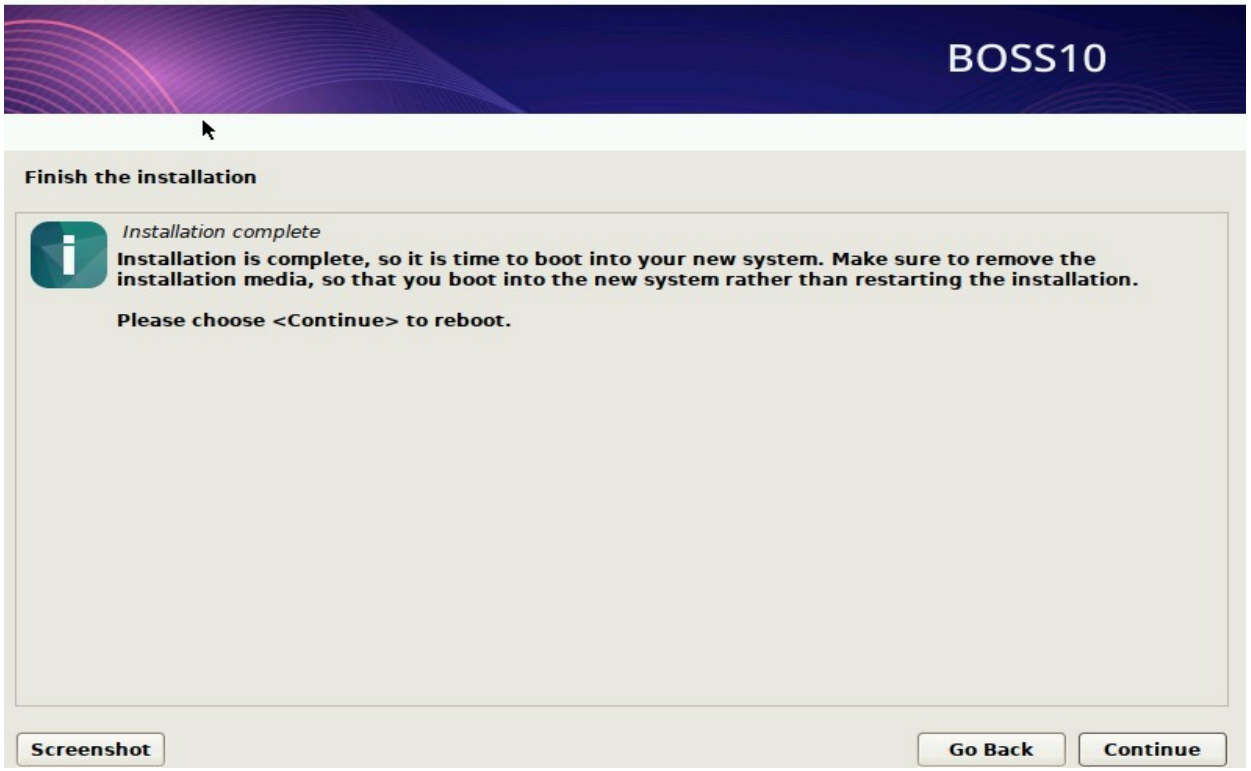

The installation process gets completed. click on “continue” to Reboot the system.

12. System boot

Now the system is ready to boot from grub. Just press Enter to boot the system.

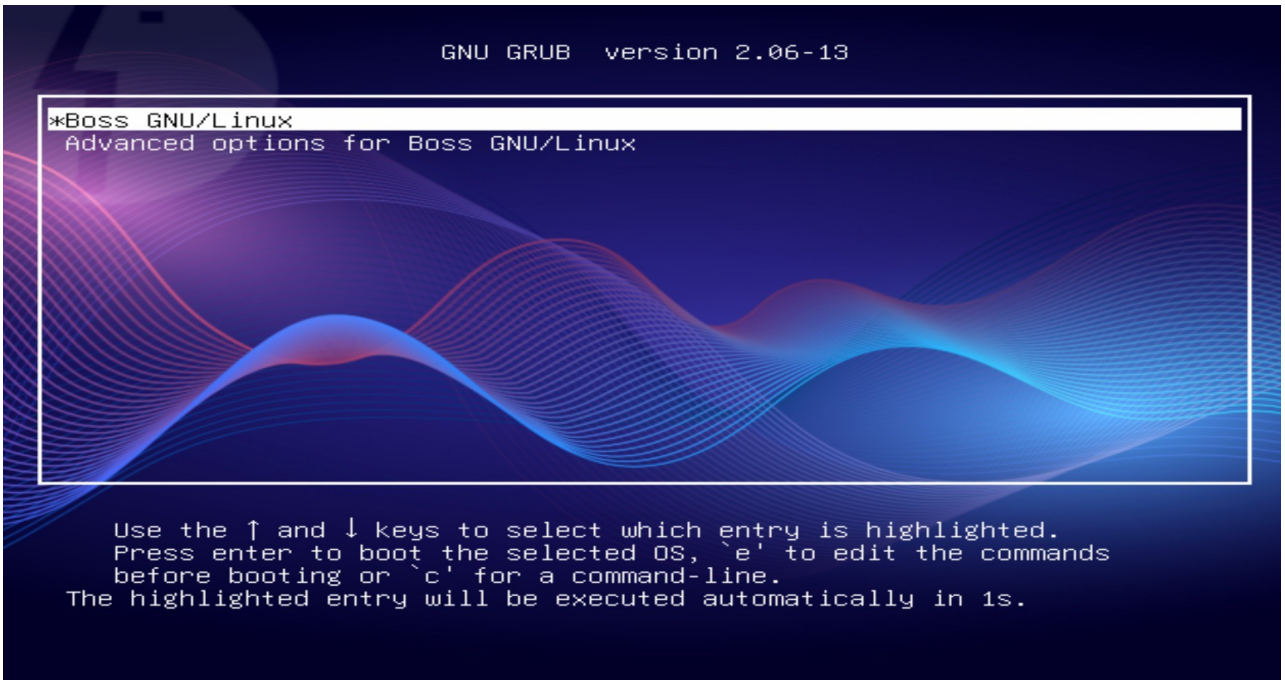

13. Decrypt disk with Password:

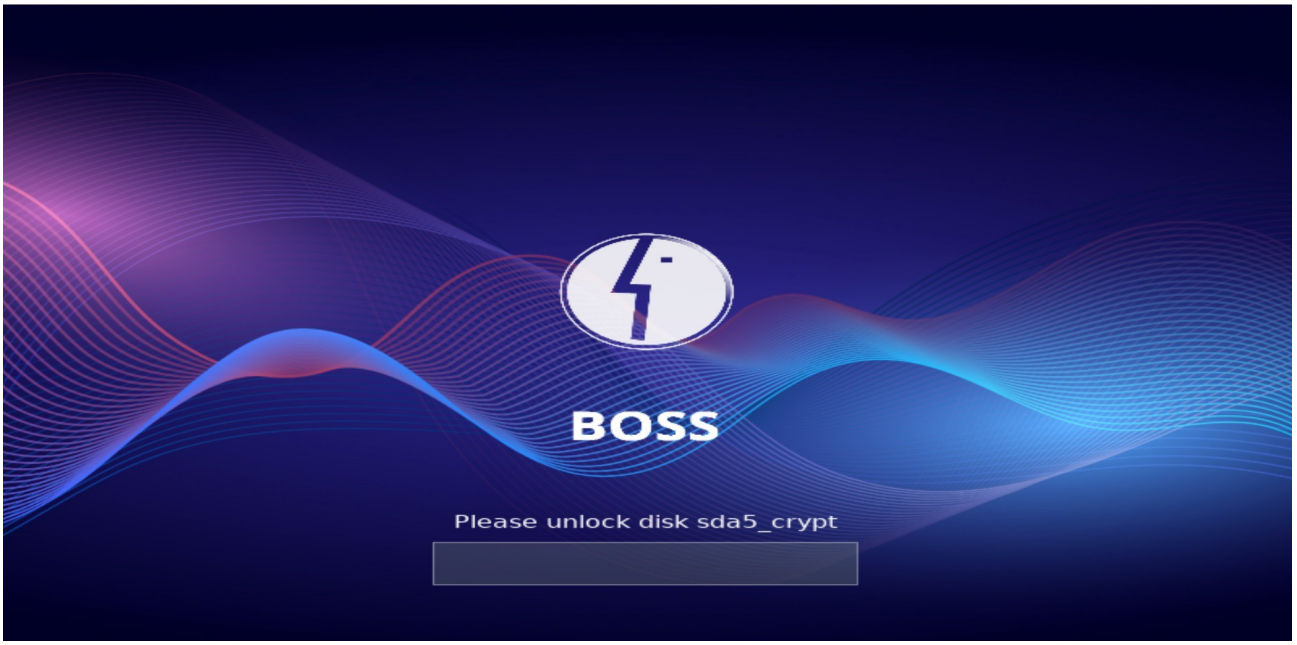

Enter the **Encryption passphrase** to continue. (**Passphrase setup in Step No 9**)

14. Login:

14.1 Enter the **Administrator User Name: (Username setup in Step No 7)**

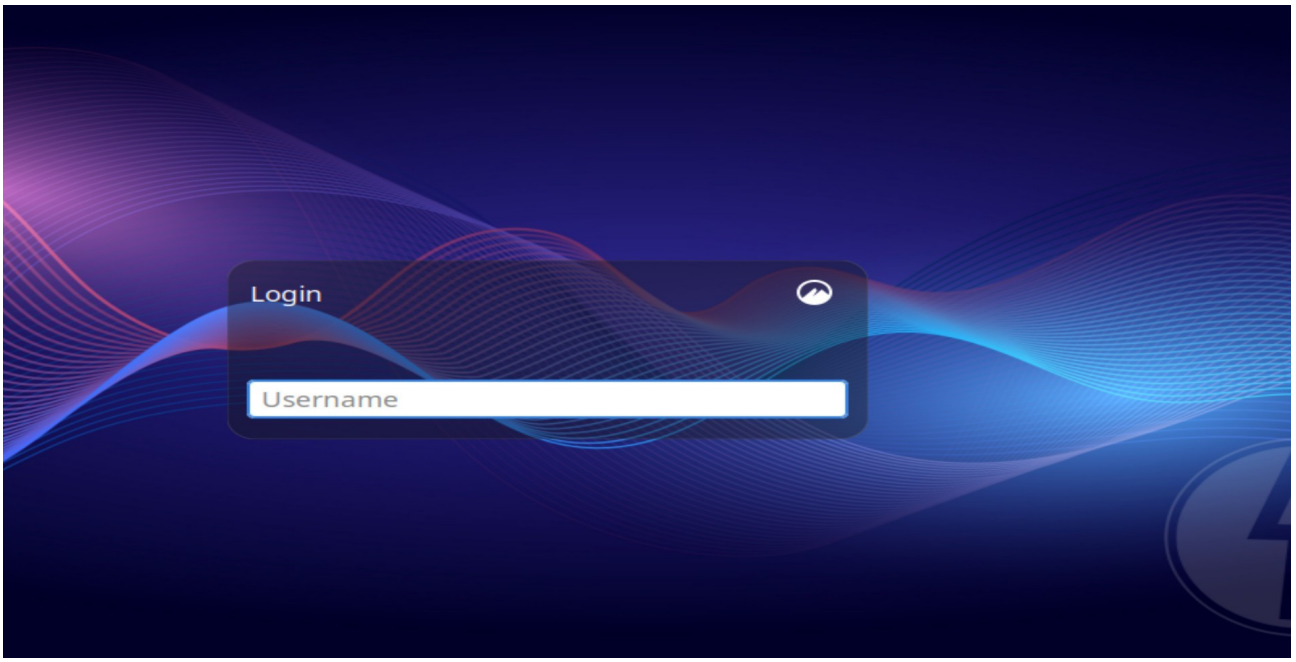

14.2. Enter Default Password: Default Password for initial login : **CDACchennai!12**

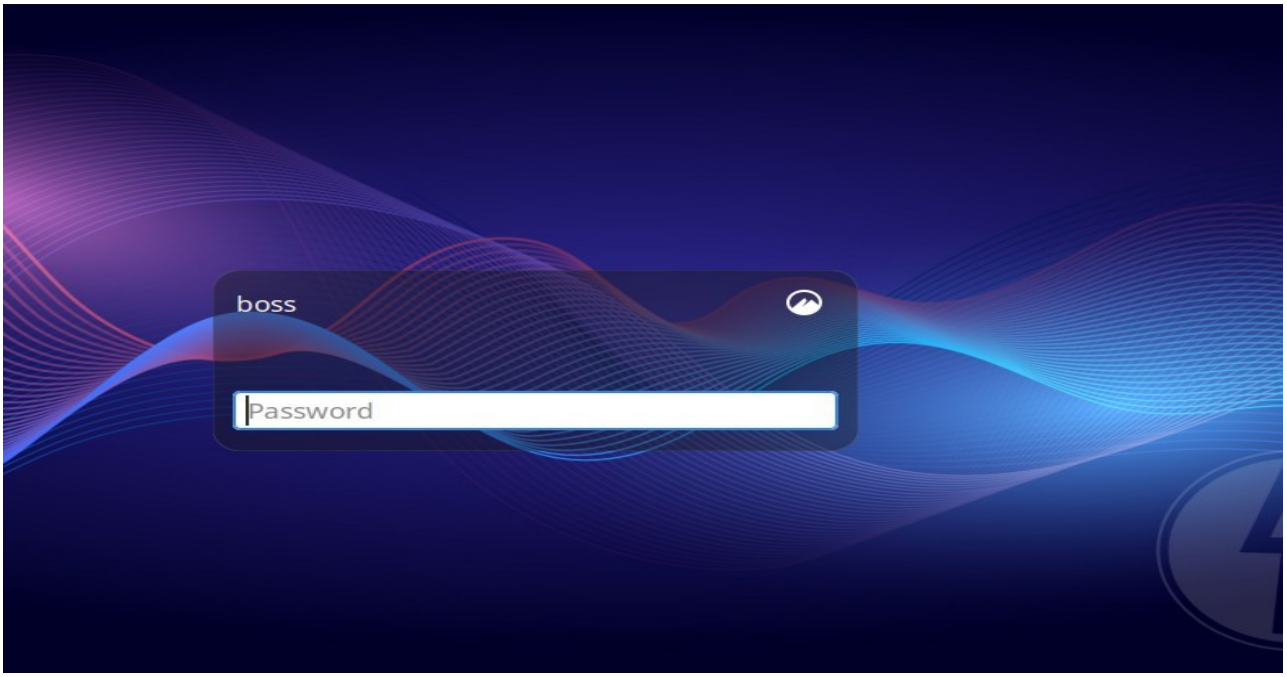

14.3. Change Password:

System is prompted to enter the **default password** to proceed further. Entering Default password then enter the **New Password** and confirm again to login the system.

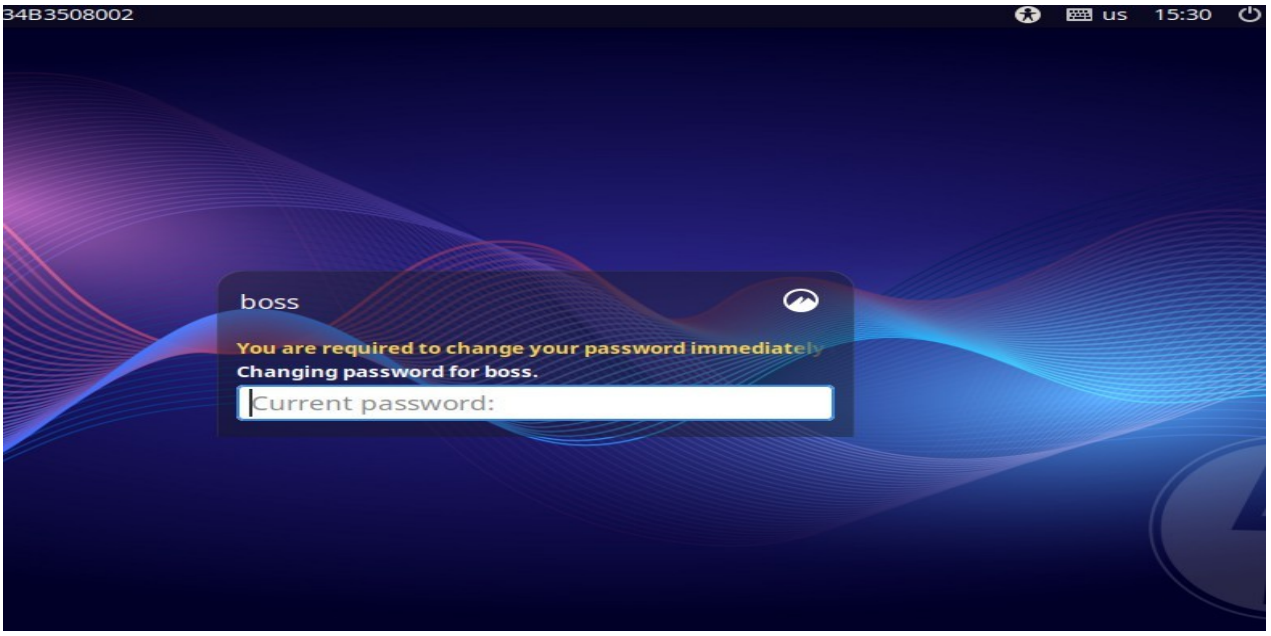

"Create New Password to continue"

15 Registration:

(Note:- To get OTP from ISOC Admin, user needs to submit **BOSS Registration Form** duly signed by OC/CO to their ISOC Admin)

The Civilnet OS mandates the user to register the client with the ISOC Server. Hence the immediate session prompts for the registration.

If your PC is not connected to the internet, following pop up will be displayed, hence kindly connect your PC to the internet and Restart the system:

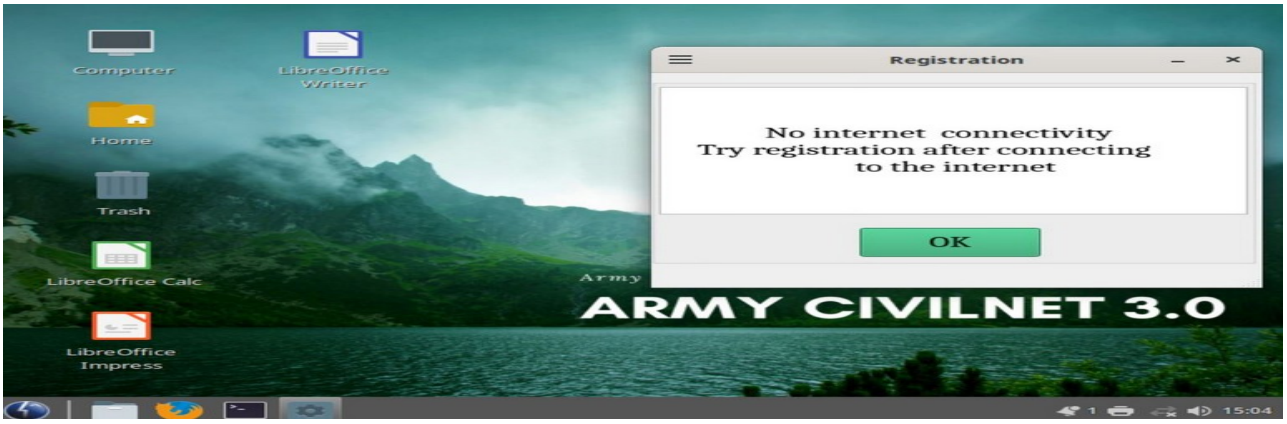

(If the OTP form not open automatically, set the **IP address, SubNet, Gateway and DNS** as per FTTH Modem/Switch/Firewall)

Proceed the registration

Enter the valid OTP for registration: (OTP received from Your ISOC Admin)

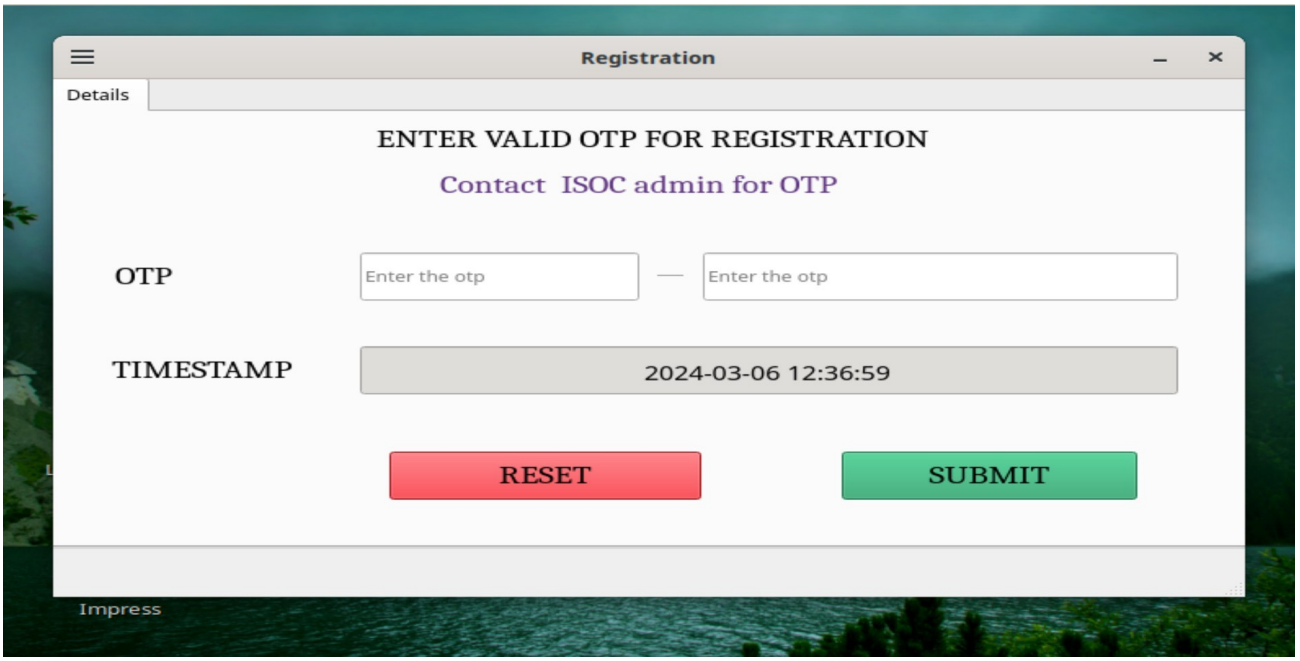

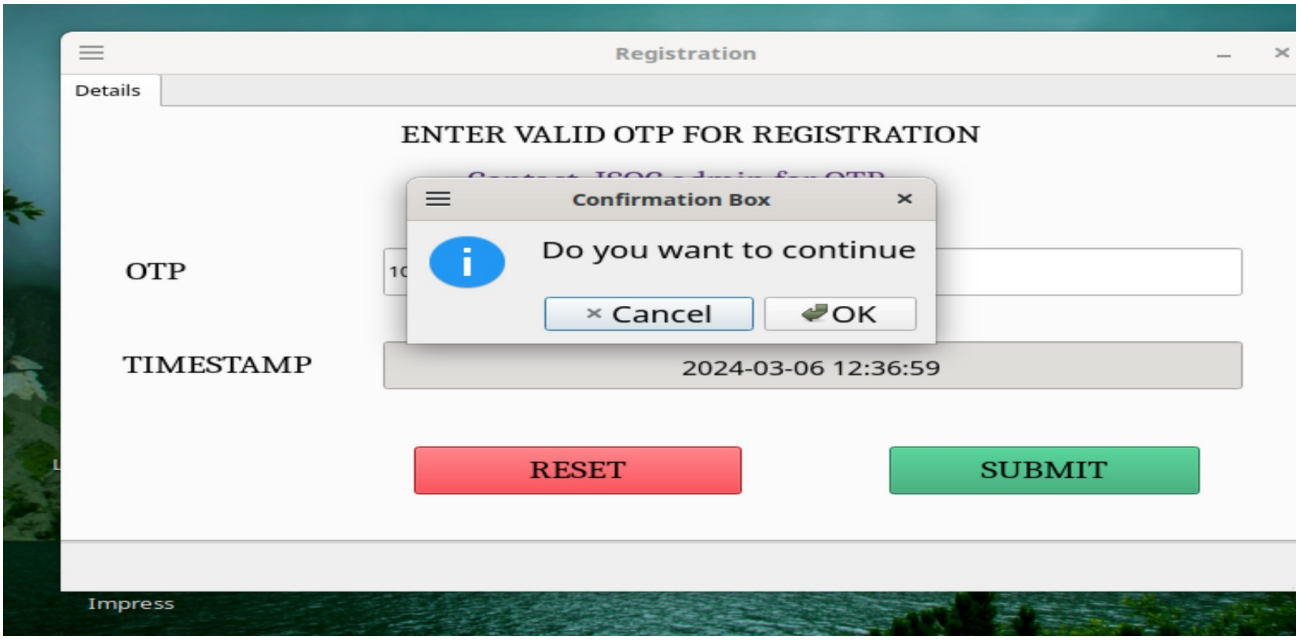

After submit the OTP Client is Register: Click on OK and Submit.

16. Create Normal User:

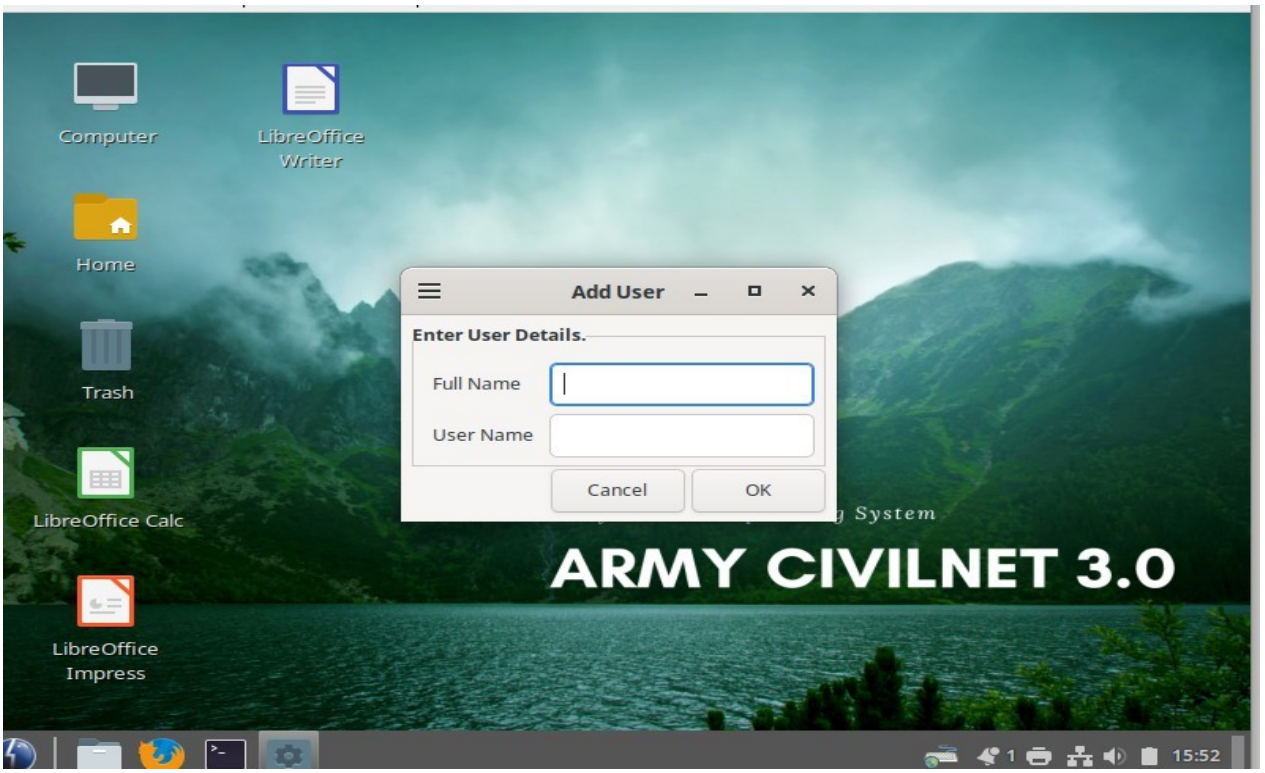

'Normal User creation successful' message will be displayed:

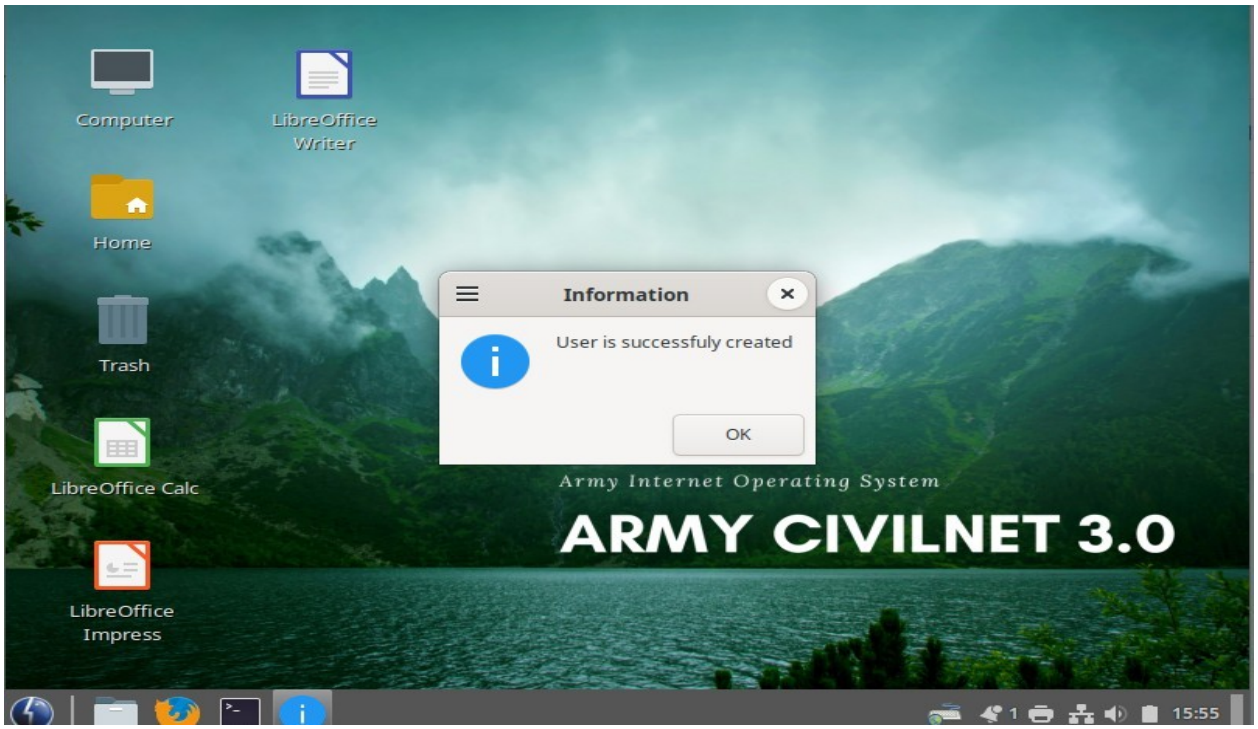

17. Set Grub User:

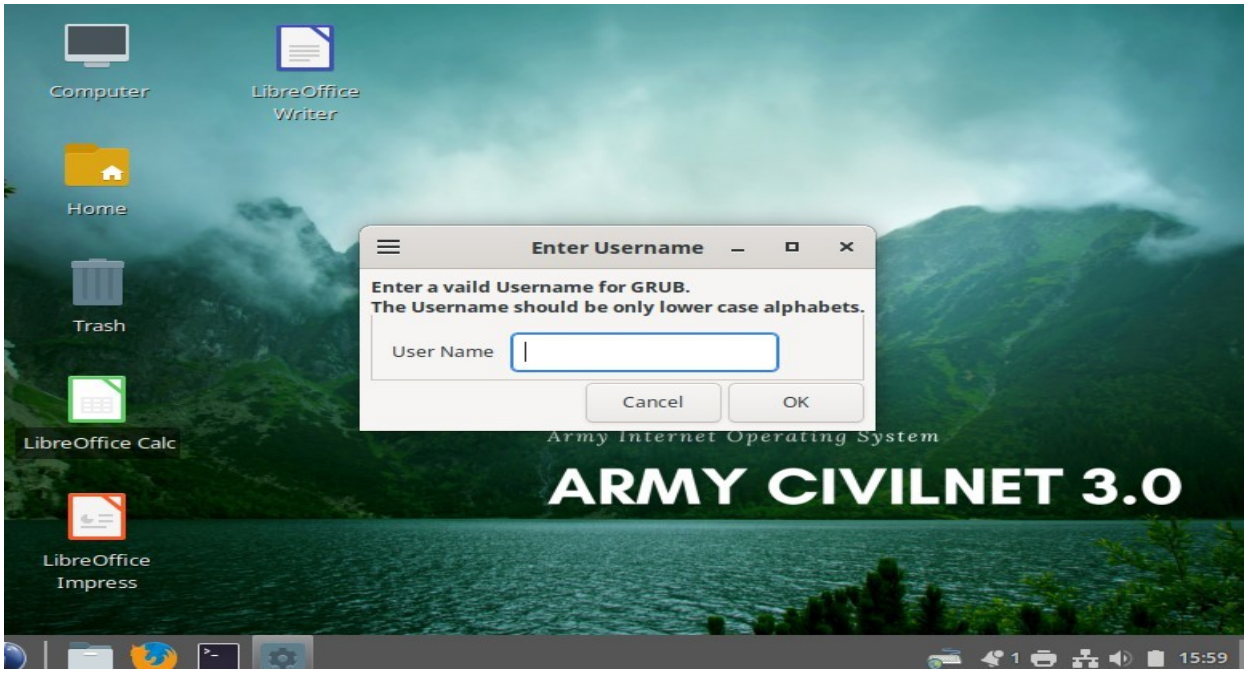

Enter the valid user name for **grub** and click 'OK' button.

17.1 Set Grub Password:

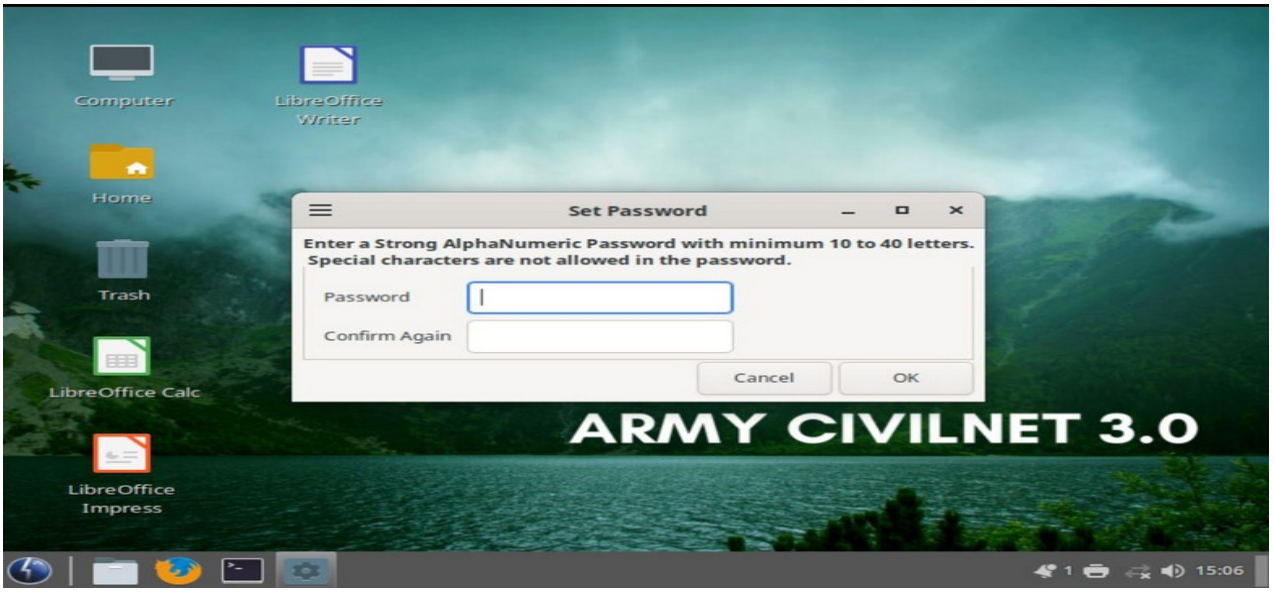

Note:-

1.Maintaining Record of GRUB credential of responsibility of Respective IT Cell of Dte/Br/Unit/Coy.

2.If Administrator credential not available with IT Cell, it can be recovered with the help of GRUB credential.

3.If GRUB credential not available with IT Cell, it cannot be recovered , only re-installation of BOSS OS is solution

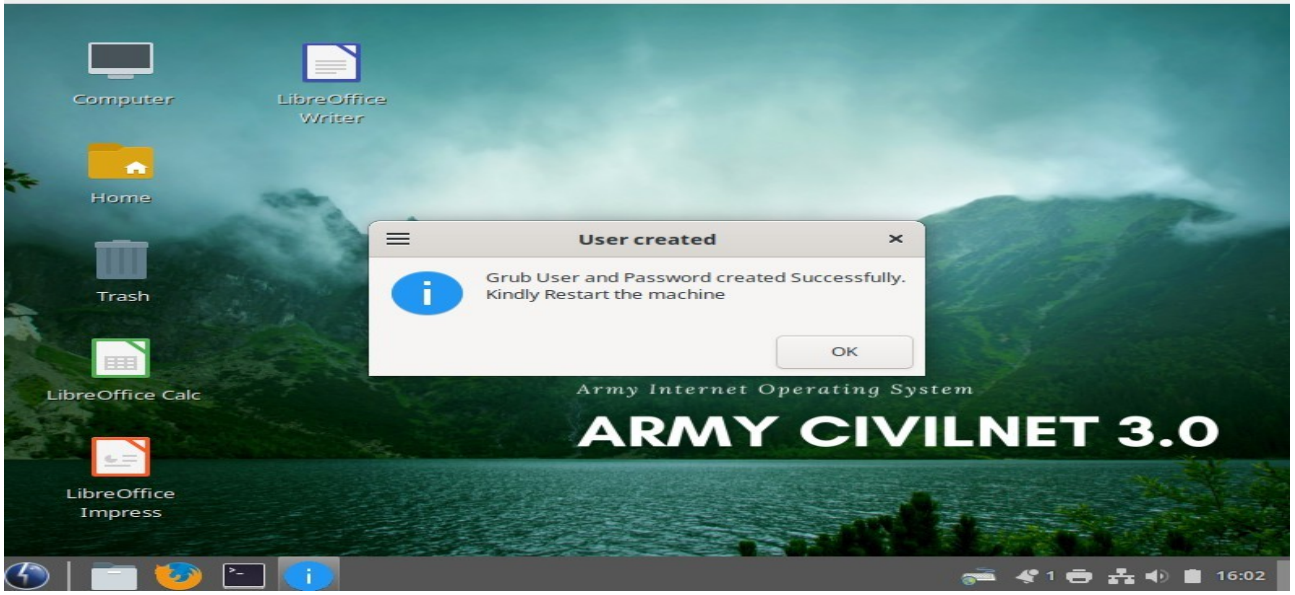

Reboot the system.

login as Normal User. (User **setup in Step No 16**)

Enter **Default password** : **CDACchennai!12** and create new password for Normal User.

Reboot the system.

Now the system ready for use.

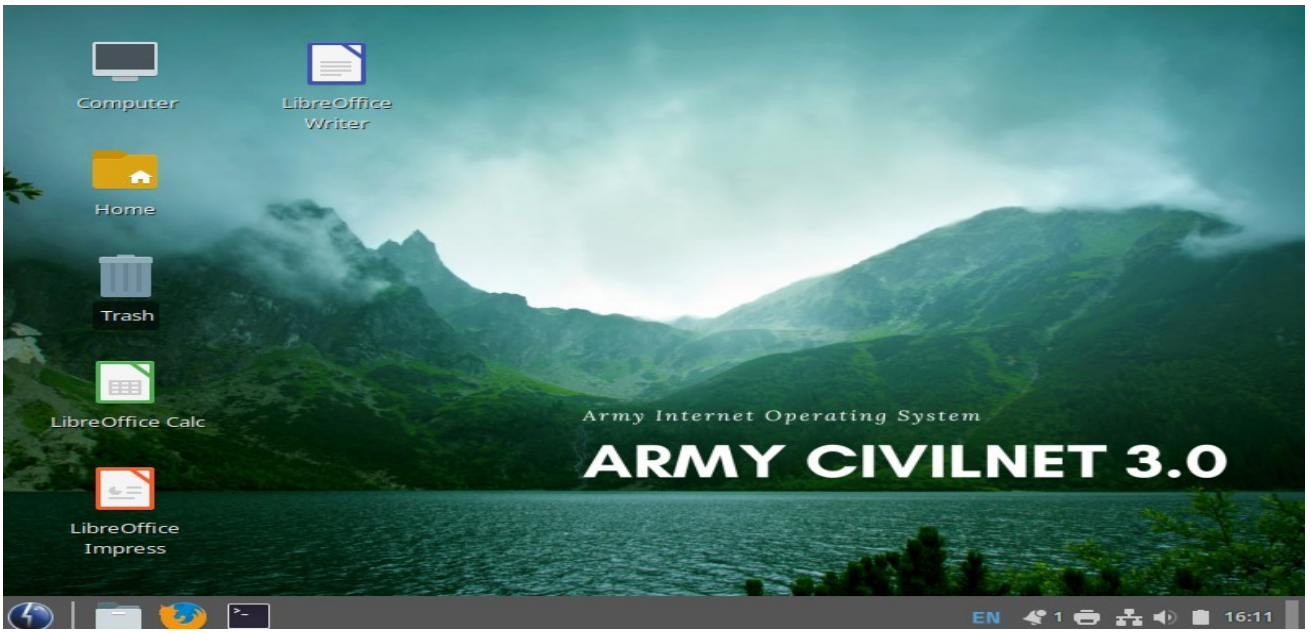

Fig. Army Civilnet 3.0 screen