

Mars Sample Return ascent trajectory analysis using Taylor Series integration

Master Thesis

S.D. Petrovic



PREFACE

Back in December 2013 Warren Gebbett gave a presentation on his work at the Jet Propulsion Laboratory ([JPL](#)) in Pasadena, California, USA and the opportunity for a new student to go and perform research at [JPL](#). At this point I sent in my application together with eight other students. Then at the end of December I heard that I was invited for an interview in the first week of January 2014. In this interview it was concluded that I met all the requirements and that I was the perfect candidate to follow Warren up as the next student at [JPL](#) with financial backing of Dutch Space (now Airbus Defence and Space, the Netherlands). Financial backing was also going to be provided by the Stichting Prof.dr.ir. H.J. van der Maas Fonds (Aerospace Engineering Faculty, TU Delft) and the Stichting Universiteitsfonds Delft (TU Delft). Communication with [JPL](#) was thus started and in March 2015 it was clear that I would be working for the Mars Program Formulation Office under the supervision of Roby Wilson (Inner Solar System group, NASA [JPL](#)). He told me to focus on subjects that dealt with Mars missions. At that point I was doing my internship at DLR Bremen on Lunar rocket ascent and descent, which lasted till June 2015. When I came back to Delft me and my supervisors Erwin Mooij (rockets, trajectories, entry and descent, TU Delft) and Ron Noomen (mission design and orbit analysis, TU Delft) agreed that it would be best to perform a study on these Mars subjects to prepare for my visit to [JPL](#) and to formulate proposal thesis topics. The first week at [JPL](#) I presented these initial thesis topics to both people from the Inner Solar System group and the Mars program formulation office. The next few weeks were spent choosing and refining one of these topics. This document is the result of the two-month literature study on that topic to prepare for the thesis project.

*S.D. Petrovic
Pasadena, California, February 2016*

CONTENTS

Nomenclature	vi
Abbreviations	vii
1 Introduction	1
2 Problem background	2
2.1 Chosen mission	2
2.2 Previous Mars ascent research	3
2.3 Research focus	3
2.4 MAV design	4
2.5 Reference systems	6
3 Models	9
3.1 State and state derivatives	9
3.2 Gravity	11
3.3 Thrust	11
3.4 Drag	11
3.4.1 Atmospheric graph function fit	12
3.4.2 Drag coefficient graph function fit	15
3.5 Circularisation	17
4 Standard integration methods	21
4.1 Different integrator types	21
4.1.1 Single-step	22
4.1.2 Multi-step	22
4.2 Chosen method for comparison	22
4.2.1 Tudat methods	22
4.2.2 Methods used in previous research	23
4.2.3 Chosen method	23
4.3 Workings of RKF	23
5 Taylor series integration	25
5.1 General theory	25
5.1.1 Workings of TSI	25
5.1.2 Step-size	26
5.2 Associated equations	27
5.2.1 Cartesian equations, first case	27
5.2.2 Cartesian equations, second case	35
5.2.3 Spherical equations	37
5.2.4 Recurrence relations	42
6 Program simulation tool	45
6.1 Existing software	45
6.1.1 Tudat	45
6.1.2 Eigen	46
6.1.3 Boost	46
6.1.4 Mars-GRAM	46
6.2 Developed software	46
6.2.1 RKF propagator	47
6.2.2 TSI propagator	47

6.3	Completed simulation tool	47
6.3.1	Initialisation	47
6.3.2	Initial propagation	47
6.3.3	Integrator burn phase	48
6.3.4	Integrator coast phase	48
6.3.5	Final circularisation	48
6.3.6	Comparison	48
7	Verification and validation	51
7.1	RK4 and RKF integrators	51
7.2	Taylor Series integration	52
7.2.1	Auxiliary equations, derivatives and functions	52
7.2.2	Computing the Taylor Series coefficients and the updated state	52
7.2.3	Next step-size	53
7.3	Complete trajectory propagation	53
7.3.1	Phase 1: RKF propagation	53
7.3.2	Phase 2: both RKF and TSI	53
7.3.3	Phase 3: three different models for TSI	54
7.3.4	Phase 4: one final TSI model	54
7.3.5	Phase 5: coasting and circularisation	54
7.3.6	Phase 6: tool validation	54
8	Results and Analysis	60
8.1	Order	60
8.1.1	Optimal order	61
8.1.2	Comparison with non-rotating Mars	62
8.2	Error tolerance	64
8.2.1	Comparison with RKF78	64
8.2.2	Comparison with non-rotating Mars	66
8.3	Multiple runs	67
8.3.1	Comparison with RKF78	67
8.3.2	Comparison with non-rotating Mars	68
8.4	Launch altitude	69
8.5	Launch latitude	71
8.6	Launch longitude	73
8.7	Flight-path angle	76
8.8	Heading angle	77
9	Conclusions and recommendations	80
Bibliography		81
A	Mars-GRAM 2005 input file	84
B	Atmospheric data fitting	88
B.1	Temperature	88
B.2	Density	88
C	Program file definitions	94
D	All Recurrence Relations	95
D.1	First Cartesian case: Euler angles	95
D.2	Second Cartesian case: unit vectors	98
D.3	Spherical case	100
E	Nominal case input values	103
E.1	Case 1	104
E.2	Case 2	105

F Results	106
E1 Order	106
E2 Multiple runs	108
E3 Launch altitude	110
E4 Launch latitude	112
E5 Launch longitude	114

NOMENCLATURE

Greek

η	Numerical approximation	-
η	Step multiplication factor	-
μ	Standard gravitational parameter	m^3/s^2
τ	Local error tolerance	-
ϕ	General rotation angle	rad
Φ	Increment function	-

Roman

E	Eccentric anomaly	rad
h	(Current) step-size	s
h	Specific relative angular momentum	m^2/s
M	Mean anomaly	rad
\mathbf{r}	Position vector	m
t_0	Initial time	s
$T_{n,k}$	Truncation error	-
\mathbf{x}_i	Current data point	-
\mathbf{x}_{i+1}	Next data point	-
x_n	n th variable	-
\mathbf{X}	State vector	-

Special

\mathbb{T}	General transformation matrix	-
--------------	-------------------------------	---

ABBREVIATIONS

AB4	Adams-Bashforth 4 th order	RF	Frame of Reference
AB6	Adams-Bashforth 6 th order	RHR	Right-hand-rule
ABM4	Adams-Bashforth-Moulton 4 th order	RKF45	Runge-Kutta-Fehlberg 4 th (5 th) order
ABM12	Adams-Bashforth-Moulton 12 th order	RKF56	Runge-Kutta-Fehlberg 5 th (6 th) order
DLR	German Aerospace Center (Deutsches Zentrum für Luft- und Raumfahrt)	RKF78	Runge-Kutta-Fehlberg 7 th (8 th) order
DOPRIN87	Dormand-Prince 8 th (7 th) order	RKF	Runge-Kutta-Fehlberg
ESA	European Space Agency	RK4	Runge-Kutta 4 th order
FPA	Flight-path angle	RKN12	Runge-Kutta-Nyström 12 th order
GLOM	Gross Lift-Off Mass	s/c	Spacecraft
GRAM	Global Reference Atmospheric Model	SC14	Störmer-Cowell 14 th order
JPL	Jet Propulsion Laboratory	SG	Shampine-Gordon
MAV	Mars Ascent Vehicle	SSTO	Single Stage to Orbit
MOLA	Mars Orbiter Laser Altimeter	TSI	Taylor Series integration
MSR	Mars Sample Return	Tudat	TU Delft Astrodynamics Toolbox

1

INTRODUCTION

Mars Sample Return ([MSR](#)) has been a mission concept that has been proposed many times in the past two decades. Even today, research into this mission is still being done. And although it is not yet an official project proposal, NASAs Jet Propulsion Laboratory ([JPL](#)) is currently working on pre-cursor missions to eventually launch an [MSR](#) mission. To prepare for this, research is being conducted on different aspects of [MSR](#), such as the Mars Ascent Vehicle ([MAV](#)) responsible for transporting the dirt and soil samples into a Martian orbit and the orbiter which will then transport the samples back to Earth. The current orbiter proposed by [JPL](#) is a low-thrust orbiter called Mars 2022. Such an [MSR](#) mission requires precise and optimum (optimised for lowest Gross Lift-Off Mass ([GLOM](#))) trajectories to be able to bring back as many samples as possible. But how does one determine the optimum [MAV](#) trajectory? Especially when it is combined with the optimum trajectory of the low-thrust orbiter.

The proposed research would focus on the combined optimisation of an [MAV](#) trajectory and the trajectory of the low-thrust Mars 2022 orbiter. Also, one hypothesis is that great mass saving can be made if the orbiter and [MAV](#) would rendezvous within one single orbital revolution after [MAV](#) lift-off. Therefore, the question that should be answered is: what is the optimal trajectory solution for the combined trajectory problem of a high-thrust [MAV](#) and a low-thrust Mars orbiter performing a single-revolution rendezvous in Mars orbit? More information on the proposed topic is provided in ??.

A mission such as [MSR](#) and the corresponding trajectories can be described in many different reference frames, or Frame of Reference ([RF](#)), and the motion of the [MAV](#) and the orbiter can be modelled in different ways. Therefore it is important to use the proper equations and environmental models. Also, the trajectory has to be determined or rather a prediction will have to be made. This can be done using integration methods. And finally, the optimum will have to be found using an optimisation method. All these different aspects are addressed in this literature study.

First however, it is important to determine the knowledge that already exists and the research that has already been performed. Therefore, ?? will describe previous sample return missions, low-thrust Spacecraft ([s/c](#)) missions, single-revolution rendezvous missions and the research performed in those fields. It will also describe the current [MAV](#) designs. Then before mathematically representing the problem it is important to understand in what kind of [RF](#) it has to be described. This will be done in ??, followed by the [MAV](#) ascent and low-thrust Mars 2022 orbiter model descriptions in ??? respectively. Here, both chapters explain the assumptions and corresponding equations for each phase. One important aspect of the [MAV](#) ascent, which sets it apart from other sample return missions, is that Mars has an atmosphere which cannot be neglected. Accordingly ?? describes the different atmospheric models and the trade-off that was performed to decide which model to use in this thesis problem. Then the integration and optimisation are discussed in ??? respectively. In the integrators chapter, different integration methods are described and a selection is made of the integration methods that will be used. The same is done for the different optimisers. All of this information will be used to define the final thesis topic, which is presented in ?. For some of the aspects that will be treated in the final thesis problem, certain software is already available. A summary of this software is provided in ?. Finally, a proposed schedule is presented in ??, which shows the work which will have to be performed during the thesis work and the time that will have to be spend on each aspect of it. This literature study will serve as a guideline during the thesis project and provide background information for the final thesis report.

2


PROBLEM BACKGROUND

The majority of this research was performed at NASA's [JPL](#) in Pasadena, California. For that reason it was decided that the research of this thesis should focus on something related to either current research being done at [JPL](#) or missions being flown by [JPL](#)¹. One of the focuses of [JPL](#) these days is Mars and the exploration of the Martian system. There are currently two planned missions to Mars: InSight and Mars 2020. InSight is a mission similar to the Viking and the Phoenix missions and primarily based on the last one. It is a lander that will perform experiments on the surface of Mars at a fixed location. Mars 2020 is the next Mars rover and is based on the current Curiosity rover. It has a similar design but will carry different scientific instruments and will focus more on finding life on Mars. Mars 2020 is part of a larger [JPL](#) effort to eventually return samples from the Martian surface back to Earth. This mission concepts has been on the drawing board for several years now, but seems to be getting closer to approval. This sample return mission, or [MSR](#), will consist of three different systems and is spread out over three different missions as shown by the proposed mission architecture in Figure 2.1. Mars 2020 is the first step of this plan where the rover will collect samples from the surface of Mars. These samples will then be put into containment tubes and dropped on the surface of Mars. A second mission will then carry a system that will collect these samples from the surface and deliver them into a Martian orbit ([Shotwell et al., 2016](#)). Then a third mission, currently proposed as the Mars 2022 orbiter, will collect the sample containment sphere in orbit and eventually deliver them back to Earth ([Woolley et al., 2011](#)). Because of the potential of the [MSR](#) mission concept and the amount of research that can be done, the focus was put on this [JPL](#) effort when looking at research subjects.

2.1. CHOSEN MISSION

The Mars 2020 rover is an approved mission that is currently in the design phase, and the Mars 2022 is a proposed mission that will have to be build in order to enhance the current communication capabilities between Mars and Earth. Therefore it is almost certain that these two missions will fly. However, this does not guarantee that the entire [MSR](#) endeavour will also be realised. This is because there is no official approval yet for the second system that will actually bring the samples from the surface back to earth. However, this does not mean that no research is being done on the return system. Many designs have been envisioned over the past few years and even now engineers cannot decide on the best design. [Shotwell et al. \(2016\)](#) shows two of the proposed designs that are currently being considered. One design involves a mobile launch system based on the Curiosity rover, which will fetch the samples and then directly put them into the spherical container. Once this container is completely filled, the sphere will be placed on top of the [MAV](#), which the rover will be carrying on its back, and launch it into Mars orbit. The second design uses two systems, one fetch rover that will grab the samples and return them to the lander, and the lander containing the [MAV](#). Once the lander returns with all the samples, the sample sphere will be put on top of the [MAV](#) and launched into orbit. There are advantages and disadvantages to both of these systems and more research is being done to determine the best option. What both of these systems have in common though is that they have to launch the sample sphere into orbit using a [MAV](#). An ascent on another celestial body with an atmosphere has never been attempted before, which makes it a crucial part of the [MSR](#) campaign. This is also why in the last several years, many researchers have looked at the [MAV](#) launch trajectory problem.

¹All past, current and proposed [JPL](#) missions: <http://www.jpl.nasa.gov/missions/> [Accessed 17 November 2016]

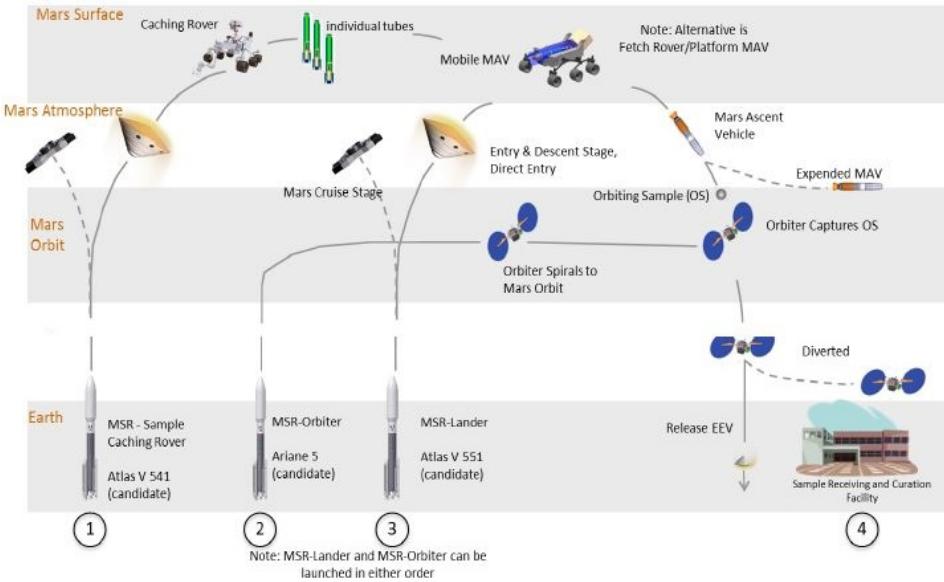Figure 2.1: Proposed MSR mission architecture (Vaughan *et al.*, 2016).

2.2. PREVIOUS MARS ASCENT RESEARCH

Not only [JPL](#) but also many other institutions around the world are working on the Mars ascent problem, for instance the German Aerospace Center (Deutsches Zentrum für Luft- und Raumfahrt) ([DLR](#)). A selection of reference research is provided in Table 2.1.

Table 2.1: Previous and current Mars ascent trajectory research.

Author	Organisation	Country
Fanning and Pierson (1996)	Iowa State University	United States
Desai <i>et al.</i> (1998)	NASA Langley and JPL	United States
Whitehead (2004, 2005)	Lawrence Livermore National Laboratory	United States
Di Sotto <i>et al.</i> (2007)	DEIMOS Engenharia and ESA	Portugal/Europe
Woolley <i>et al.</i> (2011)	JPL	United States
Trinidad <i>et al.</i> (2012)	Northrop Grumman and JPL	United States
Dumont (2015) (Ongoing)	DLR	Germany
Woolley (2015) (Ongoing)	JPL	United States
Benito and Johnson (2016) (Ongoing)	JPL	United States

Most of the papers before 2015 focus on an older [MAV](#) concept, however the newer [JPL](#) research focuses more on a Single Stage to Orbit ([SSTO](#)) design. This is why this thesis research will also be focusing on the ascent of a [SSTO MAV](#).

Many of the research that was done used either publicly available simulation software or trajectory simulation software that was developed in-house. There are several ways in which an ascent trajectory can be simulated, and these different methods of how to simulate such a launch can result in different outcomes. Therefore, a closer look was taken at the method of ascent trajectory propagation and simulation.

2.3. RESEARCH FOCUS

In order to compute an ascent trajectory, the initial state is taken and provided perturbations the state is propagated until a final condition is met. In most of the research mentioned in Table 2.1 this was done using numerical integration methods. However, often it is not mentioned which specific methods were used. When looking at integration methods, there are a number of methods that are widely used for space related problems, such as the standard integration methods (more information on these standard integration methods can be found in Chapter 4). In recent years however, another method, that has not generally been applied

in space problems, has seen potential to increase performance resulting in faster and more accurate results. This method is called Taylor Series integration (TSI) and was first used in a space trajectory problem by [Montenbruck \(1992a\)](#). A few years later, a comparison between a higher order Runge-Kutta method and TSI was performed on orbital trajectory problems by [Scott and Martini \(2008\)](#) showing that the application of TSI to such problems can be very beneficial. [Bergsma and Mooij \(2016\)](#) showed that TSI shows similar improvements compared to Runge-Kutta-Fehlberg for re-entry cases, where TSI was both faster and more accurate. However, TSI has not yet been applied to ascent cases, leaving a very important knowledge gap that has to be filled.. This is why the Mars ascent trajectory propagation is a good additional test case to add to the knowledge of TSI performance in space related problems. The TSI will have to be compared to a standard integration method to determine its performance.

From the two previous cases (orbital trajectories and re-entry) it is expected that TSI will be faster and more accurate than the standard integration methods. In this thesis, it will be tested whether or not this also holds for ascent cases. However, before this can be tested, an accurate representation of an ascent scenario has to be modelled.

2.4. MAV DESIGN

An important aspect of running an accurate simulation is making sure that the assumed vehicle is representative of the actual vehicle that will be used. Therefore, the most up to date representation of the MAV is required. Over the past 20 years there have been many different iterations of the MAV. Some of the earliest concepts were described by [Desai et al. \(1998\)](#); [Whitehead \(1997\)](#); [Guernsey \(1998\)](#); [Stone \(1999\)](#) and were prominently focussed on two-stage liquid rockets (also see Table 2.2). After a change in mission requirements in the early 2000's the leading baseline design changed to a two-stage solid ([Whitehead, 2005](#); [Stephenson, 2002](#); [Stephenson and Willenberg, 2006](#)). However, the requirements kept changing and the design kept getting better defined by (among others) [Trinidad et al. \(2012\)](#); [Sengupta et al. \(2012\)](#); [Mungas et al. \(2012\)](#); [Mars Program Planning Group \(2012\)](#) resulting in a two-stage liquid as the updated baseline. The past 4 years however have seen a slight change in the design. Most of the MAV work is now being carried out in-house at JPL. Research is still being performed on the two-stage solids, but SSTO designs are showing that they have an overall better performance. Recently presented designs include a SSTO liquid ([Vaughan et al., 2016](#)) and a SSTO hybrid as presented by ([Karp et al., 2016](#)). These two papers however focused more on the propulsion systems. Because the mission requirements kept changing leading to many different MAV designs, it can become difficult to keep track of all the differences. [Shotwell \(2016\)](#) provides a good overview of the different designs leading up to the current baseline designs.

Currently there is no clear baseline design, however, the preference leads towards the SSTO designs. Two of those designs are shown in Figure 2.2.

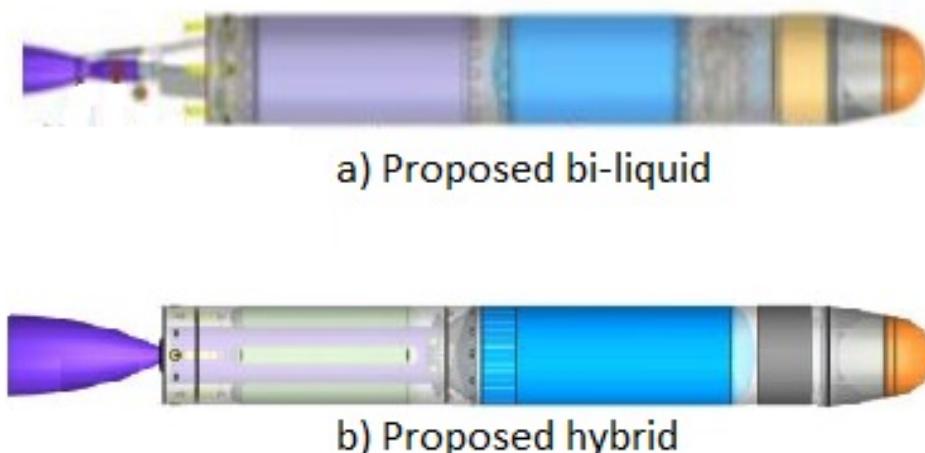


Figure 2.2: Current proposed designs. a) is one of the bi-liquid designs proposed by [Vaughan et al. \(2016\)](#). b) is the hybrid design proposed by [Karp et al. \(2016\)](#). Not to scale.

Table 2.2: Previous MAV studies.

Author	Rocket	Propellant(s)
Whitehead (1997)	two-stage rockets (comparison study)	solid and liquid (and gel recommended as well)
Guernsey (1998)	two-stage rocket	2x liquid
Desai <i>et al.</i> (1998)	two-stage rocket	2x liquid
Stone (1999)	two-stage rocket	hybrid
Stephenson (2002)	two-stage rocket (three different designs)	2x solid (best), solid and liquid or hybrid and 2x gel (best)
Whitehead (2005)	one-, two- and three-stage rockets (variational study)	solid and liquid
Stephenson and Willenberg (2006)	two-stage rocket	2x solid
Sengupta <i>et al.</i> (2012)	two-stage rocket	2x liquid
Trinidad <i>et al.</i> (2012)	1 to 4 stages (comparison study) two-stage rocket (best)	solid, liquid, hybrid and gel (comparison) 2x liquid (best)
Mungas <i>et al.</i> (2012)	single-stage rocket	liquid mono-propellant
Mars Program Planning Group (2012)	undefined rocket	solid and liquid
Vaughan <i>et al.</i> (2016)	single-stage rocket	liquid
Karp <i>et al.</i> (2016)	single-stage rocket	hybrid

Unfortunately, not much has been published on the specific flight characteristics such as drag coefficient and reference area of these new designs. Fortunately, the size requirements of the MAV have not changed (much) between the 2012 studies and the current designs. Therefore these parameters can be approximated by looking at some of the previous baseline designs such as the two-stage liquid rocket shown in Figure 2.3.

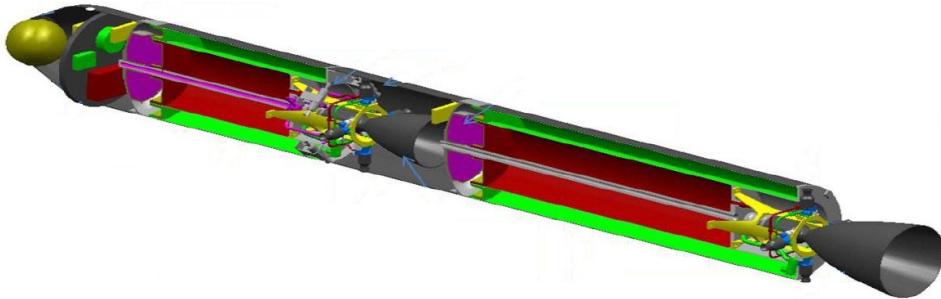
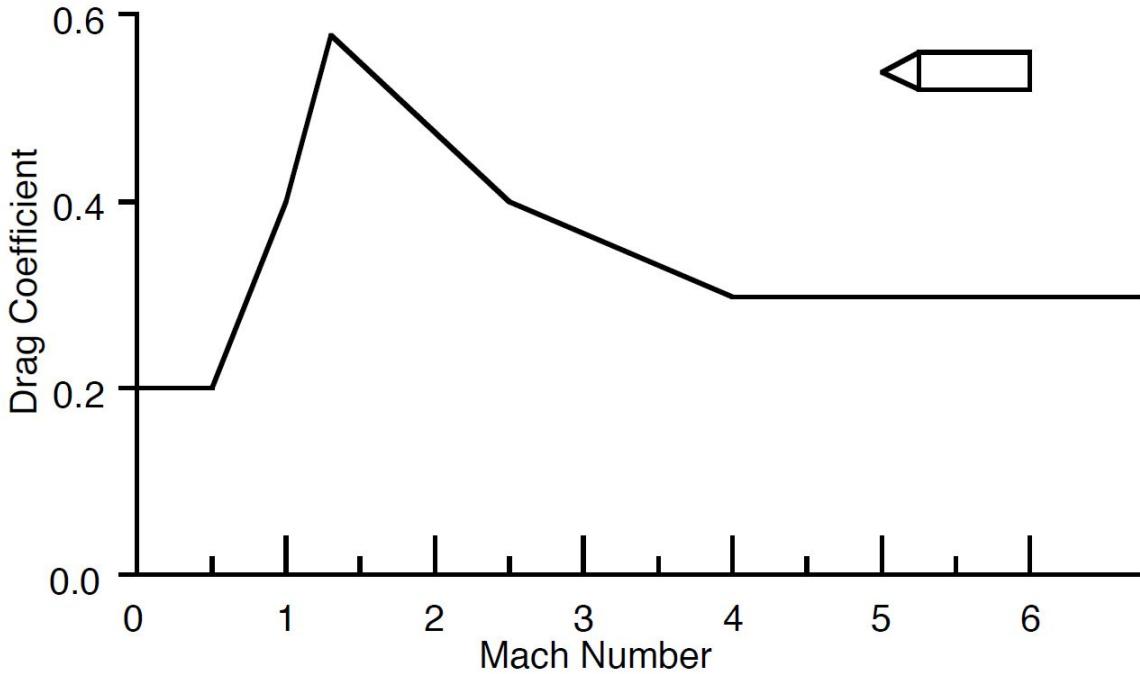


Figure 2.3: Old baseline design (?).

This concept had a diameter of approximately 340 mm. This results in a cross sectional area of approximately 0.09079 m^2 . Unfortunately, the paper did not mention anything about the drag coefficient. However, ? provided a general drag coefficient graph as a function of the Mach number for a generalized shape very similar to most MAV concepts. Therefore, this simplified relation, shown in Figure 2.4 is used in this thesis research as well.

These two parameters are used to determine the drag acting on the MAV during the ascent. This drag acts on the MAV in what is called the body frame. One of the problems with trajectories is that different perturbations act differently on the vehicle and are easier to express in different reference frames and systems. In the end however, the state will have to be expressed in one reference frame and system, which means that the drag might have to be transformed to another frame. More information on these different frames is provided in the Section 2.5.

Figure 2.4: Drag coefficient as a function of Mach number [Whitehead \(2004\)](#)

2.5. REFERENCE SYSTEMS

In this research problem, different perturbations are acting in different reference frames. One example is the drag acceleration acting in the body frame. However, the integration will be done in the inertial frame. A collection of all the different frames required is shown in Figure 2.5.

This means that the accelerations have to be translated into the inertial frame through the presented frames. This can be done using so-called transformation matrices (\mathbb{T}). These transformation matrices are composed of rotations around different axes over an associated angle. Figure 2.6 shows a general rotation around the x-axis. When this is set in a matrix, the transformation over the x-, y- and z-axis can be defined in the respective transformation matrices as described by Equation (2.1).

$$\mathbb{T}_x(\phi) = \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos\phi & \sin\phi \\ 0 & -\sin\phi & \cos\phi \end{bmatrix}, \mathbb{T}_y(\phi) = \begin{bmatrix} \cos\phi & 0 & -\sin\phi \\ 0 & 1 & 0 \\ \sin\phi & 0 & \cos\phi \end{bmatrix}, \mathbb{T}_z(\phi) = \begin{bmatrix} \cos\phi & \sin\phi & 0 \\ -\sin\phi & \cos\phi & 0 \\ 0 & 0 & 1 \end{bmatrix} \quad (2.1)$$

More information on the different reference frames and the transformation matrices can be found in [??](#).

Besides different reference frames, there are also different coordinate systems in which the state of a vehicle can be expressed. Three of the most used coordinate systems in space problems are the Cartesian, spherical and Keplerian system, and all of those systems are used in this research.

This also means that the state should be transformed between these different frames. An example of the position expressed both in the Cartesian system as well as the spherical system is shown in Figure 2.7.

From this figure the relation can be described between the two different systems. If the Cartesian coordinates are known, the spherical coordinates can be computed using Equation (2.2).

$$\begin{aligned} r &= \sqrt{x^2 + y^2 + z^2} \\ \delta &= \arcsin\left(\frac{z}{r}\right) \\ \lambda &= \arctan\left(\frac{y}{x}\right) \end{aligned} \quad (2.2)$$

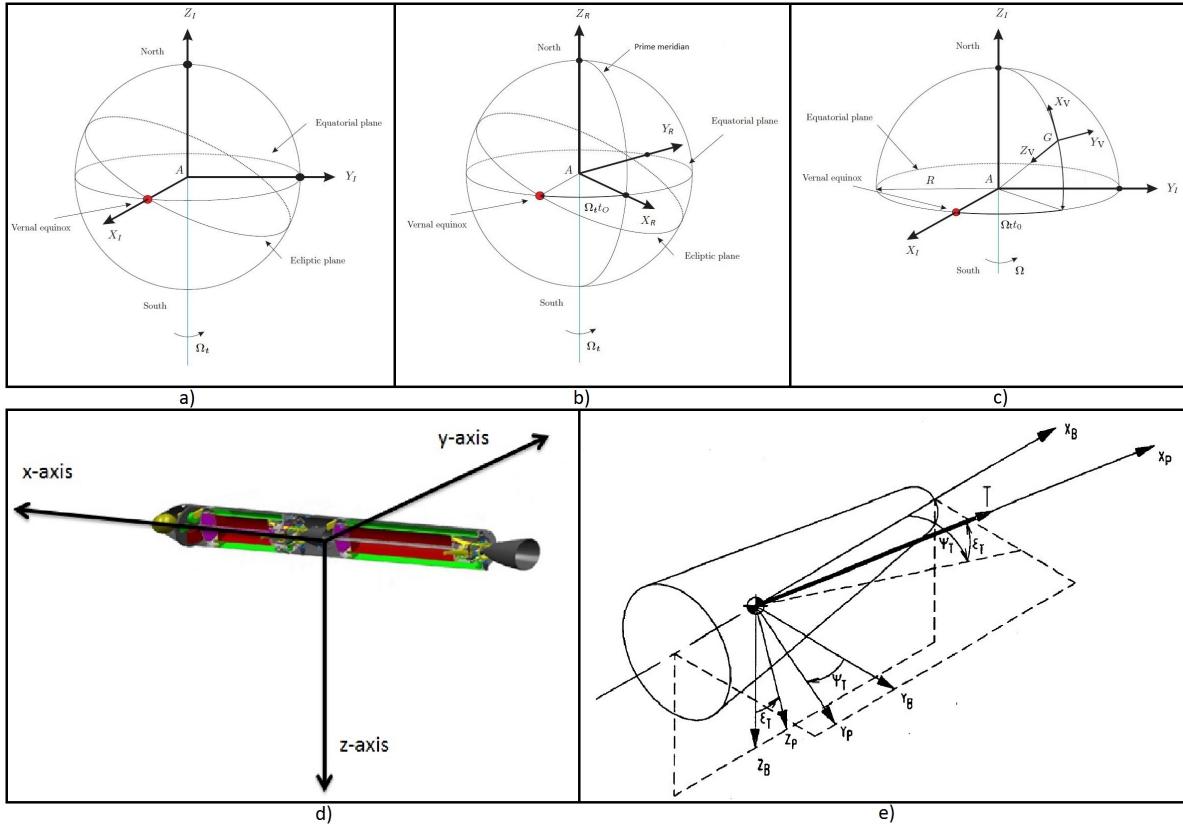


Figure 2.5: a) (Mars centred) Inertial frame, b) (Mars centred) Rotational frame, c) (Vehicle centred) Vertical frame ([Mulder et al., 2013](#)).
d) (Vehicle centred) Body frame ([Trinidad et al., 2012](#)). e) (Vehicle centred) Propulsion frame ([Mooij, 1994](#)).

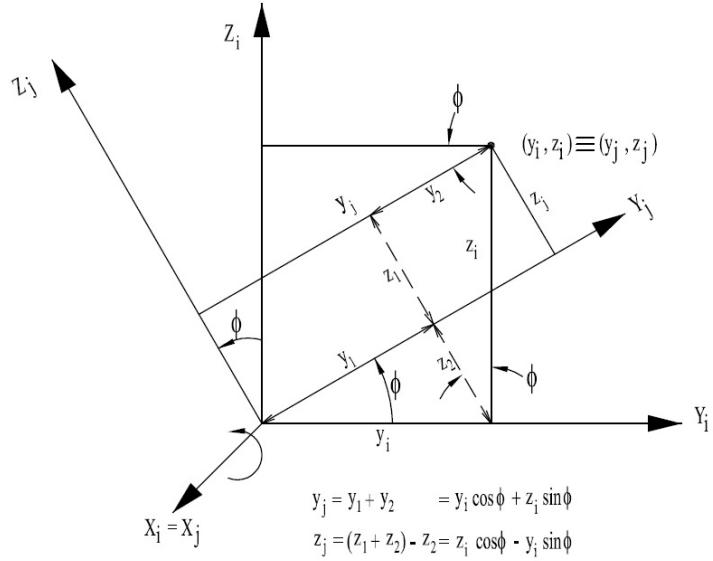


Figure 2.6: General rotation around the x-axis [Mooij](#) (2013).

The same calculation can be done from the spherical system to the Cartesian system. The corresponding equations for that calculation are shown in Equation (2.3).

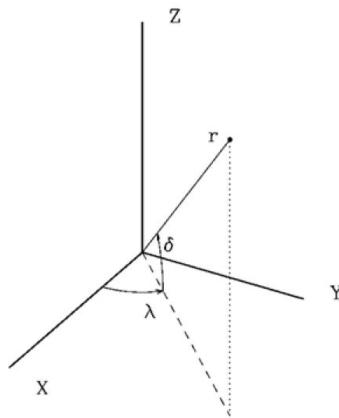


Figure 2.7: Position expressed in the Cartesian and the spherical system [Noomen \(2013a\)](#).

$$\begin{aligned}x &= r \cos \delta \cos \lambda \\y &= r \cos \delta \sin \lambda \\z &= r \sin \delta\end{aligned}\tag{2.3}$$

All the coordinate transformations can be found in ??, which include both position and velocity vectors. These transformations are essential in defining the models and setting up the equations of motion.

3

MODELS

The MAV and the corresponding ascent can be modelled in many different ways. Depending on the desired accuracy of the final solution compared to the real-life expected trajectory, different perturbations and freedom in motion can be defined and included, ranging from a low fidelity to a high fidelity program. The main goal of this thesis is to determine if TSI is an integrator that can be used for ascent cases and determine its performance compared to previously established methods. Therefore, it should be close to a real-life ascent, but not include too many aspects as to make the problem too complex to test. Therefore, it was decided to design a low fidelity program to propagate the trajectory using accelerations in the x-, y- and z-direction (3DOF). The MAV system can then be modelled as a point-mass system with different accelerations acting on it. The change in position can be described by the kinematic equations and the change in velocity by the corresponding dynamic equations. The change in mass is then described by the mass-flow. All these equations are provided in Section 3.1. For this model, three perturbing accelerations will be taken into account: the gravity, the thrust and the drag. The effect of third bodies can be neglected because of the short mission time. All the accelerations are described in Sections 3.2 to 3.4 respectively.

3.1. STATE AND STATE DERIVATIVES

Maybe include more assumptions and corresponding explanations!! The general model is described in terms of the Cartesian state; position and velocity in the x-, y-, and z-direction and the mass. The notation is shown in Equation (3.1), where m_{MAV} is the mass of the MAV and the subscript I refers to the inertial frame.

$$\mathbf{r} = \begin{pmatrix} x_I \\ y_I \\ z_I \end{pmatrix} \quad \mathbf{V} = \begin{pmatrix} V_{x_I} \\ V_{y_I} \\ V_{z_I} \end{pmatrix} \quad m_{MAV} \quad (3.1)$$

In order to determine the next state, the change in the state parameters over time have to be computed. This is done by taking the time derivatives of the state as described by Equation (3.2).

$$\begin{aligned} \dot{x}_I &= V_{x_I} & \ddot{x}_I &= \dot{V}_{x_I} = a_{x_I} \\ \dot{y}_I &= V_{y_I} & \ddot{y}_I &= \dot{V}_{y_I} = a_{y_I} \\ \dot{z}_I &= V_{z_I} & \ddot{z}_I &= \dot{V}_{z_I} = a_{z_I} \end{aligned} \quad \dot{m}_{MAV} = -\frac{T}{g_0 I_{sp}} \quad (3.2)$$

From this point on, the subscript I is omitted, because the state and the state derivatives are always presented in the inertial frame. If variables have to be presented in any other reference frame the corresponding subscripts will be provided and explained. The accelerations in the x-, y- and z-direction have three contributing components: gravitational acceleration, drag acceleration and thrust acceleration. In this model it is assumed that there is a homogeneous gravitational field acting on the point mass with a direction towards the centre of the inertial frame. The gravitational acceleration can therefore be directly expressed in the inertial frame.

The drag is assumed to work in the opposite direction of the MAV velocity vector, which in turn is assumed

to be in the positive x-direction of the body frame associated with the MAV. This way the MAV velocity, or ground velocity, is acting through the nose of the ascent vehicle. The drag acceleration is therefore expressed in the body frame. This effect in the body frame has to be translated into an acceleration in the inertial frame. This can be done using transformation matrices. A traditional transformation matrix uses an Euler angle to rotate a coordinate frame in a certain reference frame to another. Using the proper Euler, or rotation, angles, the acceleration in the x-, y- and z-direction in the body frame can be transformed into acceleration components acting in the x-, y- and z-direction of the inertial frame. Once it is expressed in the inertial frame it can be added to the effect caused by the gravitational acceleration.

It is also assumed that the nozzle of the MAV engine can be pivoted in two different directions: the y-, and z-direction of the body frame. This means that the thrust acceleration is not acting directly in the body frame, but in what is called the propulsion frame. Because the nozzle can move in two directions, or rather pivot over two different angles, the thrust acceleration can be translated to the body frame using these two thrust angles. Once the thrust acceleration is expressed in the body frame, the same transformations that are used for the drag can be used to determine the thrust acceleration components in the inertial frame.

Combining this in one equation then results in the expression for the acceleration vector as shown by Equation (3.3). The subscript G shows that the parameter is a function of the ground velocity. \mathbb{T} stands for a transformation and the subscript determines the rotation axis. The parameter in the brackets for each transformation is the rotation angle.

$$\begin{pmatrix} a_x \\ a_y \\ a_z \end{pmatrix} = \begin{pmatrix} a_{x,Grav} \\ a_{y,Grav} \\ a_{z,Grav} \end{pmatrix} + \left| \mathbb{T}_z(-\Omega_M t_O + \omega_P) \right|_{\mathbf{I}} \left| \mathbb{T}_z(-\tau) \mathbb{T}_y\left(\frac{\pi}{2} + \delta\right) \right|_{\mathbf{R}} \left| \mathbb{T}_z(-\chi_G) \mathbb{T}_y(-\gamma_G) \right|_{\mathbf{V}} \left[\begin{pmatrix} a_{Drag} \\ 0 \\ 0 \end{pmatrix} + \dots \right. \\ \left. \dots \left| \mathbb{T}_z(-\psi_T) \mathbb{T}_y(-\epsilon_T) \right|_{\mathbf{B}} \begin{pmatrix} a_{Thrust} \\ 0 \\ 0 \end{pmatrix} \right] \quad (3.3)$$

The rotations required to go from the body frame to the inertial frame are all a function of the current state. Both thrust angles are an input value that is set by the user or the program. $-\Omega_M t_O + \omega_P$ represents the angle between the rotating frame and the inertial frame and consists of three parts. Ω_M is the rotational velocity of Mars around its own axis, t_O is the difference between the current time and the time at which the inertial frame was set on Mars, and ω_P is the angle between the x-axis of the inertial frame and the zero meridian at the time that the inertial frame was set on Mars. In this thesis the inertial frame is set at the beginning of the simulation (so at $t = 0$, $t_O = 0$) and is aligned with the rotating frame (so $\omega_P = 0$). The transformation from the vertical to the rotating frame requires the latitude and longitude of the MAV, which is a function of the current state. [Mooij \(1994\)](#) provides equations to determine the different rotation angles. These expressions can be used to compute the latitude and longitude as well as shown by Equation (3.4).

$$\begin{aligned} r &= \sqrt{x^2 + y^2 + z^2} & x_R &= \cos(\Omega_M t_O) x + \sin(\Omega_M t_O) y \\ \delta &= \arcsin\left(\frac{z}{r}\right) & y_R &= -\sin(\Omega_M t_O) x + \cos(\Omega_M t_O) y \\ & & \tau &= \text{atan2}\left(\frac{y_R}{x_R}\right) \end{aligned} \quad (3.4)$$

It can be seen that in order to compute the longitude in the rotating frame (τ) the position of the MAV in the rotating frame was required. This position was found by transforming the inertial position to the rotational position using $\Omega_M t_O$ as described before. Working out that transformation matrix results in the sines and cosines presented in Equation (3.4).

Similarly, the flight-path angle and the azimuth angle can be described as a function of the current state. For this, some intermediate parameters have to be computed first and are given by Equation (3.5).

$$\begin{aligned}
V_I &= \sqrt{V_x^2 + V_y^2 + V_z^2} \\
V_G &= \sqrt{V_I^2 + \Omega_M^2(x^2 + y^2) + 2\Omega_M(xy - yx)} \\
V_{x,V} &= (V_x + \Omega_M y) \cdot (\sin(\delta) \sin(\Omega_M t_O) \sin(\tau) - \cos(\Omega_M t_O) \cos(\tau) \sin(\delta)) + \\
&\quad (V_y - \Omega_M x) \cdot (-\cos(\tau) \sin(\delta) \sin(\Omega_M t_O) - \cos(\Omega_M t_O) \sin(\delta) \sin(\tau)) + V_z \cos(\delta) \\
V_{y,V} &= (V_x + \Omega_M y) \cdot (-\cos(\tau) \sin(\Omega_M t_O) - \cos(\Omega_M t_O) \sin(\tau)) + \\
&\quad (V_y - \Omega_M x) \cdot (\cos(\Omega_M t_O) \cos(\tau) - \sin(\Omega_M t_O) \sin(\tau)) \\
V_{z,V} &= (V_x + \Omega_M y) \cdot (\cos(\delta) \sin(\Omega_M t_O) \sin(\tau) - \cos(\Omega_M t_O) \cos(\tau) \cos(\delta)) + \\
&\quad (V_y - \Omega_M x) \cdot (-\cos(\tau) \cos(\delta) \sin(\Omega_M t_O) - \cos(\Omega_M t_O) \cos(\delta) \sin(\tau)) - V_z \sin(\delta)
\end{aligned} \tag{3.5}$$

Then the angles can be computed using those parameters as shown by Equation (3.6).

$$\begin{aligned}
\chi_G &= \text{atan2}\left(\frac{V_{y,V}}{V_{x,V}}\right) \\
\gamma_G &= -\arcsin\left(\frac{V_{z,V}}{V_G}\right)
\end{aligned} \tag{3.6}$$

In this case, a transformation from the inertial frame to the vertical frame was required to get information on the velocity in the vertical frame. This transformation is written out at sines and cosines in Equation (3.5) resulting in lengthy expressions.

Now that the rotation angles from the body frame to the inertial frame are known, only the thrust angles and the different accelerations have yet to be defined. This is done in the next sections.

3.2. GRAVITY

The gravity acceleration is a function of the position of the MAV and the standard gravitational parameter of the planet, in this case Mars. Often, irregularities in the mass distribution of a planet also have to be taken into account ($J_{2,0}$ etc.), however, because the mission time is very short and the MAV does not even complete one revolution around Mars, these effects can be neglected. Therefore, the gravitational acceleration in the inertial frame can be represented by Equation (3.7).

$$\begin{pmatrix} a_{x,Grav} \\ a_{y,Grav} \\ a_{z,Grav} \end{pmatrix} = \begin{pmatrix} -\mu_M \frac{x}{r^3} \\ -\mu_M \frac{y}{r^3} \\ -\mu_M \frac{z}{r^3} \end{pmatrix} \tag{3.7}$$

3.3. THRUST

The thrust acceleration in the propulsion frame is simply the thrust divided by the current mass of the MAV, which can be written as shown by Equation (3.8).

$$a_{Thrust} = \frac{T}{m_{MAV}} \tag{3.8}$$

However, this acceleration has to be transformed to the body frame using the thrust angles. These thrust angles are the thrust elevation (ϵ_T) and thrust azimuth (ψ_T) angle, and are defined in Figure 3.1.

These angles will not be computed, but are set as an input for the program.

3.4. DRAG

The drag acceleration can be represented similarly to the thrust acceleration taking into account that the drag is acting in the negative x-direction in the body frame. The acceleration can then be written as Equation (3.9).

$$a_{drag} = -\frac{D}{m_{MAV}} \tag{3.9}$$

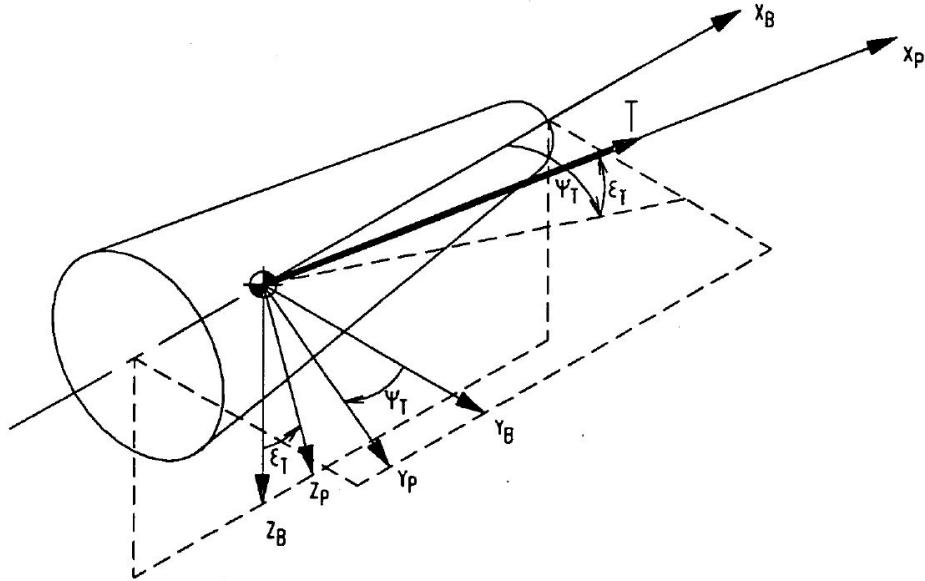


Figure 3.1: Definition of the thrust elevation and thrust azimuth angle with respect to the body frame (Mooij, 1994).

Here the drag is given by Equation (3.10).

$$D = \frac{1}{2} \rho V_G^2 S C_D \quad (3.10)$$

Where S is the reference area of the MAV set by the user, ρ is the air density which is a function of the altitude $h (= r - R_{MOLA})$ and C_D is the drag coefficient of the MAV which is a function of the Mach number. The Mach number in turn is a function of the speed of sound, which depends on the air temperature as can be seen in Equation (3.11).

$$\begin{aligned} M &= \frac{V_G}{a} \\ a &= \sqrt{\gamma_a R_a^* T_a} \quad \text{where} \quad R_a^* = \frac{R_a}{M_a} \end{aligned} \quad (3.11)$$

Here, R_a is the molar gas constant, γ_a is the adiabatic index for Mars, which according to Ho *et al.* (2002) can be set as ~ 1.35 . M_a is the molecular mass of the Martian atmosphere and depends on its composition. Williams (2015) mentions a volumetric composition of Mars which results in a mean molecular mass of 0.04334 kg/mol. This value has been used in this research to compute the speed of sound.

The air pressure and temperature (T_a) change as a function of the altitude of the MAV. This means that a pressure and temperature model of the atmosphere of Mars will have to be used to approximate these values as the ascent vehicle moves through the atmosphere. This is done through a function fit of an atmospheric model, as is described in Section 3.4.1.

The drag coefficient changes with the Mach number, however, this change is not constant over the entire Mach range. Therefore, this also requires a function fit in order to be used in the simulation program. This fit is presented in Section 3.4.2.

3.4.1. ATMOSPHERIC GRAPH FUNCTION FIT

Using Mars-GRAM 2005, a table containing altitude, latitude and longitude dependent temperature and density data was produced. The altitude range was -0.6 to 320 km Mars Orbiter Laser Altimeter (MOLA) with a step-size of 0.01 km, the latitude and longitude ranges were centred around the launch site (21.0 °N and 74.5 °E) with a 10 degree range in each direction and a step-size of 1 degree. The rest of the input parameters were

constant and can be seen in Appendix A. The temperature and density data produced is shown in Figures 3.2 and 3.3 respectively for 9 latitude and longitude combinations including the launch site itself.

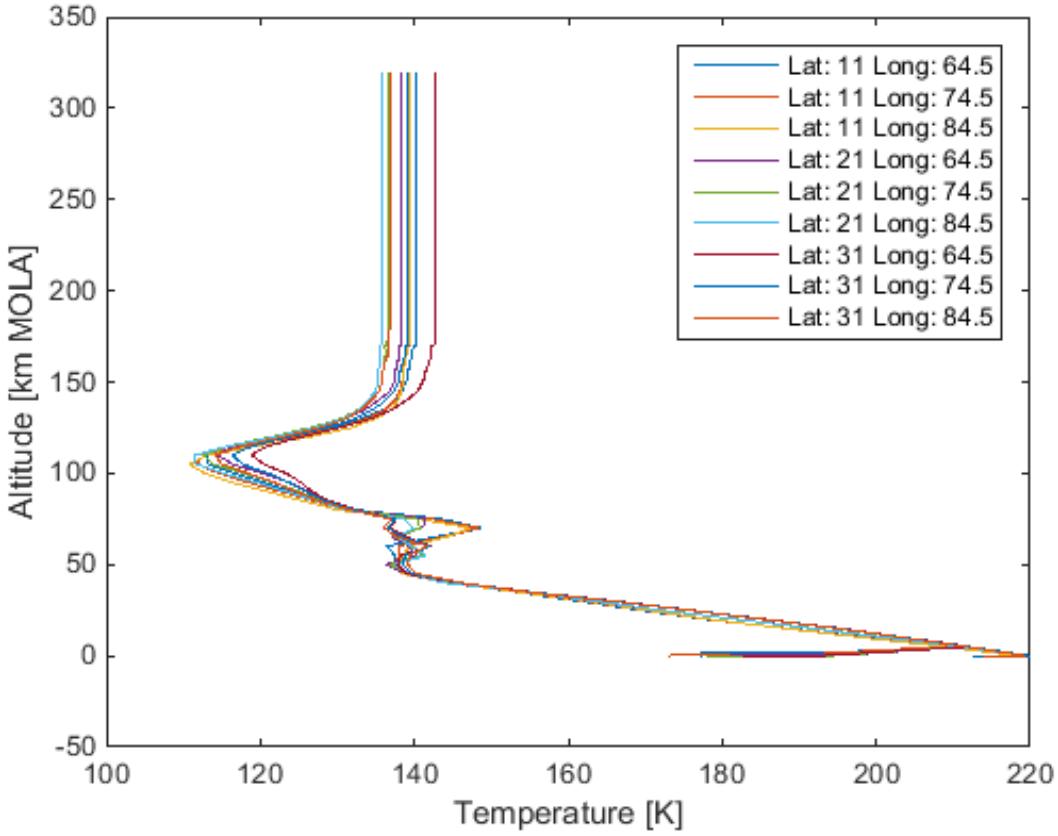


Figure 3.2: Temperature data generated with Mars-GRAM 2005 showing 9 different latitude and longitude combinations

Unfortunately discontinuous data tables cannot be used when integrating using TSI, which is why both these data tables had to be fitted with continuous functions. The temperature data could not be smoothly fit with one continuous function. Therefore, depending on the altitude range, a different approximation function is required. The condition to be met for a proper fit came from the differences in the temperature-altitude and density-altitude curves, where the maximum difference with respect to the launch site curve was taken. The requirement for the standard deviation of the polynomial curve fit was then to be (at least) one order lower than this maximum difference and that the maximum difference between the fit and the launch site curve was lower than the maximum difference. The temperature-altitude curve was split into 5 sections as roughly visualised in Figure 3.4. The number of sections come from both the shape of the curves and the requirement for accuracy and maximum order of the polynomial, which is set at 8 because otherwise the polynomial would get too long. Also, the number of sections were to be kept at a minimum. More information on the fitting process and early results is provided in Appendix B.

Each section was fit with a polynomial function of the n^{th} order where the function is represented by Equation (3.12). The last section shows a constant temperature, thus the temperature of the launch site curve was chosen to represent this final section, which is equal to 136.5 K.

$$y = p_n x^n + p_{n-1} x^{n-1} + \cdots + p_1 x + p_0 \quad (3.12)$$

A lower order is preferred, because then the fitted function will be simpler to evaluate and contain fewer terms. However the order has to be high enough to meet the accuracy requirements. Table 3.1 shows the orders that were required and the deviations to the launch site temperature-altitude curve. The actual corresponding parameters are provided in Table 3.2. It should be noted that the first few temperature data values were so different from the rest of the curve that it was assumed that this is a lack of the Mars-GRAM program

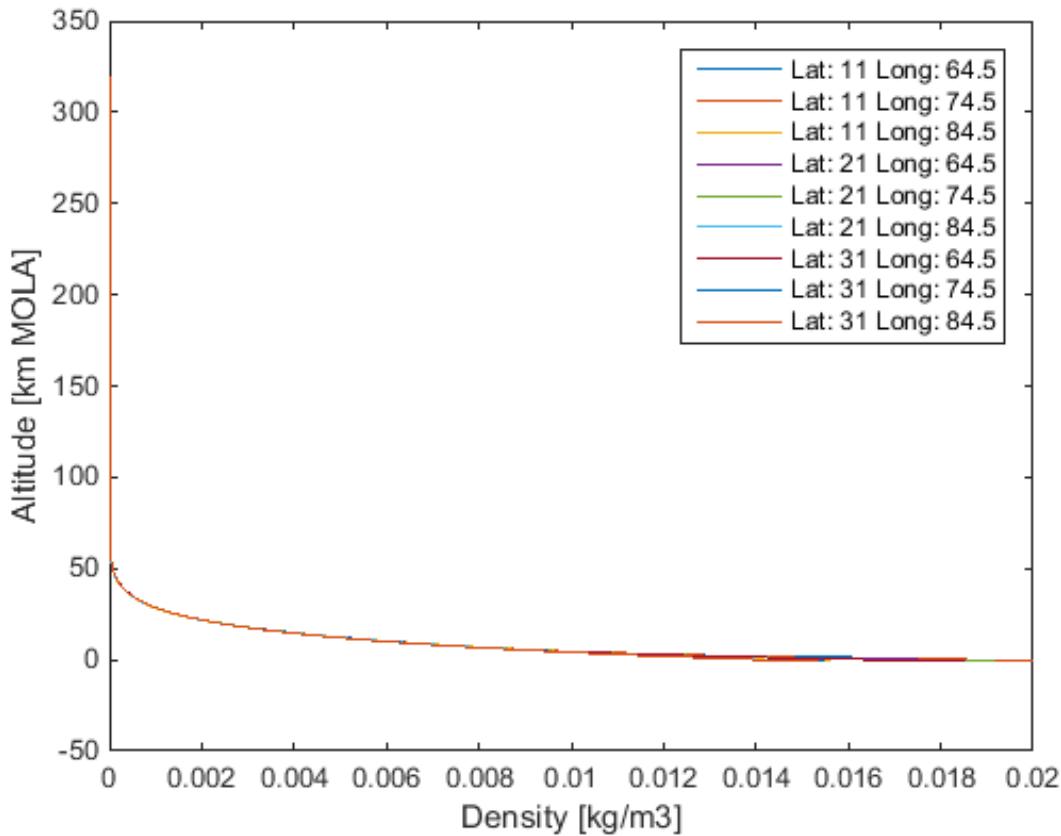


Figure 3.3: Density data generated with Mars-GRAM 2005 showing 9 different latitude and longitude combinations

and were thus treated as outliers.

Table 3.1: Temperature curve fit data all with respect to the launch site curve (Latitude and longitude of the launch site)

Section	Altitude range [km MOLA]	Order	Maximum polynomial standard deviation [K]	Maximum polynomial difference [K]	Maximum data curves difference [K]
1	-0.6 to 5.04	1	0.0312	25.8	0.177
2	5.04 to 35.53	2	0.287	3.90	0.7056
3	35.53 to 75.07	6	0.624	8.00	1.69
4	75.07 to 170.05	8	0.523	6.60	2.45

Table 3.2: Temperature curve fit parameters (rounded to 3 decimal points)

Section	p ₈	p ₇	p ₆	p ₅	p ₄	p ₃	p ₂	p ₁	p ₀
1								3.415	194.165
2							0.006	-2.130	222.052
3			-5.388 ·10 ⁻⁷	1.785 ·10 ⁻⁴	-0.0243	1.733	-68.294	1.407 ·10 ³	-1.167 ·10 ⁴
4	4.1942 ·10 ⁻¹²	-4.328 ·10 ⁻⁹	1.931 ·10 ⁻⁶	-4.862 ·10 ⁻⁴	0.076	-7.405	447.378	-1.523 ·10 ⁴	2.236 ·10 ⁵

The complete polynomial fit for the launch site curve for the temperature is shown in Figure 3.5.

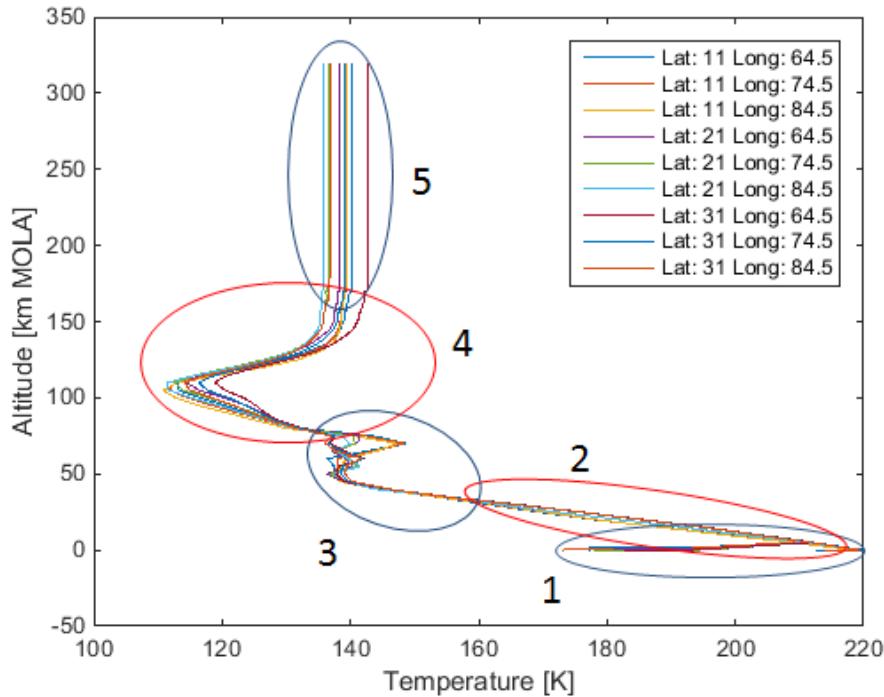


Figure 3.4: Different temperature curve sections

The density fit was slightly more difficult because the curves are all very similar and thus result in a higher accuracy requirement for the fit. At first glance it looks like a natural logarithmic function, unfortunately an ordinary exponential did not fit the curve. This is why a more extensive exponential fit was required. The natural logarithm of the data has been plotted in Figure 3.6.

With the data represented in the logarithmic domain, again a polynomial function can be fit. The total fit would then satisfy Equation (3.13).

$$y = \exp(p_n x^n + p_{n-1} x^{n-1} + \dots + p_1 x + p_0) \quad (3.13)$$

The same polynomial requirements as for the temperature curve were enforced for the density curve as well. However, because the polynomial is used in an exponential, some extra requirements are needed to assure the accuracy of the fit. One requirement is that the maximum difference between the final exponential fit and the normal launch site density curve is smaller than the maximum difference between all the data curves. Also, in this case the standard deviation of the difference between the exponential fit and the normal launch site curve had to be within the range of standard deviations of the difference between the different data curves. This meant that even though an 8th order polynomial fit could be achieved for the natural logarithmic data with the required accuracy, when converted to the exponential fit, the last two requirements were not met. Before it was mentioned that an order higher than 8 was not desirable. However, in this case, a single exponential fit could be achieved using a 10th order polynomial. This fit meant that the density curve did not have to be split up at all, which makes the integration slightly easier. Therefore, it was decided that a 10th order polynomial was acceptable in this case. The results of the fit is presented in Tables 3.3 and 3.4 and the polynomial and exponential fit curves are shown in Figures 3.7 and 3.8 respectively.

3.4.2. DRAG COEFFICIENT GRAPH FUNCTION FIT

Similar to the temperature and density curves, the relation between Mach number and drag coefficient, as depicted in Figure 2.4, had to be modelled as a continuous function as well. Again, it could not be fitted using one continuous function, but instead had to be modelled by different functions.

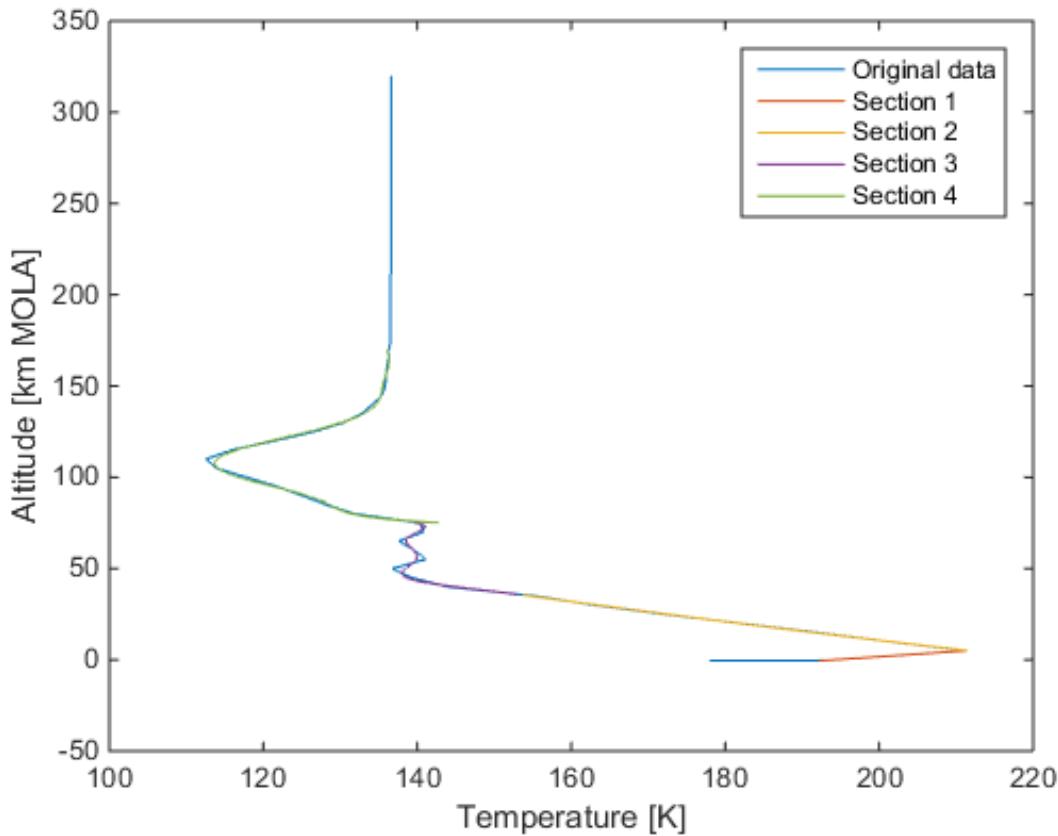


Figure 3.5: All section fits for the launch site temperature data curve

Table 3.3: Density curve fit data (10^{th} order polynomial) with respect to the launch site curve (Latitude and longitude of the launch site)

Maximum polynomial standard deviation [kg/m³]	0.0501
Maximum polynomial difference [kg/m³]	0.160
Maximum natural logarithmic data curves difference [kg/m³]	0.460
Maximum exponential difference with launch site curve [kg/m³]	$2.826 \cdot 10^{-3}$
Maximum data curves difference [kg/m³]	$3.910 \cdot 10^{-3}$
Standard deviation exponential fit difference [kg/m³]	$1.167 \cdot 10^{-4}$
Maximum standard deviation data curves difference [kg/m³]	$2.106 \cdot 10^{-4}$

Table 3.4: Density curve fit parameters (rounded to 3 decimal points)

p₁₀	p₉	p₈	p₇	p₆	p₅	p₄	p₃	p₂	p₁	p₀
2.287 $\cdot 10^{-21}$	-3.724 $\cdot 10^{-18}$	2.559 $\cdot 10^{-15}$	-9.620 $\cdot 10^{-13}$	2.146 $\cdot 10^{-10}$	-2.884 $\cdot 10^{-8}$	2.273 $\cdot 10^{-6}$	-9.604 $\cdot 10^{-5}$	1.414 $\cdot 10^{-3}$	-0.0962	-4.172

Fortunately, this curve is already an approximation and thus consists of linear elements only. It can be split up into 6 different sections where the first and last section are constant (C_D is 0.2 and 0.3 respectively). Using a similar polynomial fit as before, but now for 1 order only, a linear fit could be made for each of the remaining 4 sections. The corresponding parameters are shown in Table 3.5 and the curve fit is shown in Figure 3.9.

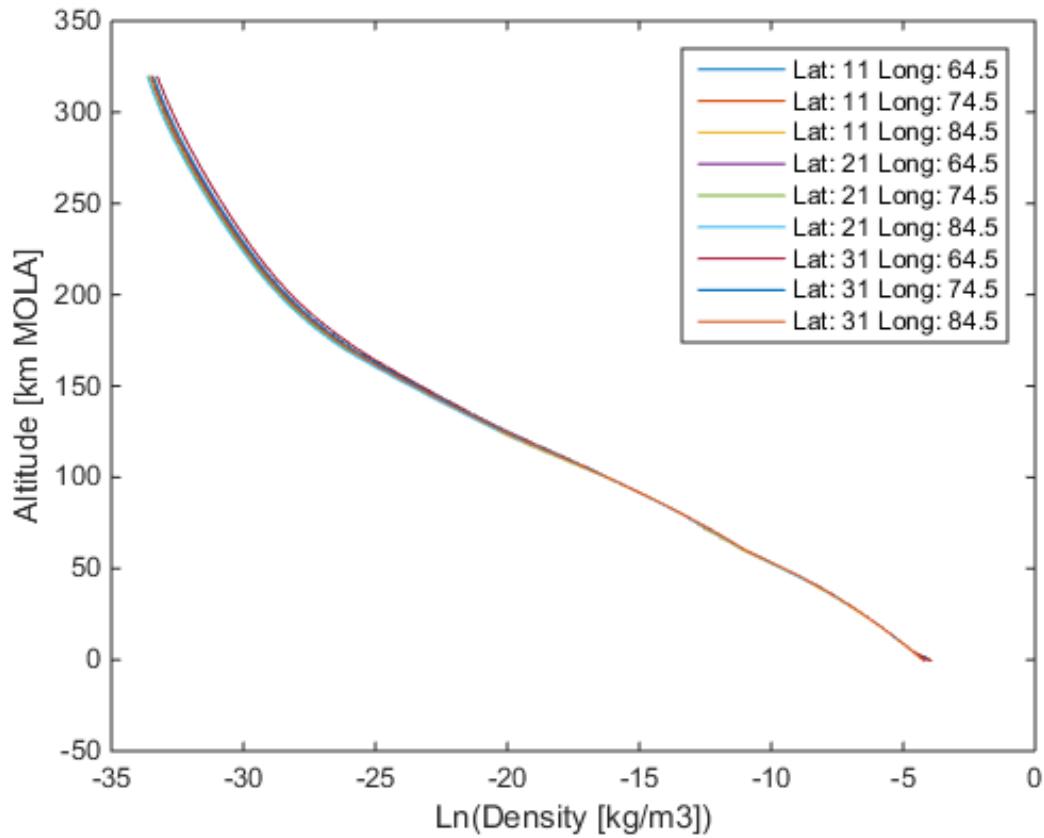


Figure 3.6: Natural logarithmic plot of the density data

Table 3.5: Drag coefficient curve fit parameters (rounded to 3 decimal points)

Section	Mach range	p_1	p_0
2	0.5 to 1	0.400	$-2.483 \cdot 10^{-16}$
3	1 to 1.3	0.567	-0.167
4	1.3 to 2.5	-0.142	0.754
5	2.5 to 4	-0.0667	0.567

3.5. CIRCULARISATION

This section still has to be added!!

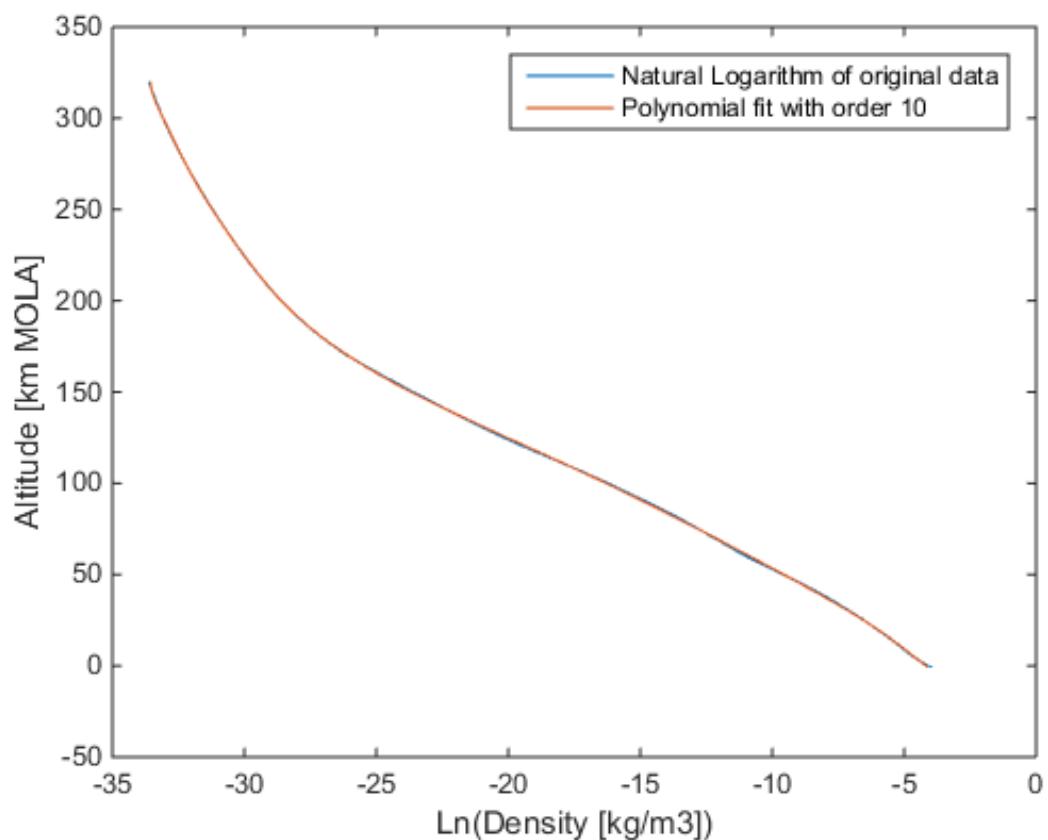


Figure 3.7: Polynomial fit for the launch site density data curve

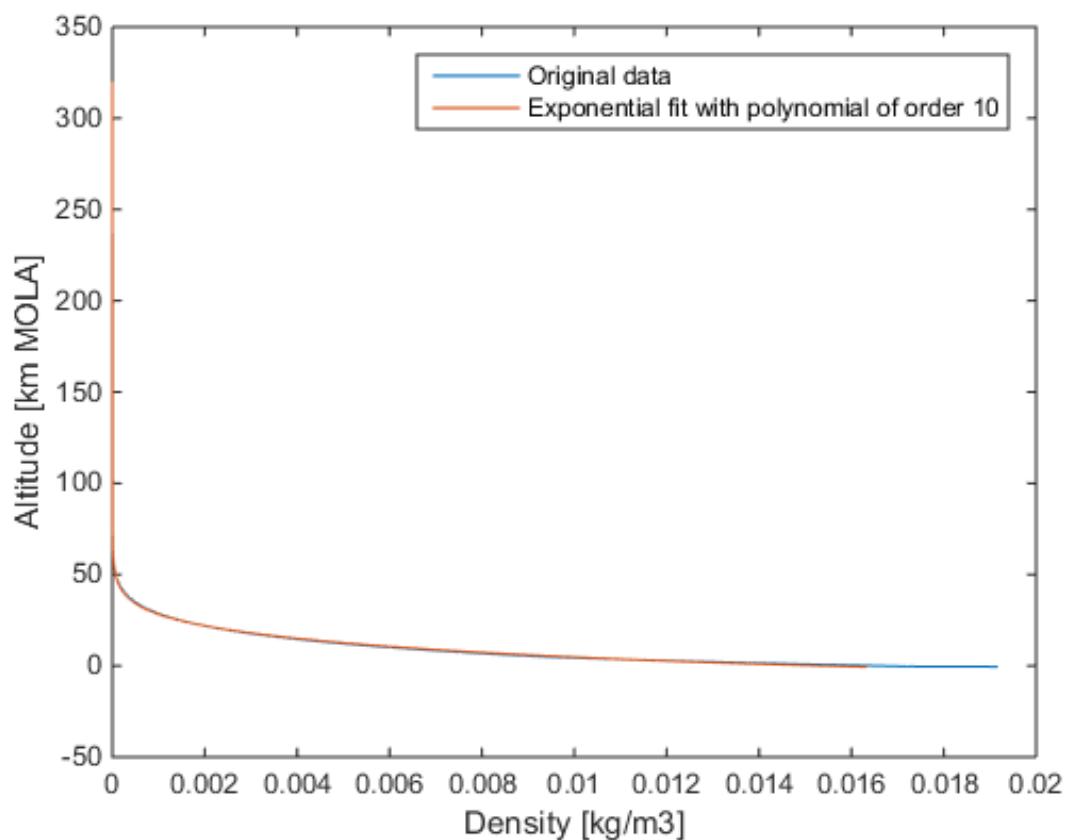


Figure 3.8: Exponential fit for the launch site density data curve

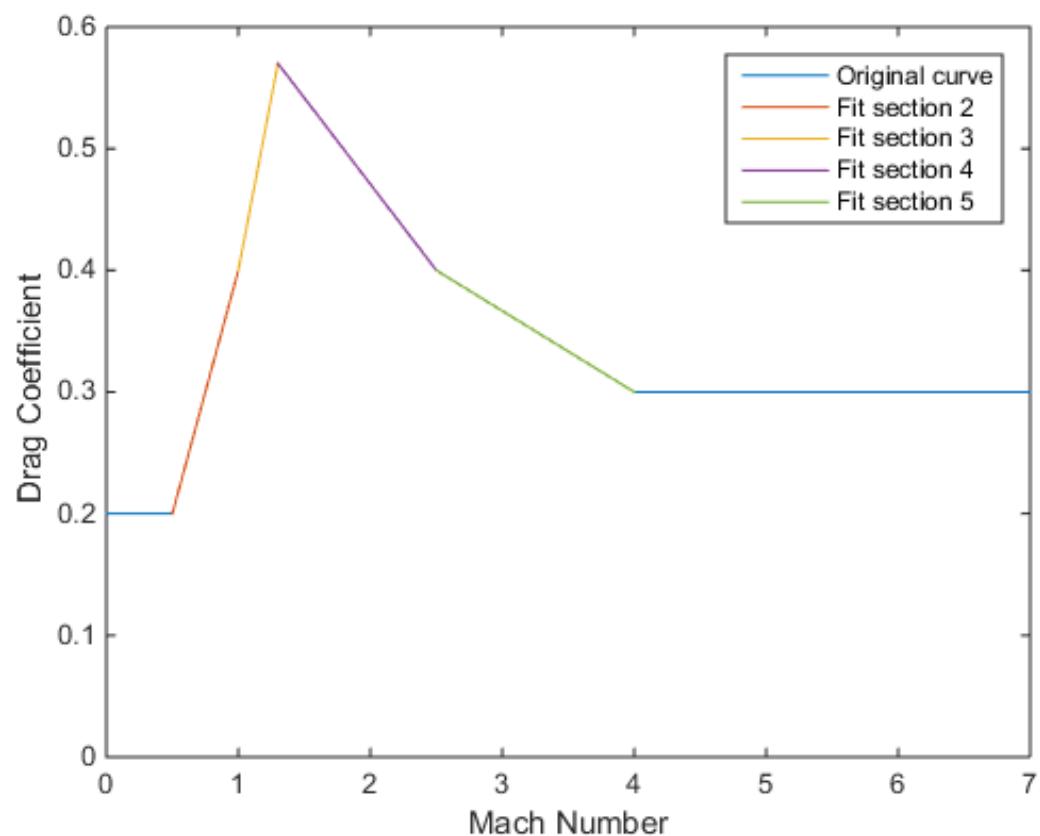


Figure 3.9: All section fits for the drag coefficient - Mach curve

4

STANDARD INTEGRATION METHODS

Propagation refers to the process of modelling/predicting the manner in which an object (for instance) will progress (in time) from a starting point, usually given an initial condition. Such an initial condition could be a constant force or another kind of perturbation. In orbital computations, numerical integration is often used to model this behaviour, because of the irregularities in the dynamic environment (many perturbations) and the absence of analytical solutions. The solution then provides an estimate of the trajectory and the state of the [s/c](#)(Hofsteenge, 2013). There are several different types of numerical integrators that all try to predict the [s/c](#) behaviour in different ways. These types are described in Section 4.1. In Section 4.2 the method is chosen that will be used in this research to compare the performance of the [TSI](#) method with.

Numerical integration methods do have one major drawback compared to analytic methods, and that is the accuracy of the produced result. Numerical methods come close to the actual result but usually do not reach it. Therefore, there will always be a certain error associated with the answer. One of the most important errors is called the local (and total) truncation error, which is caused by the numerical inaccuracy of the method itself, and are usually the largest errors. A second error can be introduced by the round-off properties of the used computer, which then also depends on the number of evaluations required for each of the integration methods (more evaluations means more round-off errors). These round-off errors are due to the fact that computers can only accurately represent a number up until a certain number of decimal figures. According to Milani and Nobili (1987) there are also specific errors that arise when integrating space-related problems. Instability errors can occur if the simulated system is chaotic or if the step-size is too large.

Another, non-method specific and not necessarily integration related, error source is the mistakes made in the physical model representing the problem in the simulation. Such errors can occur when forces and disturbances are not (properly) taken into account in the assumptions made to create the physical model.

Fortunately, many of the standard integration methods already contain functions that approximate these errors and then include those approximations to come up with a better solution, or try to minimize these errors by using multiple approximations. The focus of this chapter will thus be on the different integration methods and not the different methods of determining the different errors.

4.1. DIFFERENT INTEGRATOR TYPES

A number of different numerical integration methods exist, however in this section they will be split based on how they work. In this case they have been split into single-step (Section 4.1.1) and multi-step methods (Section 4.1.2) based on Noomen (2013b). The methods can also be split based on the used step-size; either a fixed step-size that does not change during the integration, or a variable step-size that changes per step (or sometimes even during the step). Finally, the methods can also be categorised by either being explicit or implicit. An explicit method uses the information provided at the start of the integration (the current state \mathbf{x}_i and sometimes previous states) to determine the next state \mathbf{x}_{i+1} . Whereas an implicit method uses the same information to determine \mathbf{x}_{i+1} , but once this first solution is obtained, it uses this next state as an approximation of the solution and feeds it back into the method in order to determine a more accurate solution. This requires iteration.

The numerical approximation of the next state can be written as the current state plus the change during one time-step. This change is defined as the step-size h times the increment function Φ as shown by Equa-

tion (4.1), which changes depending on the method used. Here, η represents the total numerical approximation.

$$\mathbf{x}(t_0 + h) \approx \mathbf{x}_0 + h\Phi = \eta(t_0 + h) \quad (4.1)$$

4.1.1. SINGLE-STEP

Single-step methods solely use the information at the current point to determine the approximation of the next state. This means that the information of the previous points is neglected and usually not saved (Noomen, 2013b). Examples of the most simple explicit, fixed step-size, single-step methods are Euler, Mid-point and Runge-Kutta 4th order (RK4) (Hofsteenge, 2013). Euler uses the information at the current state to directly compute the estimate of the next state. Mid-point already incorporates an extra estimation where it first computes a point at half the step-size and then uses that information to approximate the next state, and RK4 takes 4 points into account and takes the weighted average of those to come up with a solution (the starting point, two mid-points and a final point). Many methods exist that are based on these simple methods, for instance the Mid-point method based high-order extrapolation (a.k.a. DIFEX2) (explicit) method (Deufhard *et al.*, 1994).

Many more methods however are based on the RK4 principle such as Runge-Kutta-Nyström (RKN, with variations such as RKN7(6)9) (implicit) (Montenbruck, 1992b; Dormand *et al.*, 1987), Runge-Kutta-Nyström 12th order (RKN12) (implicit) (Montenbruck, 1992b) and Runge-Kutta-Fehlberg 4th (5th) order (RKF45) and Runge-Kutta-Fehlberg 7th (8th) order (RKF78) (Fehlberg, 1969, 1968). These last two integrators are slightly different since they are still explicit, but use a variable step-size.

4.1.2. MULTI-STEP

Compared to the single-step method, the multi-step method does use the information of the previous points to estimate the next state. Usually reaching as far back as the previous three points such as the Adams-Bashforth 4th order (AB4) method (Noomen, 2013b), this being the only difference between this method and the RK4 method. Extending this method creates the explicit Adams-Bashforth 6th order (AB6) method. An example of an implicit, fixed step-size, multi-step method is the Adams-Moulton method. It uses a polynomial to interpolate the function values in order to approximate the next state (Noomen, 2013b). Explicit and implicit methods can also be combined to create so-called Predictor-Corrector methods. Here an initial guess is created by the explicit method, which is then fed into the implicit part in order to correct and improve the estimate. Examples of Predictor-Corrector methods are Adams-Bashforth-Moulton 4th order (ABM4) and Adams-Bashforth-Moulton 12th order (ABM12) (Noomen, 2013b; Montenbruck, 1992b).

All previously mentioned multi-step methods use a fixed step-size. Variable step-size methods also exist, such as Shampine-Gordon (SG) (explicit) (Berry, 2004; Meijaard, 1991) and Störmer-Cowell 14th order (SC14) (Predictor-Corrector) (Berry, 2004; Ramos and Vigo-Aguiar, 2005).

4.2. CHOSEN METHOD FOR COMPARISON

In order to choose the method that will be used to compare the performance of TSI to, it was important to understand which methods were readily available. If a method is already validated and available for use a lot of time can be saved. Therefore, an inquiry of available methods is made in Section 4.2.1. Another important criteria is that the performance of TSI should be able to be compared to previous study cases. The easiest way of doing that is to see what methods other researchers used to compare TSI to (see Section 4.2.2). Using the information from Sections 4.2.1 and 4.2.2 a decision could be made on the final comparison method as is described in Section 4.2.3.

4.2.1. TUDAT METHODS

One of the software tools used in this thesis is Tudat (see Section 6.1.1 for more information). It is a computational toolbox that already comes with a number of useful functions. It also contains a number of pre-programmed validated numerical integrators. A list of the available integration methods is provided in Table 4.1.

Most of these methods are very similar except RK4 which is a fixed step-size method, and Dormand-Prince 8th (7th) order (DOPRIN87) which is actually a Runge-Kutta method similar to RKF with an accuracy order 8(7) using the formulations as described by Prince and Dormand (1981) according to Weeks and Thrasher

Table 4.1: Available *Tudat* integrators (Dirkx *et al.*, 2016)

Method	Kind of method	File	Ready for use
RK4	explicit, fixed step-size, single-step	rungeKutta4Integrator.h	Yes
RKF45	explicit, variable step-size, single-step	numericalIntegrator.h & rungeKuttaVariableStep-SizeIntegrator.h & rungeKuttaCoefficients.h/.cpp	Yes
RKF56	explicit, variable step-size, single-step	numericalIntegrator.h & rungeKuttaVariableStep-SizeIntegrator.h & rungeKuttaCoefficients.h/.cpp	No
RKF78	explicit, variable step-size, single-step	numericalIntegrator.h & rungeKuttaVariableStep-SizeIntegrator.h & rungeKuttaCoefficients.h/.cpp	Yes
DOPRIN87	explicit, variable step-size, single-step	numericalIntegrator.h & rungeKuttaVariableStep-SizeIntegrator.h & rungeKuttaCoefficients.h/.cpp	Yes

(2007). At the time of the research, the Runge-Kutta-Fehlberg 5th (6th) order (**RKF56**) method that was pre-programmed into *Tudat* was unfortunately not available for use.

4.2.2. METHODS USED IN PREVIOUS RESEARCH

Out of the research done on integration methods for space missions, the most relevant is the research that was done on *TSI*. The research performed by Scott and Martini (2008) focused on orbital trajectories and used RKF8(9) and the research performed by Bergsma and Mooij (2016) focussed on re-entry cases and used **RKF56**. Unfortunately, RKF8(9) was not available through *Tudat* and **RKF56** was out of commission at the time of this thesis research. However, it is good to notice that both researchers used higher order RKF methods, which encourages the use of similar methods for this research and fortunately similar methods are available.


4.2.3. CHOSEN METHOD

Considering the available methods and the methods used in previous *TSI* research it was determined that the **RKF** methods and **DOPRIN87** would be tested in the early phases of the verification process. In this case **RK4** would serve as a back-up. During the verification of the standard integrator it was found that **RKF78** showed the best performance when dealing with these ascent problems, which is why it was chosen as the integration method to which *TSI* was later compared.

4.3. WORKINGS OF RKF

The principle behind **RKF** is perhaps best explained by first looking at a simpler Runge-Kutta method such as **RK4**. Noomen (2013b) provides a simple explanation of the workings of **RK4** that have been adapted here. In this case, use is made of the general formulation for the numerical approximation as was shown in Equation (4.1). The increment function for **RK4** is then presented by Equation (4.2). In this case four points are used to approximate the next state as visualised in Figure 4.1.

$$\Phi_{RK4} = \frac{1}{6} (k_1 + 2k_2 + 2k_3 + k_4) \quad (4.2)$$

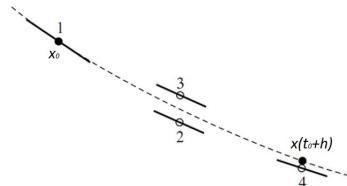Figure 4.1: Principle of **RK4** for a single parameter Noomen (2013b).

Runge-Kutta works with the time-derivatives at those points. The derivative at the first point is called k_1 , at the second point k_2 etcetera. These time derivatives are used both in the increment function but also in

the process of determining the derivative of the next intermediate point as shown by Equation (4.3).

$$\begin{aligned} k_1 &= f'(t_0, \mathbf{x}_0) \\ k_2 &= f'(t_0 + h/2, \mathbf{x}_0 + hk_1/2) \\ k_3 &= f'(t_0 + h/2, \mathbf{x}_0 + hk_2/2) \\ k_4 &= f'(t_0 + h, \mathbf{x}_0 + hk_3) \end{aligned} \quad (4.3)$$

Equations (4.2) and (4.3) can also be generalized as presented by Equation (4.4). In this case b_i represents the different weights for each of the points with the corresponding step-size weights c_i , n is the order and $a_{i,j}$ are the coefficients of the previous time-derivatives.

$$\begin{aligned} \Phi_{RK} &= \sum_{i=1}^n b_i k_i \\ \text{with } k_i &= f'\left(t + c_n h, y + h \sum_{j=1}^{n-1} a_{i,j} k_j\right) \end{aligned} \quad (4.4)$$

This general formulation can now also be used to compute the higher order Runge-Kutta approximations given that $a_{i,j}$, b_i and c_i are provided. These sets of numbers can be found in various literature, and different people have come up with different sets. Fehlberg was one of these people. In order to get a more accurate solution he decided to use two different methods. In the case of this research, [RKF78](#) was used, which means that a 7th order and 8th order solution can be computed using Equation (4.4). The 7th order solution is then used as the method solution and the difference between the 8th and the 7th order solution results in an error estimate which can be used to determine the next step-size. This step-size is thus computed such as to minimize this error estimate. This means that the only difference between [RKF78](#) and [RKF45](#) (for instance) is the coefficient set (a, b and c's).

5

TAYLOR SERIES INTEGRATION

Taylor Series integration ([TSI](#)) is different from the previously mentioned integrators, because it only uses the information at the current point to predict the next point. However, it does this using higher order derivatives at that point. These higher order derivatives have to be obtained as a function of the current state and the first order state derivatives. As soon as the K^{th} order derivative has been found, a Taylor Series can be set up to determine the next state as a function of the chosen step-size. This is all explained and described in more detail in Section 5.1. In this thesis, [TSI](#) is the main focus of the analysis. The performance with respect to the [RKF](#) integrators is tested. In order to be able to do this for the given model, a number of equation sets can be identified which have to be written in such a format that it can be used by [TSI](#). These are described, and where needed derived, in Section 5.2.

5.1. GENERAL THEORY

[TSI](#) has been used to solve ordinary differential equations since the early 1960s ([Scott and Martini, 2008](#)). However, the first modern implementation of [TSI](#) in a space trajectory problem was provided by [Montenbruck \(1992a\)](#). [Scott and Martini \(2008\)](#) were able to implement this [TSI](#) method into the SNAP trajectory propagator which is the implementation that is used in this thesis. The method is described in Section 5.1.1 and the used step-size method is discussed in Section 5.1.2.

5.1.1. WORKINGS OF TSI

The formulation used in this thesis is based on the one used by [Scott and Martini \(2008\)](#).

[TSI](#) uses the current state and its derivatives to determine the next state by computing its Taylor Series described in Equation (5.1). The state vector is represented by \mathbf{X} with the corresponding vector for the initial conditions \mathbf{X}_0 . Each of the variables can at any point be represented by $x_n(t)$. For a given step-size h and an order $K \in \mathbb{R}$ (chosen by the user) the updated state $x_n(t+h)$ can be represented by the Taylor Series with $n = 1, \dots, 7$ in this case (7 variables: three position, three velocity and one mass). The exact solution is obtained by adding $T_{n,K}$, which is the truncation error for the n^{th} variable using K terms.

$$x_n(t+h) = \sum_{k=0}^K \frac{x_n^{(k)}(t)}{k!} (h)^k + T_{n,K} \quad (5.1)$$

This particular [TSI](#) method uses recurrence relations to determine the k^{th} order derivatives and only requires the current state (x_n) and its first derivatives ($x'_n = u_n$). Each recurrence relation describes a certain operation in the state derivative, such as: multiplication, division, power, exponential, sines and cosines. Equation (5.2) shows the recurrence relations for multiplication ($w(t) = f(t)g(t)$) and division ($w(t) = \frac{f(t)}{g(t)}$) respectively (the other operations are described later in this chapter when they are required).

$$\begin{aligned}
 \text{For multiplications} \quad W(k) &= \sum_{j=0}^k F(j) G(k-j) \\
 \text{For divisions} \quad W(k) &= \frac{1}{g(t_0)} \left[F(k) - \sum_{j=1}^k G(j) W(k-j) \right] \\
 \text{Both with} \quad W(k) &= \frac{w^{(k)}(t_0)}{k!}, \quad F(j) = \frac{f^{(j)}(t_0)}{j!} \quad \text{and} \quad G(k-j) = \frac{g^{(k-j)}(t_0)}{(k-j)!}
 \end{aligned} \tag{5.2}$$

Here, both $f(t)$ and $g(t)$ are place-holder functions and $w(t)$ is called the auxiliary function which replaces the respective operation. Sometimes, the state derivative functions can be rather complex and have many operations intertwined. One can then choose to introduce extra variables to simplify the derivatives and reduce the number of operations in that particular derivative. These extra variables together with the expression that they replace then form the auxiliary equations. A random example is shown in Equation (5.3).

$$\begin{aligned}
 x'_4 &= u_4 = 2x_1 + \frac{(x_3 x_1 + x_2 x_3)}{x_4} \\
 x_8 &= x_3 x_1 + x_2 x_3
 \end{aligned} \tag{5.3}$$

However, now that the extra variable x_8 is introduced, the derivative of the corresponding auxiliary equations has to be described as well (see Equation (5.4), which in turn will use auxiliary functions to determine the k^{th} derivative of x_8 .

$$\begin{aligned}
 x'_4 &= u_4 = 2x_1 + \frac{x_8}{x_4} \\
 x'_8 &= u_8 = x'_3 x_1 + x_3 x'_1 + x'_2 x_3 + x_2 x'_3 = u_3 x_1 + x_3 u_1 + u_2 x_3 + x_2 u_3
 \end{aligned} \tag{5.4}$$

At this point it should be emphasised that using auxiliary equations and derivatives is a choice. It is not required to make TSI work. Sometimes it can be easier to introduce auxiliary equations because it makes the problem more comprehensible but this could introduce errors because all auxiliary equations also require auxiliary derivatives, which might not be easy to find. In those cases it could be more useful to just leave the state derivatives as they are and write more auxiliary functions instead. This all depends on the problem and the preference of the user.

Now let $u_n^{(k-1)} = x_n^k$ for $k = 1, \dots, K$, then $\frac{u_n^{(k-1)}}{(k-1)!} = \frac{x_n^k}{(k-1)!}$, and also $\frac{x_n^k}{k!} = X_n(k)$. Combining this results in Equation (5.5).

$$U_n(k-1) = kX_n(k) \Rightarrow X_n(k) = \frac{U_n(k-1)}{k} \tag{5.5}$$

The $X_n(k)$ are also known as the Taylor Series coefficients of the n^{th} variable for the k^{th} order derivative. Also, $U_n(k)$ are the recurrence relation expressions for the n^{th} variable which consist of all the reduced auxiliary functions ($W(k)$) that form that derivative.

Using the expression described in Equation (5.5) all Taylor Series coefficients can be found. Then Equation (5.1) can be used to determine the next state values at time $t+h$ for the known previous parameter values at time t . The same can then be done to determine the values at the time-step after that using the state values at $t+h$, etc. Going through all these different time-steps results in the final integration.

5.1.2. STEP-SIZE

The step-size used for TSI can be either set as a constant value by the user or determined using a step-size controller, giving it the variable step-size properties, which is done in this thesis. The chosen step-size method was based on the recommendation of both [Scott and Martini \(2008\)](#) and [Bergsma \(2015\)](#) and directly uses the chosen (or preferred) local error tolerance τ to determine the next step size. This method assures that the step-size is small enough such that all variables satisfy the error condition directly. The step-size is determined using a so-called fixed-point iteration performed using Equation (5.6). The initial step-size h_1 can be

chosen to be the current step-size h as an easy estimate. Then the iteration is performed over l until a certain required convergence is reached.

$$h_{l+1} = \exp\left(\frac{1}{K-1} \ln \left[\frac{\tau}{|X_n(K-1)| + K |X_n(K)| h_l} \right] \right) \quad (5.6)$$

This is then done for all variables and the smallest required step-size is chosen, which is then used to determine the next step-size through $h_{next} = \eta h_{chosen}$, where η is the chosen step multiplication factor which has to be smaller than 1.

5.2. ASSOCIATED EQUATIONS

In order for TSI to be implemented, the state derivatives have to be modelled as a set of continuous functions which are a function of the state only. This can be done in different ways. In this case, three cases were tested: two Cartesian cases and one spherical case. For the Cartesian cases, the initial conditions first have to be transformed into Cartesian coordinates. The Cartesian equations themselves require reference frame transformations, which can be written in two different ways. The first case is described in Section 5.2.1 and the second in Section 5.2.2. The reason for testing the spherical case is that the initial conditions are provided in spherical coordinates and the intermediate computations can be easily interpreted and checked for errors. However, the equations are highly sensitive to singularities. The spherical equations are described in Section 5.2.3 and already include reference frame transformations.

5.2.1. CARTESIAN EQUATIONS, FIRST CASE

The Cartesian state is described in Equation (5.7), where m_{MAV} is the mass of the MAV and the subscript I refers to the inertial frame.

$$\mathbf{r} = \begin{pmatrix} x_I \\ y_I \\ z_I \end{pmatrix} \quad \mathbf{V} = \begin{pmatrix} V_{x_I} \\ V_{y_I} \\ V_{z_I} \end{pmatrix} \quad m_{MAV} \quad (5.7)$$

The corresponding state derivatives are then described by Equation (5.8).

$$\begin{aligned} \dot{x}_I &= V_{x_I} & \ddot{x}_I &= \dot{V}_{x_I} = a_{x_I} \\ \dot{y}_I &= V_{y_I} & \ddot{y}_I &= \dot{V}_{y_I} = a_{y_I} & \dot{m}_{MAV} &= -\frac{T}{g_0 I_{sp}} \\ \dot{z}_I &= V_{z_I} & \ddot{z}_I &= \dot{V}_{z_I} = a_{z_I} \end{aligned} \quad (5.8)$$

From this point on, the subscript I is omitted, because the state and the state derivatives are always presented in the inertial frame. If variables have to be presented in any other reference frame the corresponding subscripts will be provided and explained. The accelerations in the x-, y- and z-direction have three contributing components: gravitational acceleration, drag and thrust. The gravitational acceleration can be directly expressed in the inertial frame, however the drag is presented in the body frame and the thrust is expressed in the propulsion frame. Therefore, both the drag and thrust contributions have to be transformed to the inertial frame using transformation matrices. This then results in the expression for the acceleration vector as shown by Equation (5.9). The subscript G shows that the parameter is a function of the ground velocity.

$$\begin{aligned} \begin{pmatrix} a_x \\ a_y \\ a_z \end{pmatrix} &= \begin{pmatrix} -\mu_M \frac{x}{r^3} \\ -\mu_M \frac{y}{r^3} \\ -\mu_M \frac{z}{r^3} \end{pmatrix} + \left| \mathbb{T}_z(-\Omega_M t_O + \omega_P) \right|_{\mathbf{I}} \mathbb{T}_z(-\tau) \mathbb{T}_y\left(\frac{\pi}{2} + \delta\right) \left|_{\mathbf{R}} \right. \mathbb{T}_z(-\chi_G) \mathbb{T}_y(-\gamma_G) \left|_{\mathbf{B}} \right. \begin{pmatrix} -\frac{D}{m_{MAV}} \\ 0 \\ 0 \end{pmatrix} + \dots \\ &\quad \dots \left|_{\mathbf{B}} \right. \mathbb{T}_z(-\psi_T) \mathbb{T}_y(-\epsilon_T) \left|_{\mathbf{P}} \right. \begin{pmatrix} \frac{T}{m_{MAV}} \\ 0 \\ 0 \end{pmatrix} \end{aligned} \quad (5.9)$$

It can be seen that this set of equations is a function of the current position and many other parameters. These parameters will all have to be written as a function of the current state. This can be done by writing them into auxiliary equations, forming extra variables that then also require the auxiliary derivatives. This works for certain parameters, such as the gravity, because these equations are already expressed in the inertial frame. However, the transformation angles are defined in different reference frames, which means that finding the proper auxiliary derivatives can be tricky sometimes. Therefore it was decided to directly write these parameters as auxiliary functions. Each of the auxiliary functions performs one simple algebraic operation and the collection of these auxiliary functions then form the complete set of recurrence relations using the recurrence relations for the simple algebraic operations. For the auxiliary equations, a similar notation will be used as shown by [Scott and Martini \(2008\)](#). Here the equations are denoted by x_{number} and the corresponding derivatives x'_{number} . This notation will also be used for the current state and the corresponding state derivatives. This way, Equation (5.7) can be written as Equation (5.10) and the corresponding derivatives can be written as presented by Equation (5.11).

$$\begin{aligned} x_1 &= x & x_4 &= \dot{x} = V_x \\ x_2 &= y & x_5 &= \dot{y} = V_y & x_7 &= m_{MAV} \\ x_3 &= z & x_6 &= \dot{z} = V_z \end{aligned} \quad (5.10)$$

$$\begin{aligned} x'_1 &= x_4 & x'_4 &= \dot{V}_x = a_x = a_{g,x} + a_{D,x} + a_{T,x} \\ x'_2 &= x_5 & x'_5 &= \dot{V}_y = a_y = a_{g,y} + a_{D,y} + a_{T,y} & x'_7 &= \dot{m}_{MAV} = -\frac{T}{g_0 I_{sp}} \\ x'_3 &= x_6 & x'_6 &= \dot{V}_z = a_z = a_{g,z} + a_{D,z} + a_{T,z} \end{aligned} \quad (5.11)$$

In this case the thrust and specific impulse are constant, which means that x'_7 is constant and any additional derivative will be zero. Also, neither one of the thrust angles is a function of the state, which means that a_T , in the body frame, is only a function of x_7 (also see Equation (5.9)). However, both a_g and a_D are a function of the position and velocity, where a_D is also a function of the MAV mass. Only a_g is rewritten using auxiliary equations as mentioned before.

GRAVITATIONAL ACCELERATION

For the gravitational acceleration two auxiliary equations were required since $r = \sqrt{x^2 + y^2 + z^2}$. The resulting expressions for the gravitational acceleration are shown in Equation (5.12) with the corresponding auxiliary equations and the derivatives defined in Equation (5.13).

$$\begin{aligned} a_{g,x} &= -\mu_M \frac{x_1}{r^3} = \frac{x_1}{(x_1^2 + x_2^2 + x_3^2)^{3/2}} = -\mu_M \frac{x_1}{x_9} \\ a_{g,y} &= -\mu_M \frac{x_2}{r^3} = \frac{x_2}{(x_1^2 + x_2^2 + x_3^2)^{3/2}} = -\mu_M \frac{x_2}{x_9} \\ a_{g,z} &= -\mu_M \frac{x_3}{r^3} = \frac{x_3}{(x_1^2 + x_2^2 + x_3^2)^{3/2}} = -\mu_M \frac{x_3}{x_9} \end{aligned} \quad (5.12)$$

$$\begin{aligned} x_8 &= x_1^2 + x_2^2 + x_3^2 & x'_8 &= 2x_1 x_4 + 2x_2 x_5 + 2x_3 x_6 \\ x_9 &= x_8^{3/2} & x'_9 &= \frac{3}{2} \frac{x_9 x'_8}{x_8} \end{aligned} \quad (5.13)$$

TRANSFORMATION ANGLES

The angles required for the transformation to go from the body frame to the reference frame all have to be written as a function of the state variables. The required angles are λ , δ , χ_G and γ_G . Here $\lambda = \tau + \Omega_M t_O - \omega_P$. This means that instead of first transforming to the rotating frame completely and then transforming to the inertial frame, an inertial longitude angle λ can be defined to directly transform to the inertial frame. The first two angles are the longitude and latitude and are spherical coordinates. Thus the relations for these angles can be found using the transformation from the Cartesian to the spherical system. However, the angles themselves are not required directly, because they are only used in transformation matrices. These matrices

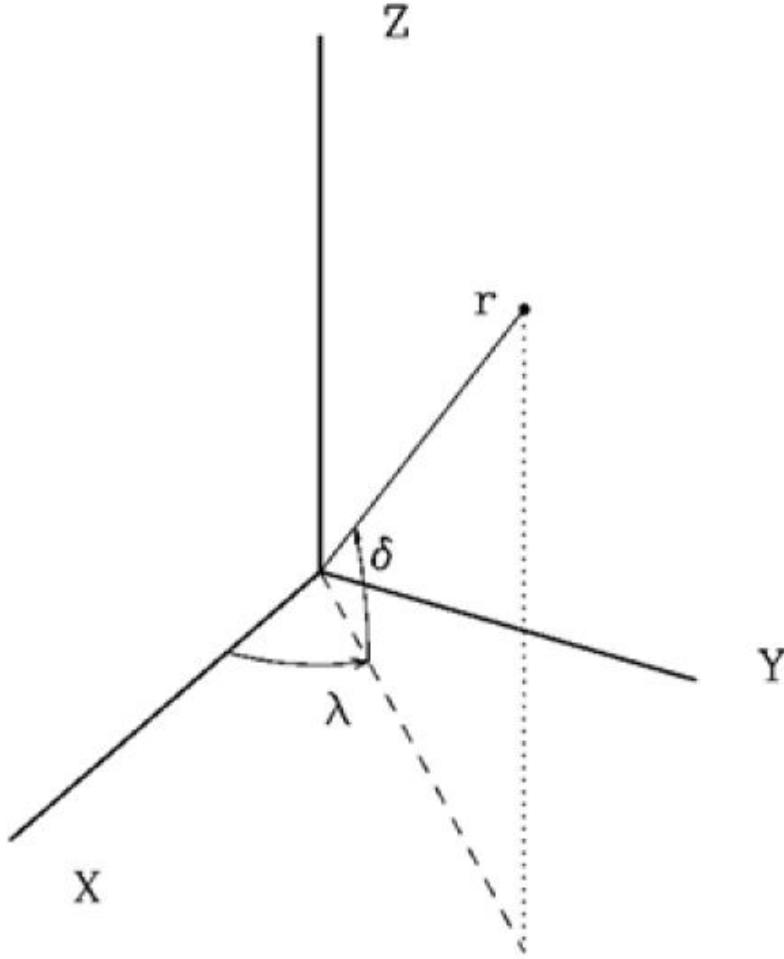


Figure 5.1: Spherical position variables in an inertial Cartesian frame (Noomen, 2013a).

are comprised of the sines and cosines of these angles, which means that a direct relation between the state variables and the sines and cosines of the position angles can be used. These relations can be derived from Figure 5.1 and are described in Equation (5.14)

$$\begin{aligned} r &= \sqrt{x^2 + y^2 + z^2} & \sin \lambda &= \frac{y}{\sqrt{x^2 + y^2}} & \sin \delta &= \frac{z}{r} \\ & & \cos \lambda &= \frac{x}{\sqrt{x^2 + y^2}} & \cos \delta &= \frac{\sqrt{x^2 + y^2}}{r} \end{aligned} \quad (5.14)$$

The corresponding auxiliary functions can then be described by Equation (5.15) using the definitions provided in Equations (5.10) and (5.11).

$$\begin{aligned} w_{4,1} &= x_1^2 + x_2^2 & w_{4,5} &= s\lambda = \frac{x_2}{w_{4,4}} & w_{4,7} &= s\delta = \frac{x_3}{w_{4,3}} \\ w_{4,2} &= w_{4,1} + x_3^2 & w_{4,6} &= c\lambda = \frac{x_1}{w_{4,4}} & w_{4,8} &= c\delta = \frac{w_{4,4}}{w_{4,3}} \\ w_{4,3} &= r = \sqrt{w_{4,2}} & & & & \\ w_{4,4} &= \sqrt{w_{4,1}} & & & & \end{aligned} \quad (5.15)$$

The latitude and longitude could be described using the position vector in the inertial frame, however the transformation from the body frame to the vertical frame is a function of the ground (underscore 'G') velocity in the rotational frame. Since the position and velocity in the inertial frame are known (current state), the ground velocity (V_G) can be written as a function of the inertial velocity (V_I). For this, the velocity components have to be transformed from the inertial frame to the vertical frame (which is the inverse of the first

three transformations described in Equation (5.9)). This transformation is shown in Equation (5.16) and was described in [Mooij \(1994\)](#). Here, c stands for cosine and s stands for sine. This transformation also includes the rotational effect on the velocity due to the rotation of Mars.

$$\mathbf{V}_V = \begin{pmatrix} V_{x_V} \\ V_{y_V} \\ V_{z_V} \end{pmatrix} = \begin{bmatrix} -c\lambda s\delta & -s\lambda s\delta & c\delta \\ -s\lambda & c\lambda & 0 \\ -c\lambda c\delta & -s\lambda c\delta & -s\delta \end{bmatrix} \left\{ \begin{pmatrix} V_x \\ V_y \\ V_z \end{pmatrix} - \begin{pmatrix} 0 \\ 0 \\ \Omega_M \end{pmatrix} \times \begin{pmatrix} x \\ y \\ z \end{pmatrix} \right\} \quad (5.16)$$

The ground velocity can now be computed as the norm of the vertical velocity vector as shown by Equation (5.17). The transformation matrices disappear because the norm of a transformation matrix is simply 1, which means that $V_G = V_V = V_R$.

$$V_G = \|\mathbf{V}_V\| = \left\| \begin{pmatrix} V_x \\ V_y \\ V_z \end{pmatrix} - \begin{pmatrix} 0 \\ 0 \\ \Omega_M \end{pmatrix} \times \begin{pmatrix} x \\ y \\ z \end{pmatrix} \right\| \quad (5.17)$$

Equation (5.17) can be rewritten as Equation (5.18).

$$V_G = \sqrt{(V_x + \Omega_M y)^2 + (V_y - \Omega_M x)^2 + V_z^2} \quad (5.18)$$

The corresponding auxiliary functions are provided in Equation (5.19).

$$\begin{aligned} w_{4,9} &= V_x + \Omega_M y = x_4 + \Omega_M x_2 & w_{4,11} &= w_{4,9}^2 + w_{4,10}^2 + x_6^2 \\ w_{4,10} &= V_y - \Omega_M x = x_5 - \Omega_M x_1 & w_{4,12} &= V_G = \sqrt{w_{4,11}} \end{aligned} \quad (5.19)$$

The spherical velocity angles can now be derived from Figure 5.2 as described by Equation (5.20). These were also provided by [Mooij \(1994\)](#).

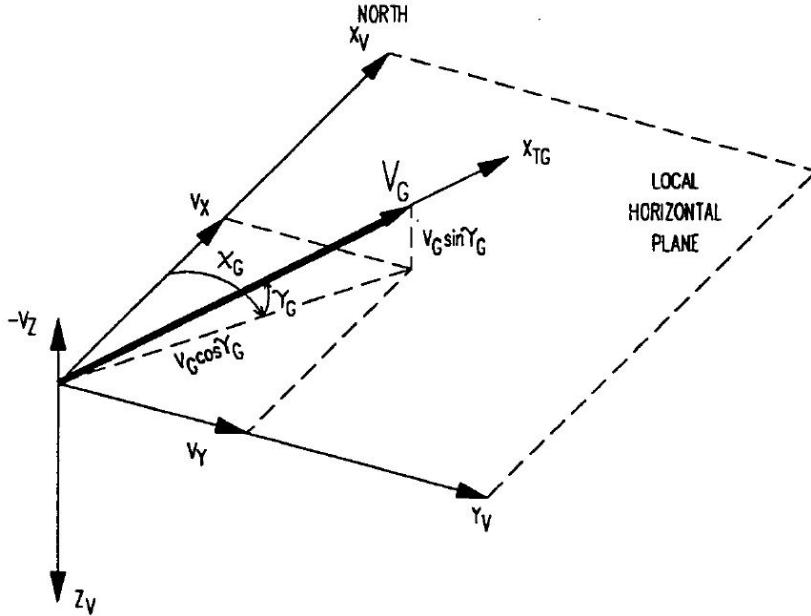


Figure 5.2: Spherical velocity variables in a vertical Cartesian frame ([Mooij, 1994](#)).

$$\begin{aligned} \sin \chi_G &= \frac{V_{y_V}}{\sqrt{V_{x_V}^2 + V_{y_V}^2}} & \sin \gamma_G &= \frac{-V_{z_V}}{V_G} \\ \cos \chi_G &= \frac{V_{x_V}}{\sqrt{V_{x_V}^2 + V_{y_V}^2}} & \cos \gamma_G &= \frac{\sqrt{V_{x_V}^2 + V_{y_V}^2}}{V_G} \end{aligned} \quad (5.20)$$

Here, V_{x_V} , V_{y_V} and V_{z_V} are the velocities in the vertical frame. Expressions for these variables can be obtained by rewriting Equation (5.16). This then results in Equation (5.22).

$$\begin{aligned} V_{x_V} &= - (V_x + \Omega_M y) s\delta c\lambda - (V_y - \Omega_M x) s\delta s\lambda + V_z c\delta \\ V_{y_V} &= (V_y - \Omega_M x) c\lambda - (V_x + \Omega_M y) s\lambda \\ V_{z_V} &= - (V_x + \Omega_M y) c\delta c\lambda - (V_y - \Omega_M x) c\delta s\lambda - V_z s\delta \end{aligned} \quad (5.21)$$

The combined auxiliary functions for Equations (5.20) and (5.22) are described in Equation (5.19).

$$\begin{aligned} w_{4,13} &= -c\lambda s\delta = -w_{4,6} w_{4,7} & w_{4,17} &= V_{x_V} = x_6 w_{4,8} + w_{4,9} w_{4,13} + w_{4,10} w_{4,14} & w_{4,22} &= s\chi_G = \frac{w_{4,18}}{w_{4,21}} \\ w_{4,14} &= -s\delta s\lambda = -w_{4,7} w_{4,5} & w_{4,18} &= V_{y_V} = w_{4,10} w_{4,6} - w_{4,9} w_{4,5} & w_{4,23} &= c\chi_G = \frac{w_{4,17}}{w_{4,21}} \\ w_{4,15} &= -c\delta c\lambda = -w_{4,8} w_{4,6} & w_{4,19} &= V_{z_V} = w_{4,9} w_{4,15} - x_6 w_{4,7} + w_{4,10} w_{4,16} & w_{4,24} &= s\gamma_G = -\frac{w_{4,19}}{w_{4,12}} \\ w_{4,16} &= -c\delta s\lambda = w_{4,8} w_{4,5} & w_{4,20} &= V_{x_V}^2 + V_{y_V}^2 = w_{4,17}^2 + w_{4,18}^2 & w_{4,25} &= c\gamma_G = \frac{w_{4,21}}{w_{4,12}} \\ w_{4,21} &= \sqrt{w_{4,20}} \end{aligned} \quad (5.22)$$

DRAG ACCELERATION

The drag acceleration is determined in the body frame by dividing the drag force (D) by the mass of the MAV (x_7). The drag force itself is a function of the position and velocity. The equations associated with the drag function are described in Equation (5.23) except for the C_D equations. The polynomial coefficients for the density equation are provided in Table 3.4 and are represented in Equation (5.23) by P_ρ .

$$\begin{aligned} h &= r - R_{MOLA} \\ D &= \frac{1}{2} \rho V_G^2 S C_D \\ \rho &= e^{P_{\rho 10} h^{10} + P_{\rho 9} h^9 + P_{\rho 8} h^8 + P_{\rho 7} h^7 + P_{\rho 6} h^6 + P_{\rho 5} h^5 + P_{\rho 4} h^4 + P_{\rho 3} h^3 + P_{\rho 2} h^2 + P_{\rho 1} h + P_{\rho 0}} \end{aligned} \quad (5.23)$$

The numbering for the drag auxiliary functions start with 27 because it was added later on and because it used to be an auxiliary equation. The auxiliary functions for the density can then be described by Equation (5.29).

$$\begin{aligned} w_{27,1} &= h = w_{4,3} - R_{MOLA} & w_{27,7} &= w_{27,1}^7 \\ w_{27,2} &= w_{27,1}^2 & w_{27,8} &= w_{27,1}^8 \\ w_{27,3} &= w_{27,1}^3 & w_{27,9} &= w_{27,1}^9 \\ w_{27,4} &= w_{27,1}^4 & w_{27,10} &= w_{27,1}^{10} \\ w_{27,5} &= w_{27,1}^5 & w_{27,11} &= P_{\rho 10} w_{27,10} + P_{\rho 9} w_{27,9} + \dots + P_{\rho 1} w_{27,1} + P_{\rho 0} \\ w_{27,6} &= w_{27,1}^6 & w_{27,12} &= \rho = e^{w_{27,11}} \end{aligned} \quad (5.24)$$

Since the drag coefficient is a function of Mach number as by Figure 2.4 and is not a continuous function, it has to be split into 6 different sections. Each section has a separate $C_D - M$ relation. Before these relations can be described, three additional expressions are required which are described in Equation (5.25).

$$\begin{aligned} M &= \frac{V_G}{a} \\ a &= \sqrt{\gamma_a R_a^* T_a} \quad \text{where} \quad R_a^* = \frac{R_a}{M_a} \end{aligned} \quad (5.25)$$

Where the corresponding auxiliary functions can be described by Equation (5.26).

$$\begin{aligned} w_{27,14} &= a = \sqrt{\gamma_a R_a^* w_{27,13}} \\ w_{27,15} &= M = \frac{w_{4,12}}{w_{27,14}} \end{aligned} \quad (5.26)$$

The conditional relations shown in Equation (5.27) describe the different equations that have to be used associated with the different sections of the drag coefficient plot. Here $P_{C_D, number, section}$ are the polynomial fit coefficients as provided in Table 3.5.

$$C_D = \begin{cases} 0.2, & \text{for } 0 \leq M < 0.5 \\ P_{C_D,1,2}M + P_{C_D,0,2}, & \text{for } 0.5 \leq M < 1 \\ P_{C_D,1,3}M + P_{C_D,0,3}, & \text{for } 1 \leq M < 1.3 \\ P_{C_D,1,4}M + P_{C_D,0,4}, & \text{for } 1.3 \leq M < 2.5 \\ P_{C_D,1,5}M + P_{C_D,0,5}, & \text{for } 2.5 \leq M < 4 \\ 0.3, & \text{for } M \geq 4 \end{cases} \quad (5.27)$$

In this case, the auxiliary functions for $C_D (= w_{27,16})$ is any of the conditional relations depending on $M (= w_{27,15})$.

This only leaves the temperature $T_a (= w_{27,13})$, which is a function of the altitude $h (= w_{27,1})$ in km, MOLA. But as described in Section 3.4.1, this parameter is split into different sections as well. The equations per section for the temperature is provided in Equation (5.28). Here $P_{T, number, section}$ are the polynomial fit coefficients as provided in Table 3.2.

$$T_a = \begin{cases} P_{T,1,1}h + P_{T,0,1}, & \text{for } -0.6 \leq h < 5.04 \\ P_{T,3,2}h^3 + P_{T,2,2}h^2 + P_{T,1,2}h + P_{T,0,2}, & \text{for } 5.04 \leq h < 35.53 \\ P_{T,6,3}h^6 + P_{T,5,3}h^5 + P_{T,4,3}h^4 + P_{T,3,3}h^3 + \dots \\ \dots + P_{T,2,3}h^2 + P_{T,1,3}h + P_{T,0,3}, & \text{for } 35.53 \leq h < 75.07 \\ P_{T,8,4}h^8 + P_{T,7,4}h^7 + P_{T,6,4}h^6 + P_{T,5,4}h^5 + \dots \\ \dots + P_{T,4,4}h^4 + P_{T,3,4}h^3 + P_{T,2,4}h^2 + P_{T,1,4}h + P_{T,0,4}, & \text{for } 75.07 \leq h < 170.05 \\ 136.5, & \text{for } h \geq 170.05 \end{cases} \quad (5.28)$$

For both the conditional parameters C_D and T_a the required section has to be determined before the evaluation of the equations.

The drag can now also be described as an auxiliary function as shown by Equation (5.29).

$$\begin{aligned} w_{27,17} &= V_G^2 = w_{4,12}^2 \\ w_{27,18} &= V_G^2 C_D = w_{27,17} w_{27,16} \\ w_{27,19} &= D = \frac{1}{2} S w_{27,18} w_{27,12} \end{aligned} \quad (5.29)$$

THRUST ACCELERATION

The only acceleration component still missing is the thrust acceleration. To be able to write the auxiliary functions for the thrust, Equation (5.9) first has to be rewritten such that all the transformations are gathered into two transformation matrices (see Equation (5.30)). The transformation matrices are described by Equations (5.31) and (5.32) for \mathbb{T}_{BP} and \mathbb{T}_{IB} respectively.

$$\begin{pmatrix} x'_4 \\ x'_5 \\ x'_6 \end{pmatrix} = \begin{pmatrix} -\mu_M \frac{x_1}{x_9} \\ -\mu_M \frac{x_2}{x_9} \\ -\mu_M \frac{x_3}{x_9} \end{pmatrix} + \mathbb{T}_{\text{IB}} \left[\begin{pmatrix} -\frac{w_{27,19}}{x_7} \\ 0 \\ 0 \end{pmatrix} + \mathbb{T}_{\text{BP}} \begin{pmatrix} \frac{T}{x_7} \\ 0 \\ 0 \end{pmatrix} \right] \quad (5.30)$$

$$\mathbb{T}_{\text{BP}} = \begin{bmatrix} c\psi_T c\epsilon_T & -s\psi_T & c\psi_T s\epsilon_T \\ s\psi_T c\epsilon_T & c\psi_T & s\psi_T s\epsilon_T \\ -s\epsilon_T & 0 & c\epsilon_T \end{bmatrix} \quad (5.31)$$

$$\mathbb{T}_{IB} = \begin{bmatrix} c\lambda(-s\delta c\chi c\gamma + c\delta s\gamma) - s\lambda s\chi c\gamma & c\lambda s\delta s\chi - s\lambda c\chi & c\lambda(-s\delta c\chi s\gamma - c\delta c\gamma) - s\lambda s\chi s\gamma \\ s\lambda(-s\delta c\chi c\gamma + c\delta s\gamma) + c\lambda s\chi c\gamma & s\lambda s\delta s\chi + c\lambda c\chi & s\lambda(-s\delta c\chi s\gamma - c\delta c\gamma) + c\lambda s\chi s\gamma \\ c\delta c\chi c\gamma + s\delta s\gamma & -c\delta s\chi & c\delta c\chi s\gamma - s\delta c\gamma \end{bmatrix} \quad (5.32)$$

The thrust accelerations in the x-, y- and z-directions (in the body frame) can now be found by rewriting the last part of Equation (5.30) to Equation (5.33) using Equation (5.31).

$$\mathbb{T}_{BP} \begin{pmatrix} \frac{T}{x_7} \\ \frac{x_7}{T} \\ 0 \\ 0 \end{pmatrix} = \begin{pmatrix} \frac{T}{x_7} c\psi_T c\epsilon_T \\ \frac{T}{x_7} s\psi_T c\epsilon_T \\ \frac{T}{x_7} c\epsilon_T c\psi_T = w_{4,33} w_{4,30} \\ -\frac{T}{x_7} s\epsilon_T \end{pmatrix} \quad (5.33)$$

Equation (5.33) can be expressed as a collection of auxiliary functions as well. These are described in Equation (5.34).

$$\begin{aligned} w_{4,26} &= \cos \psi_T & w_{4,33} &= \frac{T}{x_7} = Tw_{4,32} \\ w_{4,27} &= \cos \epsilon_T & w_{4,34} &= \frac{T}{x_7} c\epsilon_T c\psi_T = w_{4,33} w_{4,30} \\ w_{4,28} &= \sin \psi_T & w_{4,35} &= \frac{T}{x_7} c\epsilon_T s\psi_T = w_{4,33} w_{4,31} \\ w_{4,29} &= \sin \epsilon_T & w_{4,36} &= \frac{T}{x_7} s\epsilon_T = w_{4,33} w_{4,29} \\ w_{4,30} &= c\psi_T c\epsilon_T = w_{4,26} w_{4,27} \\ w_{4,31} &= c\epsilon_T s\psi_T = w_{4,27} w_{4,28} \\ w_{4,32} &= \frac{1}{x_7} \end{aligned} \quad (5.34)$$

The thrust accelerations are now written in the body frame, which means that they can be combined with the drag acceleration in the body frame. This is done in Equation (5.35). Here, $w_{4,35}$ represents the drag acceleration in the body frame and $w_{4,36}$ is the total acceleration in the x-direction in the body frame caused by both the drag and the thrust.

$$\begin{pmatrix} -\frac{x_{27}}{x_7} \\ 0 \\ 0 \\ 0 \end{pmatrix} + \begin{pmatrix} w_{4,34} \\ w_{4,37} \\ -w_{4,38} \end{pmatrix} = \begin{pmatrix} w_{4,34} - w_{4,35} \\ w_{4,37} \\ -w_{4,38} \end{pmatrix} = \begin{pmatrix} w_{4,36} \\ w_{4,37} \\ -w_{4,38} \end{pmatrix} \quad (5.35)$$

ALL ACCELERATIONS COMBINED

At this point the gravity accelerations are known in the inertial frame and the drag and thrust accelerations in the body frame. In order to get the final acceleration vector in the inertial frame, the drag and thrust accelerations have to be transformed from the body frame to the inertial frame using \mathbb{T}_{IB} resulting in Equation (5.36).

$$\mathbb{T}_{IB} \begin{pmatrix} w_{4,36} \\ w_{4,37} \\ -w_{4,38} \end{pmatrix} = \begin{pmatrix} w_{4,36}(c\lambda(-s\delta c\chi c\gamma + c\delta s\gamma) - s\lambda s\chi c\gamma) + w_{4,37}(c\lambda s\delta s\chi - s\lambda c\chi) - w_{4,38}(c\lambda(-s\delta c\chi s\gamma - c\delta c\gamma) - s\lambda s\chi s\gamma) \\ w_{4,36}(s\lambda(-s\delta c\chi c\gamma + c\delta s\gamma) + c\lambda s\chi c\gamma) + w_{4,37}(s\lambda s\delta s\chi + c\lambda c\chi) - w_{4,38}(s\lambda(-s\delta c\chi s\gamma - c\delta c\gamma) + c\lambda s\chi s\gamma) \\ w_{4,36}(c\delta c\chi c\gamma + s\delta s\gamma) + w_{4,37}(-c\delta s\chi) - w_{4,38}(c\delta c\chi s\gamma - s\delta c\gamma) \end{pmatrix} \quad (5.36)$$

Now including the gravity components as well, the (lengthy) expressions for x'_4 , x'_5 and x'_6 become Equations (5.37) to (5.39) respectively.

$$\begin{aligned} x'_4 &= -\mu_M \frac{x_1}{x_9} + w_{4,36}(c\lambda(-s\delta c\chi c\gamma + c\delta s\gamma) - s\lambda s\chi c\gamma) + \dots \\ &\quad \dots w_{4,37}(c\lambda s\delta s\chi - s\lambda c\chi) - \dots \\ &\quad \dots w_{4,38}(c\lambda(-s\delta c\chi s\gamma - c\delta c\gamma) - s\lambda s\chi s\gamma) \end{aligned} \quad (5.37)$$

$$\begin{aligned} x'_5 &= -\mu_M \frac{x_2}{x_9} + w_{4,36} (s\lambda(-s\delta c\chi c\gamma + c\delta s\gamma) + c\lambda s\chi c\gamma) + \dots \\ &\quad \dots w_{4,37} (s\lambda s\delta s\chi + c\lambda c\chi) - \dots \\ &\quad \dots w_{4,38} (s\lambda(-s\delta c\chi s\gamma - c\delta c\gamma) + c\lambda s\chi s\gamma) \end{aligned} \quad (5.38)$$

$$x'_6 = -\mu_M \frac{x_3}{x_9} + w_{4,36} (c\delta c\chi c\gamma + s\delta s\gamma) + w_{4,37} (-c\delta s\chi) - w_{4,38} (c\delta c\chi s\gamma - s\delta c\gamma) \quad (5.39)$$

These equations now have to be written as a collection of auxiliary functions for the x-, y- and z-direction in the inertial frame. The gravitational acceleration can be written as the vector shown by Equation (5.40).

$$\mathbf{a}_g = \begin{pmatrix} -\mu_M \frac{x_1}{x_9} \\ -\mu_M \frac{x_2}{x_9} \\ -\mu_M \frac{x_3}{x_9} \end{pmatrix} = \begin{pmatrix} w_{4,39} \\ w_{5,1} \\ w_{6,1} \end{pmatrix} \quad (5.40)$$

The auxiliary derivatives ($u = x'$) can now be defined as the collection of auxiliary functions that describe the different transformations for u_4, u_5 and u_6 . These are shown in Equations (5.41) to (5.43) respectively.

$$\begin{aligned} w_{4,46} &= w_{4,42} c\gamma_G = w_{4,42} w_{4,25} \\ w_{4,40} &= -s\delta c\chi_G = -w_{4,7} w_{4,23} & w_{4,47} &= -w_{4,13} s\chi_G = -w_{4,13} w_{4,22} \\ w_{4,41} &= c\delta s\gamma_G = w_{4,8} w_{4,24} & w_{4,48} &= w_{4,40} s\gamma_G = w_{4,40} w_{4,24} \\ w_{4,42} &= -s\lambda s\chi_G = -w_{4,5} w_{4,22} & w_{4,49} &= w_{4,42} s\gamma_G = w_{4,42} w_{4,24} \\ w_{4,43} &= -s\lambda c\chi_G = -w_{4,5} w_{4,23} & w_{4,50} &= c\lambda (w_{4,45} + w_{4,41}) + w_{4,46} = w_{4,6} (w_{4,45} + w_{4,41}) + w_{4,46} \\ w_{4,44} &= -c\delta c\gamma_G = -w_{4,8} w_{4,25} & w_{4,51} &= c\lambda (w_{4,48} + w_{4,44}) + w_{4,49} = w_{4,6} (w_{4,48} + w_{4,44}) + w_{4,49} \\ w_{4,45} &= w_{4,40} c\gamma_G = w_{4,40} w_{4,25} & w_{4,52} &= w_{4,39} + w_{4,36} w_{4,50} + w_{4,37} (w_{4,47} + w_{4,43}) - w_{4,38} w_{4,51} \\ && u_4 &= w_{4,52} \end{aligned} \quad (5.41)$$

$$\begin{aligned} w_{5,2} &= c\lambda s\chi_G = w_{4,6} w_{4,22} \\ w_{5,3} &= s\lambda (w_{4,45} + w_{4,41}) + w_{5,2} c\gamma_G = w_{4,5} (w_{4,45} + w_{4,41}) + w_{5,2} w_{4,25} \\ w_{5,4} &= -w_{4,14} s\chi_G + c\lambda c\chi_G = -w_{4,14} w_{4,22} + w_{4,6} w_{4,23} \\ w_{5,5} &= s\lambda (w_{4,48} + w_{4,44}) + w_{5,2} s\gamma_G = w_{4,5} (w_{4,48} + w_{4,44}) + w_{5,2} w_{4,24} \\ w_{5,6} &= w_{5,1} + w_{4,36} w_{5,3} + w_{4,37} w_{5,4} - w_{4,38} w_{5,5} \\ u_5 &= w_{5,6} \end{aligned} \quad (5.42)$$

$$\begin{aligned} w_{6,2} &= s\delta s\gamma_G = w_{4,7} w_{4,24} & w_{6,5} &= -w_{4,44} c\chi_G + w_{6,2} = -w_{4,44} w_{4,23} + w_{6,2} \\ w_{6,3} &= c\delta s\chi_G = w_{4,8} w_{4,22} & w_{6,6} &= w_{4,41} c\chi_G + w_{6,4} = w_{4,41} w_{4,23} + w_{6,4} \\ w_{6,4} &= -s\delta c\gamma_G = -w_{4,7} w_{4,25} & w_{6,7} &= w_{6,1} + w_{4,36} w_{6,5} - w_{4,37} w_{6,3} - w_{4,38} w_{6,6} \\ && u_6 &= w_{6,7} \end{aligned} \quad (5.43)$$

Also, because auxiliary equations were used for the gravitational acceleration. The corresponding auxiliary derivatives can be written as a collection of auxiliary functions as shown in Equation (5.44).

$$\begin{aligned} w_{8,1} &= x_1 x_4 & w_{9,0} &= x_9 u_8 \\ w_{8,2} &= x_2 x_5 & w_{9,1} &= \frac{w_{9,0}}{x_8} \\ w_{8,3} &= x_3 x_6 & u_9 &= 1.5 w_{9,1} \\ u_8 &= 2(w_{8,1} + w_{8,2} + w_{8,3}) \end{aligned} \quad (5.44)$$

Then the equations in Equation (5.45) complete the whole set of auxiliary derivatives.

$$\begin{aligned} u_1 &= x_4 & u_3 &= x_6 \\ u_2 &= x_5 & u_7 &= -\frac{T}{g_0 I_{sp}} \end{aligned} \quad (5.45)$$

5.2.2. CARTESIAN EQUATIONS, SECOND CASE

The second case (based on a method described by (Bergsma, 2015)) is similar to the first case in terms of set-up of the dynamic equations, the gravitational acceleration, and the drag and thrust accelerations in the body frame. The only difference lies in the formulation of \mathbb{T}_{IB} . Instead of using Euler angles and rotation transformation matrices, \mathbb{T}_{IB} can be set-up as one single matrix performing a direct transformation. This matrix is described in Equation (5.46), where C stands for transformation matrix coefficient.

$$\mathbb{T}_{IB} = \begin{bmatrix} C_1 & C_4 & C_7 \\ C_2 & C_5 & C_8 \\ C_3 & C_6 & C_9 \end{bmatrix} \quad (5.46)$$

As was seen in Section 5.2.1 the rotation from the vertical to the inertial frame is purely a function of the radius in the inertial frame (\mathbf{r} or \mathbf{r}_I) Also, the transformation from the body frame to the vertical frame was purely a function of the ground velocity in the vertical frame (\mathbf{V}_V or \mathbf{V}_{GV}). Therefore, if this transformation is to be done in one transformation, the ground velocity in the inertial frame is required (\mathbf{V}_{GI}), because it would transform directly to the inertial frame. This means that the coefficients in Equation (5.46) will have to be a function of \mathbf{r}_I and \mathbf{V}_{GI} , where \mathbf{V}_{GI} is given by Equation (5.47).

$$\mathbf{V}_{GI} = \begin{pmatrix} V_x \\ V_y \\ V_z \end{pmatrix} - \begin{pmatrix} 0 \\ 0 \\ \Omega_M \end{pmatrix} \times \begin{pmatrix} x \\ y \\ z \end{pmatrix} = \begin{pmatrix} V_x + \Omega_M y \\ V_y - \Omega_M x \\ V_z \end{pmatrix} \quad (5.47)$$

BODY FRAME UNIT VECTORS

So when looking from the inertial frame, there are two state vectors: position and ground velocity. The state changes part due to the accelerations in the body frame \mathbf{a}_B , which is a vector comprised of the drag and thrust accelerations. This vector has the same length and direction in the body frame and the inertial frame. Also, any vector is simply a multiplication of the corresponding unit vector. The same holds for the velocity, which means that because the velocity in the body frame is defined through the x-axis of that frame, the unit vector of the ground velocity can be described as the unit vector in the x-direction $\hat{\mathbf{i}}$ as shown by Equation (5.48).

$$\hat{\mathbf{i}} = \frac{\mathbf{V}_{GI}}{\|\mathbf{V}_{GI}\|} \quad (5.48)$$

This unit vector is also shown in Figure 5.3.

In Figure 5.3 it can be seen that the z-axis unit vector $\hat{\mathbf{k}}$ is defined in the same plane as $\hat{\mathbf{i}}$, \mathbf{V}_{GI} and \mathbf{r}_I perpendicular to $\hat{\mathbf{i}}$. As a matter of fact, if the flight path angle is zero degrees, $\hat{\mathbf{k}}$ points in the same direction as the radius vector. In that case, the y-axis unit vector $\hat{\mathbf{j}}$ completes the unit frame. Since $\hat{\mathbf{j}}$ is perpendicular to the $\hat{\mathbf{i}}\hat{\mathbf{k}}$ plane, it is also perpendicular to \mathbf{V}_{GI} and \mathbf{r}_I . Now because the radius vector is pointing through the centre of the body away from the centre of the inertial frame, the Right-hand-rule (RHR) gives Equation (5.49).

$$\hat{\mathbf{j}} = \frac{\mathbf{r}_I \times \mathbf{V}_{GI}}{\|\mathbf{r}_I \times \mathbf{V}_{GI}\|} \quad (5.49)$$

Now $\hat{\mathbf{k}}$ can be computed by applying the RHR to $\hat{\mathbf{i}}$ and $\hat{\mathbf{j}}$. This results in Equation (5.50).

$$\hat{\mathbf{k}} = \hat{\mathbf{i}} \times \hat{\mathbf{j}} \quad (5.50)$$

This leaves us with the unit vectors in the body frame defined as a function of the state in the inertial frame.

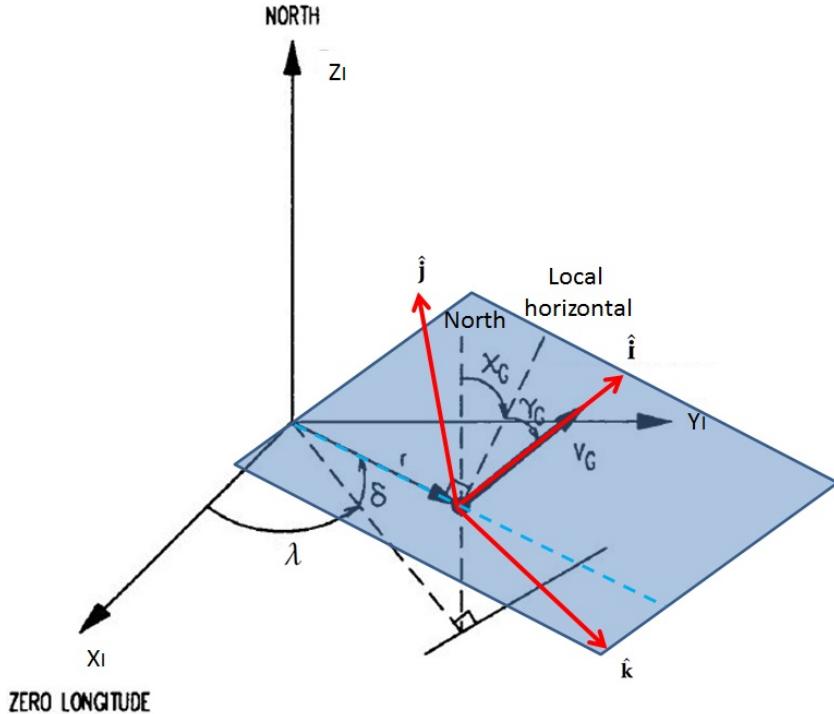


Figure 5.3: Definition of the body frame unit vectors based on the radius and ground velocity expressed in the inertial frame.

DEFINING THE TRANSFORMATION MATRIX COEFFICIENTS

Now, if the acceleration in the x-direction in the body frame is multiplied with $\hat{\mathbf{i}}$ this a_{x_B} is redefined in the inertial frame by providing a contribution in the x-, y- and z-direction. A similar multiplication can be done for a_{y_B} and $\hat{\mathbf{j}}$, and a_{z_B} and $\hat{\mathbf{k}}$. In matrix form this can be represented by Equation (5.51).

$$[\hat{\mathbf{i}} \quad \hat{\mathbf{j}} \quad \hat{\mathbf{k}}] \cdot \begin{pmatrix} a_{x_B} \\ a_{y_B} \\ a_{z_B} \end{pmatrix} \quad (5.51)$$

Comparing Equation (5.51) to the expression for the transformation matrix provided by Equation (5.46) it can be seen that the coefficients can now be expressed as Equation (5.52).

$$\begin{pmatrix} C_1 \\ C_2 \\ C_3 \end{pmatrix} = \hat{\mathbf{i}} \quad \begin{pmatrix} C_4 \\ C_5 \\ C_6 \end{pmatrix} = \hat{\mathbf{j}} \quad \begin{pmatrix} C_7 \\ C_8 \\ C_9 \end{pmatrix} = \hat{\mathbf{k}} \quad (5.52)$$

Given these definitions, the corresponding auxiliary functions can now be defined.

AUXILIARY FUNCTIONS FOR THE SECOND CASE

With the transformation matrix now defined, Equation (5.9) can be written as Equation (5.53).

$$\begin{pmatrix} a_x \\ a_y \\ a_z \end{pmatrix} = \begin{pmatrix} -\mu_M \frac{x}{r^3} \\ -\mu_M \frac{y}{r^3} \\ -\mu_M \frac{z}{r^3} \end{pmatrix} + [\hat{\mathbf{i}} \quad \hat{\mathbf{j}} \quad \hat{\mathbf{k}}] \cdot \left[\begin{pmatrix} -\frac{D}{m_{MAV}} \\ 0 \\ 0 \end{pmatrix} + \dots \dots \left|_{\mathbf{B}} \mathbb{T}_z(-\psi_T) \mathbb{T}_y(-\epsilon_T) \right|_{\mathbf{P}} \begin{pmatrix} \frac{T}{m_{MAV}} \\ 0 \\ 0 \end{pmatrix} \right] \quad (5.53)$$

In this case, all the auxiliary functions involving the rotation angles and the transformations ($w_{4,5} - w_{4,8}$, $w_{4,13} - w_{4,25}$, $w_{4,40} - w_{4,52}$, $w_{5,2} - w_{5,6}$ and $w_{6,2} - w_{6,7}$) can be discarded and instead new auxiliary functions have to be defined for the new transformation matrix. Please note that the discarded numbers will be reused but now with different function definitions for the second case!

The first auxiliary functions can be found by rewriting Equation (5.48) as a function of the non-discarded auxiliary functions described in Section 5.2.1 and are shown in Equation (5.54).

$$w_{4,13} = C_1 = \frac{V_x + \Omega_M y}{V_G} = \frac{w_{4,9}}{w_{4,12}} \quad w_{4,14} = C_2 = \frac{V_y - \Omega_M x}{V_G} = \frac{w_{4,10}}{w_{4,12}} \quad w_{4,15} = C_3 = \frac{V_z}{V_G} = \frac{x_6}{w_{4,12}} \quad (5.54)$$

In case of the auxiliary functions for $\hat{\mathbf{j}}$ first the cross product has to be computed and the norm of that cross product. This is done in Equation (5.55).

$$\begin{aligned} w_{4,16} &= x_6 x_2 - w_{4,10} x_3 & w_{4,19} &= w_{4,16}^2 + w_{4,17}^2 + w_{4,18}^2 & w_{4,21} &= C_4 = \frac{w_{4,16}}{w_{4,20}} \\ w_{4,17} &= w_{4,9} x_3 - x_6 x_1 & w_{4,20} &= \sqrt{w_{4,19}} & w_{4,22} &= C_5 = \frac{w_{4,17}}{w_{4,20}} \\ w_{4,18} &= w_{4,10} x_1 - w_{4,9} x_2 & & & w_{4,23} &= C_6 = \frac{w_{4,18}}{w_{4,20}} \end{aligned} \quad (5.55)$$

These auxiliary functions can now be used to describe the $\hat{\mathbf{k}}$ functions as shown by Equation (5.56). In this case, the last auxiliary functions was named 40 because 26 is already taken up by an auxiliary function for the thrust acceleration.

$$\begin{aligned} w_{4,24} &= C_7 = C_2 C_6 - C_3 C_5 = w_{4,14} w_{4,23} - w_{4,15} w_{4,22} \\ w_{4,25} &= C_8 = C_3 C_4 - C_1 C_6 = w_{4,15} w_{4,21} - w_{4,13} w_{4,23} \\ w_{4,40} &= C_9 = C_1 C_5 - C_2 C_4 = w_{4,13} w_{4,22} - w_{4,14} w_{4,21} \end{aligned} \quad (5.56)$$

Then combining everything results in the expression presented in Equation (5.57) for u_4 , u_5 and u_6 .

$$\begin{aligned} u_4 &= w_{4,39} + w_{4,36} w_{4,13} + w_{4,37} w_{4,21} - w_{4,38} w_{4,24} \\ u_5 &= w_{5,1} + w_{4,36} w_{4,14} + w_{4,37} w_{4,22} - w_{4,38} w_{4,25} \\ u_6 &= w_{6,1} + w_{4,36} w_{4,15} + w_{4,37} w_{4,23} - w_{4,38} w_{4,40} \end{aligned} \quad (5.57)$$

5.2.3. SPHERICAL EQUATIONS

For the Spherical case, the initial conditions are readily provided. The position comes directly from the chosen launch site and the velocity comes from the initial MAV conditions. These are all defined in the rotating frame as depicted in Figure 5.4 and Equation (5.58).

$$\mathbf{R} = \begin{pmatrix} r \\ \delta \\ \tau \end{pmatrix} \quad \mathbf{V} = \begin{pmatrix} V_G \\ \gamma_G \\ \chi_G \end{pmatrix} \quad m_{MAV} \quad (5.58)$$

The different variables are now defined as shown by Equation (5.59) and the derivatives by Equation (5.60). The numbers that were given to the variables are a result of the early derivations.

$$\begin{aligned} x_{16} &= r = h + R_{MOLA} & x_{15} &= V_G \\ x_{12} &= \delta & x_{14} &= \gamma_G & x_7 &= m_{MAV} \\ x_{11} &= \tau & x_{13} &= \chi_G \end{aligned} \quad (5.59)$$

$$\begin{aligned} x'_{16} &= \dot{r} & x'_{15} &= \dot{V}_G \\ x'_{12} &= \dot{\delta} & x'_{14} &= \dot{\gamma}_G & x'_7 &= \dot{m}_{MAV} = -\frac{T}{g_0 I_{sp}} \\ x'_{11} &= \dot{\tau} & x'_{13} &= \dot{\chi}_G \end{aligned} \quad (5.60)$$

The derivatives given in Equation (5.60) are already provided by [Mooij \(1994\)](#) in the rotating frame and include the rotational effects. A simplified form can be seen in Equations (5.61) and (5.62). This is why it

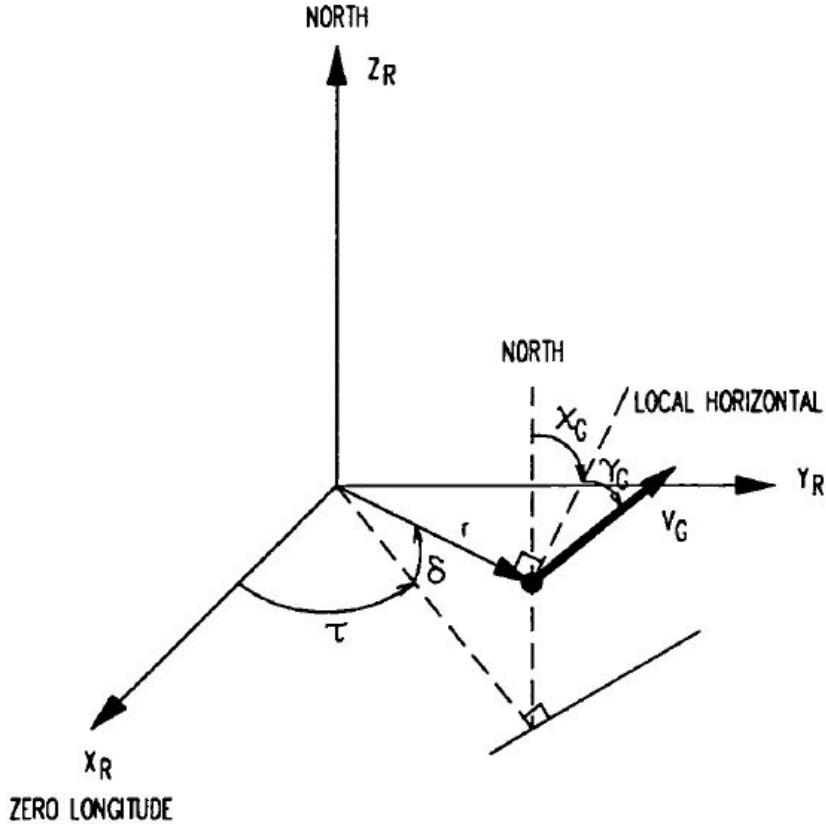


Figure 5.4: Definition of the Spherical coordinates (Mooij, 1994).

was decided to perform the TSI for the Spherical case in the rotating frame. At the end of the integration the variables can then be transformed to the inertial frame for comparison.

$$x'_{16} = \dot{r} = V_G s\gamma_G \quad x'_{12} = \dot{\delta} = \frac{V_G c\chi_G c\gamma_G}{r} \quad x'_{11} = \dot{\tau} = \frac{V_G s\chi_G c\gamma_G}{rc\delta} \quad (5.61)$$

$$\begin{aligned} x'_{15} &= \dot{V}_G = \Omega_M^2 r c \delta (s\gamma_G c\delta - c\gamma_G s\delta c\chi_G) + \frac{Tc\psi_T c\epsilon_T}{m} - \frac{D}{m} - \frac{\mu_M}{r^2} s\gamma_G \\ x'_{14} &= \dot{\gamma}_G = 2\Omega_M c\delta s\chi_G + \frac{V_G}{r} c\gamma_G + \frac{\Omega_M^2 r c \delta}{V_G} (c\delta c\gamma_G + s\gamma_G s\delta c\chi_G) + \frac{Ts\epsilon_T}{V_G m} - \frac{\mu_M}{V_G r^2} c\gamma_G \\ x'_{13} &= \dot{\chi}_G = 2\Omega_M \left(s\delta - \frac{c\delta s\gamma_G c\chi_G}{c\gamma_G} \right) + \frac{V_G}{r} c\gamma_G \frac{s\delta}{c\delta} s\chi_G + \frac{\Omega_M^2 r c \delta s\delta s\chi_G}{V_G c\gamma_G} + \frac{Ts\psi_T c\epsilon_T}{V_G m c\gamma_G} \end{aligned} \quad (5.62)$$

The last term in the first two expressions of Equation (5.62) correspond to the acceleration contribution of the gravity. The first expression has a drag component and all three have a thrust component similar to the Cartesian cases. The rest of the terms come from the rotational effects. In this case it was decided to define the drag as an auxiliary equation x_{27} , which will be discussed in more detail later in this section.

AUXILIARY FUNCTIONS FOR THE SPHERICAL CASE

Before the auxiliary functions for Equations (5.61) and (5.62) can be written, some standard auxiliary functions have to be defined first. These include δ , γ_G and χ_G . The numbering is based on early derivations and do not correspond to the definitions provided for the Cartesian cases! The angle auxiliary functions are defined in Equation (5.63).

$$\begin{aligned}
w_{4,4} &= s\delta = sx_{12} & w_{4,7} &= s\gamma_G = sx_{14} \\
w_{4,5} &= c\chi_G = cx_{13} & w_{4,8} &= c\gamma_G = cx_{14} \\
w_{4,6} &= c\delta = cx_{12} & w_{4,9} &= s\chi_G = sx_{13}
\end{aligned} \tag{5.63}$$

Some expression for the thrust are also required. These are similar to the equations defined in Section 5.2.1 but are repeated in Equation (5.64) for convenience.

$$\begin{aligned}
w_{4,26} &= \cos \psi_T & w_{4,28} &= \sin \psi_T & w_{4,32} &= \frac{1}{x_7} \\
w_{4,27} &= \cos \epsilon_T & w_{4,29} &= \sin \epsilon_T
\end{aligned} \tag{5.64}$$

Now the auxiliary functions can be written for $x'_{11} = u_{11}$ till $x'_{16} = u_{16}$ and are shown in Equations (5.65) to (5.70) respectively.

$$\begin{aligned}
w_{11,0} &= V_G c\gamma_G = x_{15} w_{4,8} & w_{11,2} &= w_{11,1} s\chi_G = w_{11,1} w_{4,9} \\
w_{11,1} &= \frac{w_{11,0}}{r} = \frac{w_{11,0}}{x_{16}} & w_{11,3} &= \frac{w_{11,2}}{c\delta} = \frac{w_{11,2}}{w_{4,6}} & u_{11} &= w_{11,3}
\end{aligned} \tag{5.65}$$

$$w_{12,1} = w_{11,1} c\chi_G = w_{11,1} w_{4,5} \quad u_{12} = w_{12,1} \tag{5.66}$$

$$\begin{aligned}
w_{13,0} &= s\psi_T c\epsilon_T = w_{4,28} w_{4,27} & w_{13,5} &= w_{13,3} s\chi_G + w_{13,4} = w_{13,3} w_{4,9} + w_{13,4} \\
w_{13,1} &= s\gamma_G c\chi_G = w_{4,7} w_{4,5} & w_{13,6} &= \frac{w_{13,5}}{V_G} = \frac{w_{13,5}}{x_{15}} \\
w_{13,2} &= \Omega_M^2 r c\delta = \Omega_M^2 x_{16} w_{4,6} & w_{13,7} &= -2\Omega_M c\delta w_{13,1} + w_{13,6} = -2\Omega_M w_{4,6} w_{13,1} + w_{13,6} & u_{13} &= w_{13,9} \\
w_{13,3} &= w_{13,2} s\delta = w_{13,2} w_{4,4} & w_{13,8} &= \frac{w_{13,7}}{c\gamma_G} = \frac{w_{13,7}}{w_{4,8}} \\
w_{13,4} &= \frac{T w_{13,0}}{x_7} = T w_{13,0} w_{4,32} & w_{13,9} &= (2\Omega_M + w_{11,3}) s\delta + w_{13,8} = (2\Omega_M + w_{11,3}) w_{4,4} + w_{13,8}
\end{aligned} \tag{5.67}$$

$$\begin{aligned}
w_{14,0} &= \frac{T s\epsilon_T}{x_7} = T w_{4,29} w_{4,32} & w_{14,5} &= w_{14,4} + w_{13,2} w_{14,1} + w_{14,0} \\
w_{14,1} &= c\delta c\gamma_G + w_{13,1} s\delta = w_{4,6} w_{4,8} + w_{13,1} w_{4,4} & w_{14,6} &= \frac{w_{14,5}}{V_G} = \frac{w_{14,5}}{x_{15}} \\
w_{14,2} &= -\mu_M c\gamma_G = -\mu_M w_{4,8} & w_{14,7} &= 2\Omega_M c\delta s\chi_G + w_{11,1} + w_{14,6} = 2\Omega_M w_{4,6} w_{4,9} + w_{11,1} + w_{14,6} \\
w_{14,3} &= r^2 = x_{16}^2 & u_{14} &= w_{14,7} \\
w_{14,4} &= \frac{w_{14,2}}{w_{14,3}}
\end{aligned} \tag{5.68}$$

$$\begin{aligned}
w_{15,0} &= T c\psi_T c\epsilon_T - D = T w_{4,26} w_{4,27} - x_{27} & w_{15,4} &= c\gamma_G c\chi_G = w_{4,8} w_{4,5} \\
w_{15,1} &= \frac{w_{15,0}}{m} = \frac{w_{15,0}}{x_7} & w_{15,5} &= s\gamma_G c\delta - w_{15,4} s\delta = w_{4,7} w_{4,6} - w_{15,4} w_{4,4} \\
w_{15,2} &= -\mu_M s\gamma_G = -\mu_M w_{4,7} & w_{15,6} &= w_{13,2} w_{15,5} + w_{15,1} + w_{15,3} \\
w_{15,3} &= \frac{w_{15,2}}{w_{14,3}} & u_{15} &= w_{15,6}
\end{aligned} \tag{5.69}$$

$$w_{16,1} = V_G s\gamma_G = x_{15} w_{4,7} \quad u_{16} = w_{16,1} \tag{5.70}$$

DRAG ACCELERATION AS AUXILIARY VARIABLE

The drag acceleration for the Spherical case is similar to the Cartesian case, except this time it was chosen to use auxiliary variables to describe the drag. This means that auxiliary equations have to be defined as is shown in Equation (5.71). Also, this means that auxiliary derivatives are required for each of these equations. Equation (5.72) shows the different derivatives corresponding to the equations.

$$\begin{aligned} x_{27} &= D = \frac{1}{2} \rho V_G^2 S C_D = \frac{1}{2} S x_{28} x_{15}^2 x_{29} \\ x_{28} &= \rho = e^{x_{30}} \\ x_{29} &= C_D \\ x_{30} &= P_{\rho 10} x_{31}^{10} + P_{\rho 9} x_{31}^9 + P_{\rho 8} x_{31}^8 + P_{\rho 7} x_{31}^7 + P_{\rho 6} x_{31}^6 + P_{\rho 5} x_{31}^5 + P_{\rho 4} x_{31}^4 + P_{\rho 3} x_{31}^3 + P_{\rho 2} x_{31}^2 + P_{\rho 1} x_{31} + P_{\rho 0} \\ x_{31} &= h = r - R_{MOLA} = x_{16} - R_{MOLA} \end{aligned} \quad (5.71)$$

$$\begin{aligned} x'_{27} &= \frac{1}{2} S x_{15} (x_{15} (x_{29} x'_{28} + x_{28} x'_{29}) + 2 x_{28} x_{29} x'_{15}) \\ x'_{28} &= x'_{30} x_{28} \\ x'_{30} &= x'_{31} (10 P_{\rho 10} x_{31}^9 + 9 P_{\rho 9} x_{31}^8 + 8 P_{\rho 8} x_{31}^7 + 7 P_{\rho 7} x_{31}^6 + 6 P_{\rho 6} x_{31}^5 + \dots \\ &\quad \dots + 5 P_{\rho 5} x_{31}^4 + 4 P_{\rho 4} x_{31}^3 + 3 P_{\rho 3} x_{31}^2 + 2 P_{\rho 2} x_{31} + P_{\rho 1}) \\ x'_{31} &= x'_{16} \end{aligned} \quad (5.72)$$

The auxiliary derivatives described in Equation (5.72) can now be used to define the auxiliary functions. These are described in Equations (5.73) to (5.75) for u_{27} , u_{28} and u_{30} respectively. In this case $u_{31} = u_{16}$.

$$\begin{aligned} w_{27,1} &= C_D \dot{\rho} = x_{29} u_{28} & w_{27,4} &= V_G (w_{27,1} + w_{27,2}) = x_{15} (w_{27,1} + w_{27,2}) \\ w_{27,2} &= \rho \dot{C}_D = x_{28} u_{29} & w_{27,5} &= w_{27,3} \dot{V}_G = w_{27,3} u_{15} & u_{27} &= \frac{1}{2} S w_{27,6} \\ w_{27,3} &= \rho C_D = x_{28} x_{29} & w_{27,6} &= V_G (w_{27,4} + w_{27,5}) = x_{15} (w_{27,4} + w_{27,5}) \end{aligned} \quad (5.73)$$

$$w_{28,1} = u_{30} \rho = u_{30} x_{28} \quad u_{28} = w_{28,1} \quad (5.74)$$

$$\begin{aligned} w_{30,1} &= h^9 = x_{31}^9 & w_{30,6} &= h^4 = x_{31}^4 \\ w_{30,2} &= h^8 = x_{31}^8 & w_{30,7} &= h^3 = x_{31}^3 \\ w_{30,3} &= h^7 = x_{31}^7 & w_{30,8} &= h^2 = x_{31}^2 \\ w_{30,4} &= h^6 = x_{31}^6 & w_{30,9} &= u_{31} (10 P_{\rho 10} w_{30,1} + \dots + 3 P_{\rho 3} w_{30,8} + 2 P_{\rho 2} x_{31} + P_{\rho 1}) \\ w_{30,5} &= h^5 = x_{31}^5 & u_{30} &= w_{30,9} \end{aligned} \quad (5.75)$$

Again, three additional auxiliary equations are required for the $C_D - M$ relation (see Figure 2.4) and are presented in Equation (5.76).

$$\begin{aligned} x_{32} &= M = \frac{V_G}{a} = \frac{x_{15}}{x_{33}} \\ x_{33} &= a = \sqrt{\gamma_a R_a^* T_a} = \sqrt{\gamma_a R_a^* x_{34}} \quad \text{where} \quad R_a^* = \frac{R_a}{M_a} \\ x_{34} &= T_a \end{aligned} \quad (5.76)$$

In this case the conditional relations shown in Equation (5.77) are not used directly in the recurrence relations, but only serve as initial conditions. Again, the $P_{C_D number, section}$ are the polynomial fit coefficients as provided in Table 3.5.

$$x_{29} = C_D = \begin{cases} x_{29,1} = 0.2, & \text{for } 0 \leq x_{32} < 0.5 \\ x_{29,2} = P_{C_D1,2}x_{32} + P_{C_D0,2}, & \text{for } 0.5 \leq x_{32} < 1 \\ x_{29,3} = P_{C_D1,3}x_{32} + P_{C_D0,3}, & \text{for } 1 \leq x_{32} < 1.3 \\ x_{29,4} = P_{C_D1,4}x_{32} + P_{C_D0,4}, & \text{for } 1.3 \leq x_{32} < 2.5 \\ x_{29,5} = P_{C_D1,5}x_{32} + P_{C_D0,5}, & \text{for } 2.5 \leq x_{32} < 4 \\ x_{29,6} = 0.3, & \text{for } x_{32} \geq 4 \end{cases} \quad (5.77)$$

The corresponding derivatives that will have to be used for the recurrence relations are presented in Equation (5.78).

$$x'_{29} = \begin{cases} x'_{29,1} = 0, & \text{for } 0 \leq x_{32} < 0.5 \\ x'_{29,2} = P_{C_D1,2}x'_{32}, & \text{for } 0.5 \leq x_{32} < 1 \\ x'_{29,3} = P_{C_D1,3}x'_{32}, & \text{for } 1 \leq x_{32} < 1.3 \\ x'_{29,4} = P_{C_D1,4}x'_{32}, & \text{for } 1.3 \leq x_{32} < 2.5 \\ x'_{29,5} = P_{C_D1,5}x'_{32}, & \text{for } 2.5 \leq x_{32} < 4 \\ x'_{29,6} = 0, & \text{for } x_{32} \geq 4 \end{cases} \quad (5.78)$$

The Mach derivative and corresponding speed of sound derivative are then described in Equation (5.79).

$$\begin{aligned} x'_{32} &= \frac{x_{33}x'_{15} - x_{15}x'_{33}}{x_{33}^2} \\ x'_{33} &= \frac{\gamma_a R_a^*}{2x_{33}} x'_{34} \end{aligned} \quad (5.79)$$

For the drag coefficient, there are no auxiliary functions required. That is why x' in Equation (5.78) can simply be replaced by u . The Mach number and the speed of sound do require auxiliary functions and are described in Equations (5.80) and (5.81) respectively.

$$\begin{aligned} w_{32,1} &= a\dot{V}_G = x_{33}u_{15} & w_{32,3} &= a^2 = x_{33}^2 \\ w_{32,2} &= V_G\dot{a} = x_{15}u_{33} & w_{32,4} &= \frac{w_{32,1} - w_{32,2}}{w_{32,3}} & u_{32} &= w_{32,4} \end{aligned} \quad (5.80)$$

$$w_{33,1} = \frac{\dot{T}_a}{a} = \frac{u_{34}}{x_{33}} \quad u_{33} = w_{33,1} \quad (5.81)$$

The last relations that still need to be described are the ones for the temperature T_a . Similar to C_D the corresponding auxiliary equations, shown by Equation (5.82) are only used for the initial conditions. Again, $P_{Tnumber,section}$ are the polynomial fit coefficients as provided in Table 3.2.

$$x_{34} = T_a = \begin{cases} x_{34,1} = P_{T1,1}x_{31} + P_{T0,1}, & \text{for } -0.6 \leq x_{31} < 5.04 \\ x_{34,2} = P_{T3,2}x_{31}^3 + P_{T2,2}x_{31}^2 + P_{T1,2}x_{31} + P_{T0,2}, & \text{for } 5.04 \leq x_{31} < 35.53 \\ x_{34,3} = P_{T6,3}x_{31}^6 + P_{T5,3}x_{31}^5 + P_{T4,3}x_{31}^4 + P_{T3,3}x_{31}^3 + \dots \\ \dots + P_{T2,3}x_{31}^2 + P_{T1,3}x_{31} + P_{T0,3}, & \text{for } 35.53 \leq x_{31} < 75.07 \\ x_{34,4} = P_{T8,4}x_{31}^8 + P_{T7,4}x_{31}^7 + P_{T6,4}x_{31}^6 + P_{T5,4}x_{31}^5 \\ + P_{T4,4}x_{31}^4 + P_{T3,4}x_{31}^3 + P_{T2,4}x_{31}^2 + P_{T1,4}x_{31} + P_{T0,4}, & \text{for } 75.07 \leq x_{31} < 170.05 \\ x_{34,5} = 136.5, & \text{for } x_{31} \geq 170.05 \end{cases} \quad (5.82)$$

The corresponding derivatives that are used for the recurrence relations are presented in Equation (5.83).

$$x'_{34} = \begin{cases} x'_{34,1} = P_{T1,1} x'_{31}, & \text{for } -0.6 \leq x_{31} < 5.04 \\ x'_{34,2} = (3P_{T3,2} x_{31}^2 + 2P_{T2,2} x_{31} + P_{T1,2}) x'_{31}, & \text{for } 5.04 \leq x_{31} < 35.53 \\ x'_{34,3} = (6P_{T6,3} x_{31}^5 + 5P_{T5,3} x_{31}^4 + 4P_{T4,3} x_{31}^3 + \dots \\ \dots + 3P_{T3,3} x_{31}^2 + 2P_{T2,3} x_{31} + P_{T1,3}) x'_{31}, & \text{for } 35.53 \leq x_{31} < 75.07 \\ x'_{34,4} = (8P_{T8,4} x_{31}^7 + 7P_{T7,4} x_{31}^6 + 6P_{T6,4} x_{31}^5 + 5P_{T5,4} x_{31}^4 + \dots \\ \dots + 4P_{T4,4} x_{31}^3 + 3P_{T3,4} x_{31}^2 + 2P_{T2,4} x_{31} + P_{T1,4}) x'_{31}, & \text{for } 75.07 \leq x_{31} < 170.05 \\ x'_{34,5} = 0, & \text{for } x_{31} \geq 170.05 \end{cases} \quad (5.83)$$

All the power relations in Equation (5.83) were already described in auxiliary functions in Equation (5.75). Therefore, depending on the section, the equations presented in Equation (5.83) can be rewritten by simply replacing x' by u and the auxiliary functions. This is shown in Equation (5.84).

$$u_{34} = \begin{cases} u_{34,1} = P_{T1,1} u_{31}, & \text{for } -0.6 \leq x_{31} < 5.04 \\ u_{34,2} = (3P_{T3,2} w_{30,2} + 2P_{T2,2} x_{31}) u_{31} + P_{T1,2} u_{31}, & \text{for } 5.04 \leq x_{31} < 35.53 \\ u_{34,3} = (6P_{T6,3} w_{30,5} + 5P_{T5,3} w_{30,4} + 4P_{T4,3} w_{30,3} + \dots \\ \dots + 3P_{T3,3} w_{30,2} + 2P_{T2,3} x_{31}) u_{31} + P_{T1,3} u_{31}, & \text{for } 35.53 \leq x_{31} < 75.07 \\ u_{34,4} = (8P_{T8,4} w_{30,7} + 7P_{T7,4} w_{30,6} + 6P_{T6,4} w_{30,5} + 5P_{T5,4} w_{30,4} + \dots \\ \dots + 4P_{T4,4} w_{30,3} + 3P_{T3,4} w_{30,2} + 2P_{T2,4} x_{31}) u_{31} + P_{T1,4} u_{31}, & \text{for } 75.07 \leq x_{31} < 170.05 \\ u_{34,5} = 0, & \text{for } x_{31} \geq 170.05 \end{cases} \quad (5.84)$$

Now all the information that is required to compute the recurrence relation for the drag is available. Please note that there is a certain order in which these equations have to be computed, since they depend on each other. Table 5.1 shows this order.

Table 5.1: Order of auxiliary equations and derivatives computations

Auxiliary equations				Auxiliary derivatives			
Order	x_n	Order	x_n	Order	u_n	Order	u_n
0	$x_7, x_{11}, x_{12}, x_{13}, x_{14}, x_{15}, x_{16}$	4	x_{32}	7	$u_7, u_{11}, u_{12}, u_{16}$	11	u_{32}
1	x_{31}	5	x_{29}	8	u_{31}	12	u_{29}
2	x_{30}, x_{34}	6	x_{27}	9	u_{30}, u_{34}	13	u_{27}
3	x_{33}, x_{28}			10	u_{28}, u_{33}	14	u_{13}, u_{14}, u_{15}

5.2.4. RECURRENCE RELATIONS

Now that all the auxiliary functions are known, they can be used to determine the required recurrence relations. In order to write these concisely and following the same convention as used by [Scott and Martini \(2008\)](#), a number of extra parameters will have to be introduced. The Taylor series coefficients can be written as described by Equation (5.85). Where n is the variable number and k is the order of the derivative.

$$\frac{x_n^{(k)}}{k!} \triangleq X_n(k) \quad \text{where } k \geq 1 \quad (5.85)$$

A similar expression is defined for u_n and w_n as well as the place-holder functions f_n and g_n which are all shown in Equation (5.86).

$$U_n(k) \triangleq \frac{u_n^{(k)}}{k!} \quad W_n(k) \triangleq \frac{w_n^{(k)}}{k!} \quad F_n(k) \triangleq \frac{f_n^{(k)}}{k!} \quad G_n(k) \triangleq \frac{g_n^{(k)}}{k!} \quad (5.86)$$

Then remembering that $u_n = x'_n$ and using Equation (5.85) a relation can be described between X_n and U_n as shown in Equation (5.87) ([Scott and Martini, 2008](#)).

$$\begin{aligned} u_n^{(k-1)} = x_n^{(k)} &\Rightarrow \frac{u_n^{(k-1)}}{(k-1)!} = \frac{x_n^{(k)}}{(k-1)!} \Rightarrow \\ U_n(k-1) = kX_n(k) &\Rightarrow X_n(k) = \frac{U_n(k-1)}{k} \end{aligned} \quad (5.87)$$

Using these definitions, the auxiliary functions can be written into reduced auxiliary functions $W(k)$ for the three cases. The equations stay the same, but the lower-case letters are replaced by their upper-case counterparts. A complete list of the reduced auxiliary functions (starting at $k=2$, or the second derivative u') for the three cases is presented in Appendix D. As was mentioned before, all the auxiliary functions have been defined such that they incorporate one of the following operations: multiplication, division, power, exponential or trigonometric. This has been done because recurrence relations exist for these simple operations as provided by [Jorba and Zou \(2005\)](#). These recurrence relations are written using the definitions from Equation (5.86) and are described in Equations (5.88) to (5.94).

$$\text{for } f_n \pm g_n \Rightarrow W_{n,\pm}(k) = F_n(k) \pm G_n(k) \quad (5.88)$$

$$\text{for } f_n g_n \Rightarrow W_{n,mult}(k) = \sum_{j=0}^k F_n(j) G_n(k-j) \quad (5.89)$$

$$\text{for } \frac{f_n}{g_n} \Rightarrow W_{n,div}(k) = \frac{1}{G_n(0)} \left[F_n(k) - \sum_{j=1}^k G_n(j) W_{n,div}(k-j) \right] \quad (5.90)$$

$$\text{for } f_n^\alpha \Rightarrow W_{n,pow}(k) = \frac{1}{kF_n(0)} \sum_{j=0}^{k-1} [k\alpha - j(\alpha+1)] F_n(k-j) W_{n,pow}(j) \quad (5.91)$$

$$\text{for } e^{f_n} \Rightarrow W_{n,exp}(k) = \frac{1}{k} \sum_{j=0}^{k-1} (k-j) W_{n,exp}(j) F_n(k-j) \quad (5.92)$$

$$\text{for } \cos f_n \Rightarrow W_{n,cos}(k) = -\frac{1}{k} \sum_{j=1}^k j W_{n,sin}(k-j) F_n(j) \quad (5.93)$$

$$\text{for } \sin f_n \Rightarrow W_{n,sin}(k) = \frac{1}{k} \sum_{j=1}^k j W_{n,cos}(k-j) F_n(j) \quad (5.94)$$

Checking the presented equations it can be seen that Equations (5.93) and (5.94) are interdependent. This means that whenever a cosine recurrence relation has to be computed, the same recurrence relation for sine (with at least order $k-1$) has to be computed at the same time (and vice versa). All these equations have been derived by [Jorba and Zou \(2005\)](#) using the general Leibniz rule for the k^{th} derivative of a multiplication as portrayed in Equation (5.95).

$$(f_n g_n)^{(k)} = \sum_{j=0}^k \binom{k}{j} f_n^{(j)} g_n^{(k-j)} \quad (5.95)$$

Combining Equation (5.95) and the definition of the reduced derivative for the auxiliary function (see Equation (5.86)) results in Equation (5.96). This equation, when rewritten to include the reduced derivatives for f_n and g_n , results in Equation (5.89).

$$W_{n,mult}(k) = \frac{1}{k!} \sum_{j=0}^k \binom{k}{j} f_n^{(j)} g_n^{(k-j)} \quad (5.96)$$

With all the recurrence relations now known, and using the definition of Equation (5.87) the updated state can be described using the Taylor series expansion as described in Equation (5.97).

$$x_n(t+h) = \sum_{k=0}^K \frac{x_n^{(k)}(t)}{k!} h^k + T_{n,K} = \sum_{k=0}^K X_n(k) h^k + T_{n,K} \quad \text{with } n=1, \dots, 7 \quad (5.97)$$

Here K is the order of the series to which it has to be evaluated and $T_{n,K}$ is the truncation error. Please note that all the Taylor series coefficients computed for the auxiliary equations are only needed to determine the Taylor series coefficients of the state variables (which is why they are auxiliary).

6

PROGRAM SIMULATION TOOL

To perform the analysis associated with this thesis, a simulation program has been written. This tool is comprised of both existing (Section 6.1) and newly developed software (Section 6.2). It is written in C++ and is based on the [Tudat](#) structure. The purpose of the software is to simulate the trajectory of the [MAV](#) using [RKF](#) and [TSI](#). This tool is written such that the performance of both integrators can be compared. The final workings of the complete tool is described in Section 6.3.

6.1. EXISTING SOFTWARE

The use of existing software can greatly improve the performance of the final tool and save time as well. Another important reason to use existing software is that this will make it easier for other people to use and incorporate into their own software as well. The existing software used for this thesis is software that is currently being used by the space department of the TU Delft and (in case of Mars-[GRAM](#)) by the mission design section at [JPL](#).

6.1.1. TUDAT

[Tudat](#) is, as the name suggests, a toolbox that can be used to solve numerous astrodynamical problems ([Dirkx et al., 2016](#)). It was, and still is, being developed by students and staff of the Delft University of Technology. Specifically by the section Astrodynamics and Space missions of the Aerospace Engineering faculty. It is programmed in C++ and consists of a number of libraries. These libraries can be called upon by the user to invoke different [Tudat](#) functionalities such as standard reference frame transformations or often used integrators. The available software is completely validated and comes with its own tests to make sure that everything is working properly. It itself uses two external libraries: Eigen and Boost. Both these libraries will be discussed in Sections 6.1.2 and 6.1.3 respectively. Figure 6.1 shows [Tudat](#) with the different libraries that are used within the [Tudat](#) Bundle including the core functions ([Tudat Core](#)). In this thesis, the [Tudat](#) libraries are used for all standard mathematical and astrodynamical operations.



Figure 6.1: [Tudat](#) structure

6.1.2. EIGEN

Eigen is an external C++ library that was written to perform linear algebra computations¹. The software is free and easy to use, which is why it is widely used by the C++ community and thus also within **Tudat** (Dirkx *et al.*, 2016). Another advantage is that because it does not use any source files, it does not need to be build before using it. The Eigen libraries contain a number of standardized matrices and vectors, each with its own characteristics. An example of an often used vector is *Vector3d* (or *Eigen::Vector3d*), which can for instance be used to store the Cartesian position of a satellite. Here the *3* shows that it can store 3 values/parameters and the *d* shows that these are of the type *double*. It is mentioned on the **Tudat** wiki (Dirkx *et al.*, 2016) that these Eigen vectors and matrices should only be used if required for linear algebra computations. For ordinary storage, the C++ arrays, vectors and matrices should be used to save both storage and computation time.

6.1.3. BOOST

Boost is a slightly more complicated set of C++ libraries, where compared to the Eigen library, Boost first has to be compiled before being able to use all of its functionalities. Fortunately, this compiling is performed by **Tudat** automatically when setting it up for the first time. Boost is described as an addition to the standard C++ libraries, thus adding more functionalities (Dirkx *et al.*, 2016)². Within **Tudat**, Boost is used to pass free and class functions as an argument to another object and also for dynamic allocation using so-called pointers. Four libraries that are often used within **Tudat** are *boost::function*, *boost::bind*, *boost::shared_ptr* and *boost::make_shared*. The first two libraries are used to pass functions (a function is pointed to by *function* and called by *bind*) and the last two are used in case of dynamic allocation (*shared_ptr* is the pointer and *make_shared* is the object creator that returns a shared pointer to the created object).

6.1.4. MARS-GRAM

Mars-**GRAM** is a high-fidelity atmospheric model developed by NASA to simulate the global atmospheric conditions on Mars (Justh and Justus, 2008)³. The model is based on NASA Ames Mars General Circulation Model (for altitudes between 0-80 km) and Mars Thermospheric General Circulation model (for altitudes above 80 km). It can provide density, temperature and pressure data (among other data) with respect to the current altitude, latitude and longitude on Mars. Seasonal variations are taken into account in the model as well, which is why different calendar dates will result in different atmospheric compositions. The tool can be used within a simulation tool or as a separate executable. Unfortunately, because it is so detailed, each computation requires a lot of CPU time. This is why it was decided to use the stand-alone Mars-**GRAM** executable to generate a detailed table with atmospheric data as a function of altitude, latitude and longitude at the start of the optimisation. Even generating this table required a lot of CPU time (on average a single computation using the stand-alone executable took 67.9 seconds to complete). The starting altitude was set at -0.6 km **MOLA** and advanced with a step-size of 0.1 km to 320 km altitude to cover the entire range that the **MAV** would have to cover. Also, the latitude and longitude were varied within 10 degrees from the launch site with a step-size of 1 degree. A Matlab script was written to extract the relevant atmospheric data from the Mars-**GRAM** output files and write them into a .csv file, thus creating the required atmospheric data table. The atmospheric data in this table was then interpolated to provide an estimate of the atmospheric characteristics at every point along the ascent trajectory, which is required to compute the drag at each time step. Some of the earlier versions of Mars-**GRAM** are available for free (such as the Mars-**GRAM** 2005 version used in this thesis), however, the latest versions (such as the Mars-**GRAM** 2010 version used as a back-up in this thesis) require a licence agreement.

6.2. DEVELOPED SOFTWARE

This section of the software chapter describes the software that either had to be developed around existing software/libraries or had to be developed from scratch (the **TSI** propagator). Each piece of software is accompanied by the corresponding software architecture. Every next piece of software then indirectly incorporates the previous architecture through the use of the completed tool.

¹More documentation on Eigen can be found on eigen.tuxfamily.org/dox/ [Accessed 8 March 2016]

²More documentation on Boost can be found on <http://www.boost.org/> [Accessed 8 March 2016]

³NASA website: <https://see.msfc.nasa.gov/model-Marsgram> [Accessed 9 March 2016]

6.2.1. RKF PROPAGATOR

The **RKF** (or traditional) propagator architecture is described in Figure 6.2. It starts with the current state, which is then passed on to the state derivative function. The state derivative function is used by the **RKF** integrators to determine the next state by calling the function a number of times depending on the used method. Both **RK4** and **RKF45** (and higher order **RKF** integrators) are already available through the **Tudat** libraries. **RK4** can be called by including the `rungeKutta4Integrator.h` header file, and **RKF** methods can be called by including the `rungeKuttaVariableStepSizeIntegrator.h` header file. This integration process is repeated until the final condition is met. Within the state derivative function all the state derivatives are updated and stored. The current position is used to update the gravitational acceleration on the **MAV**, the current mass is used to determine the accelerations caused by the thrust and finally the complete state is required to determine the accelerations caused by the drag. Both the drag and thrust accelerations have to be transformed to the inertial frame using the updated angles from the current state. The function also computes the current mass flow rate, however since the thrust is constant, this does not change over time. In the state derivative function, all the transformations are governed by pre-developed functions within the **Tudat** library, which includes the state transformations and the frame transformation from the body frame to the inertial frame. The transformation from the propulsion frame to the body frame is however not included in **Tudat** and had to be written.

All blocks represent a different action. These actions might be performed in classes, header files and/or source files. More information on the classification of the different blocks can be found in Appendix C.

6.2.2. TSI PROPAGATOR

The **TSI** propagator has a significantly different architecture compared to the traditional propagator as can be seen in Figure 6.3. **TSI** requires an initial order and step-size to start the integration process. In this thesis it has been decided to keep the order the same throughout the entire integration. The step-size will change during the integration depending on the Taylor series evaluations. The initial state is set as the current state and is fed into the **TSI** block. Within this block, first the auxiliary equations and functions are called, which were set-up for this particular problem. They are evaluated using the current state. These auxiliary equations and functions already include all the reference frame and coordinate transformations, as well as approximate atmospheric parameter functions. This is required to set-up the recurrence relations, which is where **TSI** differs from the traditional propagator. Once the auxiliary equations and functions have been computed they are used to compute the Taylor coefficients through the recurrence relations set-up for the thesis problem. These coefficients are then stored for later use and are also passed to the block creating the Taylor series expansion for every state variable thus creating the updated state. The last two coefficients are then used to determine the next step-size. This continues until the final integration condition has been met.

6.3. COMPLETED SIMULATION TOOL

The final simulation tool combined the integration software in such a way that a complete trajectory propagation could be simulated. It consists of different phases: initialisation, initial propagation, integrator burn phase, integrator coast phase, final circularisation and comparison. A brief description of each phase is provided in this section. It should be noted that in the actual program, the **TSI** propagation (burn and coast phase) supersedes the **RKF** propagation. Also, three different **RKF** methods can be chosen: Runge-Kutta-Fehlberg 4th (5th) order (**RKF45**), **RKF78** and **DOPRIN87**.

6.3.1. INITIALISATION

During the initialisation phase, all the input values are loaded into the program. This is done by calling the input .txt files and assigning all the proper values to the corresponding parameters. Then, the Mars celestial body class and the **MAV** class are initialised, providing the Mars atmospheric and planetary data and the **MAV** system characteristics respectively. At this point, any values that differ from the pre-set default values are updated in both classes. The next step is to convert the initial spherical state into the initial Cartesian state and both states are saved in the respective output files for both **TSI** and **RKF**. Finally, the **StateAndTime** class is initialised for the **TSI**.

6.3.2. INITIAL PROPAGATION

As will be described in Chapter 7, during the verification process it was found that **TSI** had trouble dealing with initial conditions close to its singular values during the initial second(s), both for velocity and flight-path angle. This is why it was decided to slightly shift the initial conditions at which the actual integration

for **TSI** would start. Because **RKF** did not have similar issues with the first second(s), it was chosen to use an **RKF** method to propagate the first second. For this initial integration, the default integrator is **RKF78** with a tolerance of $1 \cdot 10^{-15}$. The output of this initial propagation is then used as the initial state for both **TSI** and **RKF** for the remainder of the integration. This way, both methods can still be compared properly.

6.3.3. INTEGRATOR BURN PHASE

At the start of the burn phase the final state of the initial propagation is taken as the initial state input for the integrators. During the burn phase, both **TSI** and **RKF** are initiated and run until the end of the first burn phase occurs. Within this phase, **TSI** stops at every altitude and Mach section of the atmospheric graphs to make sure that no errors occur in the model. Provided that the atmospheric graphs are piecewise continuous, such stops are not required for **RKF**. The end of the first burn phase can either be based on a set time or a set altitude. Of course, extra cut-off criteria can be added. During the propagation, all intermediate states are stored in the output files for both methods.

6.3.4. INTEGRATOR COAST PHASE

After the first burn phase, the **MAV** enters a coasting phase. This is simulated by setting the thrust equal to zero. For **TSI** this can simply be done by setting the thrust in the **MAV** class zero within the propagation do-loop. This means that when the set burn-out condition is met, the class is updated, and the loop is continued. However, it is not possible to do this within one loop for the **RKF**, because of the manner in which **RKF** is initialised. In **Tudat** it is described that in order to use the build in **RKF** functions, a separate state derivative class has to be build first. This class is initialised using the initial state classes, and therefore does not change when updating the initial state classes in the loop directly. This means that when the thrust changes to zero, the state derivative class has to be re-initialised, creating the need for a second separate do-loop. This also means that the integrator class has to be re-initialised as well, which means that a separate integrator has to be defined (one with a different name from the first one). Both the **TSI** and **RKF** coasting phases are terminated whenever the desired altitude is reached, or after a certain limit time. Again, all the intermediate states are stored in the output files during the coasting phase.

6.3.5. FINAL CIRCULARISATION

Once the final condition is met, both the **RKF** and the **TSI** final state are used to determine the required final circularisation burn in order to reach the desired final orbit. For this computation, the states are first converted into Kepler elements using the **Tudat** library. Then the required ΔV is computed using the methods described by Wakker (2010a). In this case, an instantaneous burn to change the inclination, flight-path angle and orbital velocity to match the desired orbit is assumed. From the ΔV for both methods, it can be determined, using the Tsiolkovsky rocket equation what the required propellant mass is. This then results in a final mass estimate for both the **RKF** and the **TSI** propagations.

6.3.6. COMPARISON

Finally, the end states of both **TSI** and **RKF** are compared to each other. The program provides the numeric difference between the position, velocity and mass as well as the quotient between those values. This quotient, or difference fraction, is the **TSI** state divided by the **RKF** state and the numeric difference is the **TSI** state minus the **RKF** state. These values were used in the verification and validation phase and are used during the thesis analysis as well to show the behaviour of **TSI** compared to **RKF**.

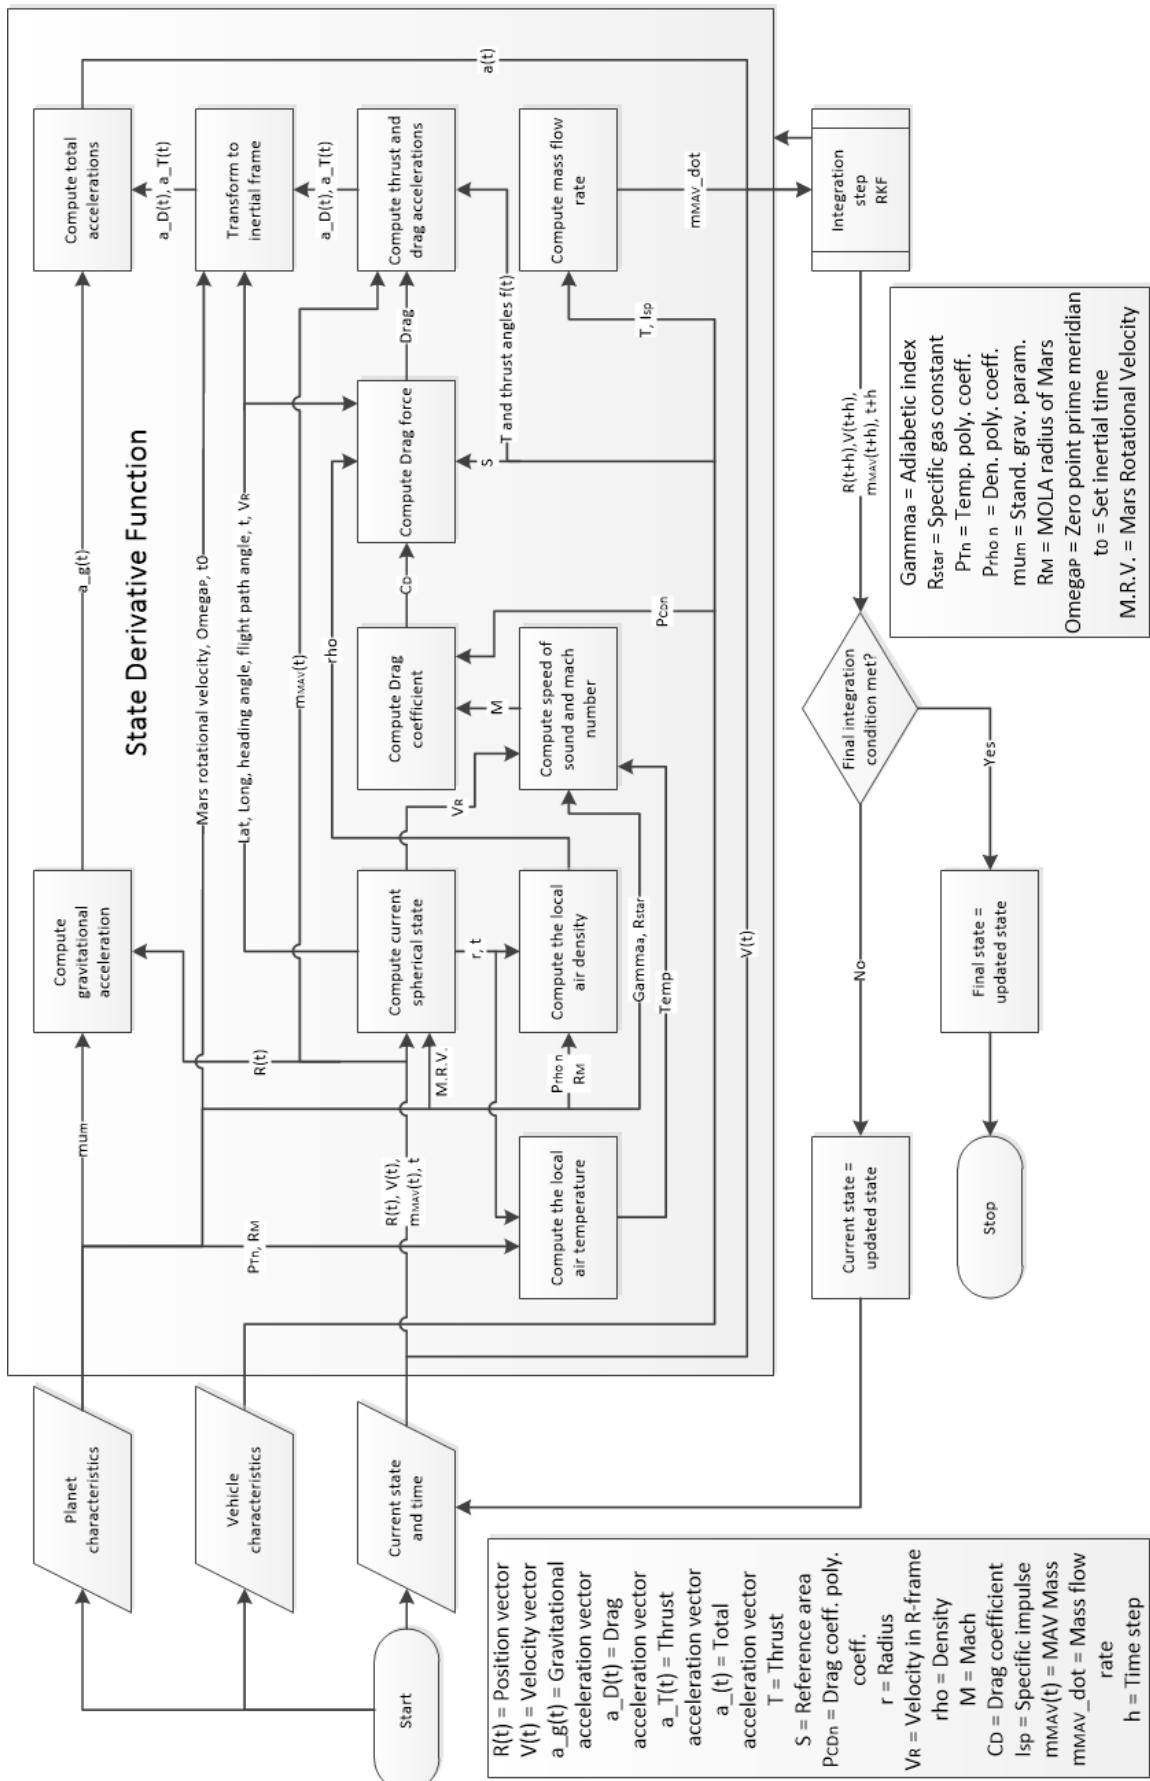


Figure 6.2: RKF interface architecture

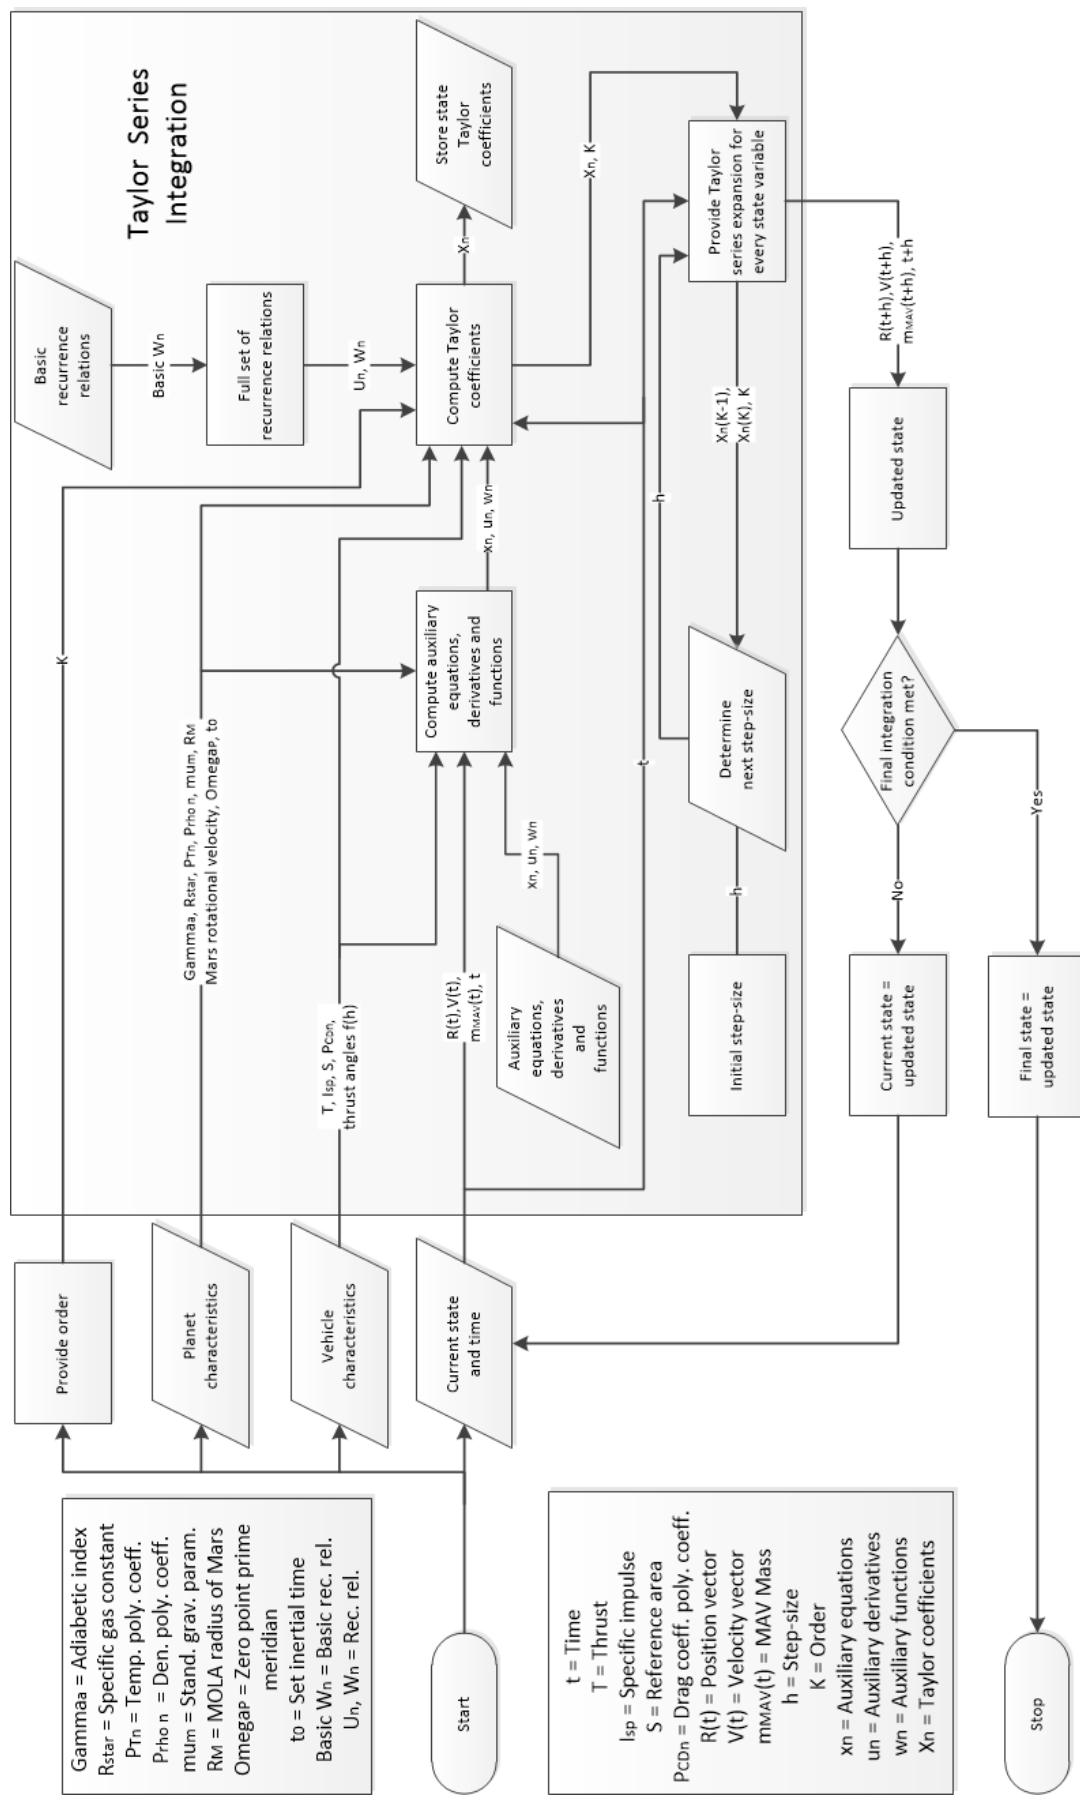


Figure 6.3: TSI architecture

7

VERIFICATION AND VALIDATION

Verification is the process of determining whether a program meets the requirements or not. Is it working the way it is suppose to? As soon as it works and produces output (verified), these outputs can be compared to other data from which it is known that it is correct. This is called validation. If a program is verified and validated, the outputs should be correct. Fortunately, all the existing software has already been validated, which means that they only still have to be verified to make sure everything is working properly on the simulation computer. Each of the software packages comes with tests which can be used to do this. If all the tests are passed it means that the software is verified for the computer and ready to use. Since [Tudat](#) shipped with Eigen and Boost, the [Tudat](#) test files also test these libraries. All the tests were passed, which means that the [Tudat](#), Eigen and Boost libraries are working properly. However, because the integrators are an intricate part of this thesis, it was decided to perform a separate verification for the Runge-Kutta integrators. This verification is described in Section 7.1.

Mars-[GRAM](#) also came with its own verification test, where three delivered output files had to be replicated. These verification tests were also successful.

7.1. RK4 AND RKF INTEGRATORS

The tutorial page of the [Tudat](#) website ([Dirkx et al., 2016](#)) offers two integration tutorials: one involving [RK4](#) and another involving variable step-size Runge-Kutta methods including [RKF](#). The objective of the tutorial is to get familiar with the different integration methods available in [Tudat](#). At the same time, a small data table has to be reproduced, which also serves as a verification test. For each of the integrators the same problem was addressed: the computation of the velocity of a falling body after a certain amount of time assuming no drag. The results that had to be reproduced are presented in Table 7.1.

Table 7.1: Verification data for the standard integrators

End time [s]	1.0	5.0	15.0	25.0
Velocity [m/s]	-9.81	-49.05	-147.15	-245.25

The first script was written using the instructions from the tutorial and is called `numericalintegrators.cpp`. This script uses the `rungeKutta4Integrator.h` header file and the `RungeKutta4IntegratorXd` function from this header file. This function requires three inputs: the state derivative function (problem specific), the initial time and the initial state. Using the `.integrateTo` extension the end state at a certain end time can be computed. This requires the end time and the step-size. For [RK4](#) the step-size is constant. This resulted in the same values as presented in Table 7.1.

The second script was used to test the variable step-size integrators [RKF](#). This script is called `rungekutavariable.cpp` and uses the `rungeKuttaCoefficients.h` and `rungeKuttaVariableStepSizeIntegrator.h` header files. In this case the `RungeKuttaVariableStepSizeIntegratorXd` function was used which requires the Runge-Kutta coefficients (from the respective header file), the state derivative function (problem specific), the initial time,

initial state, zero minimum step-size, infinite maximum step-size, relative tolerance and the absolute tolerance as inputs. In this case the integration can be done in individual steps using `.performIntegrationStep` with the current step-size as the only input. The current step-size is computed in the integration method itself, but in this case it is checked to make sure that the step-size does not take the function beyond the specified end time. The integration steps are then repeated until the end time is met. Running this script resulted in the same results as presented in Table 7.1 as well.

These results, combined with the fact that the test files for these two methods produced no errors is proof that they are working accordingly. Thus it can be said that the standard integration methods used in this thesis are verified and ready for use in the simulation tool. However, during the development of the trajectory propagation tools, the entire tool (including the integrators) will be verified again to determine the performance of the integrators.

For the actual propagation tool, the `RKF` method required the state derivative function associated with this particular ascent problem. The state derivative class was constructed using the state derivative functions as described in this thesis in the Cartesian coordinate system based on equations provided by [Mooij \(1994\)](#). The state is used to compute the required transformation angles first and then both the thrust and drag accelerations are transformed to the inertial frame. There they are combined with the gravitational acceleration resulting in the accelerations in the x-, y- and z-direction. This class was tested by itself by inputting certain values which would result in known outcomes. And those simple values by themselves provided the expected results. Later the state derivative function was combined with the `RKF` integrator in the trajectory propagation tool and verified again as will be described in Section 7.3.

The verification of the state derivative class took approximately one day.

7.2. TAYLOR SERIES INTEGRATION

In this section, the verification and validation of the `TSI` header and source file is described. This was done for each of the blocks shown in Figure 6.3. For the verification it was important that the running of the different classes and header/source files did not produce any obvious errors. For the validation, the results were often checked against manual calculations and expected behaviour. The verification and validation of `TSI` was a very lengthy process and required many rewrites of the used equations because of mistakes in the model or mistakes in the derivations. Section 7.3 talks a bit more about the model mistakes. This section has been divided into several subsections which showed similar issues during the verification and validation.

7.2.1. AUXILIARY EQUATIONS, DERIVATIVES AND FUNCTIONS

As shown by Figure 6.3 the first step in the `TSI` is to compute the auxiliary equations, derivatives and functions. The computations, in theory, are fairly straightforward, however it is really easy to make a mistake. During the initial verification of these different classes the outcomes were checked against simple manual solutions. Thus, provided a certain input, the output was known. This was an easy way to check any coding errors. Since the early versions of the code required a lot of equations, it took a long time to go through all the equations and find all the errors and mistakes. This was initially done with the combination of Cartesian coordinates and spherical transformation angles, however, later on more efficient equations were used for separate Cartesian and spherical cases. This also made it easier to identify mistakes in the equations and understand certain issues found during the validation process.

7.2.2. COMPUTING THE TAYLOR SERIES COEFFICIENTS AND THE UPDATED STATE

Once the auxiliary classes were verified, the Taylor Series coefficients could be computed using the basic recurrence relations and the full set of recurrence relations. For the Taylor Series coefficients it is important that they show a decreasing number series for each of the coefficients. This was the desired outcome that was used for the verification of the full set of recurrence relations. The basic recurrence relations were all checked by hand calculations to determine if they indeed worked the way that they were suppose to. The verified basic recurrence relations were used to verify the full set of recurrence relations. This class consists of the equations mentioned in Appendix D. When writing the full set of recurrence relations, it is really easy to make mistakes and there are a lot of rules that have to be taken into account as mentioned in Chapter 5. Therefore, a lot of time was spend on rewriting these equations in such a way that the outcomes were what was expected. Also, a number of these recurrence relations were checked by manual calculations. An often recurring problem was that the Taylor Series coefficients would show a diverging behaviour where the coef-

ficient would keep increasing to infinity (theoretically). This was often an indication that a writing mistake was made when setting up the full set of recurrence relations. Another easy way to identify mistakes during the validation process was to compute the next state. Should an error occur in the computation of the Taylor Series coefficients, this would usually result in very large increases in the state even if the coefficient itself would be relatively small. Then following the trail back to the largest change in Taylor Series coefficient, often a coding or writing mistake could be identified in the full set of recurrence relations.

7.2.3. NEXT STEP-SIZE

Fortunately, the step-size class was not a very large class and took less time to verify and validate. Provided a set of Taylor Series coefficients, the step-size class could be tested separately from the other files. The verification process was rather straight forward; the class should be able to provide a step-size estimate given the different input values. Also, when similar sets of Taylor Series coefficients were used, the output step-sizes should be rather similar. This was then also part of the validation process. A pure validation process was difficult because there were no reference Taylor series coefficients available, however an estimate for the order of the next step-size could be used. This can however still be improved. Two different step-size determination methods were tested, but in the end it was found that the direct method described by [Scott and Martini \(2008\)](#) and [Bergsma \(2015\)](#) showed more reasonable results and was easier to implement. Also, during the verification process, the iteration method failed to work properly which led to unusable results and the program failing. But the direct method worked very well.

7.3. COMPLETE TRAJECTORY PROPAGATION

For the complete trajectory propagation it was important to have the integrator method as the only difference between the [RKF](#) and the [TSI](#) propagation. First the initial values were provided and transformed into the proper coordinate system. These would then be fed into the integrator and at the end of the integration, the results would be printed. The verification and validation of the complete trajectory propagation have been split up into several phases.

7.3.1. PHASE 1: RKF PROPAGATION

This was first done for [RKF](#) because this method was already validated. Therefore, any mistakes or problems found would lead back to a mistake in the state derivative functions or the model itself. During this phase, a number of problems were identified; certain singularities were found, a limit to the tolerance value was determined for each of the [RKF](#) methods ([DOPRIN87](#) does not converge fast enough in many cases for a value of 10^{-15}) and a mistake in the model was found where the wrong velocity was used to determine the drag acceleration. This meant that some of the model equations had to be rewritten for both [RKF](#) and [TSI](#).

7.3.2. PHASE 2: BOTH RKF AND TSI

During the second phase of the verification, both [RKF](#) and [TSI](#) were tested at the same time and the outcomes were compared. Since the [RKF](#) method was verified and validated at this point, the outcome of the [RKF](#) propagation could be used to verify [TSI](#). This was done using different test cases that focussed on different elements of the code.

Each element was tested separately by activating (or deactivating) the gravity, thrust and drag as well as the rotation of Mars. In each case, simple test cases were used to verify the class, such as: vertical drops from a certain altitude, thrusting in a known direction and flying parabolic trajectories. This was all done in each of the axis directions first and then combining the different axes. First the gravity was tested, then the thrust, then a combination of these two, followed by the drag all in the non-rotating case. The same was then done for the rotating case as well. This was initially done for a zero thrust elevation and thrust azimuth angle, such that the thrust was acting directly through the x-axis of the body frame. Also, because the drag by definition works through the x-axis of the body frame, there should not be any accelerations in the y- and z-direction in the body frame. This simplified the problem and meant that some of the equations could be tested without involving all the other equations just yet.

During this phase it was discovered that there was an inconsistency in the manner in which the different accelerations were computed. Basically, the rotational angles were being computed using spherical equations which already incorporated the accelerations and then those angles were then used to transform the Cartesian coordinates and incorporate the accelerations again. Therefore it was decided to rewrite all the equations and actually come up with three different sets: two Cartesian models and one spherical model for

[TSI](#). The associated equations were already described in Chapter 5.

7.3.3. PHASE 3: THREE DIFFERENT MODELS FOR TSI

The third phase consisted of verifying each of these three models in a similar manner as was done during the second phase. During this phase, it was discovered that a starting ground velocity too close to zero would cause singularities in both the Cartesian as well as the spherical model. This is why a small initial ground velocity was introduced, which seemed to work for the second Cartesian case (unit vector transformations) and the spherical case, however, the first Cartesian case (Euler angles) still did not work. At this point it was decided to focus on the other two methods instead because of time constraints. It was also found that the initial flight path angle could not be equal to (or close to) 90 degrees for the spherical case due to singularities in the model. This is why a value of 89 degrees was chosen for the test cases of that particular model. This worked well for gravity and thrust for the spherical and second Cartesian case. But not always.

7.3.4. PHASE 4: ONE FINAL TSI MODEL

As it turned out, setting an initial ground velocity for the [TSI](#) models (Cartesian and spherical) was only a temporary solution and did not solve the problem. Apparently the initial second is vital for [TSI](#) and when the velocity is too small, the Taylor Series coefficients tend to increase in value. The solution was to off-set the initial conditions to a later point in the trajectory. This off-set was achieved by having the first second of the trajectory be integrated by [RKF78](#) with a set tolerance of 10^{-15} (if the method and the tolerance was not set constant, the results of the integration would be inconsistent). When this was applied to the propagation involving [TSI](#) the Taylor Series coefficients dropped to an acceptable number again which could then be used to determine the next state. This worked really well for the spherical case, however the second Cartesian case still had some bugs (either in the model or in the coding). Again, due to time constraints it was decided to solely continue with the spherical model and use that for the rest of the thesis work. This is the reason that an initial propagation phase was needed as was described in Section 6.3. At the end of the phase, the [TSI](#) code was deemed verified, since it showed similar results to the [RKF](#) propagation.

7.3.5. PHASE 5: COASTING AND CIRCULARISATION

Once the [TSI](#) method was verified, the rest of the trajectory propagation could be added. For the coasting phase this meant that the thrust had to be set equal to zero at the point of main engine cut-off. Fortunately, this was a simple change in class value for the [TSI](#) method, however this did not work for [RKF](#). Instead it was discovered that because of the manner in which the state derivative class is set-up and used in the integrator itself, the class had to be re-initialized if anything in the state derivative class changed. Therefore, a new integration had to be started for [RKF](#) at main engine cut-off.

Because the circularisation is treated as an instantaneous burn, this only affected the total propellant mass and velocity of the [MAV](#). Therefore, it could be treated with simple circularisation equations described by [Wakker \(2010a\)](#). The velocity required to reach a perfect desired circular orbit can be computed. Then because the equations are simple and can be solved by hand, the code could be verified (and validated) by using simple cases computed using the program and then compared to the hand written solutions.

7.3.6. PHASE 6: TOOL VALIDATION

The most important part of this thesis is the comparison between [RKF](#) and [TSI](#), therefore these two methods should produce results that can be compared and where the only difference is the manner in which they were computed. Provided that the [RKF](#) method is verified and validated, [TSI](#) could be validated using [RKF](#) with this purpose as mentioned before. However, besides this validation, it should also be checked if these solutions represent a real-life solution to the problem. This means validating both methods against other validated simulations outcomes from other people. Unfortunately, no flight data is available for a Mars Ascent case yet. Two [JPL](#) internal sources were found that could potentially be used to validate the software: [Woolley \(2015\)](#) and [Benito and Johnson \(2016\)](#). Woolley used an analytical model to approximate an ascent trajectory for different launch cases and conditions, one of which was a [SSTO](#) launcher which was used for validation. Benito on the other hand used a high-fidelity simulation program to simulate the ascent trajectory of some of the newer concept [MAV](#) designs numerically. Some of the latest data was provided and was also used for the validation.

In Table 7.2 are the validation numbers provided associated with the simulated trajectory of the case as presented by Woolley. The left columns show the inputs that were provided and the inputs that were used in the program. The right columns show the results of the simulation as provided and as computed by the program. The thrust angles in that column represent the required thrust angles that were needed as input to get the desired outcome.

Table 7.2: Validation case 1: SSTO Woolley

Provided parameters	Given	Used	Provided parameters	Given	Computed
Thrust [kN]	3.56	3.56	Propellant mass [kg]	202.2	202.07
I_{sp} [s]	256	256	Burn-out angle [deg]	6	5.344
Burn Time [s]	142.6	142.5	Circularisation ΔV [m/s]	181	159.6
MAV GLOM [kg]	267.4	267.4	Ascent time [s]	1757	1796.27
Launch altitude [km MOLA]	-	-0.6	Thrust azimuth [deg]	-	-0.299
Launch latitude [deg]	0.0	0.0	Thrust elevation [deg]	-	-0.184
Launch longitude [deg]	-	74.5			
Launch ground velocity [km/s]	-	$1 \cdot 10^{-5}$			
Launch Flight-path angle (FPA) [deg]	90	89			
Launch Azimuth [deg]	90	90			
Desired altitude [km MOLA]	390	390			
Desired inclination [deg]	45	45			

It can be seen that there are some differences, however in this case the validation is to prove that the trajectory computed by the simulation program is indeed a viable trajectory (so close to a reference trajectory). This is because that is enough to compare the RKF and TSI methods. The plotted trajectories are shown in Figures 7.1 to 7.4.

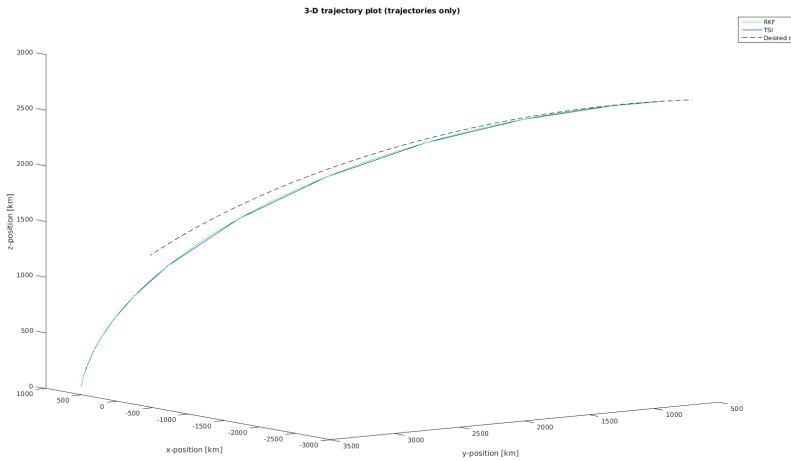


Figure 7.1: Case 1 3-D trajectory

A similar validation was done using the second case. However, in this case the reference trajectory was provided. But the main difference here was that the simulation program still was only able to use a constant thrust elevation and azimuth angle. Therefore, the exact profile could not be matched. Benito also included extra perturbing effects creating another difference. However, it was possible to get a trajectory close to the one provided, which is enough for all current purposes. Table 7.3 shows the used values and computed parameter values for case 2 (similar to case 1).

Again, the trajectory was visualised, however, this time the reference trajectory was also known. In the figures this is represented by a red line. These are shown in Figures 7.5 to 7.8.

The difference in trajectory can mainly be explained by the thrust elevation and thrust azimuth angle

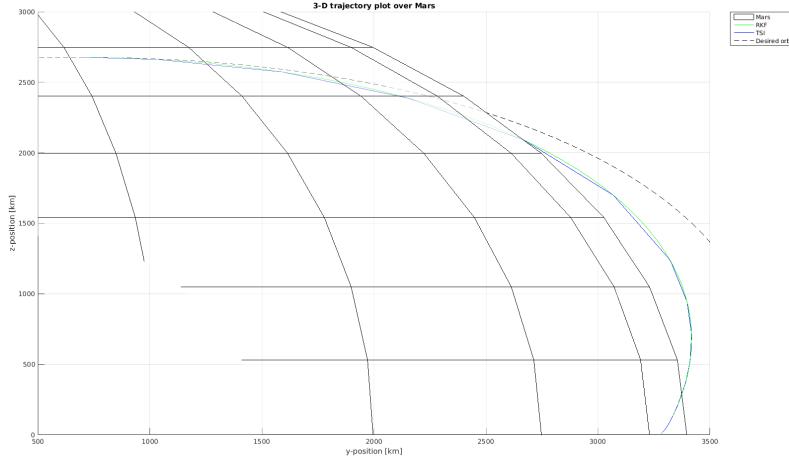


Figure 7.2: Case 1 2-D trajectory as seen from the x-axis

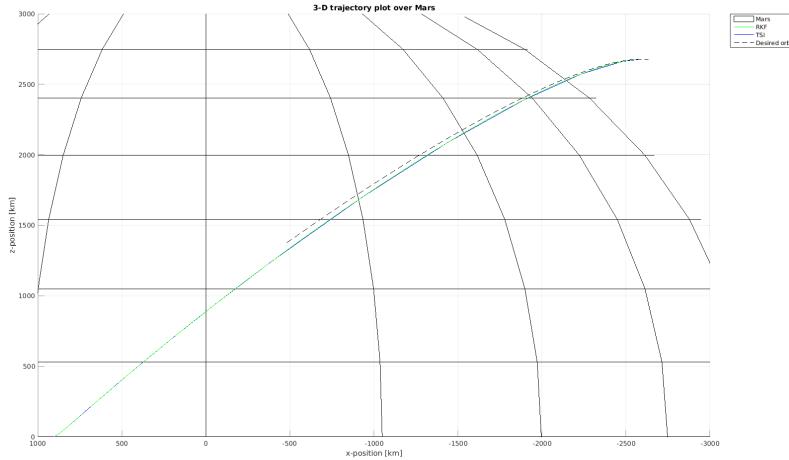


Figure 7.3: Case 1 2-D trajectory as seen from the y-axis

Table 7.3: Validation case 2: SSTO Benito

Provided parameters	Given	Used	Provided parameters	Given	Computed
Thrust [kN]	6.1087	6.0187	Propellant mass [kg]	213.85	213.85
I_{sp} [s]	315.9	315.9	Burn-out angle [deg]	-	15.644
Burn Time [s]	99.362	99.362	Circularisation ΔV [m/s]	757.57	594.74
MAV GLOM [kg]	288.96	288.96	Ascent time [s]	949.12	876.09
Launch altitude [km MOLA]	-0.8	-0.6	Thrust azimuth [deg]	-	-0.7273
Launch latitude [deg]	0.0	0.0	Thrust elevation [deg]	-	-0.674
Launch longitude [deg]	90	90			
Launch ground velocity [km/s]	$1 \cdot 10^{-6}$	$1 \cdot 10^{-6}$			
Launch FPA [deg]	90	89			
Launch Azimuth [deg]	90	90			
Desired altitude [km MOLA]	479.19	479.19			
Desired inclination [deg]	92.69	92.69			

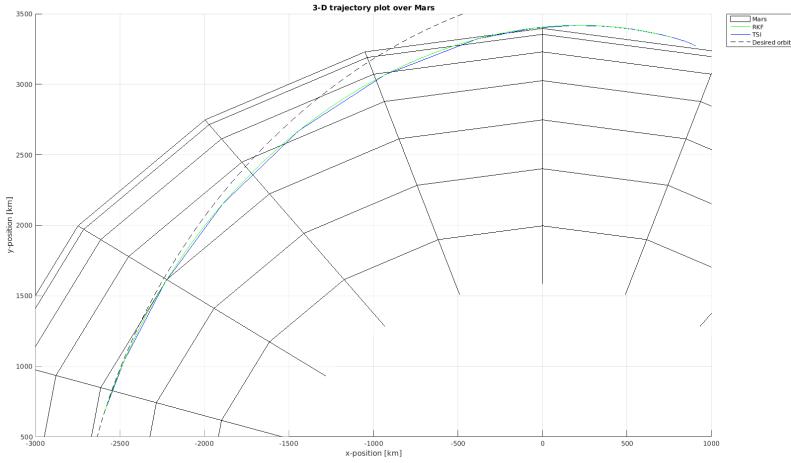


Figure 7.4: Case 1 2-D trajectory as seen from the z-axis

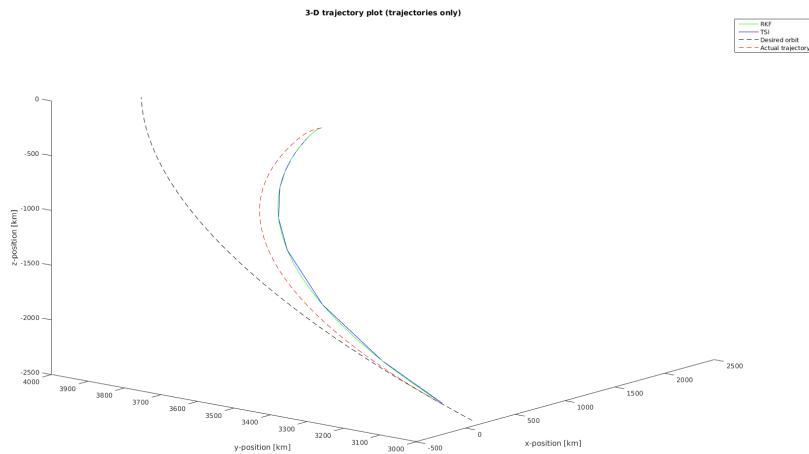


Figure 7.5: Case 2 3-D trajectory

curve of the reference trajectory. This curve was derived from the thrust data provided by Benito. This curve is shown in Figure 7.9.

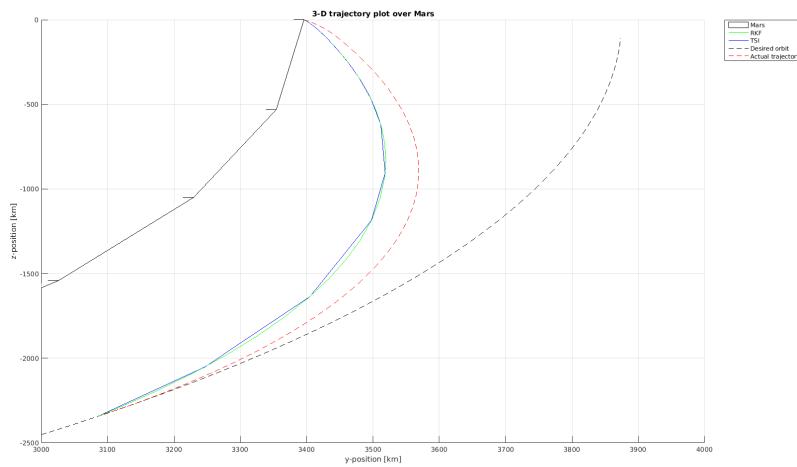


Figure 7.6: Case 2 2-D trajectory as seen from the x-axis

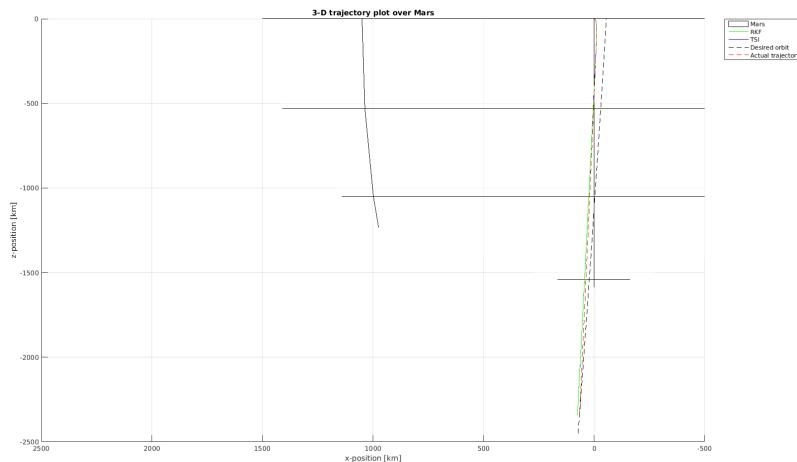


Figure 7.7: Case 2 2-D trajectory as seen from the y-axis

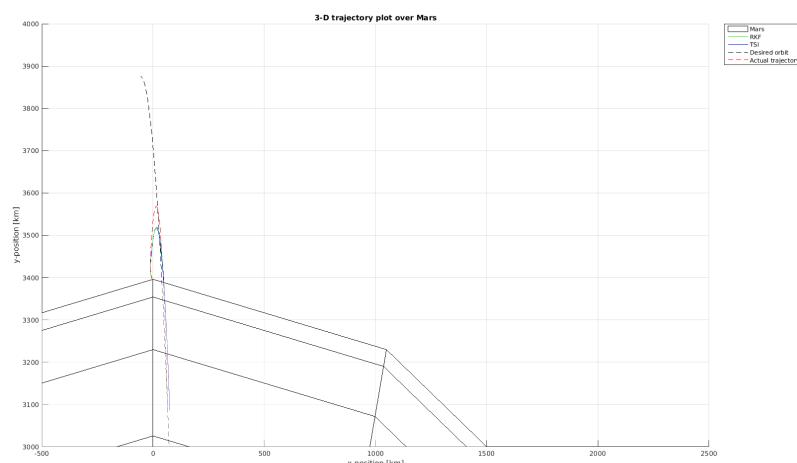


Figure 7.8: Case 2 2-D trajectory as seen from the z-axis

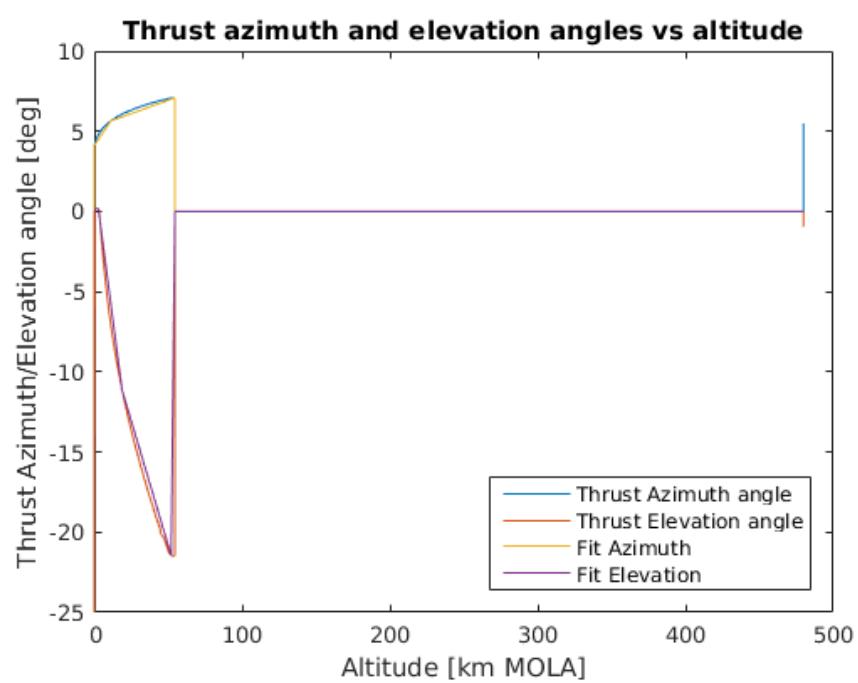


Figure 7.9: Case 2 thrust elevation and azimuth angle curve.

8

RESULTS AND ANALYSIS

With the program validated, both case 1 and case 2 can be used to examine the behaviour of [TSI](#). This is done in a sensitivity analysis and is very useful to determine the limitations and characteristics of this method. In the previous chapter the trajectories from both [TSI](#) and [RKF](#) were plotted and it could be seen that the results were very similar to the point where the accuracy of [TSI](#) was validated. Therefore, in this chapter the performance of [TSI](#) will be compared to [RKF](#) to determine any advantages and disadvantages. In order to do this only one variable will be changed every time, which means that from the nominal case only one parameter will be different. This way the effects can be clearly associated with that particular parameter, which provides a solid base of comparison. The nominal values for both the first and second case are provided in Appendix E. It is also important to have the same cut-off point. This can either be a certain altitude, set end time or zero degrees flight-path angle. Usually the set end time is taken as the cut-off criteria to determine the difference in state. Sometimes the altitude is used in cases where it is interesting to see when a certain altitude is reached and under what conditions when a certain parameter is changed. An example was shown in the validation chapter where certain conditions had to be met at a certain altitude. And in some cases it is best to set the zero degrees flight-path angle as a cut-off criteria because either the cut-off time or altitude will never be reached but the effects of a parameter still need to be investigated. This last cut-off criteria is the "fail-safe" for every simulation because this prevents the simulation from going back to the surface and literally crashing the program. In this chapter every section discusses the effect of a different parameter or focusses on one aspect of the simulation.

Besides comparing [TSI](#) to [RKF](#) it will also be compared to the non-rotational case. The nominal case takes the rotating Mars into account, however it is interesting to see what [TSI](#) does when the rotation is turned off. For these two cases to be properly compared, again for most parameters, the set end time is the cut-off criteria unless mentioned otherwise.

The parameters changed in this sensitivity analysis are: order, error tolerance, launch altitude, launch latitude, launch longitude, flight-path angle and heading angle. A multiple run analysis will also be described where the nominal case is run for a number of times and the CPU time is compared.

8.1. ORDER

For most classic integrators the order is set and cannot be easily changed. For [RKF](#) for instance, a whole new set of coefficients is required if a different order is desired. However, for [TSI](#) changing the order is as simple as updating the maximum order input value. Theoretically this means that an infinite order can be chosen to get the most accurate result. The question is, is this indeed the most optimal. Section 8.1.1 hopes to answer this question by looking at the CPU time. In Section 8.1.2 a range of orders has been run for both cases. Once with the nominal conditions of a rotating Mars and once assuming a non-rotating Mars. The effect of the rotating Mars will be investigated. The cut-off criteria for case 1 was an end time of 1796 seconds for the data collection case and 789 seconds without live data collection. For case 2 the cut-off criteria was 876 second for both runs.

8.1.1. OPTIMAL ORDER

To determine the optimal order an important criteria is that the outcome is accurate, however, what is often more important is that this accurate outcome is computed really fast. This is why, in order to find the optimum order, the CPU time is the most important criteria. In order to properly observe the effect of a different order, the nominal case is run for different orders. Thus the only difference will be the maximum order. This can be done for the two presented cases. During real-life simulations a user can choose to either collect all the data during the simulation or only store the final outcomes at the end of the simulation. Storing data during the integration requires a lot of computational power and will therefore increase the CPU time required, but this will provide the user with the desired trajectory data. Both cases with and without live data collection have been run for a specific range of orders depending on the case, and the results are shown in Figure 8.1. The first case was run with a maximum order ranging from 5 to 100, and the second case was run from 5 to 31 because of the behaviour observed during the first case runs.

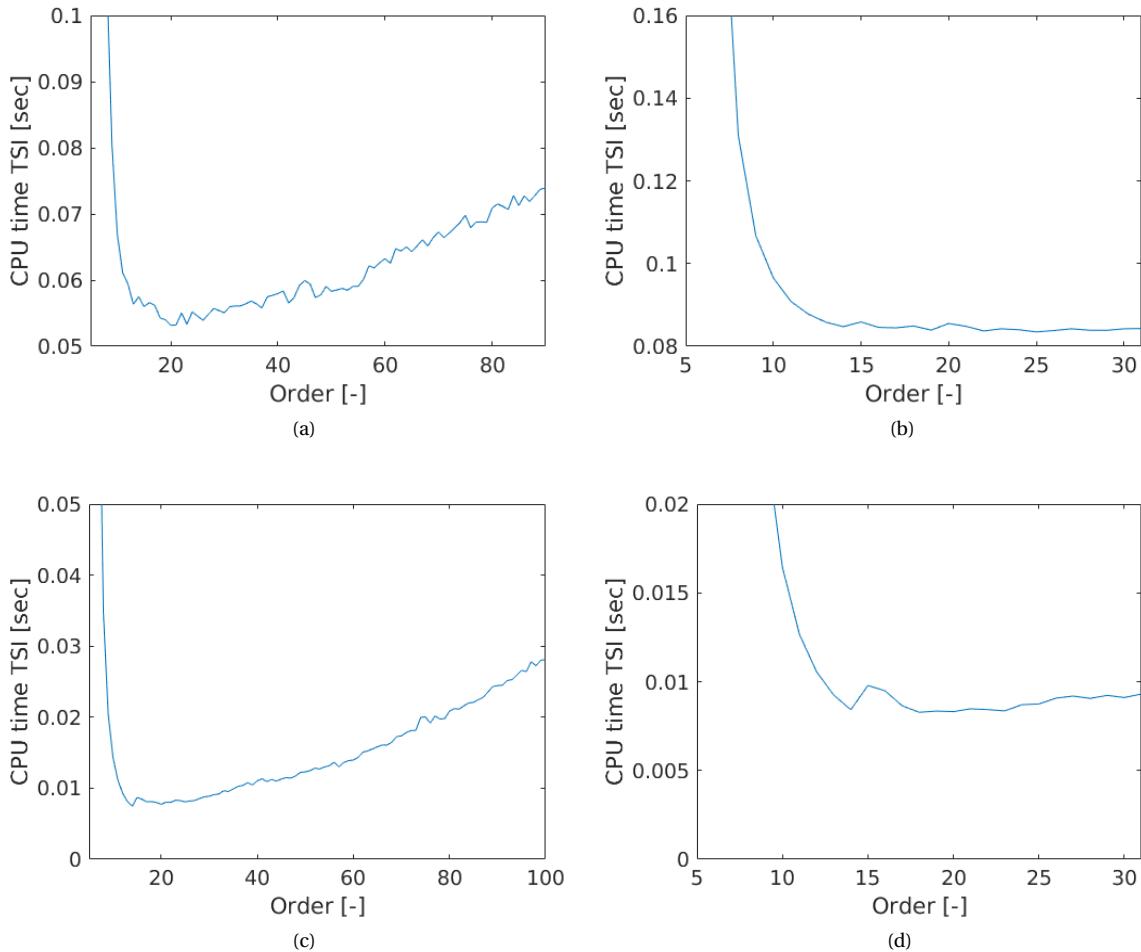


Figure 8.1: Order versus CPU time (a) case 1 including live data collection, (b) case 2 including live data collection, (c) case 1 without live data collection, (d) case 2 without live data collection

Looking at Figure 8.1a it is clear that the order versus CPU curve can be split up into two phases that have different properties that influence the CPU time. The first phase shows a rapid decrease in the CPU time until order 20 is reached, the second phase continues from that point until the final order is reached. The order has a direct relation to the chosen step-size that **TSI** computes automatically because the step-size is determined by the error tolerance and the difference between the penultimate Taylor Series coefficient and the final one (as described in Section 5.1.2). This means that if these last two coefficients show a large difference, which can happen lower order because fewer derivatives are taken into account, the step-size will be lowered and thus increasing the number of steps. In the first phase, this large number of steps result in a high CPU time.

Another factor that affects the CPU time is the number of derivatives taken into account, which is directly related to the order (10 as maximum order equals 10 derivatives that are taken into account). At a certain point, an increase in order does not affect the number of steps that much any more, resulting in a decrease of 3 to 1 steps with every order increase. The result is that the number of steps remains approximately the same but the number of derivatives that are taken into account keeps increasing. Every extra derivative means an extra computation per auxiliary equation/variable. This is what is observed in the second phase. Here the effect of adding more computations on the CPU time becomes clear, showing a corresponding increase in CPU time. This tipping point between the two phases can be observed around the lowest CPU time, where the effect of the number of steps and the number of derivative computations equal out. This is therefore the optimum order for the **TSI** method. The two phases can be observed in each of the four graphs, however, because the increase of CPU time, the higher orders were not required and were thus left out in the simulations for case 2. For each of the simulation runs, the two orders which resulted in the lowest CPU time have been recorded in Table 8.1.

Table 8.1: Lowest two orders with corresponding CPU times for each of the sub-graphs

Sub-graph	Lowest CPU time		Second lowest CPU time	
	Order	CPU time [s]	Order	CPU time [s]
a	20	0.053162	21	0.053226
b	25	0.083474	22	0.0837
c	14	0.007465	20	0.007736
d	18	0.008273	20	0.008314

In the table and the graphs it can be seen that the minima are all situated around an order of 20, which is why a maximum order of 20 was set as the nominal value and used for all simulations.

8.1.2. COMPARISON WITH NON-ROTATING MARS

For the comparison of the rotating and the non-rotating cases with a varying order it is again interesting to look at the differences in CPU time. Figure 8.6 shows these plots for both cases when the trajectory data is not collected during the simulation. It can be seen that for case 1, on average, the non-rotating runs are faster. Also, for a non-rotating Mars the optimum order is 20 as well. The difference in CPU time is better shown by the case 2 run, where the non-rotating curve fits perfectly below the rotating curve. Here, the order 20 has again the second lowest CPU time (the lowest is order 17 with a time difference of 28 microseconds). The time difference between the curves of the rotating and non-rotating Mars can be explained by the fact that if Mars does not rotate, the rotating effects become zero, which reduces the number of computations.

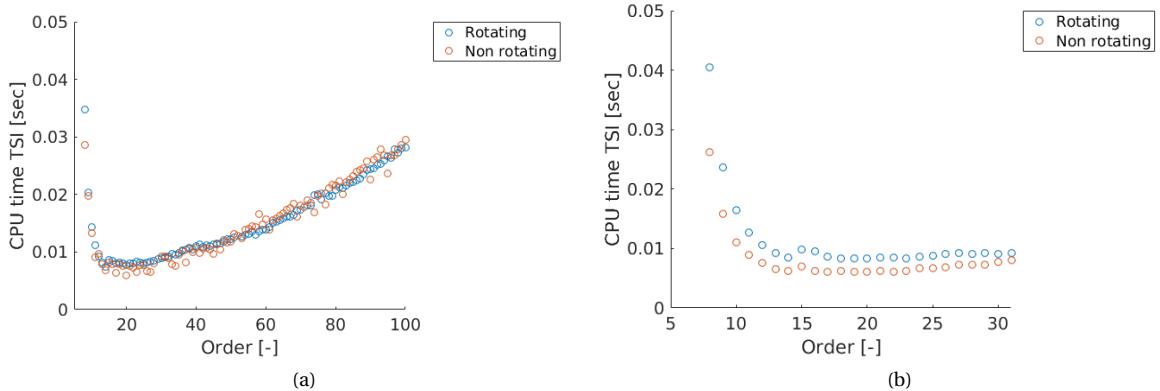


Figure 8.2: Order versus CPU time for rotating and non-rotating Mars (a) case 1, (b) case 2

As was mentioned before, the accuracy of the results is very important. In Figure 8.3 the absolute difference between the nominal end state of **RKF** before circularisation and **TSI** for both the rotating and non-rotating Mars. A trend can be identified where it is shown that an order of 11 or higher will result in a difference

of μm in position and nm/s in velocity. Even the lowest order of 5 results in an accuracy of less than 10 cm for position and 10 mm/s for velocity. The spikes in the first case are caused by a slight error resulting from the combination of variables that result at those specific orders. This proves that the simulator is not yet robust enough and could still use some improvements. One improvement that might solve this problem is a change in the manner in which the step-size is computed. Additional comparison plots are shown in Appendix F.

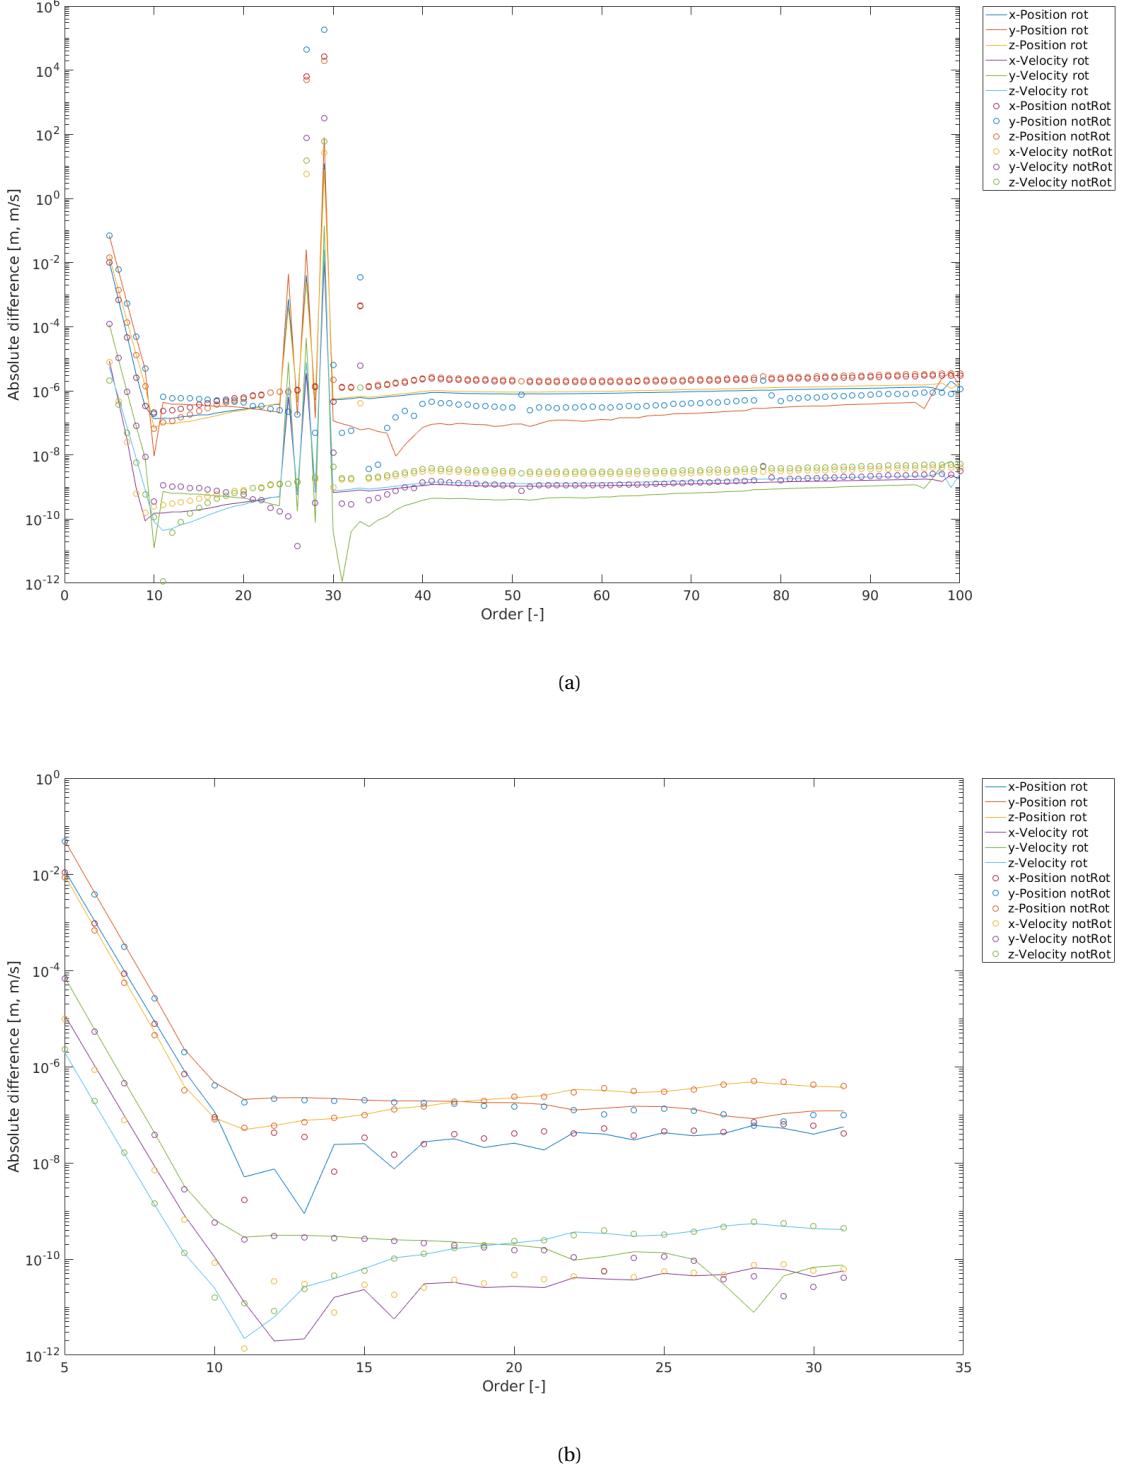


Figure 8.3: Difference with respect to RKF case for rotating and non-rotating Mars (a) case 1, (b) case 2

8.2. ERROR TOLERANCE

The error tolerance is used to determine the required step-size during the integration. A high error tolerance (say 10^{-5}) will therefore provide an end result that is less accurate than a lower error tolerance (such as 10^{-15}). For the **RKF78** provided by **Tudat** the lowest accuracy that can be used is 10^{-15} , which is why that accuracy is used as the nominal accuracy. When a range of error tolerances is examined the accuracy of the end state and the speed of convergence can be determined. The speed of convergence follows from the consecutive differences between the end states and the accuracy of the end states comes from the comparison to the nominal case. Both these characteristics will be examined and compared for **RKF** and **TSI**, see Section 8.2.1, and for the rotating and non-rotating Mars described in Section 8.2.2. The cut-off criteria for case 1 was 789 seconds and 876 seconds for case 2 and both cases were run without live data collection.

8.2.1. COMPARISON WITH RKF78

The speed of convergence is important because it shows the relationship between the different error tolerances. If the differences are small it means that the change in error tolerance had a small effect. If the consecutive difference is large, it means that the solution has not yet converged. Figure 8.4 shows the consecutive differences in position and velocity for the two cases for both integration methods. Here it can clearly be seen that **TSI** converges much faster than **RKF**. The curve of **RKF** lies quite a bit higher, which means that the differences are larger, and thus it converges slower than **TSI**.

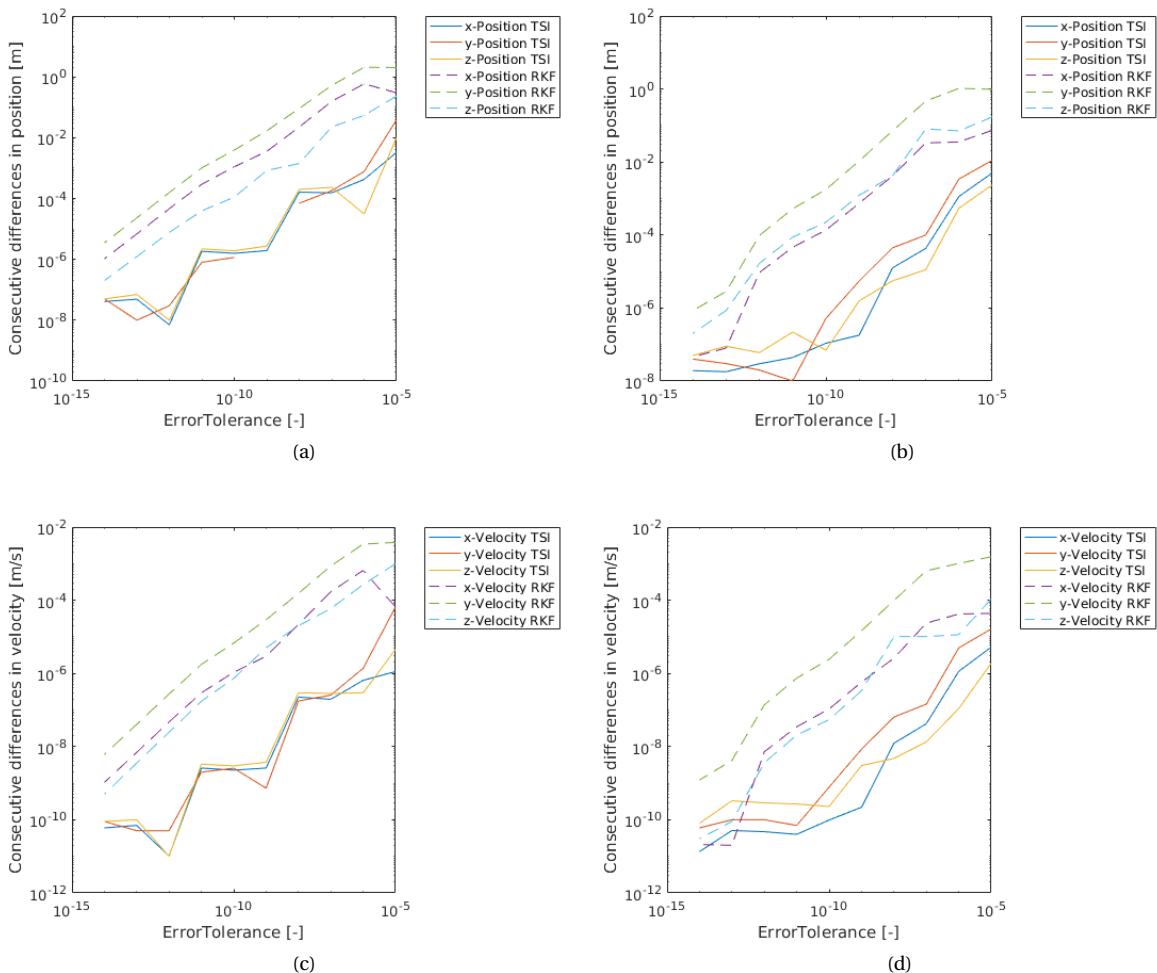


Figure 8.4: Error tolerance versus consecutive difference between end states before circularisation for **TSI** and **RKF** (a) case 1 position, (b) case 2 position, (c) case 1 velocity, (d) case 2 velocity

A similar comparison can be done when comparing each of the end states directly to the nominal end

state. The result is a nominal absolute difference graph as presented in Figure 8.5 for position and velocity and both cases. Here it can be seen that the accuracy of the position at an error tolerance of 10^{-5} is already in cm for **TSI** whereas this accuracy is only reached at an error tolerance of 10^{-9} for **RKF**. For the velocity the **TSI** accuracy is in the order of $10 \mu\text{m}$ at this initial error tolerance which also is reached at an error tolerance of 10^{-9} using **TSI**. This means that **TSI** is, on average, more accurate at any given error tolerance.

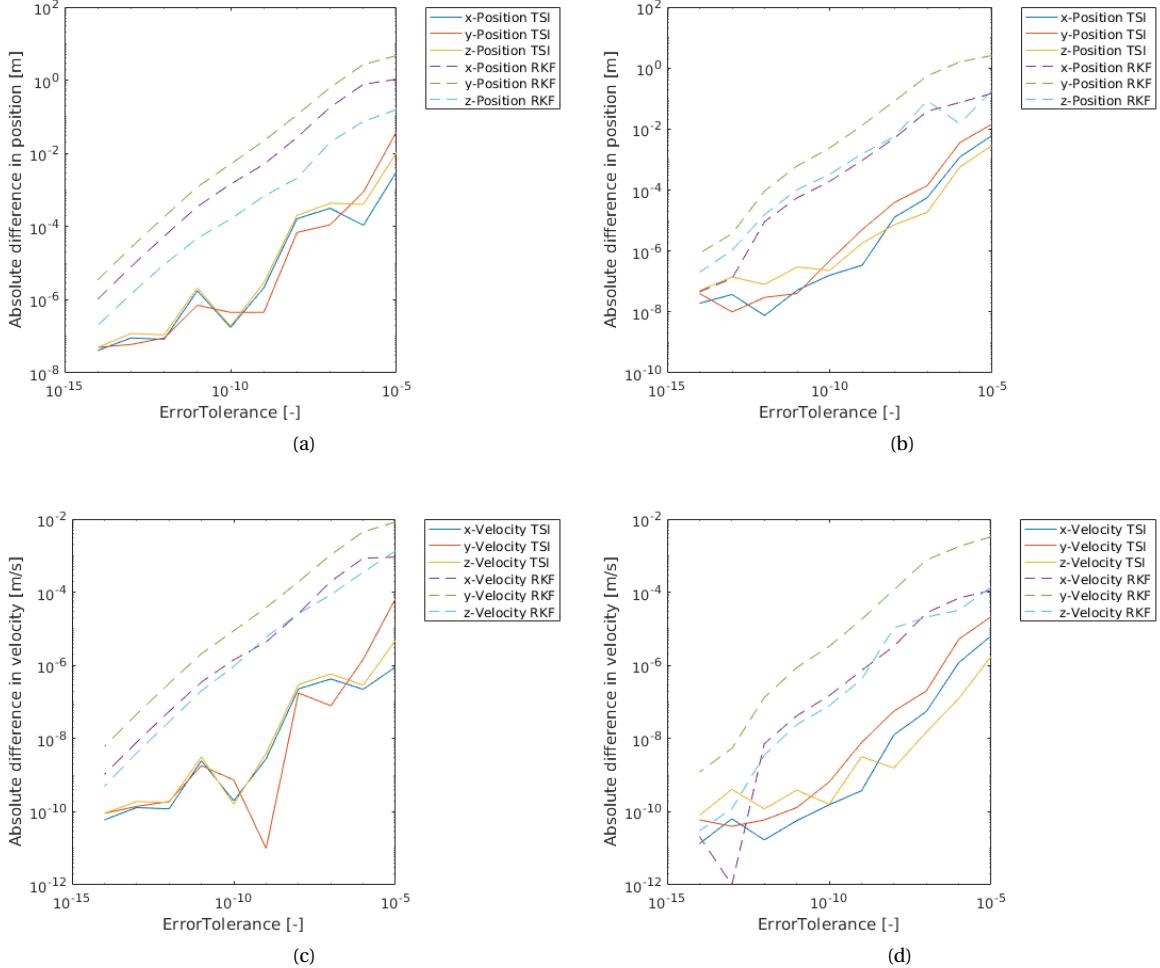


Figure 8.5: Error tolerance versus nominal absolute difference between end states before circularisation for **TSI** and **RKF** (a) case 1 position, (b) case 2 position, (c) case 1 velocity, (d) case 2 velocity

Another important observation can be made when looking at the difference in function evaluations and CPU time for each error tolerance for both **RKF** and **TSI**. The values for both cases are shown in Table 8.2.

Table 8.2: Number of function evaluations and CPU time for RKF and TSI

Error tolerance	Case 1				Case 2			
	Number of evaluations		CPU time [ms]		Number of evaluations		CPU time [ms]	
	RKF	TSI	RKF	TSI	RKF	TSI	RKF	TSI
10^{-5}	169	24	0.419	4.703	156	24	0.392	5.353
10^{-6}	182	24	0.432	4.57	182	25	0.49	5.518
10^{-7}	221	26	0.542	4.769	208	27	0.527	5.823
10^{-8}	260	29	0.614	5.272	247	29	0.567	6.354
10^{-9}	312	30	0.823	5.571	286	30	0.709	6.439
10^{-10}	364	32	0.845	5.685	338	33	0.789	7.083
10^{-11}	455	36	1.032	6.227	390	36	0.904	7.454
10^{-12}	546	38	1.277	6.506	546	39	1.231	8.02
10^{-13}	702	41	1.541	7.062	728	41	1.604	8.627
10^{-14}	910	42	1.965	7.227	936	45	2.055	9.538
10^{-15}	1222	46	2.666	7.754	1300	47	2.851	9.538

Here one evaluation is defined as running through the derivative equations once. For TSI this means that each time step, one evaluation is performed because all desired derivatives are computed during one computational run. In the case of RKF78 however, each time step consists of 13 computational runs. Table 8.2 shows that for both cases the number of evaluations of RKF are approximately one order more at the high error tolerances but almost two orders higher at the lowest tolerance compared to TSI. This means that a decrease in error tolerance results in a large increase in number of evaluations for RKF but a relatively small increase for TSI. For both cases, the number of evaluations is not even doubled from the highest to the lowest tolerance, whereas the maximum number of evaluations for RKF is 7 to 8 times more.

This advantage however does not translate well to the CPU time where it can be seen that for most of the error tolerances RKF is an order faster than TSI. The similar increase in CPU time for both integrators is nevertheless still observed. An explanation for the large difference in CPU time could be that TSI was not optimally programmed and thus results in a relatively high CPU time. Further analysis is required.

8.2.2. COMPARISON WITH NON-ROTATING MARS

Looking at the rotating Mars and non-rotating Mars runs, a noticeable difference in the CPU time can be observed as shown in Figure 8.6. In both cases the non-rotating Mars run is approximately 0.2 ms faster. This is similar to what was observed with the order runs.

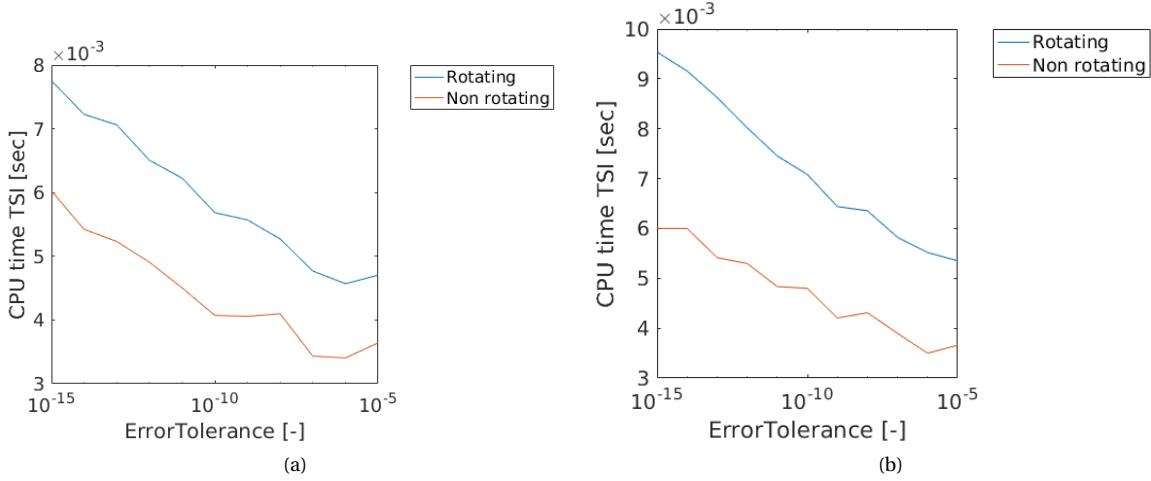


Figure 8.6: Error tolerance versus CPU time for rotating and non-rotating Mars (a) case 1, (b) case 2

The real question is, is there a noticeable difference in the convergence speed and the accuracy? This question can be answered by looking at Figures 8.7 and 8.8. Here it can be seen that the rotation of Mars does not have a significant influence on the convergence speed nor the accuracy of the results.

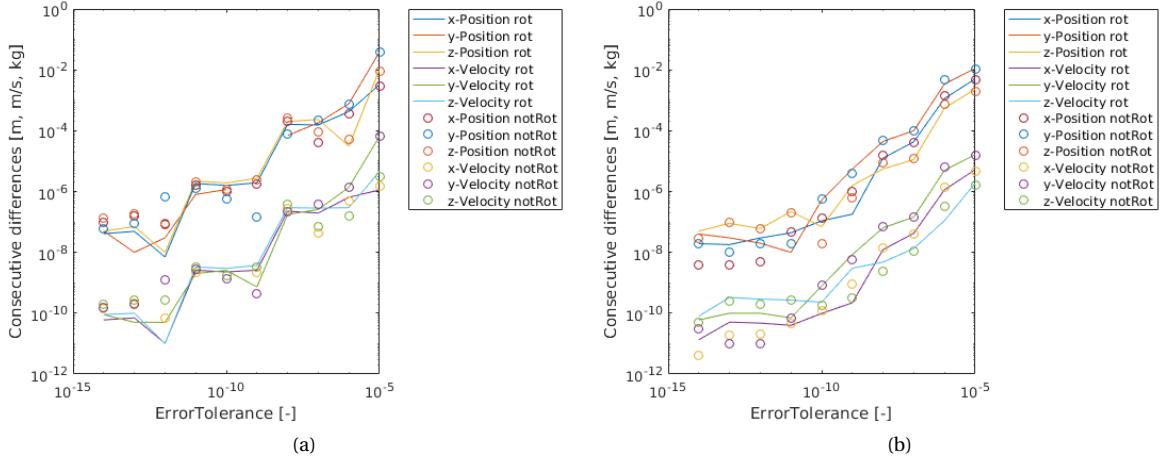


Figure 8.7: Error tolerance versus consecutive difference for rotating and non-rotating Mars (a) case 1, (b) case 2

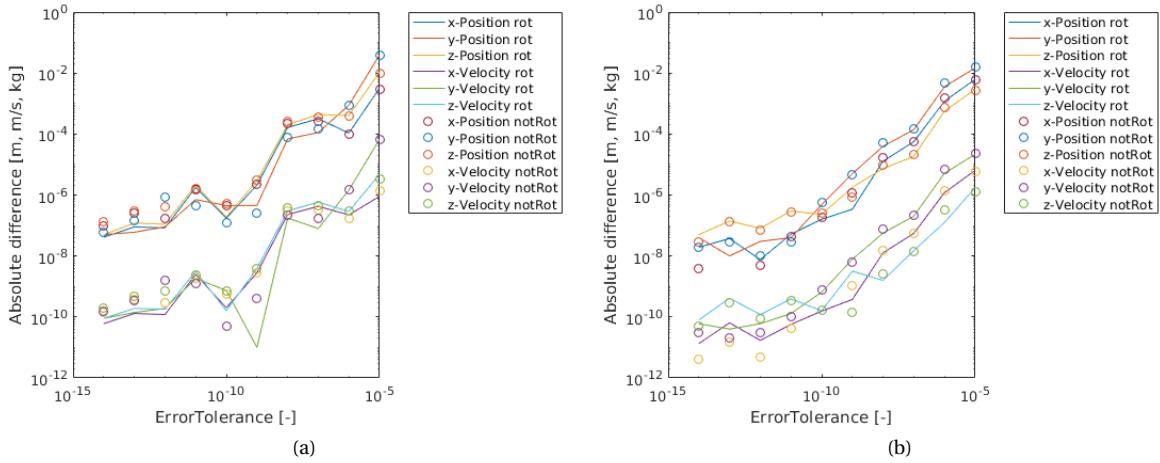


Figure 8.8: Error tolerance versus nominal absolute difference for rotating and non-rotating Mars (a) case 1, (b) case 2

8.3. MULTIPLE RUNS

In Section 8.2.2 it was shown that in this thesis research, the **TSI** turned out to be slower than **RKF** for both tested cases. This is contrary to the reference research. Therefore it is a good idea to look at the differences that could occur when measuring CPU time for different runs. In this section the nominal case has been run 5000 times in sequence for both **RKF** and **TSI** (Section 8.3.1) using a rotating and a non-rotating Mars (Section 8.3.2). If the computer and the CPU measurements would be perfect, there should be no difference in CPU time and there would simply be two lines. This, interestingly enough, is not the case.

The graphs shown in this section can also be found enlarged in Appendix F.

8.3.1. COMPARISON WITH RKF78

Again the notion that **RKF** is faster than **TSI** is confirmed when looking at Figure 8.9, however for both cases there is not one single line per integrator. Instead several outliers and patterns can be observed.

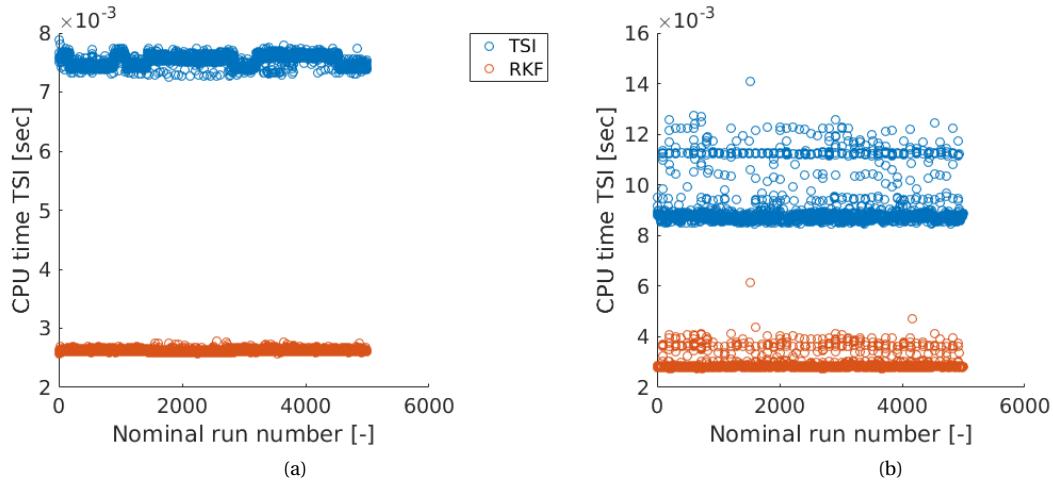


Figure 8.9: Nominal runs versus CPU time comparison between RKF and TSI (a) case 1, (b) case 2

For case 1 it can be seen that there were some periods where the CPU time was slightly higher. This is even clearer for case 2 where two different CPU levels can be distinguished and many random CPU times in between. The CPU time is computed using the internal clock of the computer. And it could occur that background programs are run while the integration is running. In such a case, the CPU time computed for that particular integration run can turn out to be higher than expected because the internal clock cannot differentiate between the simulation program and all other programs running at that same instance. Therefore, even if the same nominal case is run, the CPU time could still be 30% higher or more.

8.3.2. COMPARISON WITH NON-ROTATING MARS

The effect of a program running in the background during a simulation run becomes even more clear when looking at the rotating and non-rotating Mars CPU times shown in Figure 8.10.

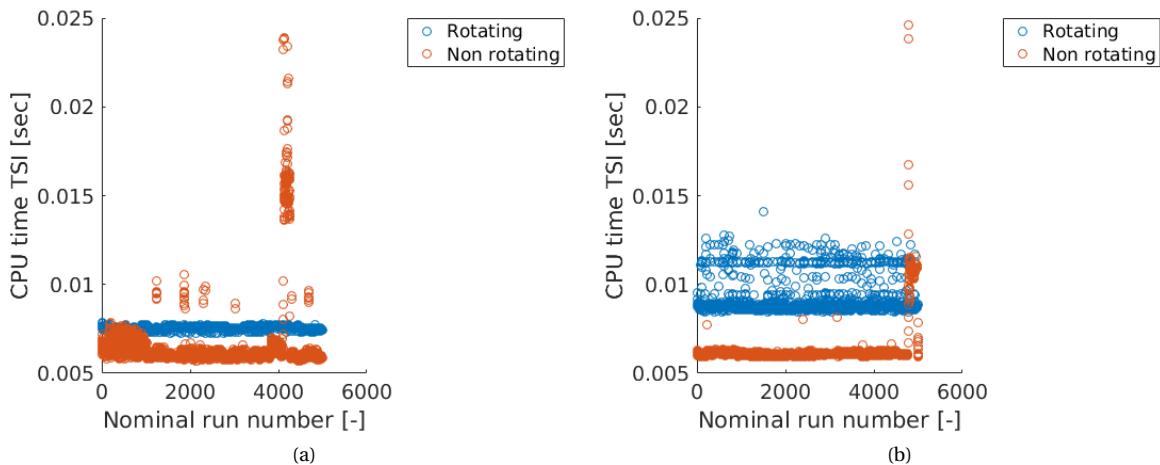


Figure 8.10: Nominal runs versus CPU time for rotating and non-rotating Mars (a) case 1, (b) case 2

Here it can be seen that, on average, the non-rotating Mars runs are faster than the rotating Mars runs, which is similar to what has been observed before. However, in both cases there was a spike where the CPU time suddenly increased tremendously for the non-rotating runs. This shows, that at that time a program (or process) was running in the background and clearly affected the performance of the simulation a lot. This means that CPU time is not always an accurate representation of the performance of the simulation. As a matter of fact, if the same program would be run on a different computer, the CPU times could be completely

different. But it would still show the same relationship between the rotating and non-rotating Mars runs as well as **RKF** and **TSI** and does therefore not explain why **TSI** is so much slower compared to **RKF**.

8.4. LAUNCH ALTITUDE

From now on only the rotating runs and the non-rotating runs will be compared. This can be done because **TSI** has proven to be accurate compared to **RKF** producing similar results. Thus it is only interesting to look at the effect of the different parameters on the performance of **TSI**. In this case the effect on CPU time, consecutive difference and absolute difference will be investigated as well as effect on end radius and end velocity before circularisation. Here the cut-off criteria for case 1 was an end time of 789 seconds and 856 seconds for case 2.

In Figure 8.11 the launch altitude is plotted against the CPU time. This has been done for the altitude range from the candidate altitude of -0.6 km **MOLA** to the maximum altitude where the **MAV** could be launched from; 0.5 km **MOLA**. In this case, no clear pattern can be observed due to the large differences in CPU time. Therefore it can be concluded that the launch altitude in this particular range does not have an effect on the CPU time.

- Consecutive differences end state before circularisation comb case 1
- Consecutive differences end state before circularisation comb case 2
- Differences nominal case end state before circularisation comb case 1
- Differences nominal case end state before circularisation comb case 2

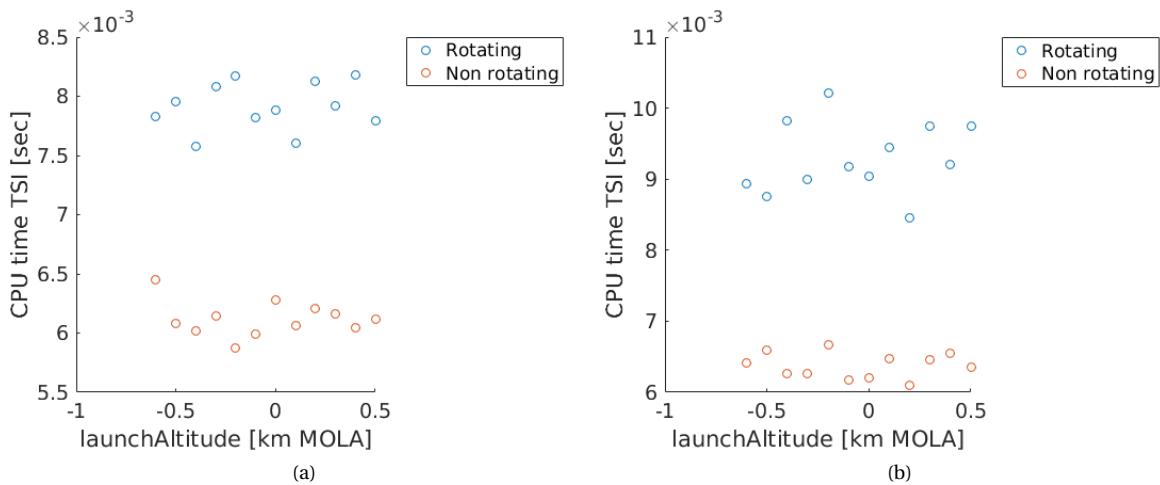


Figure 8.11: Launch altitude versus CPU time for rotating and non-rotating Mars (a) case 1, (b) case 2

Randomness can also be observed when looking at the consecutive difference for the rotating runs in Figure 8.12. Here the z-position and z-velocity show some slight deviations for case 1, and in the curves of case 2 the rotating states all show deviations. However, it is interesting to notice that no deviations are observed for the non-rotating runs, which means that all the deviations are caused by rotating effects. A similar behaviour can be observed in the nominal absolute difference graphs presented in Figure 8.13. Here case 1 shows almost no deviations except for the z-position and z-velocity. However, again large deviations can be observed for case 2. These deviations can be caused by the fact that for case 2 the **MAV** is launched due East but quickly heads South therefore going against the rotation of Mars and creating variations that are not observed for the non-rotating Mars.

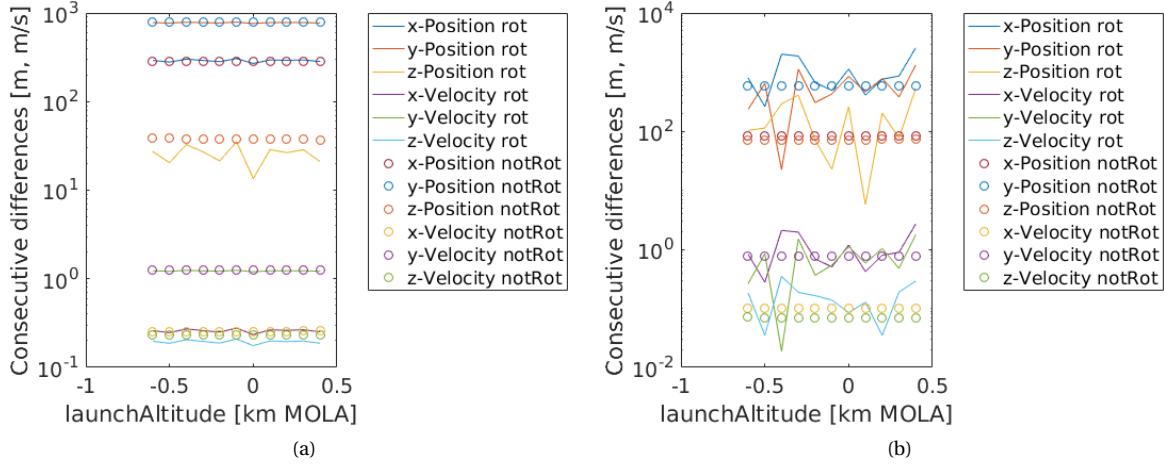


Figure 8.12: Launch altitude versus consecutive difference for rotating and non-rotating Mars (a) case 1, (b) case 2

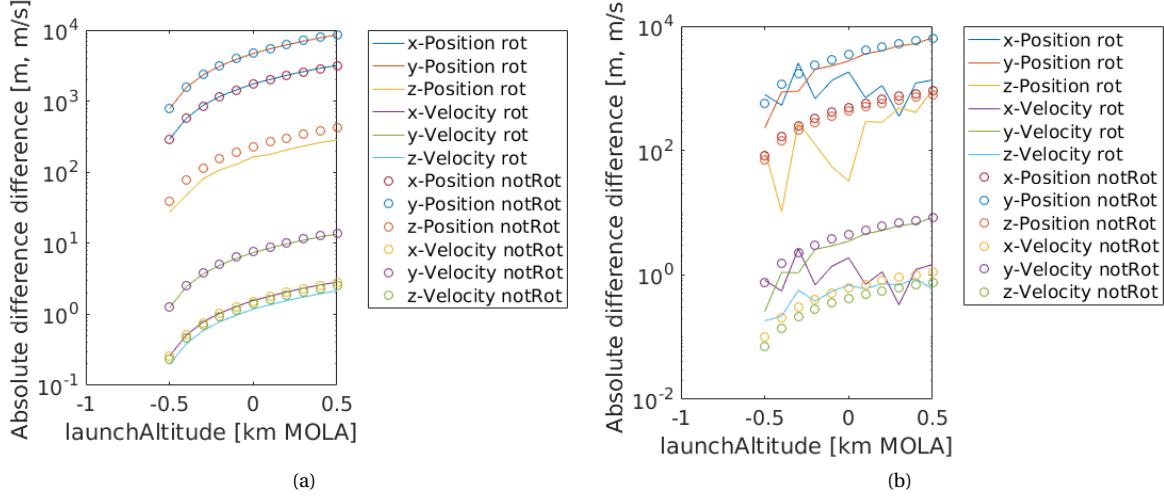


Figure 8.13: Launch altitude versus nominal absolute difference for rotating and non-rotating Mars (a) case 1, (b) case 2

Another example of the effect of the rotating Mars can be seen in the radius graphs in Figure 8.14. Because in both case 1 and 2 the MAV is launched due East on the equator it is able to get an initial ΔV boost. This increase in velocity compared to the non-rotating results in a final radius that is higher than the non-rotating Mars runs for both case 1 and case 2. It can also be observed that the radius of the final orbit increases with an increase in launch altitude. This could be a direct effect of both the drag and the gravitational acceleration, because the atmosphere becomes less dense and the gravitational acceleration becomes smaller the further away from the surface the MAV is.

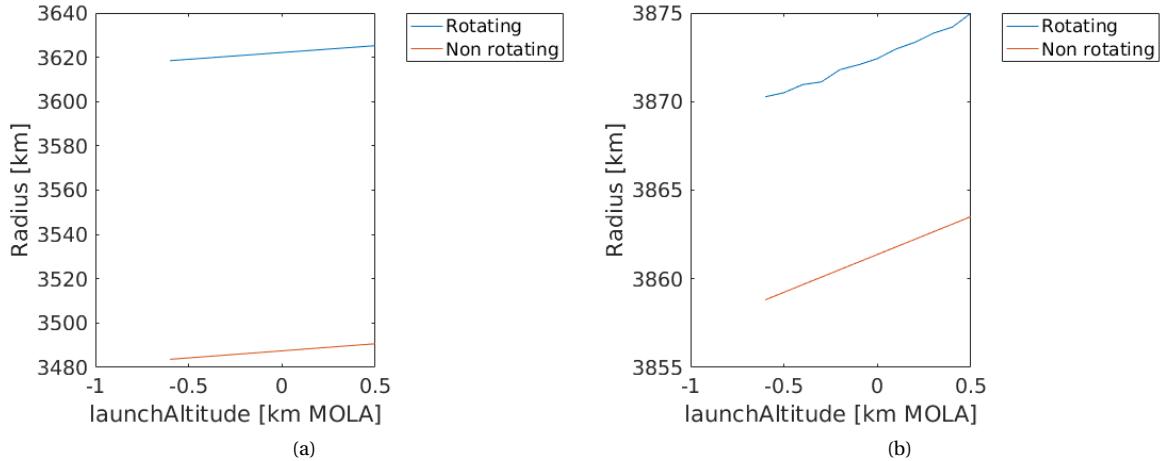


Figure 8.14: Launch altitude versus orbital radius for rotating and non-rotating Mars (a) case 1, (b) case 2

In Figure 8.14 the ground and inertial velocity for both cases and both rotating and non-rotating Mars have been plotted. These are the end velocities of the MAV before circularisation. And because an increase in final radius was observed, a decrease in end velocity was expected and this is indeed observed for both cases.

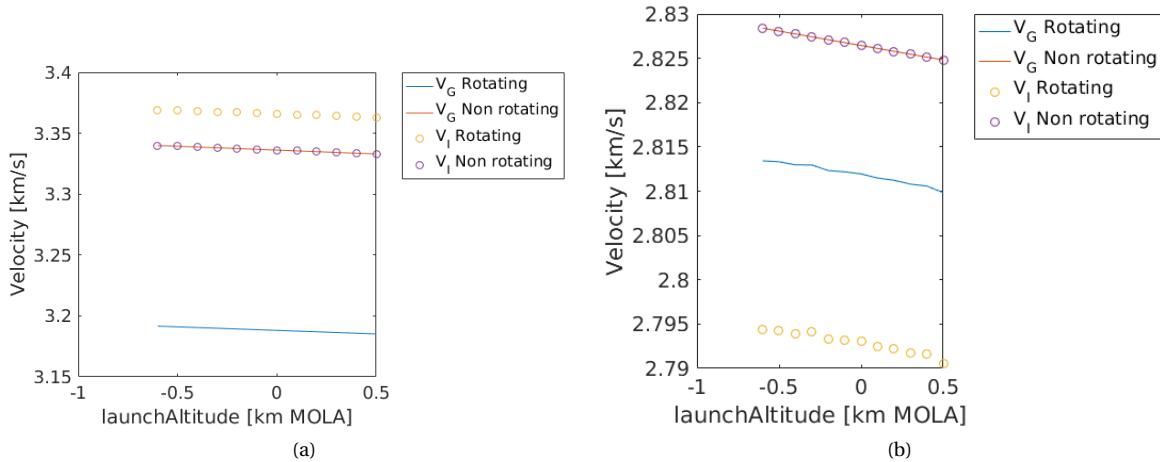


Figure 8.15: Launch altitude versus velocity for rotating and non-rotating Mars (a) case 1, (b) case 2

When comparing ground velocity it would be expected that the rotating Mars run would show a lower velocity because Mars is actually rotating with the MAV. This effectively lowers the speed at which the MAV travels as observed from the Martian surface. This is indeed seen in both cases. What is also noticeable is that there is fortunately no velocity difference between the inertial and ground velocity for the non-rotating case, which means that the rotation of Mars was indeed zero and the program is working properly. There is however a large difference between the ground and inertial velocity for the rotating runs, which is precisely the effective velocity boost from the rotating Mars.

Finally it is interesting to notice the difference in end velocities between case 1 and case 2. Case 1 has an inertial velocity which is higher than the ground velocity and also the velocity for the non-rotating run. This is what one would expect for a MAV that is launched due East. However, case 2 also launches due East and shows an inertial velocity for the rotating run which is lower than all other velocities. This can be explained by taking to account that these are all final velocities before the circularisation and remembering the trajectory profile of both cases as presented in Chapter 7. The trajectory of case 1 takes the MAV slightly North after launch, whereas in case 2 the trajectory goes South and even slightly West. This means that it is moving

against the rotation of Mars and thus effectively loses some velocity when compared to both the ground velocity as well as the velocity in the non-rotating run. This effect was therefore expected. More position and velocity graphs can be found in Appendix F.

8.5. LAUNCH LATITUDE

Only comparison with non-rotating Mars and simply look at the different latitudes and the effects Show for both cases the differences in x,y and z position and velocity. Do case 1 and 2 look similar? Why do the graphs look a certain way?

Graphs needed:

- CPU time vs order case 1 combined (if not random)

- CPU time vs order case 2 combined (if not random)

- All position graphs case 1

Appendix - All position graphs case 2

Appendix - All velocity graphs case 1

Appendix - All velocity graphs case 2

Appendix

- Consecutive differences end state before circularisation comb case 1

- Consecutive differences end state before circularisation comb case 2

- Differences nominal case end state before circularisation comb case 1

- Differences nominal case end state before circularisation comb case 2

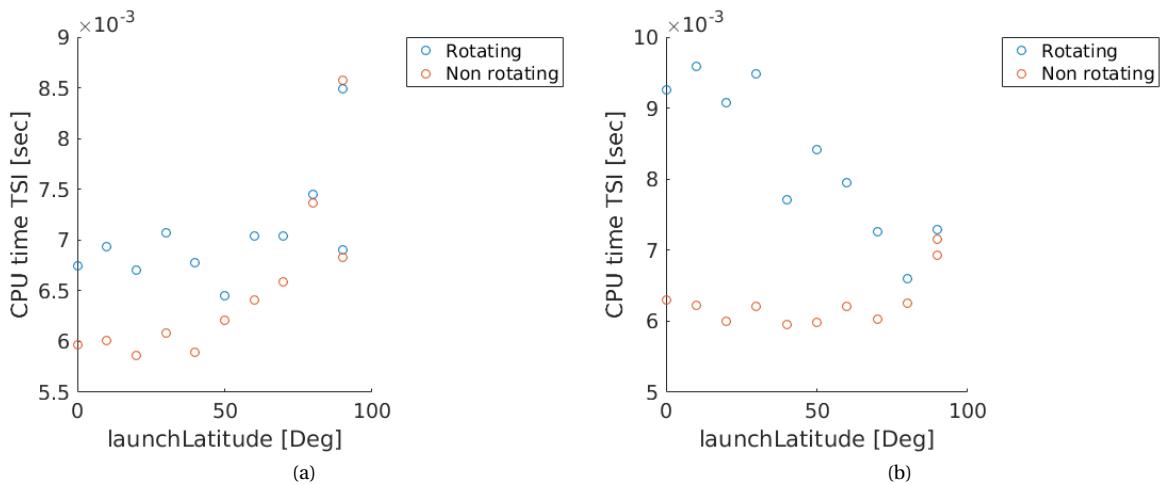


Figure 8.16: Launch latitude versus CPU time for rotating and non-rotating Mars (a) case 1, (b) case 2

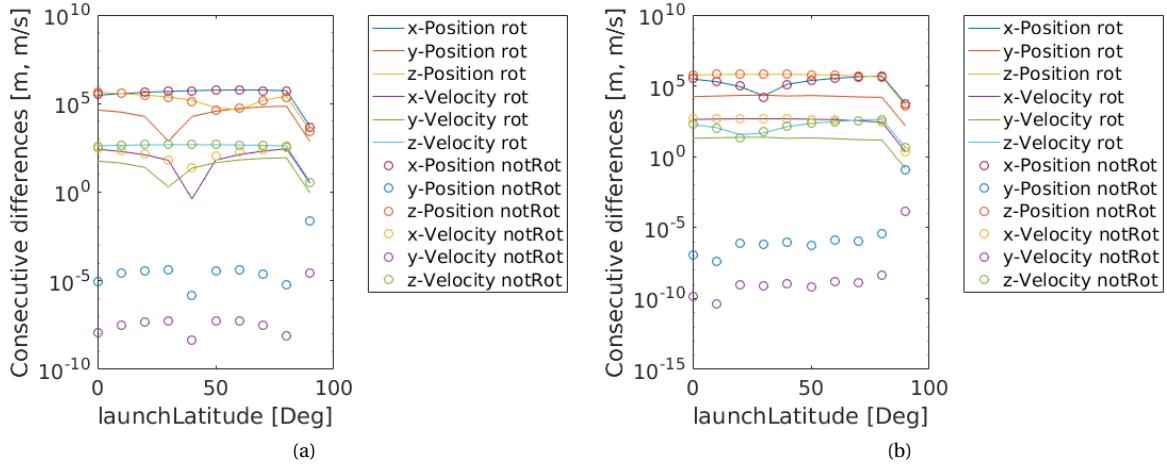


Figure 8.17: Launch latitude versus consecutive difference for rotating and non-rotating Mars (a) case 1, (b) case 2

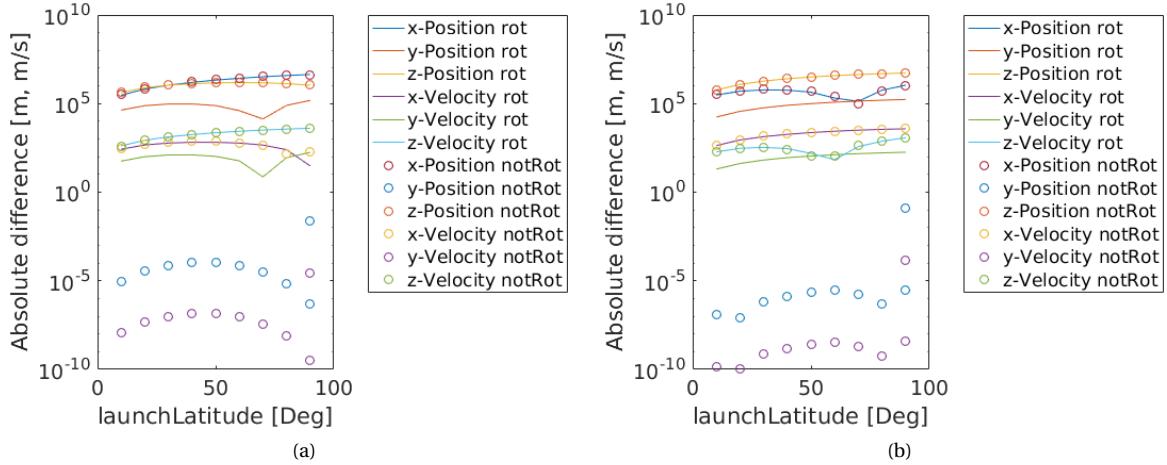


Figure 8.18: Launch latitude versus nominal absolute difference for rotating and non-rotating Mars (a) case 1, (b) case 2

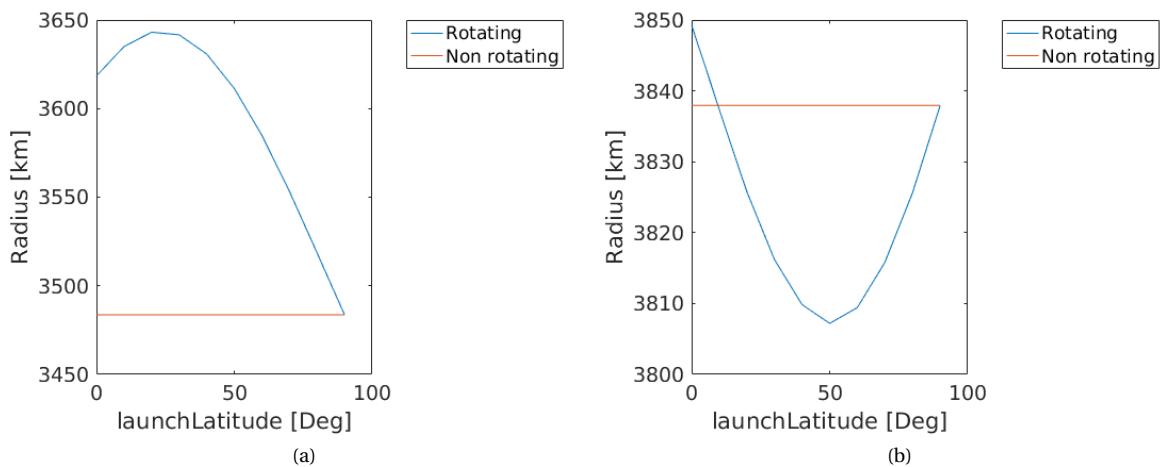


Figure 8.19: Launch latitude versus orbital radius for rotating and non-rotating Mars (a) case 1, (b) case 2

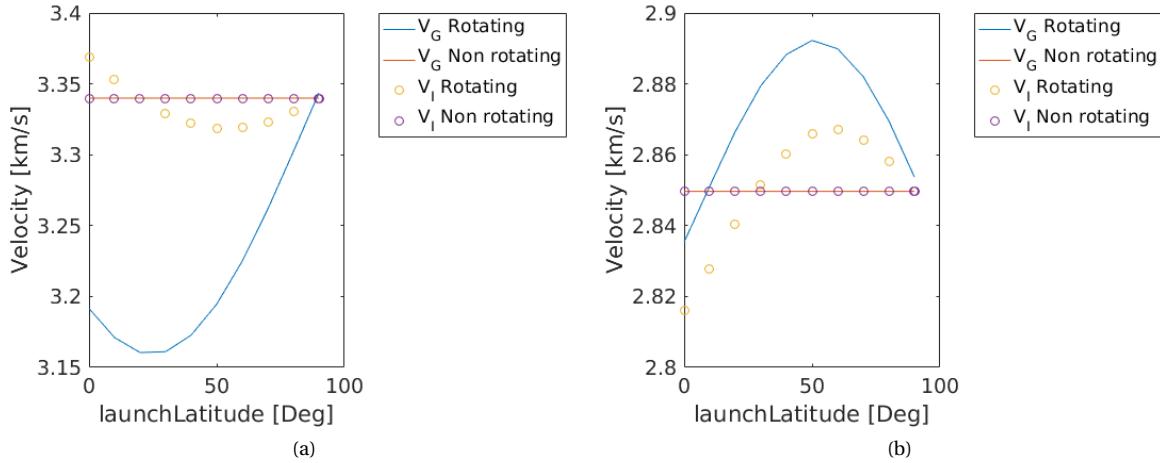


Figure 8.20: Launch latitude versus velocity for rotating and non-rotating Mars (a) case 1, (b) case 2

Tables needed:

- Radius and difference with nominal case in m case 1
- Radius and difference with nominal case in m case 2
- Ground velocity and difference with nominal case in m case 1
- Ground velocity and difference with nominal case in m case 2

8.6. LAUNCH LONGITUDE

Only comparison with non-rotating Mars and simply look at the different longitudes and the effects Show for both cases the differences in x,y and z position and velocity. Do case 1 and 2 look similar? Why do the graphs look a certain way?

Graphs needed:

- CPU time vs order case 1 combined (if not random)
- CPU time vs order case 2 combined (if not random)
- All position graphs case 1

Appendix - All position graphs case 2

Appendix - All velocity graphs case 1

Appendix - All velocity graphs case 2

Appendix

- Consecutive differences end state before circularisation comb case 1
- Consecutive differences end state before circularisation comb case 2
- Differences nominal case end state before circularisation comb case 1
- Differences nominal case end state before circularisation comb case 2

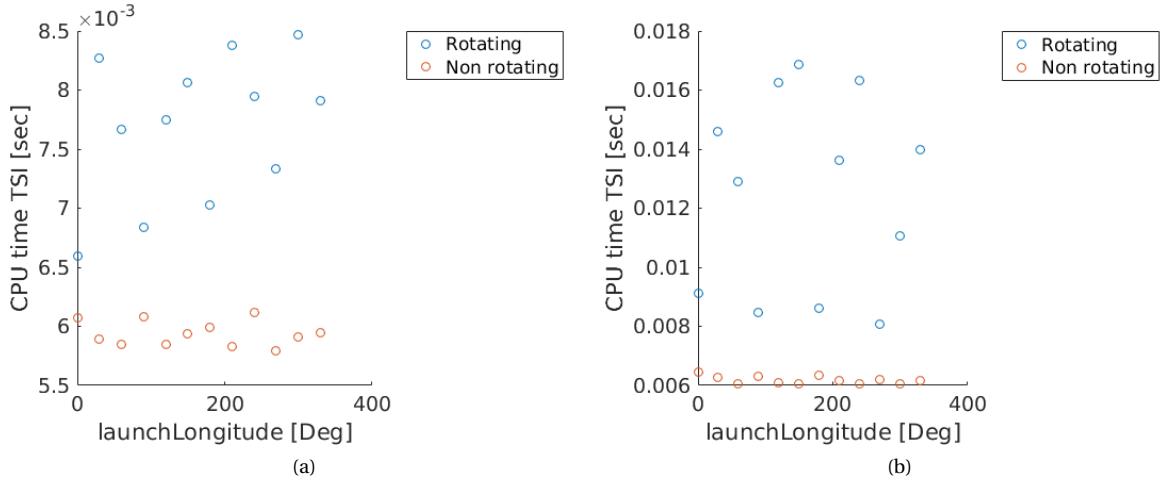


Figure 8.21: Launch longitude versus CPU time for rotating and non-rotating Mars (a) case 1, (b) case 2

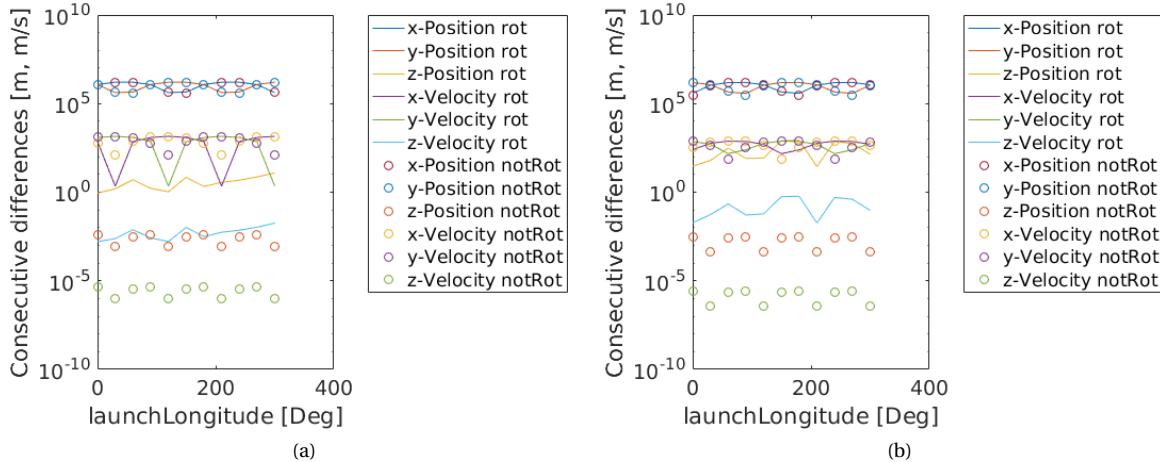


Figure 8.22: Launch longitude versus consecutive difference for rotating and non-rotating Mars (a) case 1, (b) case 2

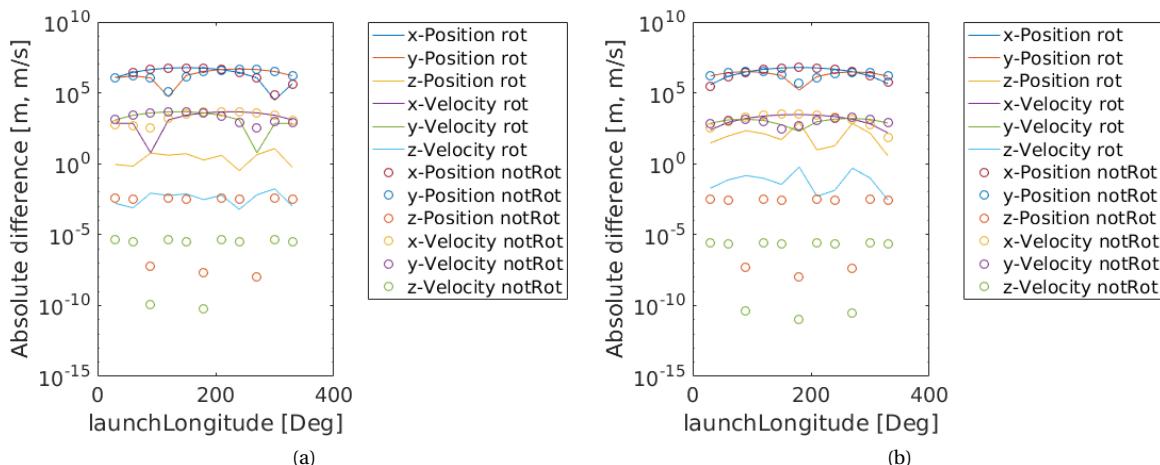


Figure 8.23: Launch longitude versus nominal absolute difference for rotating and non-rotating Mars (a) case 1, (b) case 2

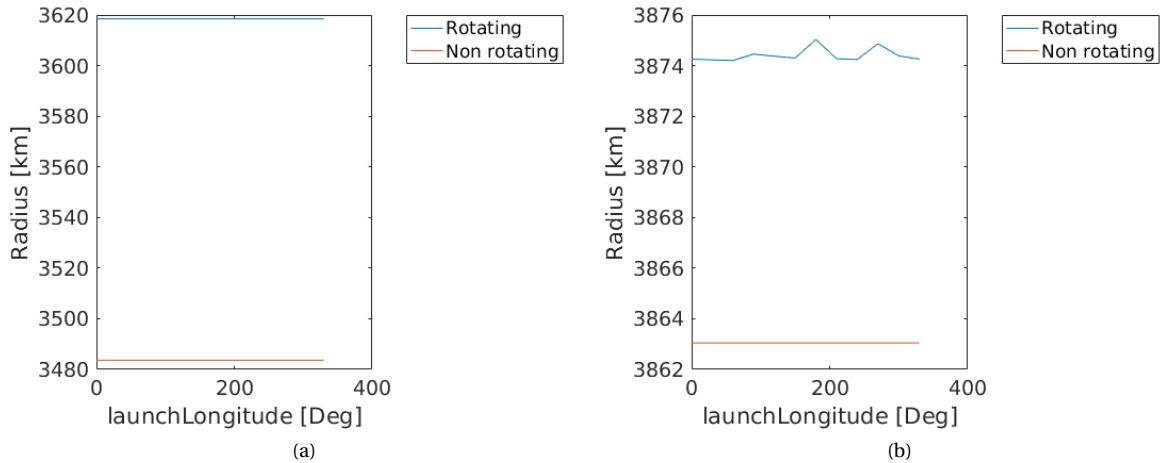


Figure 8.24: Launch longitude versus orbital radius for rotating and non-rotating Mars (a) case 1, (b) case 2

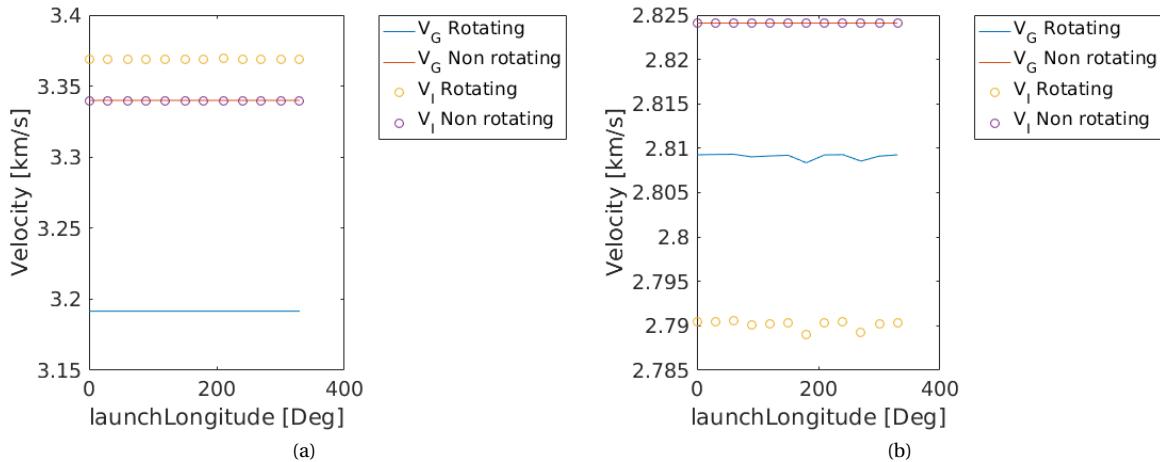


Figure 8.25: Launch longitude versus velocity for rotating and non-rotating Mars (a) case 1, (b) case 2

8.7. FLIGHT-PATH ANGLE

Only comparison with non-rotating Mars and simply look at the different Flight-path angles and the effects Show for both cases the differences in x,y and z position and velocity. Do case 1 and 2 look similar? Why do the graphs look a certain way? Explain why only a few runs could be done because of the huge initial effect that the FPA has because of the low velocity in the beginning.

Graphs needed:

- Circularisation propellant mass comb case 1 (if different end conditions were used then once with comb and once just the case 1)
- Circularisation propellant mass comb case 2 (if different end conditions were used then once with comb and once just the case 2)

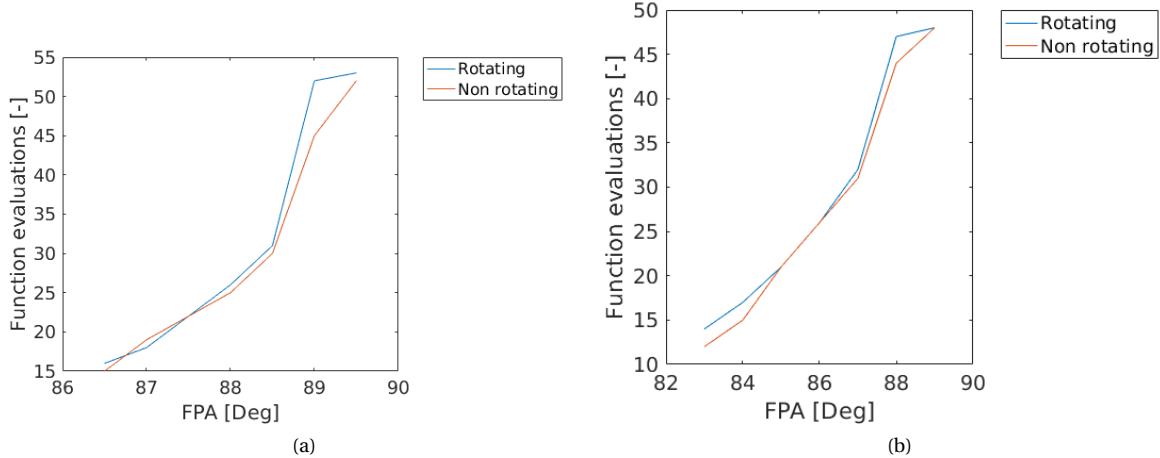


Figure 8.26: Flight-path angle versus Function Evaluations for rotating and non-rotating Mars (a) case 1, (b) case 2

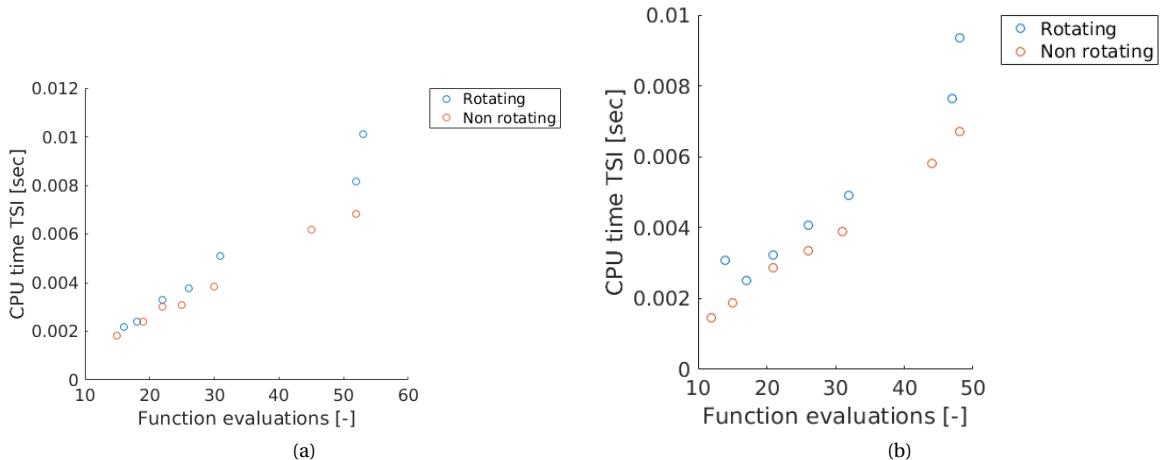


Figure 8.27: Function evaluations versus CPU time for rotating and non-rotating Mars (a) case 1, (b) case 2

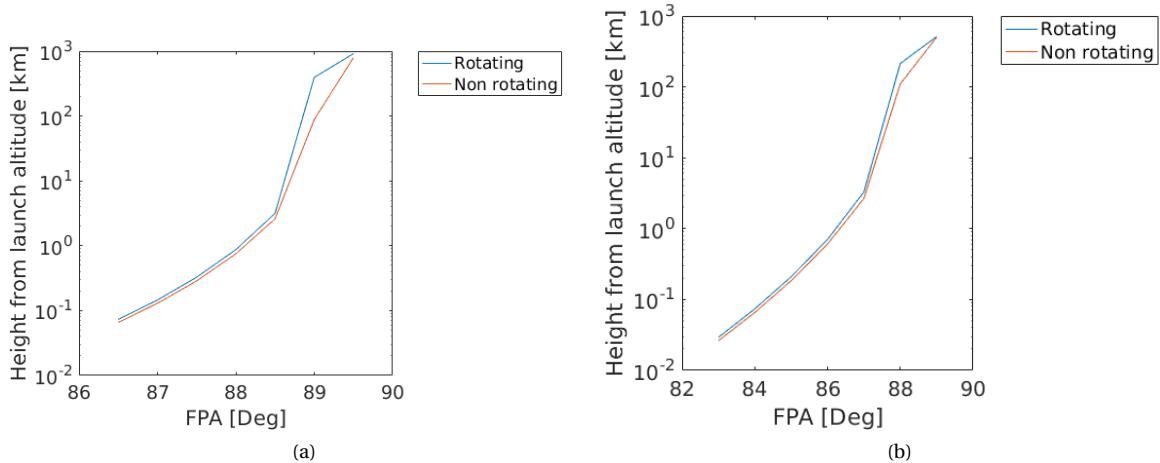


Figure 8.28: Flight-path angle versus end height from launch site for rotating and non-rotating Mars (a) case 1, (b) case 2

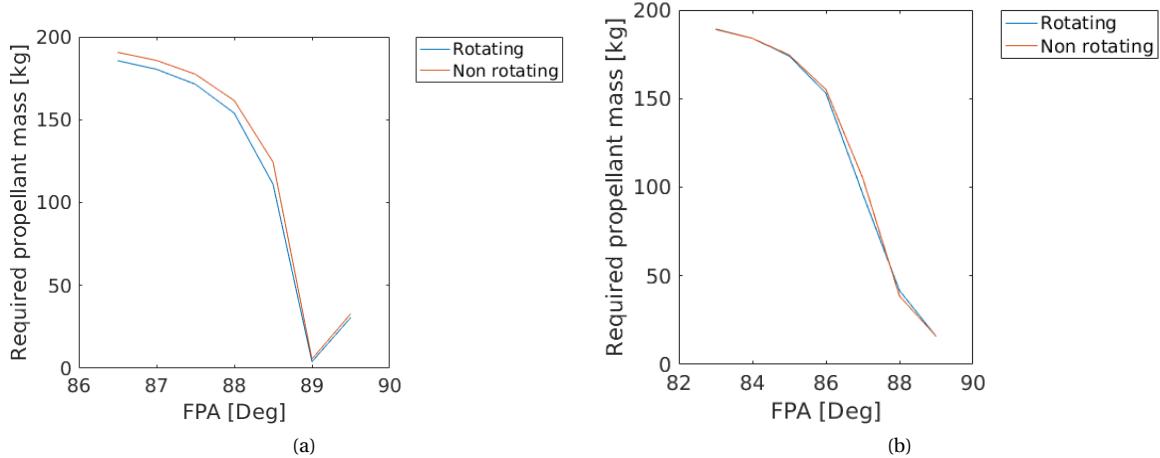


Figure 8.29: Flight-path angle versus propellant mass required for circularisation and desired inclination change for rotating and non-rotating Mars (a) case 1, (b) case 2

Tables needed:

- Radius and difference with nominal case in m case 1
- Radius and difference with nominal case in m case 2
- Ground velocity and difference with nominal case in m case 1
- Ground velocity and difference with nominal case in m case 2

8.8. HEADING ANGLE

Only comparison with non-rotating Mars and simply look at the different heading angles and the effects
Show for both cases the differences in x,y and z position and velocity. Do case 1 and 2 look similar? Why do the graphs look a certain way?

Graphs needed:

- Circularisation propellant mass comb case 1 (if different end conditions were used then once with comb and once just the case 1)
- Circularisation propellant mass comb case 2 (if different end conditions were used then once with comb and once just the case 2)

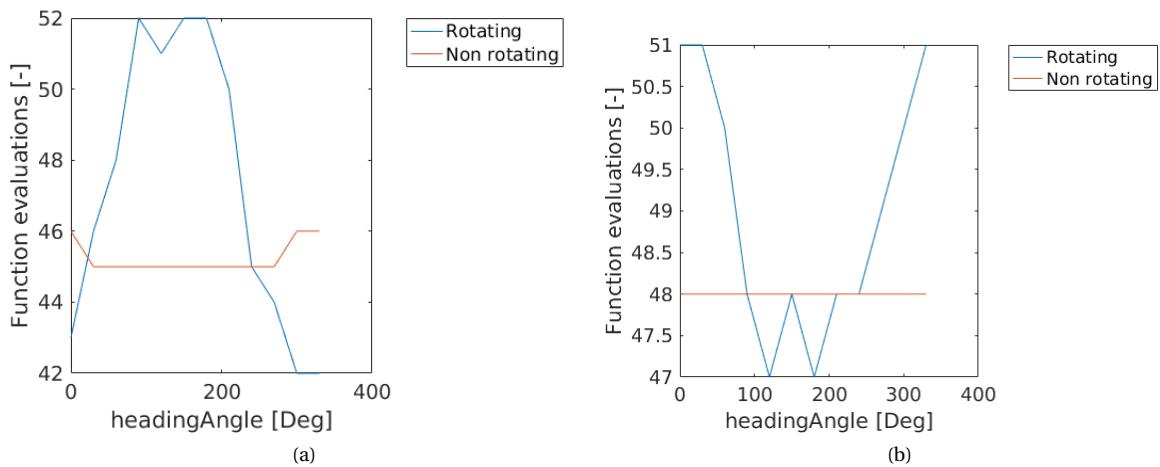


Figure 8.30: Heading angle versus Function Evaluations for rotating and non-rotating Mars (a) case 1, (b) case 2

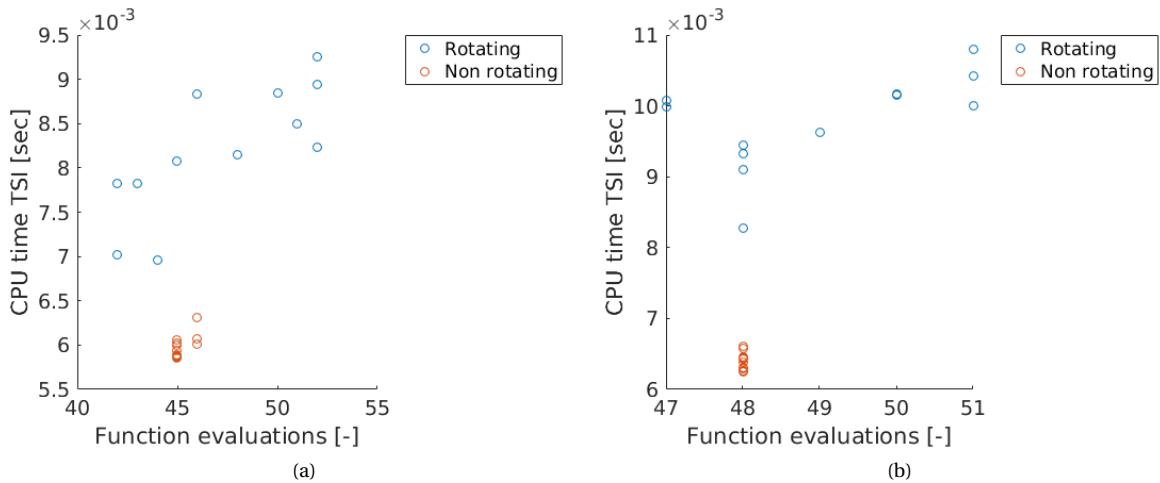


Figure 8.31: Function evaluations versus CPU time for rotating and non-rotating Mars (a) case 1, (b) case 2

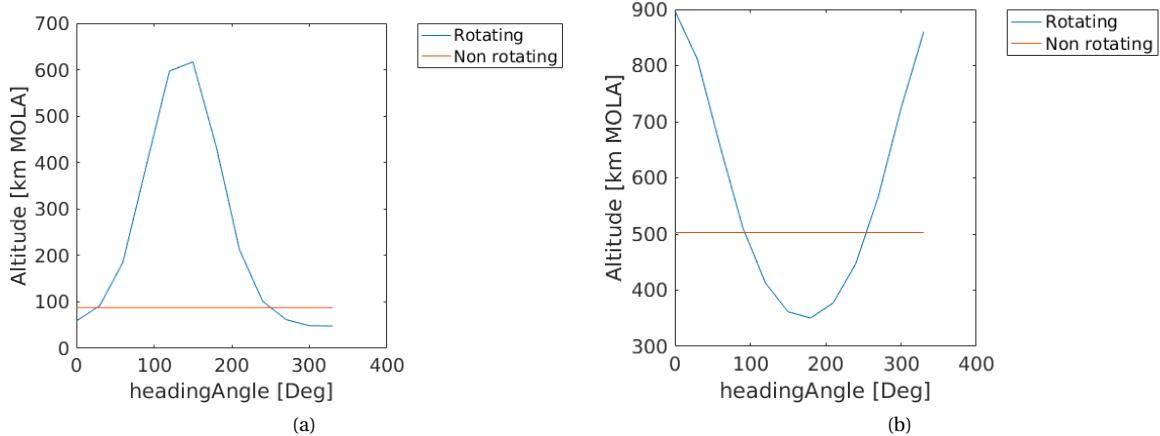


Figure 8.32: Heading angle versus altitude with respect to the MOLA reference for rotating and non-rotating Mars (a) case 1, (b) case 2

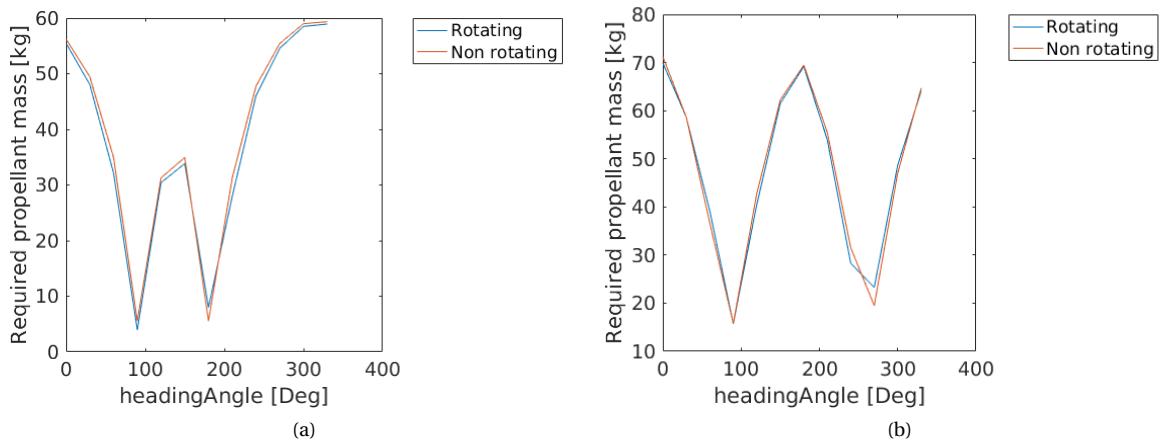


Figure 8.33: Heading angle versus propellant mass required for circularisation and desired inclination change for rotating and non-rotating Mars (a) case 1, (b) case 2

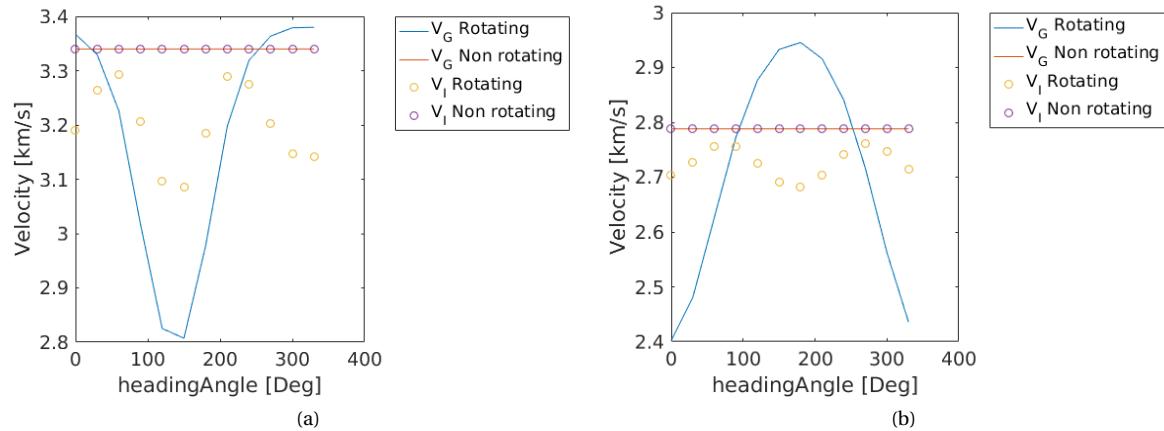


Figure 8.34: Heading angle versus velocity for rotating and non-rotating Mars (a) case 1, (b) case 2

Tables needed:

- Radius and difference with nominal case in m case 1
- Radius and difference with nominal case in m case 2
- Ground velocity and difference with nominal case in m case 1
- Ground velocity and difference with nominal case in m case 2

9

CONCLUSIONS AND RECOMMENDATIONS

BIBLIOGRAPHY

- R. Shotwell, J. Benito, A. Karp, and J. Dankanich, *Drivers, developments and options under consideration for a Mars ascent vehicle*, in *Aerospace Conference, 2016 IEEE* (IEEE, 2016) pp. 1–14.
- R. C. Woolley, R. L. Mattingly, J. E. Riedel, and E. J. Sturm, *Mars Sample Return - Launch and Detection Strategies for Orbital Rendezvous*, in *AAS/AIAA Astrodynamics Specialist Conference*, Vol. 142 (Univelt, Inc., 2011).
- D. Vaughan, B. Nakazono, A. Karp, R. Shotwell, A. London, A. Mehra, and F. Mechentel, *Technology development and design of liquid bi-propellant mars ascent vehicles*, in *Aerospace Conference, 2016 IEEE* (IEEE, 2016) pp. 1–12.
- J. Fanning and B. Pierson, *A model comparison for optimal Mars ascent trajectories*, in *Engineering Optimization*, Vol. 26 (1996) pp. 271–285.
- P. Desai, R. Braun, W. Engelund, E. Cheatwood, and J. Kangas, *Mars Ascent Vehicle Flight Analysis*, in *7th AIAA/ASME Joint Thermophysics and Heat Transfer Conference* (1998).
- J. C. Whitehead, *Mars Ascent Propulsion Trades with Trajectory Analysis*, in *40th AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit* (American Institute of Aeronautics and Astronautics, 2004).
- J. C. Whitehead, *Trajectory analysis and staging trades for smaller Mars ascent vehicles*, in *Journal of spacecraft and rockets*, Vol. 42 (2005) pp. 1039–1046.
- E. Di Sotto, J. C. Bastante, and R. Drai, *System and GNC concept for RendezVous into elliptical Orbit for Mars Sample Return mission*, in *AIAA Guidance, Navigation, and Control Conference and Exhibit, Colorado* (2007).
- M. Trinidad, E. Zabrensky, and A. Sengupta, *Mars Ascent Vehicle system studies and baseline conceptual design*, in *Aerospace Conference, 2012 IEEE* (IEEE, 2012) pp. 1–13.
- E. Dumont, *Design of a Modular Transportation System for Future Lunar Robotic Missions*, in *30th ISTS/34th IEPC/6th NSAT Joint Conference, Kobe, Japan* (2015).
- R. C. Woolley, *A simple analytic model for estimating Mars Ascent Vehicle mass and performance*, in *2015 IEEE Aerospace Conference* (2015).
- J. Benito and B. J. Johnson, *Trajectory Optimization for a Mars Ascent Vehicle*, in *AIAA/AAS Astrodynamics Specialist Conference* (2016).
- O. Montenbruck, *Numerical integration of orbital motion using Taylor series*, in *Spaceflight mechanics* (1992) pp. 1217–1231, available at JPL library.
- J. R. Scott and M. C. Martini, *High speed solution of spacecraft trajectory problems using Taylor series integration*, in *AIAA/AAS Astrodynamics Specialist Conference and Exhibit, Honolulu, Hawaii* (2008).
- M. Bergsma and E. Mooij, *Application of Taylor-Series Integration to Reentry Problems with Wind*, in *Journal of Guidance, Control, and Dynamics* (American Institute of Aeronautics and Astronautics, 2016) pp. 2324–2335.
- J. Whitehead, *Mars ascent propulsion options for small sample return vehicles*, in *33rd AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit* (AIAA Joint Propulsion Conference and Exhibit, 1997).
- C. S. Guernsey, *Mars Ascent Propulsion System (MAPS) Technology Program: Plans and Progress*, in *34th AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit* (1998).
- C. Stone, *Rice Mars*, presentation/website (1999), [online database], URL: <http://www.slideshare.net/cliffordstone/rice-mars-nov99> [cited 25 October 2015].

- D. Stephenson, *Mars ascent vehicle - Concept development*, in *38th Joint Propulsion Conference and Exhibit, Indianapolis, Indiana*, Vol. 4318 (AIAA, 2002).
- D. D. Stephenson and H. J. Willenberg, *Mars ascent vehicle key elements of a Mars Sample Return mission*, in *Aerospace Conference, 2006 IEEE* (IEEE, 2006) p. 11.
- A. Sengupta, A. Kennett, M. Pauken, M. Trinidad, and E. Zabrensky, *Systems Engineering and Technology Considerations of a Mars Ascent Vehicle*, in *2011 IEEE Aerospace Conference* (2012).
- G. Mungas, D. Fisher, J. Vozoff, and M. Villa, *NOFBX Single Stage to Orbit Mars Ascent Vehicle*, in *Aerospace Conference, 2012 IEEE* (IEEE, 2012) pp. 1–11.
- Mars Program Planning Group, *Summary of the Final Report*, (2012), [online database], URL: <http://www.nasa.gov/sites/default/files/files/> [cited 14 October 2015].
- A. C. Karp, M. Redmond, B. Nakazono, D. Vaughan, R. Shotwell, G. Story, D. Jackson, and D. Young, *Technology development and design of a hybrid Mars ascent vehicle concept*, in *Aerospace Conference, 2016 IEEE* (IEEE, 2016) pp. 1–10.
- R. Shotwell, *History of Mars Ascent Vehicle development over the last 20 years*, in *Aerospace Conference, 2016 IEEE* (IEEE, 2016) pp. 1–11.
- J. Mulder, W. van Staveren, J. van der Vaart, E. de Weerdt, A. in 't Veld, and E. Mooij, *Flight Dynamics, Lecture Notes*, Reader, Delft University of Technology (2013), [Internal publication] Course: Flight Dynamics.
- E. Mooij, *The motion of a vehicle in a planetary atmosphere* (Delft University Press, Delft, 1994).
- E. Mooij, *AE3202-week1-lecture1b-Frames*, Lecture slides, Delft University of Technology (2013), [Internal publication] Course: Flight Dynamics.
- R. Noomen, *ae4-878.basics.v4-14*, Lecture slides, Delft University of Technology (2013a), [Internal publication] Course: Mission Geometry and Orbit Design.
- C. Ho, N. Golshan, and A. Kliore, *Radio Wave Propagation Handbook for Communication on and Around Mars*, 1st ed. (NASA Jet Propulsion Laboratory, Pasadena, CA, 2002) handbook JPL Publication 02-5.
- D. Williams, *Mars Fact Sheet*, website (2015), [online database], URL: <http://nssdc.gsfc.nasa.gov/planetary/factsheet/marsfact.html> [cited 1 November 2015].
- R. Hofsteenge, *Computational Methods for the Long-Term Propagation of Space Debris Orbits*, Master's thesis, Delft University of Technology (2013).
- A. Milani and A. M. Nobili, *Integration error over very long time spans*, in *Celestial mechanics*, Vol. 43 (Springer, 1987) pp. 1–34.
- R. Noomen, *ae4-878.integrators.v4-3*, Lecture slides, Delft University of Technology (2013b), [Internal publication] Course: Mission Geometry and Orbit Design.
- P. Deuflhard, U. Nowak, and U. Poehle, *Program Descriptions of ELib*, (1994), [online database], URL: <http://elib.zib.de/pub/elib/codelib/difex2/readme> [cited 30 October 2015].
- O. Montenbruck, *Numerical integration methods for orbital motion*, in *Celestial Mechanics and Dynamical Astronomy*, Vol. 53 (1992) pp. 59–69.
- J. Dormand, M. El-Mikkawy, and P. Prince, *Families of Runge-Kutta-Nystrom formulae*, in *IMA Journal of Numerical Analysis*, Vol. 7 (1987) pp. 235–250.
- E. Fehlberg, *Low order classical Runge-Kutta formulas with stepwise control*, Tech. Rep. (Marschall Space Flight Center, NASA, 1969) : NASA TR R-316.
- E. Fehlberg, *Classical fifth-, sixth-, seventh-, and eighth-order Runge-Kutta formulas with stepsize control*, Tech. Rep. (Marschall Space Flight Center, NASA, 1968) : NASA TR R-287.

- M. M. Berry, *A Variable-Step Double-Integration Multi-Step Integrator*, Ph.D. thesis, Virginia Polytechnic Institute and State University (2004).
- J. Meijaard, *A Comparison of Numerical Integration Methods with a View to Fast Simulation of Mechanical Dynamical Systems*, in *Real-Time Integration Methods for Mechanical System Simulation*, Vol. 69 (Springer, 1991) pp. 329–343.
- H. Ramos and J. Vigo-Aguiar, *Variable stepsize Störmer-Cowell methods*, in *Mathematical and Computer Modelling*, Vol. 42 (2005) pp. 837–846.
- D. Dirkx, K. Kumar, E. Doornbos, E. Mooij, and R. Noomen, *TUDAT*, (2016), [online database], URL: tudat.tudelft.nl [cited 8 March 2016].
- P. Prince and J. Dormand, *High order embedded Runge-Kutta formulae*, in *Journal of Computational and Applied Mathematics*, Vol. 7 (Elsevier, 1981) pp. 67–75.
- M. Weeks and S. Thrasher, *Comparison of Fixed and Variable Time Step Trajectory Integration Methods for Cislunar Trajectories*, in *AAS/AIAA Space Flight Mechanics Meeting* (2007).
- M. C. W. Bergsma, *Application of Taylor Series Integration to Reentry Problems*, Master's thesis, Delft University of Technology (2015).
- A. Jorba and M. Zou, *A Software Package for the Numerical Integration of ODEs by Means of High-Order Taylor Methods*, in *Experimental Mathematics*, Vol. 14 (Taylor & Francis, 2005) pp. 99–117.
- H. L. Justh and C. G. Justus, *Utilizing Mars global reference atmospheric model (Mars-GRAM 2005) to evaluate entry probe mission sites*, Presentation (2008), [online database], URL: <https://smartech.gatech.edu/bitstream/handle/1853/26375/34-186-1-PB.pdf?sequence=1> [cited 10 December 2015].
- K. Wakker, *Astroynamics-II Course AE4874, part 2*, Reader, Delft University of Technology (2010a), [Internal publication] Course: Astrodynamics-II.
- N. Bachman, *NAIF SPICE toolkit hypertext documentation, required reading documents, reference frames*, website (2014), [online database], URL: <http://naif.jpl.nasa.gov/pub/naif/> [cited 18 December 2015].
- J. D. del Rio, *Generic frame definition Kernel file for ESA planetary missions*, (2008), [online database], URL: <http://naif.jpl.nasa.gov/pub/naif/VEX/kernels/fk/RSSD0002.TF> [cited 8 December 2015].
- B. A. Archinal, M. Ahearn, E. Bowell, A. Conrad, G. J. Consolmagno, R. Courtin, T. Fukushima, D. Hestroffer, J. L. Hilton, G. A. Krasinsky, et al., *Report of the IAU working group on cartographic coordinates and rotational elements: 2009*, in *Celestial Mechanics and Dynamical Astronomy*, Vol. 109 (2011) pp. 101–135.
- O. Morton, *Mapping Mars: Science, Imagination, and the Birth of a World*, 1st ed. (Picador, New York, 2003) available at JPL library.
- T. Duxbury, P. Christensen, D. Smith, G. Neumann, R. Kirk, M. Caplinger, A. Albee, N. Seregina, G. Neukum, and B. Archinal, *The location of Airy-0, the Mars prime meridian reference, from stereo photogrammetric processing of THEMIS IR imaging and digital elevation data*, in *Journal of Geophysical Research: Planets*, Vol. 119 (John Wiley & Sons, 2014) pp. 2471–2486.
- O. E. Akcasu and I. Akcay, *Solar time using gps technology*, Lonestar Inventions, L.P., Austin, TX, U.S. Patent (2013), patent application, Docket No. WO 2013070518 A1, filed 2 Nov. 2012.
- K. Wakker, *Astroynamics-I Course AE4874, Part 1*, Reader, Delft University of Technology (2010b), [Internal publication] Course: Astrodynamics I.

A

MARS-GRAM 2005 INPUT FILE

```
1 $INPUT
2 LSTFL   = 'LIST.txt'
3 OUTFL   = 'OUTPUT.txt'
4 TRAJFL  = 'TRAJDATA.txt'
5 profile = 'null'
6 WaveFile= 'null'
7 DATADIR = '/home/stachap/MarsGram/binFiles_TUDelft/'
8 GCMDIR  = '/home/stachap/MarsGram/binFiles_TUDelft/'
9 IERT     = 0
10 IUTC    = 1
11 MONTH   = 2
12 MDAY    = 28
13 MYEAR   = 2025
14 NPOS    = 32061
15 IHR     = 12
16 IMIN    = 0
17 SEC     = 0.0
18 LonEW   = 1
19 Dusttau = 0
20 Dustmin = 0.3
21 Dustmax = 1.0
22 Dustnru = 0.003
23 Dustdiam = 5.0
24 Dustdens = 3000.
25 ALSO    = 0.0
26 ALSDUR  = 48.
27 INTENS  = 0.0
28 RADMAX  = 0.0
29 DUSTLAT = 0.0
30 DUSTLON = 0.0
31 MapYear = 0
32 F107    = 68.0
33 STDL    = 0.0
34 NR1     = 1234
35 NVARX   = 1
36 NVARY   = 0
37 LOGSCALE = 0
38 FLAT    = 21
39 FLON    = 74.5
40 FHGT    = -0.6
41 MOLAhtgs = 1
42 hgtasfcm = 0.
43 zoffset  = 0.
44 ibougher = 0
45 DELHGT   = 0.01
46 DELLAT   = 0.0
47 DELLON   = 0.0
48 DELTIME  = 0.0
49 ATEX    = 0.0
```

```

50     profnear = 0.0
51     proffar = 0.0
52     rpscale = 1.0
53     rwscale = 1.0
54     wlyscale = 1.0
55     wmscale = 0.0
56     blwinfac = 0.0
57     NMONTE = 1
58     iup = 13
59     WaveA0 = 1.0
60     WaveDate = 0.0
61     WaveA1 = 0.0
62     Wavephil = 0.0
63     phidot = 0.0
64     WaveA2 = 0.0
65     Wavephi2 = 0.0
66     phi2dot = 0.0
67     WaveA3 = 0.0
68     Wavephi3 = 0.0
69     phi3dot = 0.0
70     iuwave = 0
71     Wscale = 20.
72     corlmin = 0.0
73     ipclat = 1
74     requa = 3396.19
75     rpole = 3376.20
76     idaydata = 1
77 $END
78
79 Explanation of variables:
80 LSTFL = List file name (CON for console listing)
81 OUTFL = Output file name
82 TRAJFL = (Optional) Trajectory input file. File contains time (sec)
83           relative to start time, height (km), latitude (deg),
84           longitude (deg W if LonEW=0, deg E if LonEW=1, see below)
85 profile = (Optional) auxiliary profile input file name
86 WaveFile = (Optional) file for time-dependent wave coefficient data.
87           See file description under parameter iuwave, below.
88 DATADIR = Directory for COSPAR data and topographic height data
89 GCMDIR = Directory for GCM binary data files
90 IERT = 1 for time input as Earth-Receive time (ERT) or 0 Mars-event
91           time (MET)
92 IUTC = 1 for time input as Coordinated Universal Time (UTC), or 0
93           for Terrestrial (Dynamical) Time (TT)
94 MONTH = (Integer) month of year
95 MDAY = (Integer) day of month
96 MYEAR = (Integer) year (4-digit; 1970-2069 can be 2-digit)
97 NPOS = max # positions to evaluate (0 = read data from trajectory
98           input file)
99 IHR = Hour of day (ERT or MET, controlled by IERT and UTC or TT,
100           controlled by IUTC)
101 IMIN = minute of hour (meaning controlled by IERT and IUTC)
102 SEC = seconds of minute (meaning controlled by IERT and IUTC).
103           IHR:IMIN:SEC is time for initial position to be evaluated
104 LonEW = 0 for input and output West longitudes positive; 1 for East
105           longitudes positive
106 Dusttau = Optical depth of background dust level (no time-developing
107           dust storm, just uniformly mixed dust), 0.1 to 3.0, or use
108           0 for assumed seasonal variation of background dust
109 Dustmin = Minimum seasonal dust tau if input Dusttau=0 (>0.1)
110 Dustmax = Maximum seasonal dust tau if input Dusttau=0 (<1.0)
111 Dustnu = Parameter for vertical distribution of dust density (Haberle
112           et al., J. Geophys. Res., 104, 8957, 1999)
113 Dustdiam = Dust particle diameter (micrometers, assumed monodisperse)
114 Dustdens = Dust particle density (kg/m**3)
115 ALSO = starting Ls value (degrees) for dust storm (0 = none)
116 ALSDUR = duration (in Ls degrees) for dust storm (default = 48)
117 INTENS = dust storm intensity (0.0 - 3.0)
118 RADMAX = max. radius (km) of dust storm (0 or >10000 = global)
119 DUSTLAT = Latitude (degrees) for center of dust storm
120 DUSTLON = Longitude (degrees) (West positive if LonEW=0, or East

```

```

121           positive if LonEW = 1) for center of dust storm
122 MapYear   = 1 or 2 for TES mapping year 1 or 2 GCM input data, or 0 for
123           Mars-GRAM 2001 GCM input data sets
124 F107      = 10.7 cm solar flux (10**-22 W/cm**2 at 1 AU)
125 NR1       = starting random number (0 < NR1 < 30000)
126 NVARX     = x-code for plotable output (1=hgt above MOLA areoid).
127           See file xycodes.txt
128 NVARY     = y-code for 3-D plotable output (0 for 2-D plots)
129 LOGSCALE  = 0=regular SI units, 1=log-base-10 scale, 2=percentage
130           deviations from COSPAR model, 3=SI units, with density
131           in kg/km**3 (suitable for high altitudes)
132 FLAT      = initial latitude (N positive), degrees
133 FLON      = initial longitude (West positive if LowEW = 0 or East
134           positive if LonEW = 1), degrees
135 FHGT      = initial height (km); <-10 means evaluate at surface height;
136           > 3000 km means planeto-centric radius
137 MOLAhgts = 1 for input heights relative to MOLA areoid, otherwise
138           input heights are relative to reference ellipsoid
139 hgtasfcm = height above surface (0-4500 m); use if FHGT < -10. km
140 zoffset   = constant height offset (km) for MTGCM data or constant
141           part of Ls-dependent (Bougher) height offset (0.0 means
142           no constant offset). Positive offset increases density,
143           negative offset decreases density.
144 ibougher = 0 for no Ls-dependent (Bougher) height offset term; 1
145           means add Ls-dependent (Bougher) term, -A*Sin(Ls) (km),
146           to constant term (zoffset) [offset amplitude A = 2.5 for
147           MapYear=0 or 0.5 for MapYear > 0]; 2 means use global mean
148           height offset from data file hgoffset.dat; 3 means use
149           daily average height offset at local position; 4 means
150           use height offset at current time and local position.
151           Value of zoffset is ignored if ibougher = 2, 3, or 4.
152 DELHGT    = height increment (km) between steps
153 DELLAT    = Latitude increment (deg) between steps (Northward positive)
154 DELLON    = Longitude increment (deg) between steps (Westward positive
155           if LonEW = 0, Eastward positive if LonEW = 1)
156 DELTIME   = time increment (sec) between steps
157 ΔTEX      = adjustment for exospheric temperature (K)
158 profnear  = Lat-lon radius (degrees) within which weight for auxiliary
159           profile is 1.0 (Use profnear = 0.0 for no profile input)
160 proffar   = Lat-lon radius (degrees) beyond which weight for auxiliary
161           profile is 0.0
162 rpscale   = random density perturbation scale factor (0-2)
163 rwscale   = random wind perturbation scale factor (>0)
164 wlscale   = scale factor for perturbation wavelengths (0.1-10)
165 wmscale   = scale factor for mean winds
166 blwinfac = scale factor for boundary layer slope winds (0 = none)
167 NMONTE   = number of Monte Carlo runs
168 iup       = 0 for no LIST and graphics output, or unit number for output
169 WaveA0    = Mean term of longitude-dependent wave multiplier for density
170 WaveDate  = Julian date for (primary) peak(s) of wave (0 for no traveling
171           component)
172 WaveA1    = Amplitude of wave-1 component of longitude-dependent wave
173           multiplier for density
174 Wavephi1  = Phase of wave-1 component of longitude-dependent wave
175           multiplier (longitude, with West positive if LonEW = 0,
176           East positive if LonEW = 1)
177 phildot   = Rate of longitude movement (degrees per day) for wave-1
178           component (Westward positive if LonEW = 0, Eastward
179           positive if LonEW = 1)
180 WaveA2    = Amplitude of wave-2 component of longitude-dependent wave
181           multiplier for density
182 Wavephi2  = Phase of wave-2 component of longitude-dependent wave
183           multiplier (longitude, with West positive if LonEW = 0,
184           East positive if LonEW = 1)
185 phi2dot   = Rate of longitude movement (degrees per day) for wave-2
186           component (Westward positive if LonEW = 0, Eastward
187           positive if LonEW = 1)
188 WaveA3    = Amplitude of wave-3 component of longitude-dependent wave
189           multiplier for density
190 Wavephi3  = Phase of wave-3 component of longitude-dependent wave
191           multiplier (longitude, with West positive if LonEW = 0,
```

```
192          East positive if LonEW = 1)
193  phi3dot   = Rate of longitude movement (degrees per day) for wave-3
194          component (Westward positive if LonEW = 0, Eastward
195          positive if LonEW = 1)
196  iuwave    = Unit number for (Optional) time-dependent wave coefficient
197          data file "WaveFile" (or 0 for none).
198          WaveFile contains time (sec) relative to start time, and
199          wave model coefficients (WaveA0 thru Wavephi3) from the
200          given time to the next time in the data file.
201  Wscale    = Vertical scale (km) of longitude-dependent wave damping
202          at altitudes below 100 km (10≤Wscale≤10,000 km)
203  corlmin   = minimum relative step size for perturbation updates
204          (0.0-1.0); 0.0 means always update perturbations, xx
205          means only update perturbations when corlim > xx
206  ipclat    = 1 for Planeto-centric latitude and height input,
207          0 for Planeto-graphic latitude and height input
208  requa     = Equatorial radius (km) for reference ellipsoid
209  rpole     = Polar radius (km) for reference ellipsoid
210  idaydata = 1 for daily max/min data output; 0 for none
```

B

ATMOSPHERIC DATA FITTING

In Section 3.4.1 the final results of the atmospheric data fits were presented. However, before those results could be obtained, a few iterations of trial-and-error fits were required. These intermediate trials are presented for both the temperature data, in Appendix B.1, as well as for the density data, in Appendix B.2. The fit requirements for the polynomial function were set such that the errors created by the fit were less than the uncertainty of the latitude and longitude dependent data. This way the desired accuracy could still be reached. This uncertainty is caused by the difference in atmospheric data curves for the different latitudes and longitudes. The atmospheric data curve for the latitude and longitude corresponding to the launch site (21.0°N and 74.5°E) was taken as the reference curve and called the launch site curve. The differences between this launch site curve and the 8 other curves were used to define the maximum data curves difference. The *polyfit.m* function within Matlab was used to fit a polynomial to the data. This function also directly provides a standard deviation of the fit for each data point (in combination with the *polyval.m* function). One of the requirements was for the maximum standard deviation of the polynomial fit to be one order less than the maximum difference of the data curves with respect to the launch site curve. The second requirements for a proper fit was for the absolute maximum difference between the polynomial fit and the launch site curve to be less than the absolute maximum difference between the data curves and that same launch site curve.

B.1. TEMPERATURE

Initially, the temperature data curve was split into 6 different sections as portrayed in Figure B.1. The sections were selected on the basis of their individual shapes and the maximum order that was required, where the maximum order for temperature was set at 8. Fewer sections were however always preferred.

Unfortunately, the fourth quarter of section 3 caused this section to not meet the maximum standard deviation requirement because in that quarter the linear behaviour changes directions slightly and the differences between the different data curves become a lot smaller. Therefore section 3 was split into two different sections resulting in a total of 7 sections as shown in Figure B.2.

These sections all met the requirements and thus provided a proper fit to the data. This fit is shown in Figure B.3.

However, because fewer sections were preferred, an attempt was made to reduce the number of sections. Because of the inaccuracy in the Mars-GRAM model close to the planet surface, it was decided to delete the outliers near the surface (section 1) and stretch the outcome of the second polynomial fit to the surface instead. Also, it turned out that section 4 and 5 could be combined in such a way that the requirements were still met. This reduced the number of section from 7 to 5. The final fit was presented in Section 3.4.1 as well as the corresponding errors and polynomial coefficients.

B.2. DENSITY

For the density curve, because the data represents a logarithmic curve, initially an exponential atmosphere was fit. However, this did not meet any of the requirements for a proper fit as can be seen in . This is why a polynomial fit was attempted for the density curve as well with the same requirement as the temperature fits. The first fit was attempted with two sections as presented in Figure B.4.

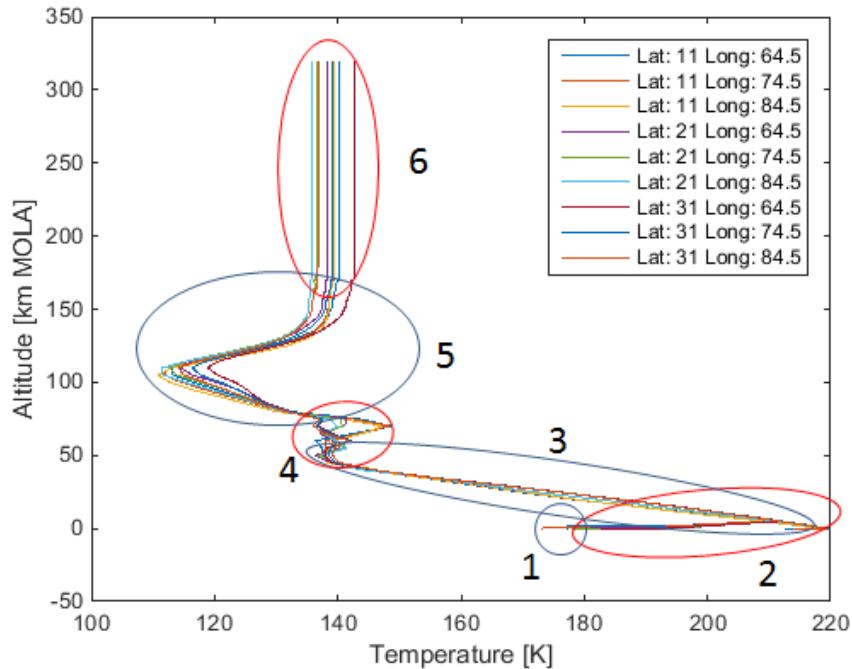


Figure B.1: Six different temperature curve sections

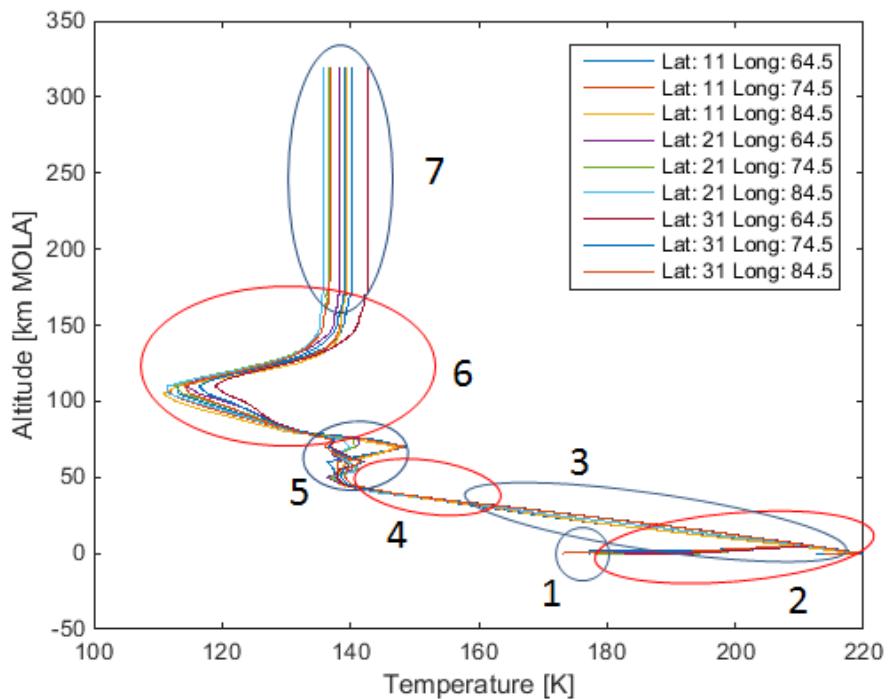


Figure B.2: Seven different temperature curve sections

However, the second section could not meet the requirements because of the initial part. This is why it was split into two sections as presented in Figure B.5.

This did meet the error requirements and resulted in the fit as shown in Figure B.6 with section 1 being

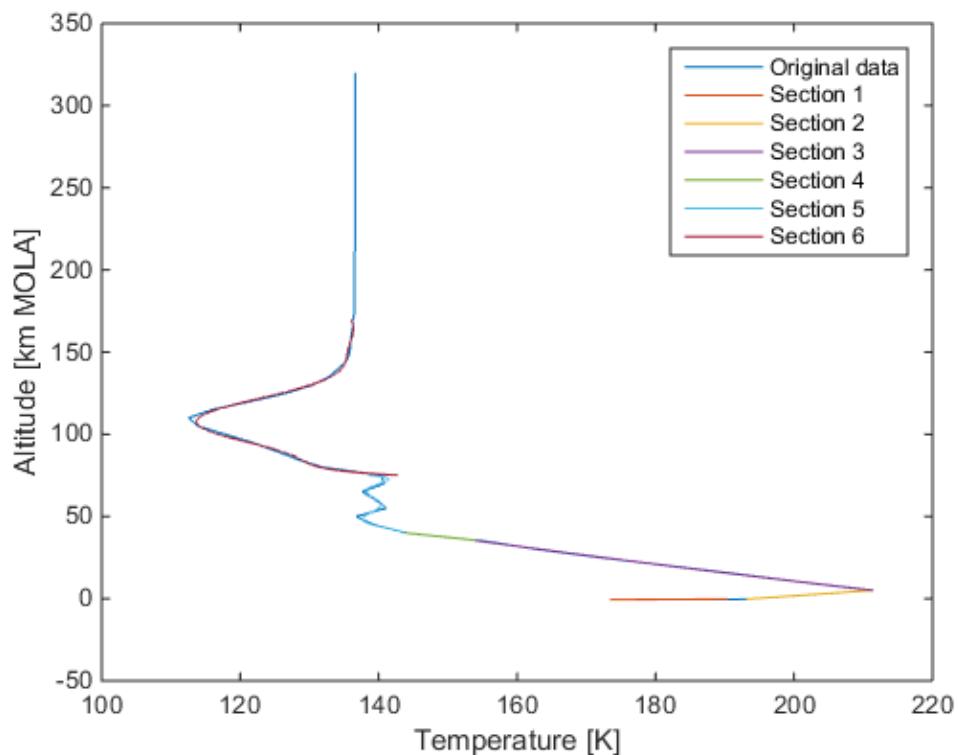


Figure B.3: All section fits for the launch site temperature data curve

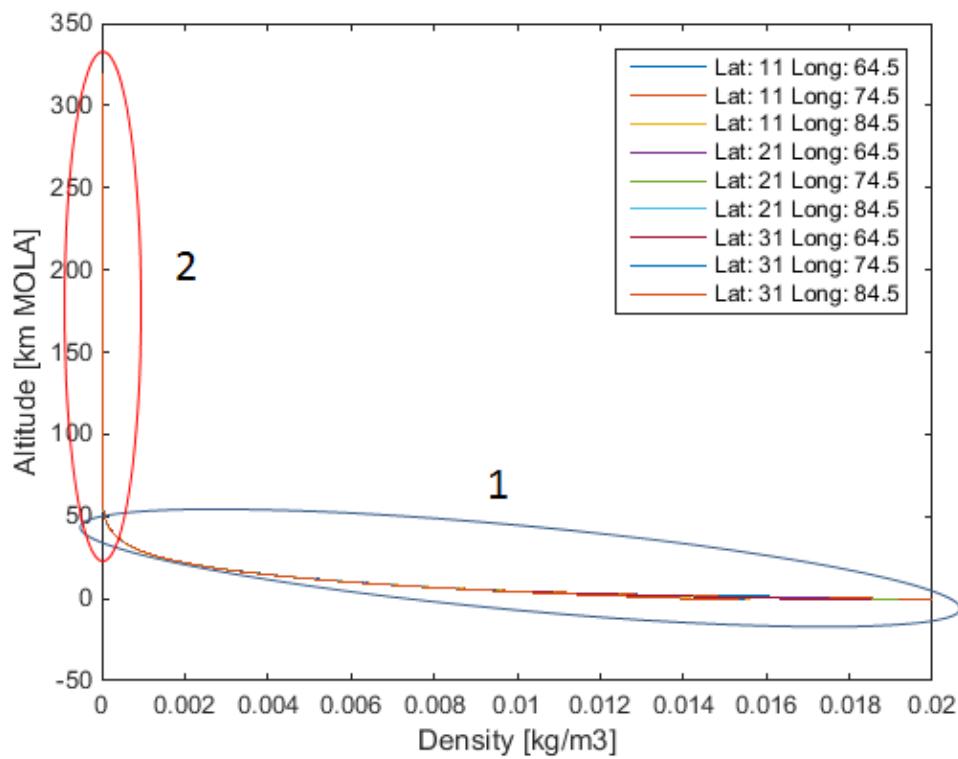


Figure B.4: Two different density curve sections

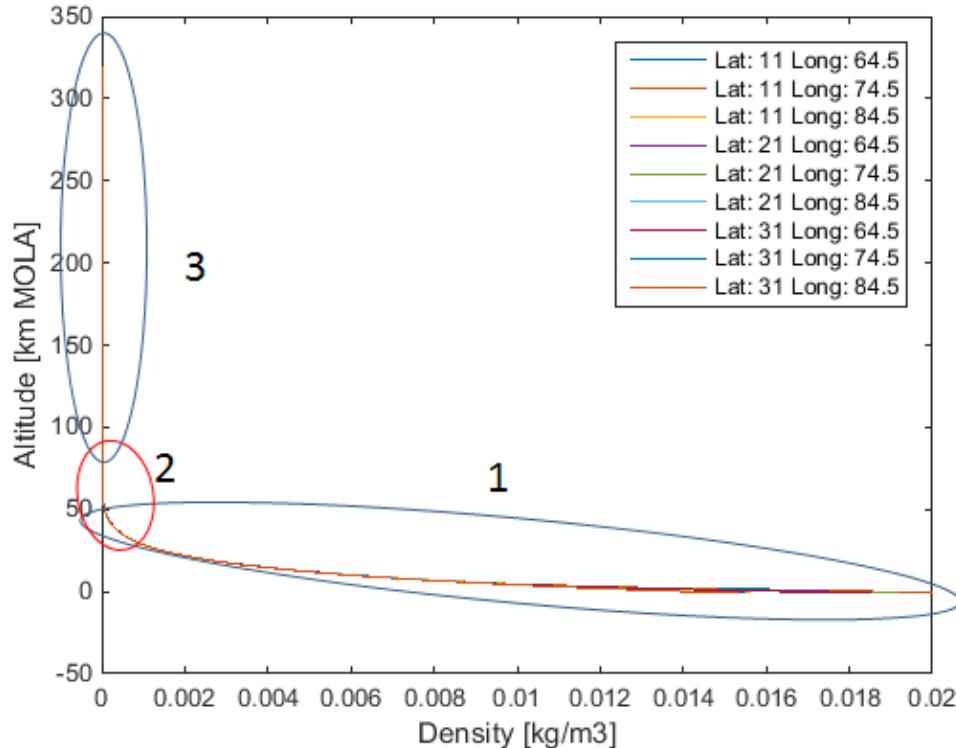


Figure B.5: Three different density curve sections

the lower part, section 2 the middle and section 3 the upper part.

However, in this case the fit for section three resulted in an oscillating behaviour around the actual data which caused the density values to drop below zero as shown in Figure B.7. Since this is unrealistic, an exponential atmospheric fit for only the third section was attempted (also shown in Figure B.7) however, this resulted in the same behaviour as the attempt for the entire curve. Therefore, it was decided to try a different exponential approach which eventually resulted in the fit described in Section 3.4.1.

Figure B.8 clearly shows that both the full exponential atmospheric fit and the polynomial fits were not a proper choice here. The figure shows the curved part of the curve.

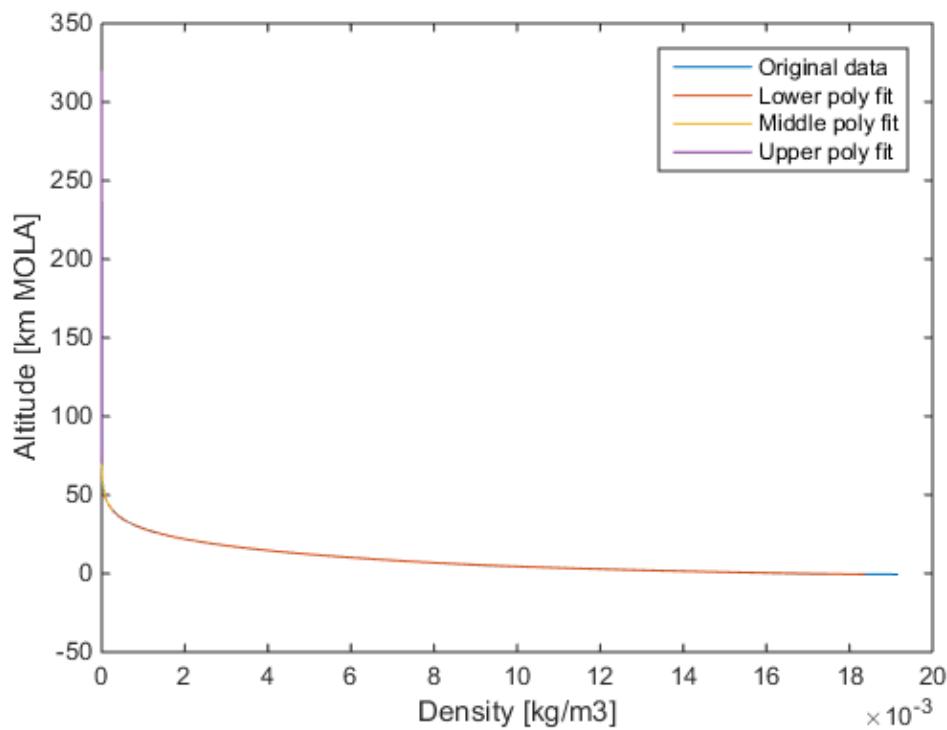


Figure B.6: All section fits for the launch site density data curve

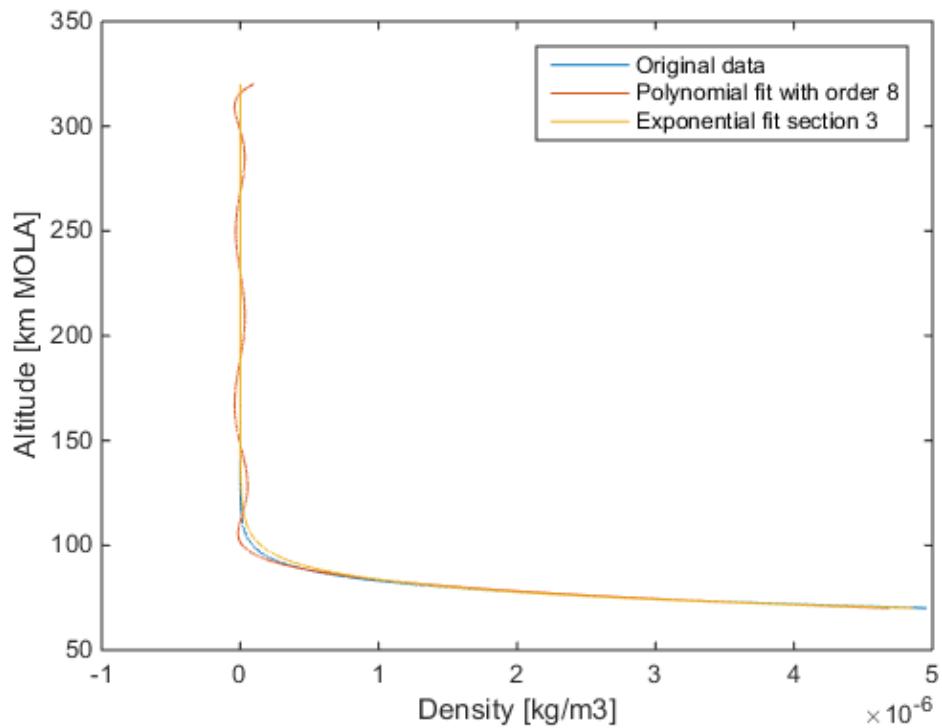


Figure B.7: Section 3 fit for the launch site density data curve

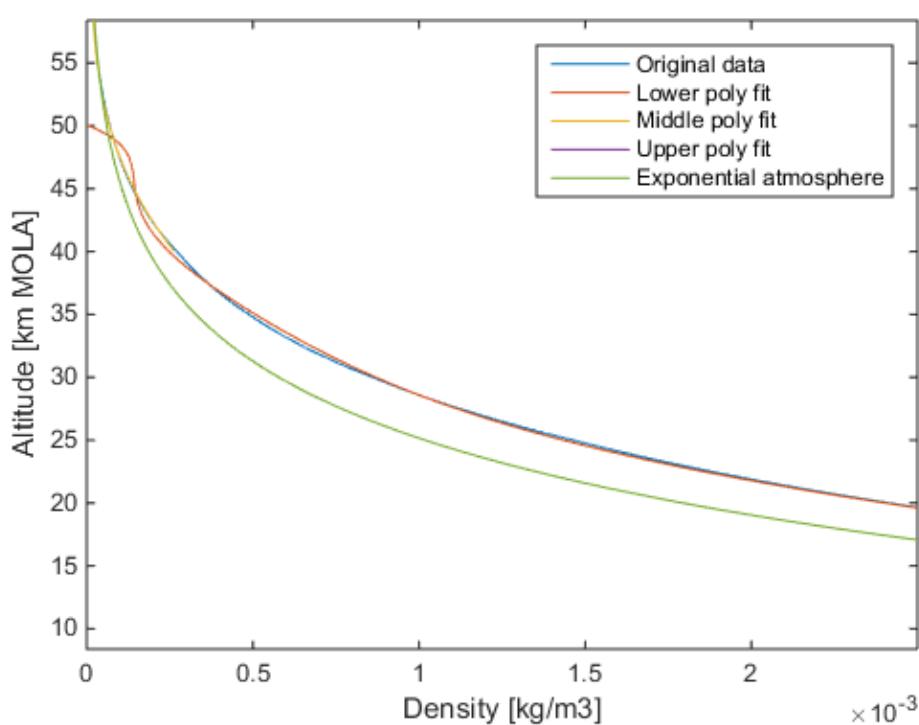


Figure B.8: Zoom in of the end of section 1 with the polynomial and exponential atmospheric fits

C

PROGRAM FILE DEFINITIONS

Both the [RKF](#) and [TSI](#) propagator architectures were presented in ??(Figures 6.2 and 6.3 respectively). These included many different operation blocks. Each block is either a separate class, a combination of a header and source file (without it being a class), a function of either of these files or a function in the main file (MAVPropagator). The different files that include several blocks are MAVPropagator.h/.cpp, TaylorSeriesIntegration.h/.cpp, ascentDragForce.h/.cpp and ascentStateDerivativeFunction.h/.cpp, where this last file is also a class. The functions that will be implemented in these files are mentioned in Table C.1 all other blocks are described in Table C.2.

Table C.1: Large program files and included functions.

MAVPropagator	TaylorSeriesIntegration	ascentStateDerivativeFunction
Update current state	Compute auxiliaries	Compute current spherical state
Integration step	Thrust acceleration in B-frame	Compute gravitational acceleration
	Compute Taylor coefficients	Compute thrust and drag acceleration
ascentDragForce	Store state Taylor coefficients	Transfer to inertial frame
Compute speed of sound and Mach number	Initial step-size	Compute total acceleration
	Provide Taylor series expansion	Compute mass flow rate
	Estimate the max. trunc. error	
Compute drag force	Taylor series expansion incl. trunc. error	

Table C.2: Separate function files

Block	Kind of file
Planet characteristics	Class
Vehicle characteristics	Class
Auxiliary equations, derivatives and functions	Class
Current state and time	Class
Basic recurrence relations	Header and source
Full set of recurrence relations	Header and source
Determine next step-size	Header and source
Compute local air temperature	Header and source
Compute local air density	Header and source
Compute drag coefficient	Header and source

D

ALL RECURRENCE RELATIONS

In this appendix, all the reduced auxiliary functions that form the complete recurrence relations for each of the variables using the basic recurrence relations are provided for all three cases. Each case contains a table with the function definition, the corresponding equation and the basic recurrence relation category. All the reduced auxiliary derivatives are also described. All these expressions are a function of k , where $W(k)$ refers to the k^{th} order reduced derivative. The same holds for $X(k)$ and $U(k)$. All the expressions hold for $k \geq 1$. In the tables, the (k) is neglected to make it more readable.

D.1. FIRST CARTESIAN CASE: EULER ANGLES

The first Cartesian case requires a large number of reduced auxiliary functions. These are all provided in Table D.1. For each function, the number, the equations and the category is provided.

Table D.1: Reduced auxiliary functions for the first Cartesian case.

Auxiliary function	Equation	Category
$W_{4,1} =$	$X_1^2 + X_2^2$	Multiplication
$W_{4,2} =$	$W_{4,1} + X_3^2$	Multiplication
$W_{4,3} =$	$\sqrt{W_{4,2}}$	Power
$W_{4,4} =$	$\sqrt{W_{4,1}}$	Power
$W_{4,5} =$	$\frac{X_2}{W_{4,4}}$	Division
$W_{4,6} =$	$\frac{X_1}{W_{4,4}}$	Division
$W_{4,7} =$	$\frac{X_3}{W_{4,3}}$	Division
$W_{4,8} =$	$\frac{W_{4,4}}{W_{4,3}}$	Division
$W_{4,9} =$	$X_4 + \Omega_M X_2$	Constant Multiplication
$W_{4,10} =$	$X_5 - \Omega_M X_1$	Constant Multiplication
$W_{4,11} =$	$W_{4,9}^2 + W_{4,10}^2 + X_6^2$	Multiplication
$W_{4,12} =$	$\sqrt{W_{4,11}}$	Power
$W_{4,13} =$	$-W_{4,6} W_{4,7}$	Multiplication
$W_{4,14} =$	$-W_{4,7} W_{4,5}$	Multiplication
$W_{4,15} =$	$-W_{4,8} W_{4,6}$	Multiplication
$W_{4,16} =$	$W_{4,8} W_{4,5}$	Multiplication
$W_{4,17} =$	$X_6 W_{4,8} + W_{4,9} W_{4,13} + W_{4,10} W_{4,14}$	Multiplication
$W_{4,18} =$	$W_{4,10} W_{4,6} - W_{4,9} W_{4,5}$	Multiplication

$W_{4,19} =$	$W_{4,9}W_{4,15} - X_6W_{4,7} + W_{4,10}W_{4,16}$	Multiplication
$W_{4,20} =$	$W_{4,17}^2 + W_{4,18}^2$	Multiplication
$W_{4,21} =$	$\sqrt{W_{4,20}}$	Power
$W_{4,22} =$	$\frac{W_{4,18}}{W_{4,21}}$	Division
$W_{4,23} =$	$\frac{W_{4,17}}{W_{4,21}}$	Division
$W_{4,24} =$	$-\frac{W_{4,19}}{W_{4,12}}$	Division
$W_{4,25} =$	$\frac{W_{4,21}}{W_{4,12}}$	Division
$W_{4,26} =$	$c\psi_T$	Cosine
$W_{4,27} =$	$c\epsilon_T$	Cosine
$W_{4,28} =$	$s\psi_T$	Sine
$W_{4,29} =$	$s\epsilon_T$	Sine
$W_{4,30} =$	$W_{4,26}W_{4,27}$	Multiplication
$W_{4,31} =$	$W_{4,27}W_{4,28}$	Multiplication
$W_{4,32} =$	$\frac{1}{X_7}$	Division
$W_{4,33} =$	$TW_{4,32}$	Constant Multiplication
$W_{4,34} =$	$W_{4,33}W_{4,30}$	Multiplication
$W_{4,35} =$	$\frac{X_{27}}{X_7}$	Division
$W_{4,36} =$	$W_{4,34} - W_{4,35}$	Subtraction
$W_{4,37} =$	$W_{4,33}W_{4,31}$	Multiplication
$W_{4,38} =$	$W_{4,33}W_{4,29}$	Multiplication
$W_{4,39} =$	$-\mu_M \frac{X_1}{X_9}$	Division
$W_{4,40} =$	$-W_{4,7}W_{4,23}$	Multiplication
$W_{4,41} =$	$W_{4,8}W_{4,24}$	Multiplication
$W_{4,42} =$	$-W_{4,5}W_{4,22}$	Multiplication
$W_{4,43} =$	$-W_{4,5}W_{4,23}$	Multiplication
$W_{4,44} =$	$-W_{4,8}W_{4,25}$	Multiplication
$W_{4,45} =$	$W_{4,40}W_{4,25}$	Multiplication
$W_{4,46} =$	$W_{4,42}W_{4,25}$	Multiplication
$W_{4,47} =$	$-W_{4,13}W_{4,22}$	Multiplication
$W_{4,48} =$	$W_{4,40}W_{4,24}$	Multiplication
$W_{4,49} =$	$W_{4,42}W_{4,24}$	Multiplication
$W_{4,50} =$	$W_{4,6}(W_{4,45} + W_{4,41}) + W_{4,46}$	Multiplication
$W_{4,51} =$	$W_{4,6}(W_{4,48} + W_{4,44}) + W_{4,49}$	Multiplication
$W_{4,52} =$	$W_{4,39} + W_{4,36}W_{4,50} + W_{4,37}(W_{4,47} + W_{4,43}) - W_{4,38}W_{4,51}$	Multiplication
$W_{5,1} =$	$-\mu_M \frac{X_2}{X_9}$	Division
$W_{5,2} =$	$W_{4,6}W_{4,22}$	Multiplication
$W_{5,3} =$	$W_{4,5}(W_{4,45} + W_{4,41}) + W_{5,2}W_{4,25}$	Multiplication
$W_{5,4} =$	$-W_{4,14}W_{4,22} + W_{4,6}W_{4,23}$	Multiplication
$W_{5,5} =$	$W_{4,5}(W_{4,48} + W_{4,44}) + W_{5,2}W_{4,24}$	Multiplication
$W_{5,6} =$	$W_{5,1} + W_{4,36}W_{5,3} + W_{4,37}W_{5,4} - W_{4,38}W_{5,5}$	Multiplication
$W_{6,1} =$	$-\mu_M \frac{X_3}{X_9}$	Division
$W_{6,2} =$	$W_{4,7}W_{4,24}$	Multiplication
$W_{6,3} =$	$W_{4,8}W_{4,22}$	Multiplication
$W_{6,4} =$	$-W_{4,7}W_{4,25}$	Multiplication
$W_{6,5} =$	$-W_{4,44}W_{4,23} + W_{6,2}$	Multiplication

$W_{6,6} =$	$W_{4,41}W_{4,23} + W_{6,4}$	Multiplication
$W_{6,7} =$	$W_{6,1} + W_{4,36}W_{6,5} - W_{4,37}W_{6,3} - W_{4,38}W_{6,6}$	Multiplication
$W_{8,1} =$	X_1X_4	Multiplication
$W_{8,2} =$	X_2X_5	Multiplication
$W_{8,3} =$	X_3X_6	Multiplication
$W_{9,0} =$	X_9U_8	Multiplication
$W_{9,1} =$	$\frac{W_{9,0}}{X_8}$	Division
$W_{27,1} =$	$W_{4,3}$	Redefining
$W_{27,2} =$	$W_{27,1}^2$	Multiplication
$W_{27,3} =$	$W_{27,1}^3$	Power
$W_{27,4} =$	$W_{27,1}^4$	Power
$W_{27,5} =$	$W_{27,1}^5$	Power
$W_{27,6} =$	$W_{27,1}^6$	Power
$W_{27,7} =$	$W_{27,1}^7$	Power
$W_{27,8} =$	$W_{27,1}^8$	Power
$W_{27,9} =$	$W_{27,1}^9$	Power
$W_{27,10} =$	$W_{27,1}^{10}$	Power
$W_{27,11} =$	$P_{\rho 10}W_{27,10} + P_{\rho 9}W_{27,9} + \dots + P_{\rho 1}W_{27,1} + P_{\rho 0}$	Constant Multiplication
$W_{27,12} =$	$e^{W_{27,11}}$	Exponential
$W_{27,13} =$	$T_a = \begin{cases} P_{T1,1}W_{27,1}, & \text{for } -0.6 \leq h < 5.04 \\ P_{T3,2}W_{27,3} + P_{T2,2}W_{27,2} + P_{T1,2}W_{27,1}, & \text{for } 5.04 \leq h < 35.53 \\ P_{T6,3}W_{27,6} + P_{T5,3}W_{27,5} + P_{T4,3}W_{27,4} + \dots \\ \dots + P_{T3,3}W_{27,3} + P_{T2,3}W_{27,2} + P_{T1,3}W_{27,1}, & \text{for } 35.53 \leq h < 75.07 \\ P_{T8,4}W_{27,8} + P_{T7,4}W_{27,7} + P_{T6,4}W_{27,6} + \dots \\ \dots + P_{T5,4}W_{27,5} + P_{T4,4}W_{27,4} + P_{T3,4}W_{27,3} + \dots \\ \dots + P_{T2,4}W_{27,2} + P_{T1,4}W_{27,1}, & \text{for } 75.07 \leq h < 170.05 \\ 0, & \text{for } h \geq 170.05 \end{cases}$	Constant Multiplication
$W_{27,14} =$	$\sqrt{\gamma_a R_a^* W_{27,13}}$	Power
$W_{27,15} =$	$\frac{W_{4,12}}{W_{27,14}}$	Division
$W_{27,16} =$	$C_D = \begin{cases} 0, & \text{for } 0 \leq M < 0.5 \\ P_{C_D,1,2}W_{27,15}, & \text{for } 0.5 \leq M < 1 \\ P_{C_D,1,3}W_{27,15}, & \text{for } 1 \leq M < 1.3 \\ P_{C_D,1,4}W_{27,15}, & \text{for } 1.3 \leq M < 2.5 \\ P_{C_D,1,5}W_{27,15}, & \text{for } 2.5 \leq M < 4 \\ 0, & \text{for } M \geq 4 \end{cases}$	Constant Multiplication
$W_{27,17} =$	$W_{4,12}^2$	Multiplication
$W_{27,18} =$	$W_{27,17}W_{27,16}$	Multiplication
$W_{27,19} =$	$\frac{1}{2}SW_{27,18}W_{27,12}$	Multiplication

The complete recurrence relation for each of the auxiliary variables can now be written as a function of the reduced auxiliary functions. These are shown by Equation (D.1) and hold for $k \geq 1$.

$$\begin{aligned}
 U_1(k) &= X_4(k) = \frac{U_4(k-1)}{k} & U_5(k) &= W_{5,6}(k) \\
 U_2(k) &= X_5(k) = \frac{U_5(k-1)}{k} & U_6(k) &= W_{6,7}(k) \\
 U_3(k) &= X_6(k) = \frac{U_6(k-1)}{k} & U_7(k) &= 0 \\
 U_4(k) &= W_{4,52}(k) & U_8(k) &= 2W_{8,1}(k) + 2W_{8,2}(k) + 2W_{8,3}(k) \\
 & & U_9(k) &= \frac{3}{2}W_{9,1}(k)
 \end{aligned} \tag{D.1}$$

These equations are now all a function of the recurrence relations corresponding to the rest of the auxiliary functions, which are all basic recurrence relations as mentioned in Table D.1.

D.2. SECOND CARTESIAN CASE: UNIT VECTORS

The second Cartesian case is similar to the first one, however fewer reduced auxiliary functions are needed. These are all provided in Table D.2. For each function, the number, the equations and the category is provided. The numbers are not always the same as in the first case, so these should be read as completely new reduced auxiliary functions. In this case, $u4$, $u5$ and $u6$ are included in the table, because they were defined as recurrence multiplication relations.

Table D.2: Reduced auxiliary functions for the second Cartesian case.

Function	Equation	Category
$W_{4,1} =$	$X_1^2 + X_2^2$	Multiplication
$W_{4,2} =$	$W_{4,1} + X_3^2$	Multiplication
$W_{4,3} =$	$\sqrt{W_{4,2}}$	Power
$W_{4,4} =$	$\sqrt{W_{4,1}}$	Power
$W_{4,9} =$	$X_4 + \Omega_M X_2$	Constant Multiplication
$W_{4,10} =$	$X_5 - \Omega_M X_1$	Constant Multiplication
$W_{4,11} =$	$W_{4,9}^2 + W_{4,10}^2 + X_6^2$	Multiplication
$W_{4,12} =$	$\sqrt{W_{4,11}}$	Power
$W_{4,13} =$	$\frac{W_{4,9}}{W_{4,12}}$	Division
$W_{4,14} =$	$\frac{W_{4,10}}{W_{4,12}}$	Division
$W_{4,15} =$	$\frac{X_6}{W_{4,12}}$	Division
$W_{4,16} =$	$W_{4,10}X_3 - X_6X_2$	Multiplication
$W_{4,17} =$	$X_6X_1 - W_{4,9}X_3$	Multiplication
$W_{4,18} =$	$W_{4,9}X_2 - W_{4,10}X_1$	Multiplication
$W_{4,19} =$	$W_{4,16}^2 + W_{4,17}^2 + W_{4,18}^2$	Multiplication
$W_{4,20} =$	$\sqrt{W_{4,19}}$	Power
$W_{4,21} =$	$\frac{W_{4,16}}{W_{4,20}}$	Division
$W_{4,22} =$	$\frac{W_{4,17}}{W_{4,20}}$	Division
$W_{4,23} =$	$\frac{W_{4,18}}{W_{4,20}}$	Division
$W_{4,24} =$	$W_{4,16}W_{4,23} - W_{4,15}W_{4,22}$	Multiplication
$W_{4,25} =$	$W_{4,15}W_{4,21} - W_{4,13}W_{4,23}$	Multiplication
$W_{4,26} =$	$c\psi_T$	Cosine
$W_{4,27} =$	$c\epsilon_T$	Cosine
$W_{4,28} =$	$s\psi_T$	Sine
$W_{4,29} =$	$s\epsilon_T$	Sine
$W_{4,30} =$	$W_{4,26}W_{4,27}$	Multiplication
$W_{4,31} =$	$W_{4,27}W_{4,28}$	Multiplication
$W_{4,32} =$	$\frac{1}{X_7}$	Division
$W_{4,33} =$	$TW_{4,32}$	Constant Multiplication
$W_{4,34} =$	$W_{4,33}W_{4,30}$	Multiplication
$W_{4,35} =$	$\frac{X_{27}}{X_7}$	Division

$W_{4,36} =$	$W_{4,34} - W_{4,35}$	Subtraction
$W_{4,37} =$	$W_{4,33} W_{4,31}$	Multiplication
$W_{4,38} =$	$W_{4,33} W_{4,29}$	Multiplication
$W_{4,39} =$	$-\mu_M \frac{X_1}{X_9}$	Division
$W_{4,40} =$	$W_{4,13} W_{4,22} - W_{4,14} W_{4,21}$	Multiplication
$U_4 =$	$W_{4,39} + W_{4,36} W_{4,13} + W_{4,37} W_{4,21} - W_{4,38} W_{4,24}$	Multiplication
$W_{5,1} =$	$-\mu_M \frac{X_2}{X_9}$	Division
$U_5 =$	$W_{5,1} + W_{4,36} W_{4,14} + W_{4,37} W_{4,22} - W_{4,38} W_{4,25}$	Multiplication
$W_{6,1} =$	$-\mu_M \frac{X_3}{X_9}$	Division
$U_6 =$	$W_{6,1} + W_{4,36} W_{4,15} + W_{4,37} W_{4,23} - W_{4,38} W_{4,40}$	Multiplication
$W_{8,1} =$	$X_1 X_4$	Multiplication
$W_{8,2} =$	$X_2 X_5$	Multiplication
$W_{8,3} =$	$X_3 X_6$	Multiplication
$W_{9,0} =$	$X_9 U_8$	Multiplication
$W_{9,1} =$	$\frac{W_{9,0}}{X_8}$	Division
$W_{27,1} =$	$W_{4,3}$	Redefining
$W_{27,2} =$	$W_{27,1}^2$	Multiplication
$W_{27,3} =$	$W_{27,1}^3$	Power
$W_{27,4} =$	$W_{27,1}^4$	Power
$W_{27,5} =$	$W_{27,1}^5$	Power
$W_{27,6} =$	$W_{27,1}^6$	Power
$W_{27,7} =$	$W_{27,1}^7$	Power
$W_{27,8} =$	$W_{27,1}^8$	Power
$W_{27,9} =$	$W_{27,1}^9$	Power
$W_{27,10} =$	$W_{27,1}^{10}$	Power
$W_{27,11} =$	$P_{\rho 10} W_{27,10} + P_{\rho 9} W_{27,9} + \dots + P_{\rho 1} W_{27,1} + P_{\rho 0}$	Constant Multiplication
$W_{27,12} =$	$e^{W_{27,11}}$	Exponential
$W_{27,13} =$	$T_a = \begin{cases} P_{T1,1} W_{27,1}, & \text{for } -0.6 \leq h < 5.04 \\ P_{T3,2} W_{27,3} + P_{T2,2} W_{27,2} + P_{T1,2} W_{27,1}, & \text{for } 5.04 \leq h < 35.53 \\ P_{T6,3} W_{27,6} + P_{T5,3} W_{27,5} + P_{T4,3} W_{27,4} + \dots \\ \dots + P_{T3,3} W_{27,3} + P_{T2,3} W_{27,2} + P_{T1,3} W_{27,1}, & \text{for } 35.53 \leq h < 75.07 \\ P_{T8,4} W_{27,8} + P_{T7,4} W_{27,7} + P_{T6,4} W_{27,6} + \dots \\ \dots + P_{T5,4} W_{27,5} + P_{T4,4} W_{27,4} + P_{T3,4} W_{27,3} + \dots \\ \dots + P_{T2,4} W_{27,2} + P_{T1,4} W_{27,1}, & \text{for } 75.07 \leq h < 170.05 \\ 0, & \text{for } h \geq 170.05 \end{cases}$	Constant Multiplication
$W_{27,14} =$	$\sqrt{\gamma_a R_a^* W_{27,13}}$	Power
$W_{27,15} =$	$\frac{W_{4,12}}{W_{27,14}}$	Division
$W_{27,16} =$	$C_D = \begin{cases} 0, & \text{for } 0 \leq M < 0.5 \\ P_{C_D 1,2} W_{27,15}, & \text{for } 0.5 \leq M < 1 \\ P_{C_D 1,3} W_{27,15}, & \text{for } 1 \leq M < 1.3 \\ P_{C_D 1,4} W_{27,15}, & \text{for } 1.3 \leq M < 2.5 \\ P_{C_D 1,5} W_{27,15}, & \text{for } 2.5 \leq M < 4 \\ 0, & \text{for } M \geq 4 \end{cases}$	Constant Multiplication
$W_{27,17} =$	$W_{4,12}^2$	Multiplication
$W_{27,18} =$	$W_{27,17} W_{27,16}$	Multiplication

$W_{27,19} =$	$\frac{1}{2} SW_{27,18} W_{27,12}$	Multiplication
---------------	------------------------------------	----------------

The complete recurrence relation for each of the auxiliary variables can again be written as a function of the reduced auxiliary functions. These are shown by Equation (D.2).

$$\begin{aligned}
 U_1(k) &= X_4(k) = \frac{U_4(k-1)}{k} \\
 U_2(k) &= X_5(k) = \frac{U_5(k-1)}{k} \\
 U_3(k) &= X_6(k) = \frac{U_6(k-1)}{k} \\
 U_4(k) &= W_{4,39}(k) + W_{4,36}(k) W_{4,13}(k) + W_{4,37}(k) W_{4,21}(k) - W_{4,38}(k) W_{4,24}(k) \\
 U_5(k) &= W_{5,1}(k) + W_{4,36}(k) W_{4,14}(k) + W_{4,37}(k) W_{4,22}(k) - W_{4,38}(k) W_{4,25}(k) \\
 U_6(k) &= W_{6,1}(k) + W_{4,36}(k) W_{4,15}(k) + W_{4,37}(k) W_{4,23}(k) - W_{4,38}(k) W_{4,40}(k) \\
 U_7(k) &= 0 \\
 U_8(k) &= 2W_{8,1}(k) + 2W_{8,2}(k) + 2W_{8,3}(k) \\
 U_9(k) &= \frac{3}{2} W_{9,1}(k)
 \end{aligned} \tag{D.2}$$

D.3. SPHERICAL CASE

Since the Spherical case is very different from the Cartesian cases, it comes with its own auxiliary functions. The reduced versions are shown in Table D.3.

Table D.3: Reduced auxiliary functions for the Spherical case.

Auxiliary function	Equation	Category
$W_{4,4} =$	sX_{12}	Sine
$W_{4,5} =$	cX_{13}	Cosine
$W_{4,6} =$	cX_{12}	Cosine
$W_{4,7} =$	sX_{14}	Sine
$W_{4,8} =$	cX_{14}	Cosine
$W_{4,9} =$	sX_{13}	Sine
$W_{4,26} =$	$c\psi_T$	Cosine
$W_{4,27} =$	$c\epsilon_T$	Cosine
$W_{4,28} =$	$s\psi_T$	Sine
$W_{4,29} =$	$s\epsilon_T$	Sine
$W_{4,32} =$	$\frac{1}{X_7}$	Division
$W_{11,0} =$	$X_{15} W_{4,8}$	Multiplication
$W_{11,1} =$	$\frac{W_{11,0}}{X_{16}}$	Division
$W_{11,2} =$	$W_{11,1} W_{4,9}$	Multiplication
$W_{11,3} =$	$\frac{W_{11,2}}{W_{4,6}}$	Division
$W_{12,1} =$	$W_{11,1} W_{4,5}$	Multiplication
$W_{13,0} =$	$W_{4,28} W_{4,27}$	Multiplication
$W_{13,1} =$	$W_{4,7} W_{4,5}$	Multiplication
$W_{13,2} =$	$\Omega_M^2 X_{16} W_{4,6}$	Multiplication
$W_{13,3} =$	$W_{13,2} W_{4,4}$	Multiplication
$W_{13,4} =$	$TW_{13,0} W_{4,32}$	Multiplication
$W_{13,5} =$	$W_{13,3} W_{4,9} + W_{13,4}$	Multiplication
$W_{13,6} =$	$\frac{W_{13,5}}{X_{15}}$	Division

$W_{13,7} =$	$-2\Omega_M W_{4,6} W_{13,1} + W_{13,6}$	Multiplication
$W_{13,8} =$	$\frac{W_{13,7}}{W_{4,8}}$	Division
$W_{13,9} =$	$(2\Omega_M + W_{11,3}) W_{4,4} + W_{13,8}$	Multiplication
$W_{14,0} =$	$T W_{4,29} W_{4,32}$	Multiplication
$W_{14,1} =$	$W_{4,6} W_{4,8} + W_{13,1} W_{4,4}$	Multiplication
$W_{14,2} =$	$-\mu_M W_{4,8}$	Constant Multiplication
$W_{14,3} =$	X_{16}^2	Multiplication
$W_{14,4} =$	$\frac{W_{14,2}}{W_{14,3}}$	Division
$W_{14,5} =$	$W_{14,4} + W_{13,2} W_{14,1} + W_{14,0}$	Multiplication
$W_{14,6} =$	$\frac{W_{14,5}}{X_{15}}$	Division
$W_{14,7} =$	$2\Omega_M W_{4,6} W_{4,9} + W_{11,1} + W_{14,6}$	Multiplication
$W_{15,0} =$	$T W_{4,26} W_{4,27} - X_{27}$	Multiplication
$W_{15,1} =$	$\frac{W_{15,0}}{X_7}$	Division
$W_{15,2} =$	$-\mu_M W_{4,7}$	Constant Multiplication
$W_{15,3} =$	$\frac{W_{15,2}}{W_{14,3}}$	Division
$W_{15,4} =$	$W_{4,8} W_{4,5}$	Multiplication
$W_{15,5} =$	$W_{4,7} W_{4,6} - W_{15,4} W_{4,4}$	Multiplication
$W_{15,6} =$	$W_{13,2} W_{15,5} + W_{15,1} + W_{15,3}$	Multiplication
$W_{16,1} =$	$X_{15} W_{4,7}$	Multiplication
$W_{27,1} =$	$X_{29} U_{28}$	Multiplication
$W_{27,2} =$	$X_{28} U_{29}$	Multiplication
$W_{27,3} =$	$X_{28} X_{29}$	Multiplication
$W_{27,4} =$	$X_{15} (W_{27,1} + W_{27,2})$	Multiplication
$W_{27,5} =$	$W_{27,3} U_{15}$	Multiplication
$W_{27,6} =$	$X_{15} (W_{27,4} + W_{27,5})$	Multiplication
$W_{28,1} =$	$U_{30} X_{28}$	Multiplication
$W_{29,1} =$	$\begin{cases} 0, & \text{for } 0 \leq M < 0.5 \\ P_{C_D 1,2} U_{32}, & \text{for } 0.5 \leq M < 1 \\ P_{C_D 1,3} U_{32}, & \text{for } 1 \leq M < 1.3 \\ P_{C_D 1,4} U_{32}, & \text{for } 1.3 \leq M < 2.5 \\ P_{C_D 1,5} U_{32}, & \text{for } 2.5 \leq M < 4 \\ 0, & \text{for } M \geq 4 \end{cases}$	Constant Multiplication
$W_{30,1} =$	X_{31}^9	Power
$W_{30,2} =$	X_{31}^8	Power
$W_{30,3} =$	X_{31}^7	Power
$W_{30,4} =$	X_{31}^6	Power
$W_{30,5} =$	X_{31}^5	Power
$W_{30,6} =$	X_{31}^4	Power
$W_{30,7} =$	X_{31}^3	Power
$W_{30,8} =$	X_{31}^2	Multiplication
$W_{30,9} =$	$U_{31} (10P_{\rho 10} W_{30,1} + \dots + 3P_{\rho 3} W_{30,8} + 2P_{\rho 2} X_{31} + P_{\rho 1})$	Multiplication
$W_{32,1} =$	$X_{33} U_{15}$	Multiplication
$W_{32,2} =$	$X_{15} U_{33}$	Multiplication
$W_{32,3} =$	X_{33}^2	Multiplication
$W_{32,4} =$	$\frac{W_{32,1} - W_{32,2}}{W_{32,3}}$	Division

$W_{33,1} =$	$\frac{U_{34}}{X_{33}}$	Division
$W_{34,1} =$	$\begin{cases} P_{T1,1}U_{31}, & \text{for } -0.6 \leq h < 5.04 \\ (3P_{T3,2}W_{30,8} + 2P_{T2,2}X_{31})U_{31} + P_{T1,2}U_{31}, & \text{for } 5.04 \leq h < 35.53 \\ (6P_{T6,3}W_{30,5} + 5P_{T5,3}W_{30,6} + 4P_{T4,3}W_{30,7} + \dots \\ \dots + 3P_{T3,3}W_{30,8} + 2P_{T2,3}X_{31})U_{31} + P_{T1,3}U_{31}, & \text{for } 35.53 \leq h < 75.07 \\ (8P_{T8,4}W_{30,3} + 7P_{T7,4}W_{30,4} + 6P_{T6,4}W_{30,5} + 5P_{T5,4}W_{30,6} + \dots \\ \dots + 4P_{T4,4}W_{30,7} + 3P_{T3,4}W_{30,8} + 2P_{T2,4}X_{31})U_{31} + P_{T1,4}U_{31}, & \text{for } 75.07 \leq h < 170.05 \\ 0, & \text{for } h \geq 170.05 \end{cases}$	Multiplication

In this case, a number of extra auxiliary equations were used, which result in extra recurrence relations. These are all described in Equation (D.3) and hold for $k \geq 1$.

$$\begin{aligned}
U_7(k) &= 0 & U_{27}(k) &= \frac{1}{2}SW_{27,6}(k) \\
U_{11}(k) &= W_{11,3}(k) & U_{28}(k) &= W_{28,1}(k) \\
U_{12}(k) &= W_{12,1}(k) & U_{29}(k) &= W_{29,1}(k) \\
U_{13}(k) &= W_{13,9}(k) & U_{30}(k) &= W_{30,9}(k) \\
U_{14}(k) &= W_{14,7}(k) & U_{31}(k) &= U_{16}(k) \\
U_{15}(k) &= W_{15,6}(k) & U_{32}(k) &= W_{32,4}(k) \\
U_{16}(k) &= W_{16,1}(k) & U_{33}(k) &= W_{33,1}(k) \\
&& U_{34}(k) &= W_{34,1}(k)
\end{aligned} \tag{D.3}$$

E

NOMINAL CASE INPUT VALUES

In this appendix, the input files for the two different cases are given. Table E.1 describes the definition of the input parameters and the units.

Table E.1: Description of the input parameters

Parameter	Meaning
desiredOrbitalAltitude	This is the altitude in km MOLA that the MAV should reach, so the altitude of the desired orbit. At the same time it is also a cut-off criteria for the simulation.
desiredInclinationDeg	This is the desired inclination in degrees of the target orbit.
initialAltitude	This is the altitude at which the simulation starts, so the launch altitude for the MAV in km MOLA .
initialLatitudeDeg	This is the launch latitude on Mars in degrees at the start of the simulation.
initialLongitudeDeg	This is the launch longitude on Mars in degrees at the start of the simulation.
FlightPathAngleDeg	This is the flight-path angle in degrees at the start of the simulation. 90 degrees is straight up and 0 degrees is horizontal.
HeadingAngleDeg	This is the angle in degrees that defines the heading of the MAV and in the simulation it is defined 0 degrees when pointing North and 90 degrees when pointing East.
initialGroundVelocity	This is the ground velocity in km/s of the MAV at the start of the simulation. Because both TSI and RKF have to do too many steps if the ground velocity starts at 0 km/s, it is better to give it a small initial velocity.
massMAV	This is the GLOM in kg of the MAV .
thrust	This is the nominal thrust in Newton of the MAV engine and is a constant throughout the simulation.
specificImpulse	This is the specific impulse in seconds of the MAV engine and is a constant throughout the simulation.
initialBurnTime	This is the burn time in seconds of the first burn from the start of the simulation until the coasting phase.
constantThrustElevationAngle	This is the thrust elevation angle in degrees as defined in the propulsion frame and is a constant throughout the simulation.
constantThrustAzimuthAngle	This is the thrust azimuth angle in degrees as defined in the propulsion frame and is a constant throughout the simulation.
maxOrder	This is the order of the TSI simulation run, or K .
chosenLocalErrorTolerance	This is the error tolerance for both TSI and RKF during the actual integration and should not go below 10^{-15} .

chosenStepSize	This is the initial step-size in seconds that TSI starts with. It is the default first step-size of the step-size class that is updated every time from then on.
setEndTime	This is a cut-off criteria and can be chosen to be a certain amount of seconds at which the simulation should stop unless one of the other cut-off criteria is met first.
RKFinitiatorTime	This is the minimum time in seconds that the initiator step should be run. The initiator step is an RKF run with an error tolerance of 10^{-15} and stops when it goes beyond the initiator time. This does not mean that it is cut-off at the initiator time exactly.
rotatingPlanet	If this value is 1, the rotation of Mars is taken into account during the simulation. If it is 0 the simulation is run with a non-rotating Mars such that the inertial frame and the rotating frame are the same.
Gravity	If this value is 1, the Martian gravitational acceleration is taken into account. If it is 0, then this is neglected.
Thrust	If this value is 1, the MAV thrust acceleration is taken into account. If it is 0, then this is neglected.
Drag	If this value is 1, the drag acceleration is taken into account. If it is 0, then this is neglected.
comparison	If this value is 1, then the comparison results between TSI and RKF are computed after each integration. If it is 0, then this is not the case.

E.1. CASE 1

```

1 Test case from Woolley 2015 (case 10 SSTO)
2 desiredOrbitalAltitude      = 390.0
3 desiredInclinationDeg      = 45.0
4 initialAltitude            = -0.6
5 initialLatitudeDeg         = 0.0
6 initialLongitudeDeg        = 74.5
7 FlightPathAngleDeg         = 89.0
8 HeadingAngleDeg            = 90.0
9 initialGroundVelocity      = 0.00001
10 massMAV                   = 267.4
11 thrust                      = 3.56
12 specificImpulse            = 256
13 initialBurnTime            = 142.5
14 constantThrustElevationAngle = -0.184
15 constantThrustAzimuthAngle = -0.299
16 maxOrder                   = 20
17 chosenLocalErrorTolerance = 1e-15
18 chosenStepSize              = 0.01
19 setEndTime                  = 2000.0
20 RKFinitiatorTime           = 1.0
21 rotatingPlanet              = 1
22 Gravity                     = 1
23 Thrust                      = 1
24 Drag                         = 1
25 comparison                  = 1

```

E.2. CASE 2

```
1 Test case from Joel (hybrid) case7_3_2016_v33
2 desiredOrbitalAltitude      = 479.19000000064
3 desiredInclinationDeg       = 92.6899999999988
4 initialAltitude             = -0.6
5 initialLatitudeDeg          = 0.0
6 initialLongitudeDeg         = 90.0
7 FlightPathAngleDeg          = 89.0
8 HeadingAngleDeg             = 90.0
9 initialGroundVelocity        = 0.000001
10 massMAV                     = 288.95985303149
11 thrust                       = 6.01868886452604
12 specificImpulse              = 315.9
13 initialBurnTime              = 99.361911852794
14 constantThrustElevationAngle = -0.674
15 constantThrustAzimuthAngle   = 0.7273
16 maxOrder                     = 20
17 chosenLocalErrorTolerance    = 1e-15
18 chosenStepSize                = 0.01
19 setEndTime                    = 2000.0
20 RKFinitiatorTime             = 1.0
21 rotatingPlanet                = 1
22 Gravity                       = 1
23 Thrust                         = 1
24 Drag                           = 1
25 comparison                     = 1
```

F

RESULTS

F.1. ORDER

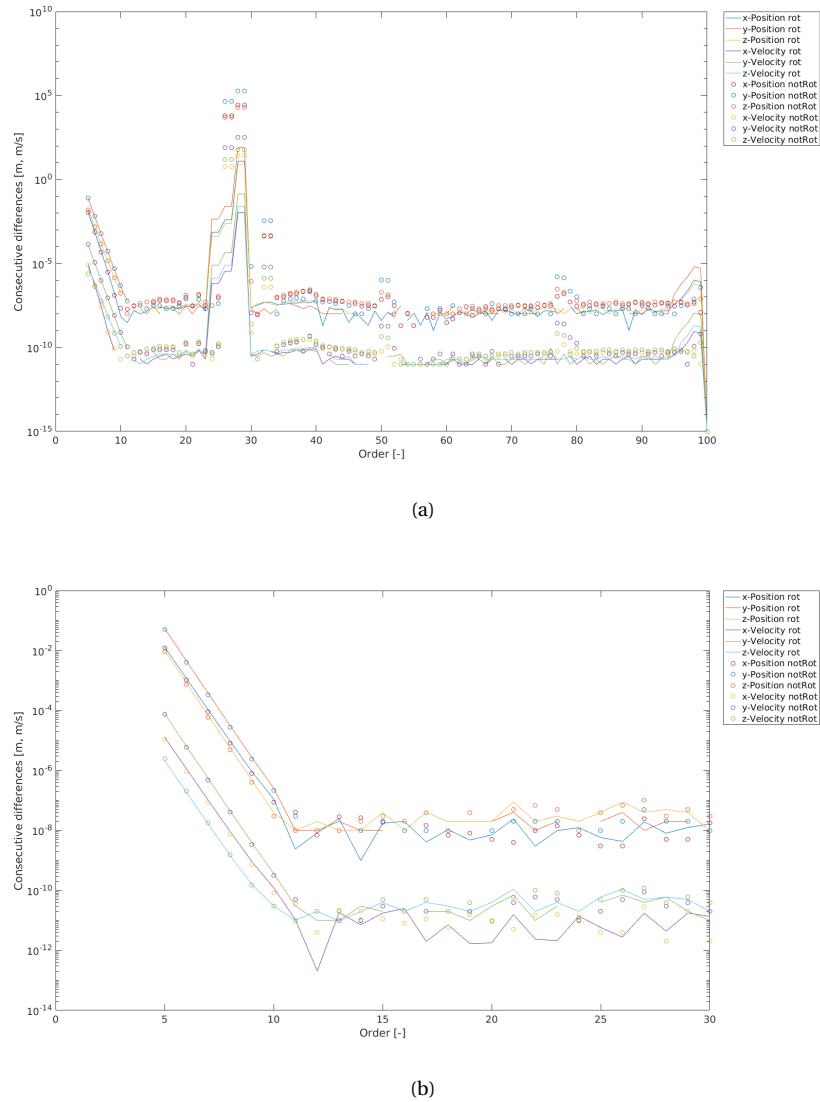


Figure F.1: Consecutive difference for rotating and non-rotating Mars (a) case 1, (b) case 2

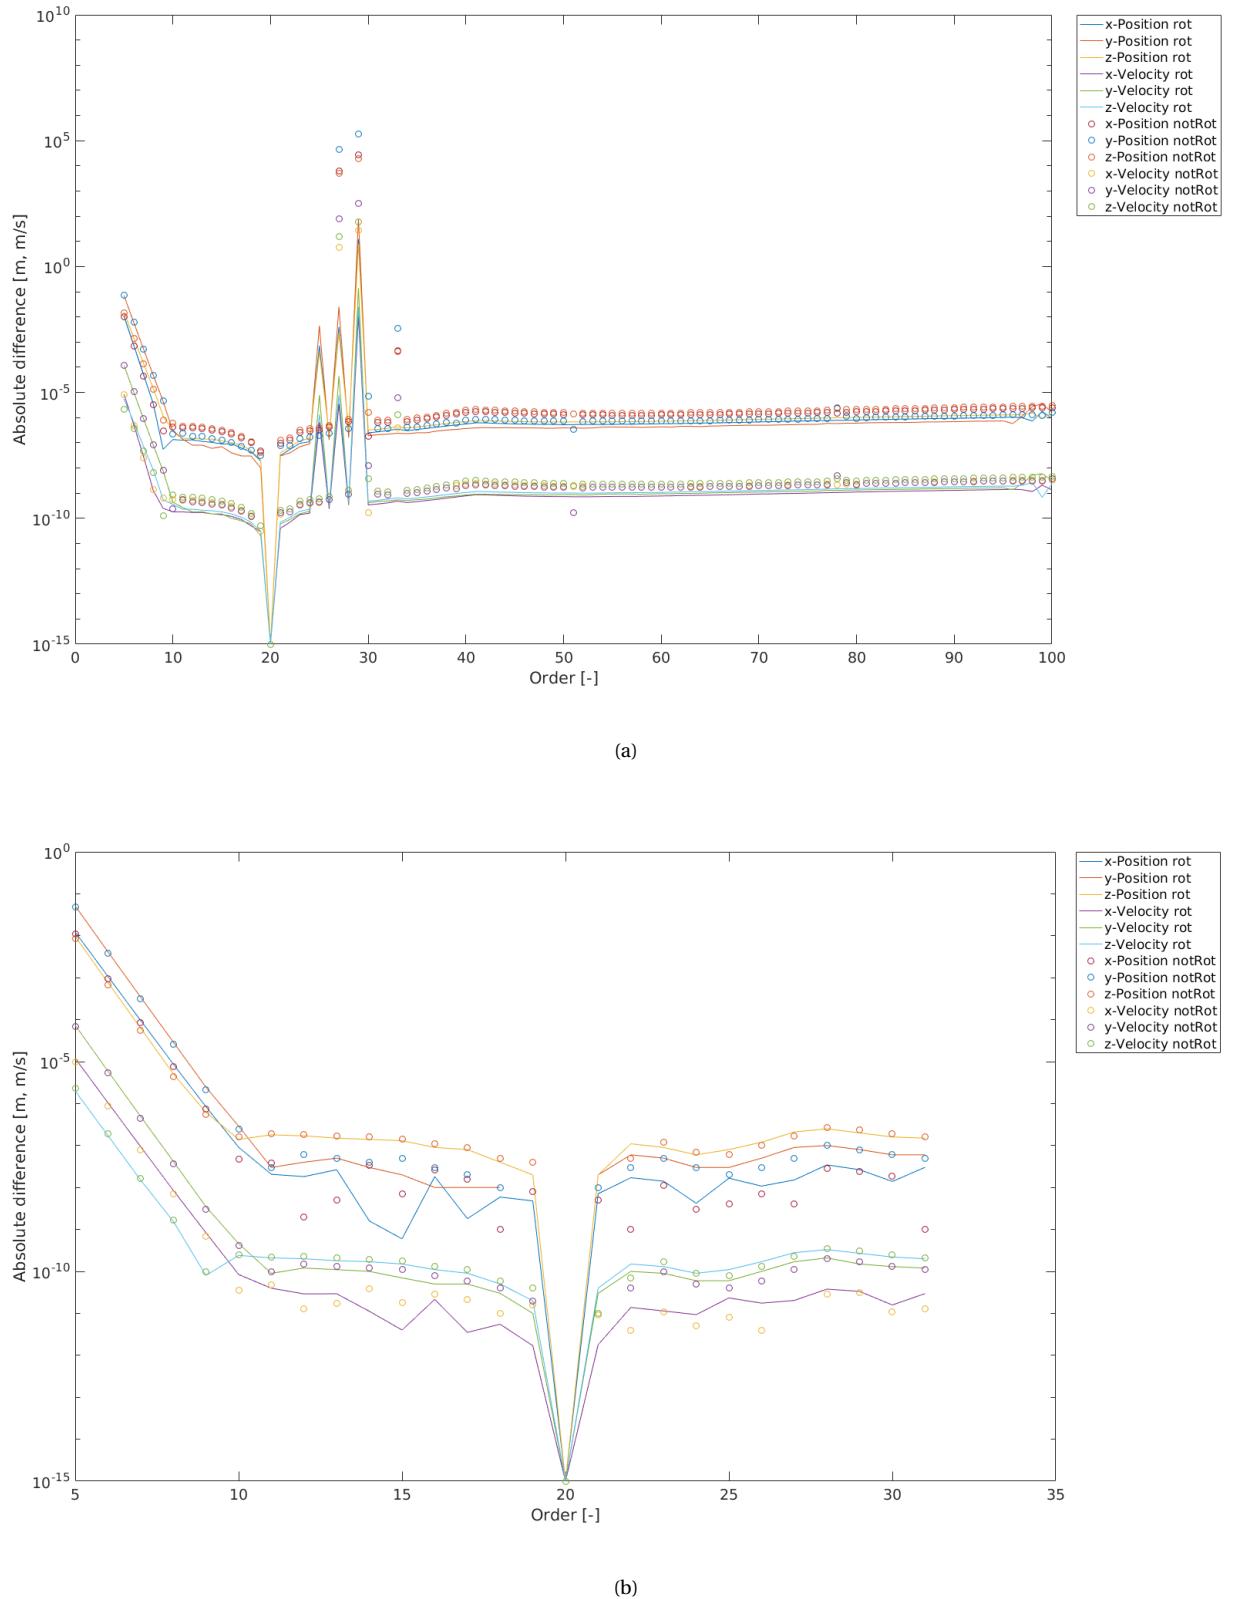


Figure F.2: Difference with respect to the nominal case for rotating and non-rotating Mars (a) case 1, (b) case 2

F.2. MULTIPLE RUNS

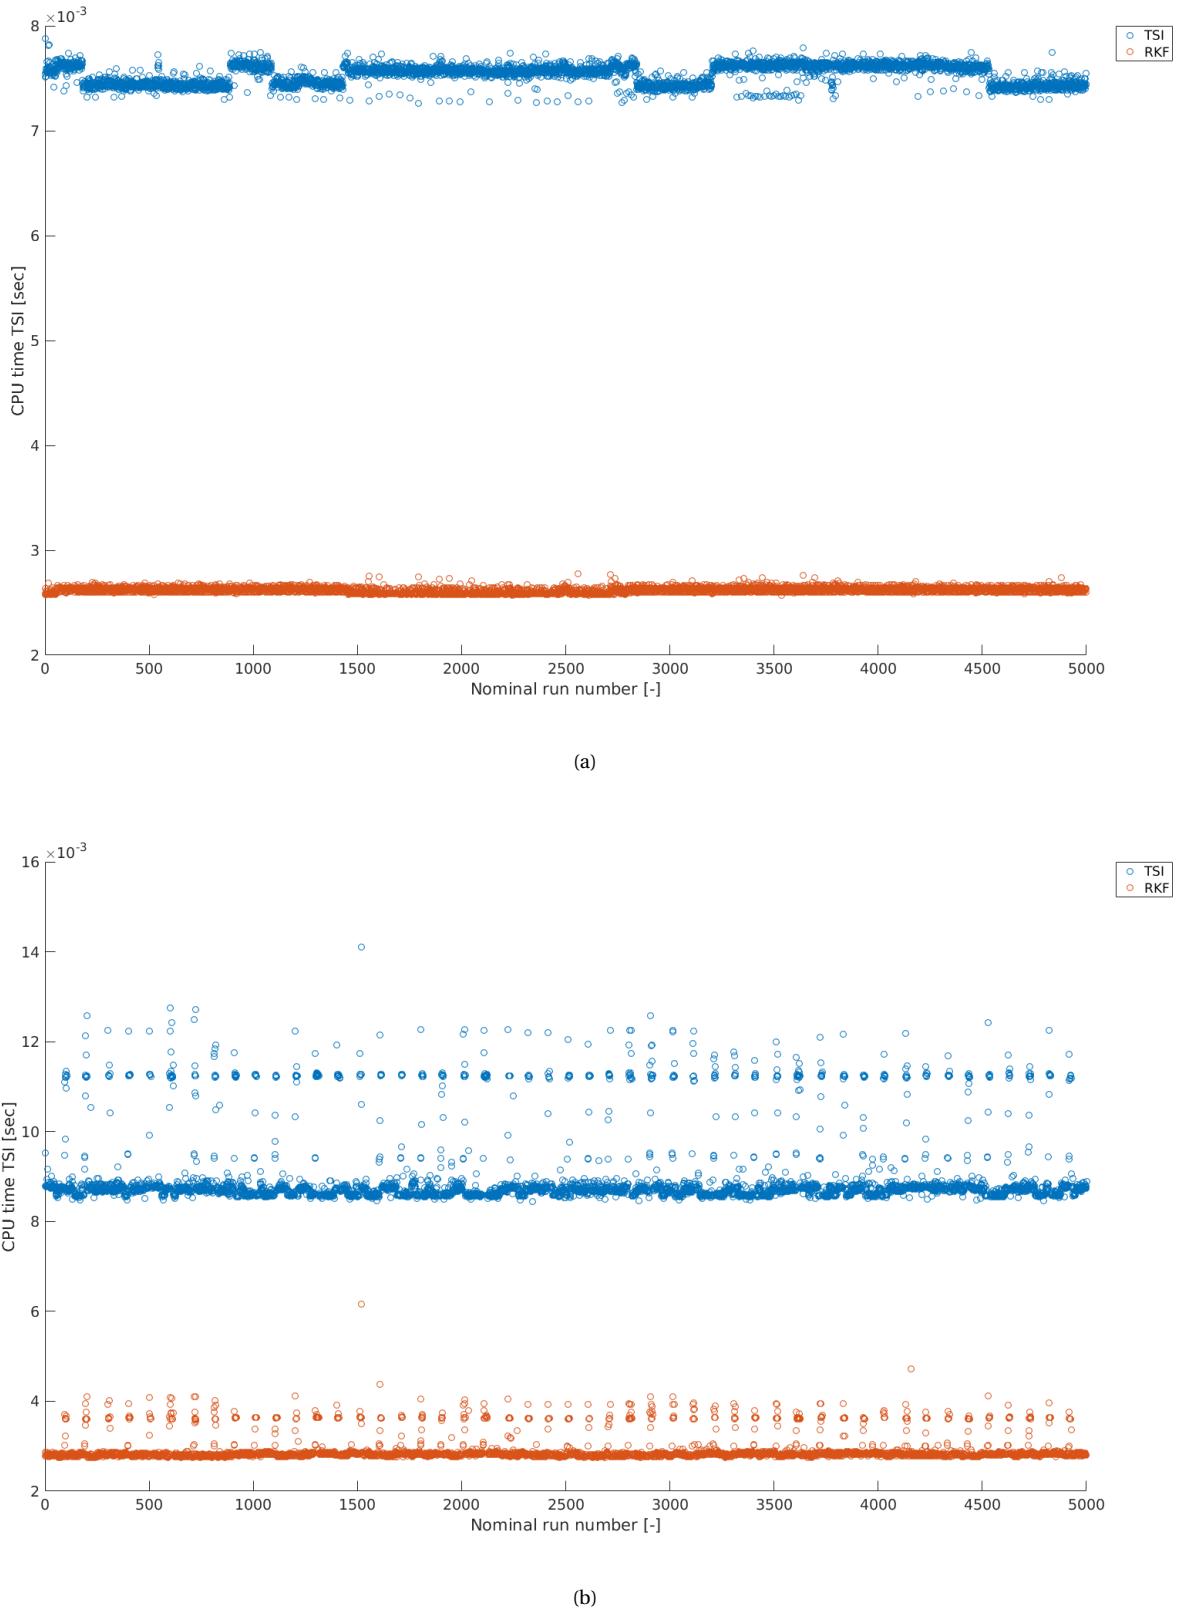


Figure E3: Nominal runs versus CPU time comparison between RKF and TSI (a) case 1, (b) case 2

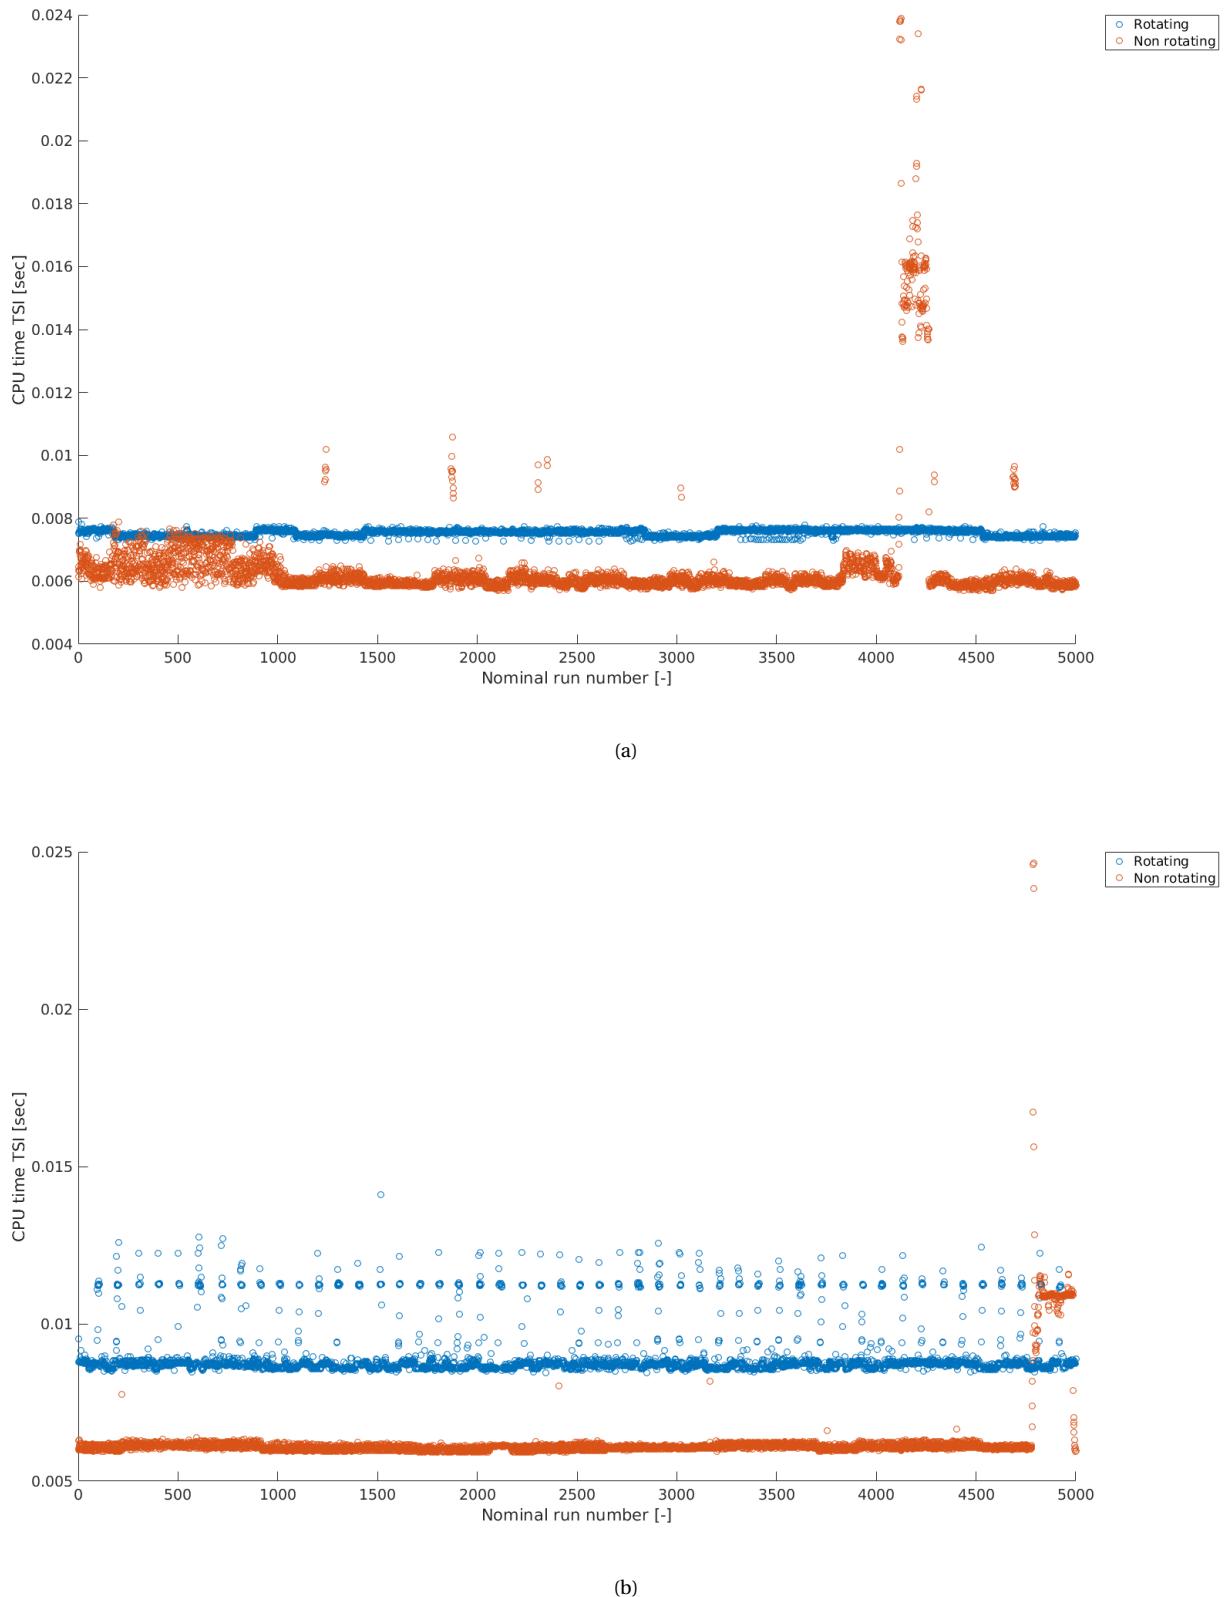


Figure F4: Nominal runs versus CPU time for rotating and non-rotating Mars (a) case 1, (b) case 2

F.3. LAUNCH ALTITUDE

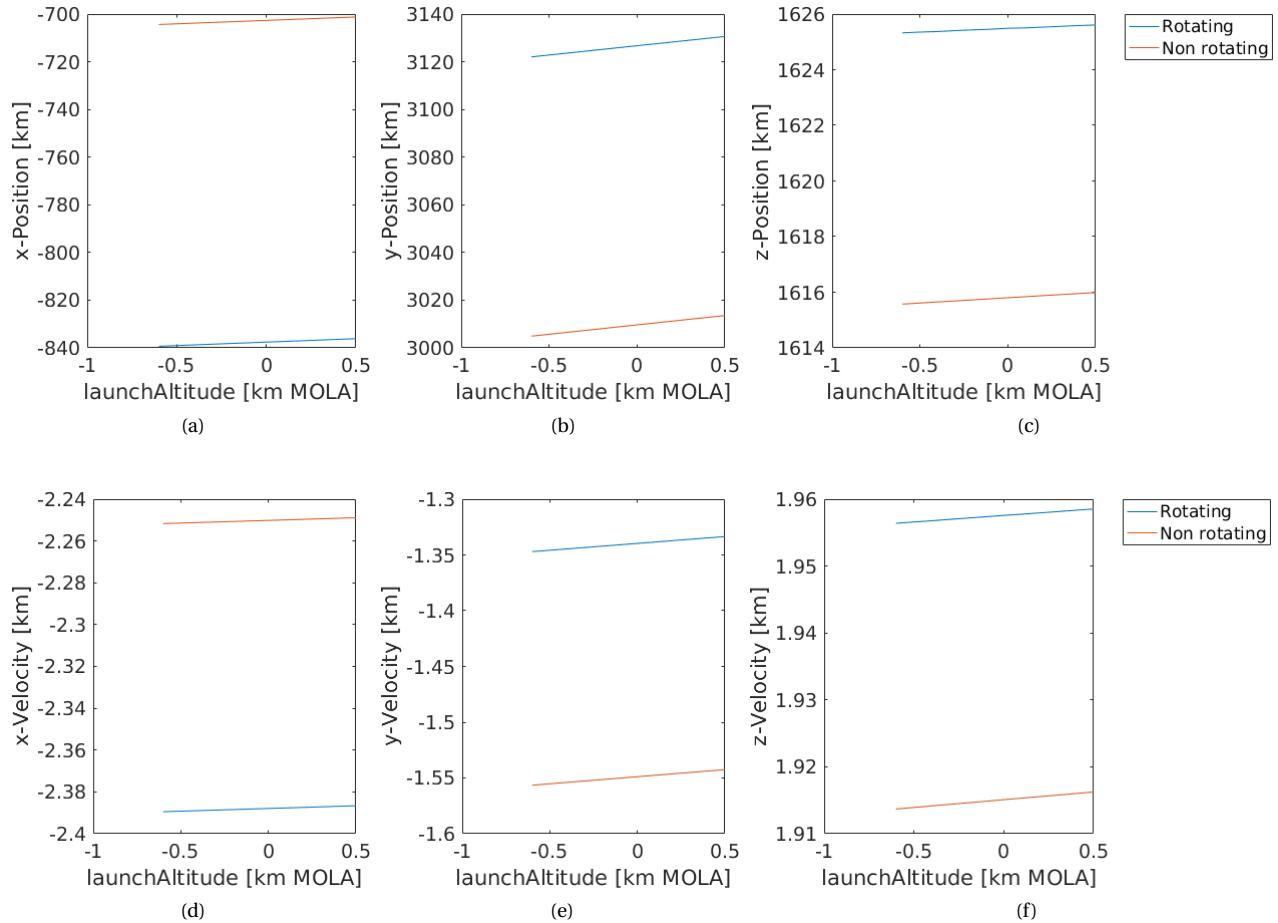


Figure F.5: Launch altitude end characteristics case 1 before circularisation for rotating and non-rotating Mars (a) x-position, (b) y-position, (c) z-position, (d) x-velocity, (e) y-velocity, (f) z-velocity

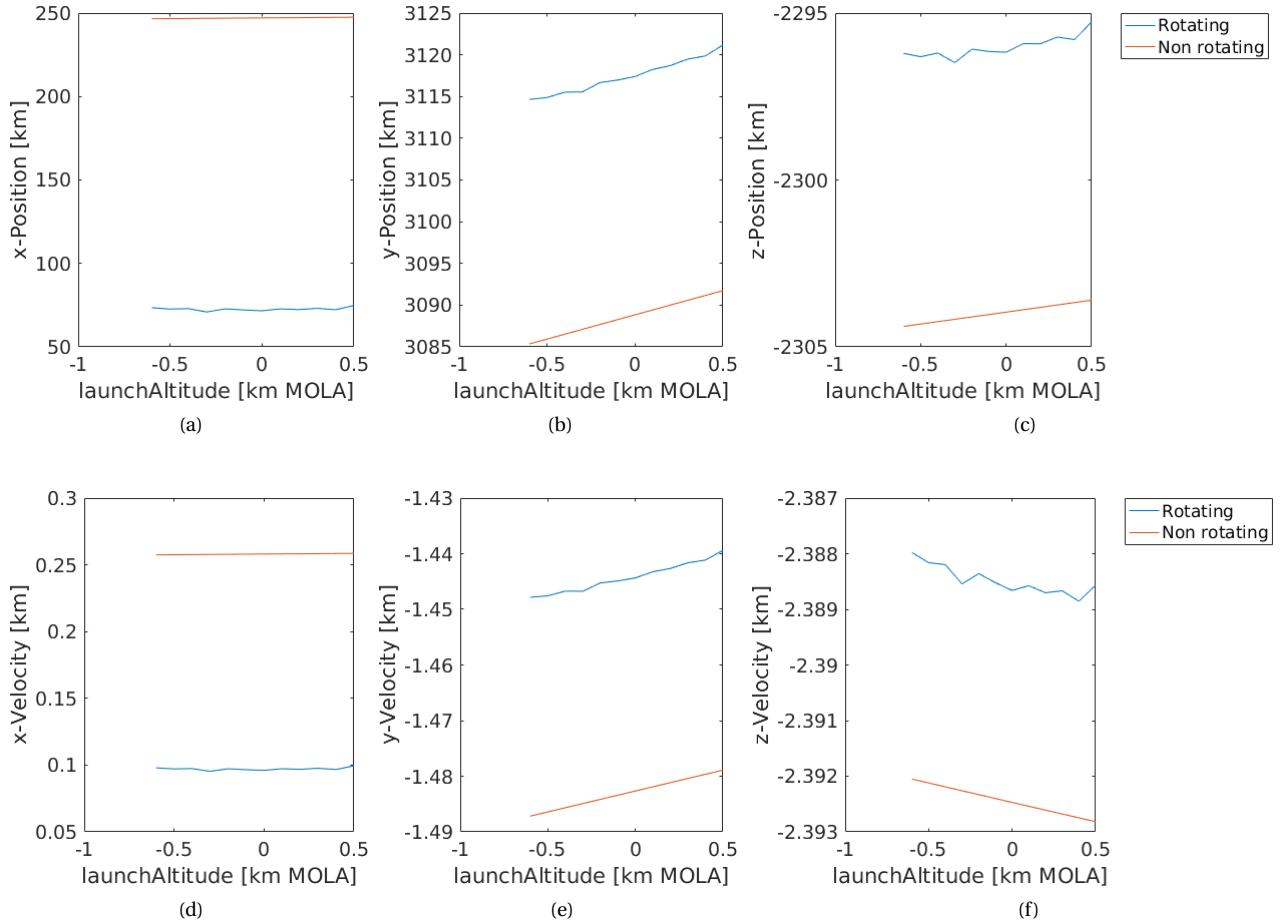


Figure E6: Launch altitude end characteristics case 2 before circularisation for rotating and non-rotating Mars (a) x-position, (b) y-position, (c) z-position, (d) x-velocity, (e) y-velocity, (f) z-velocity

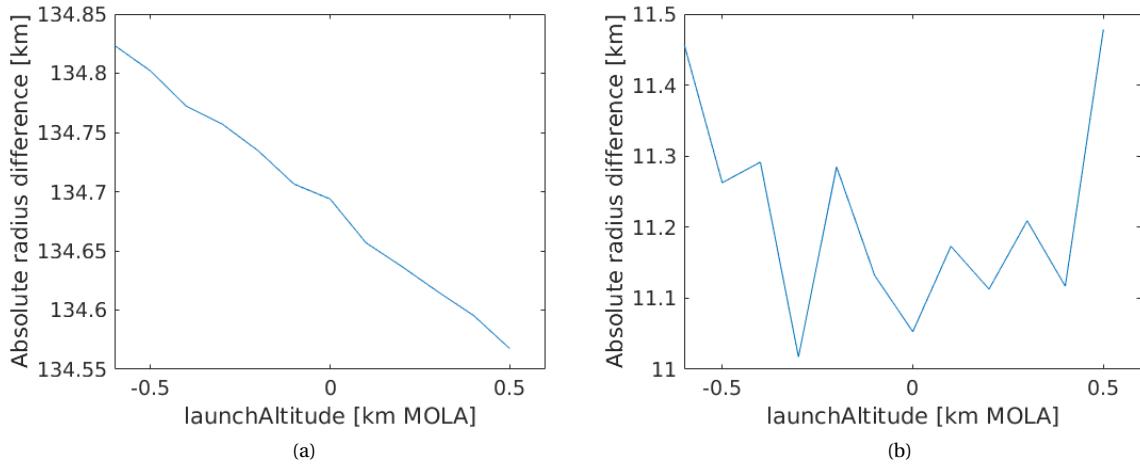


Figure E7: Launch altitude versus radius difference between a rotating and a non-rotating Mars (a) case 1, (b) case 2

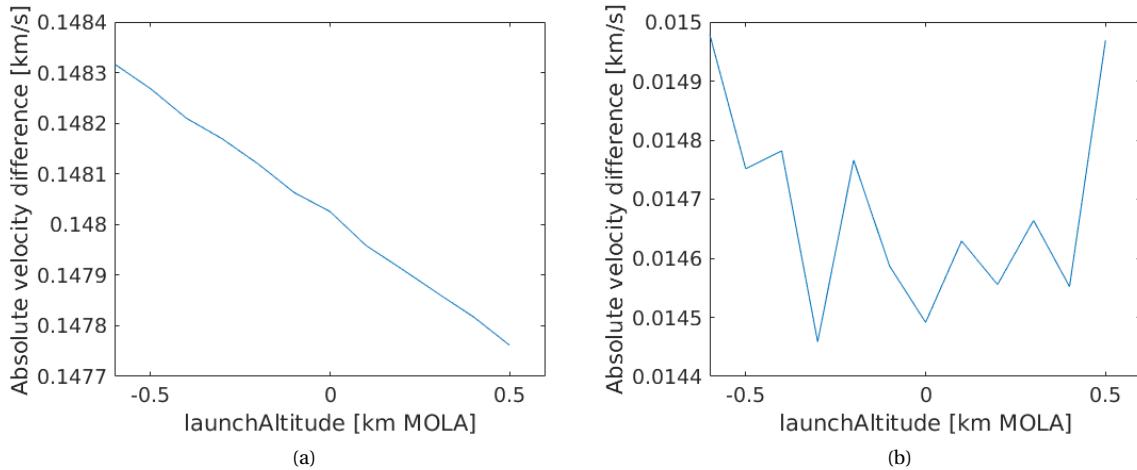


Figure E.8: Launch altitude versus velocity difference between a rotating and a non-rotating Mars (a) case 1, (b) case 2

F.4. LAUNCH LATITUDE

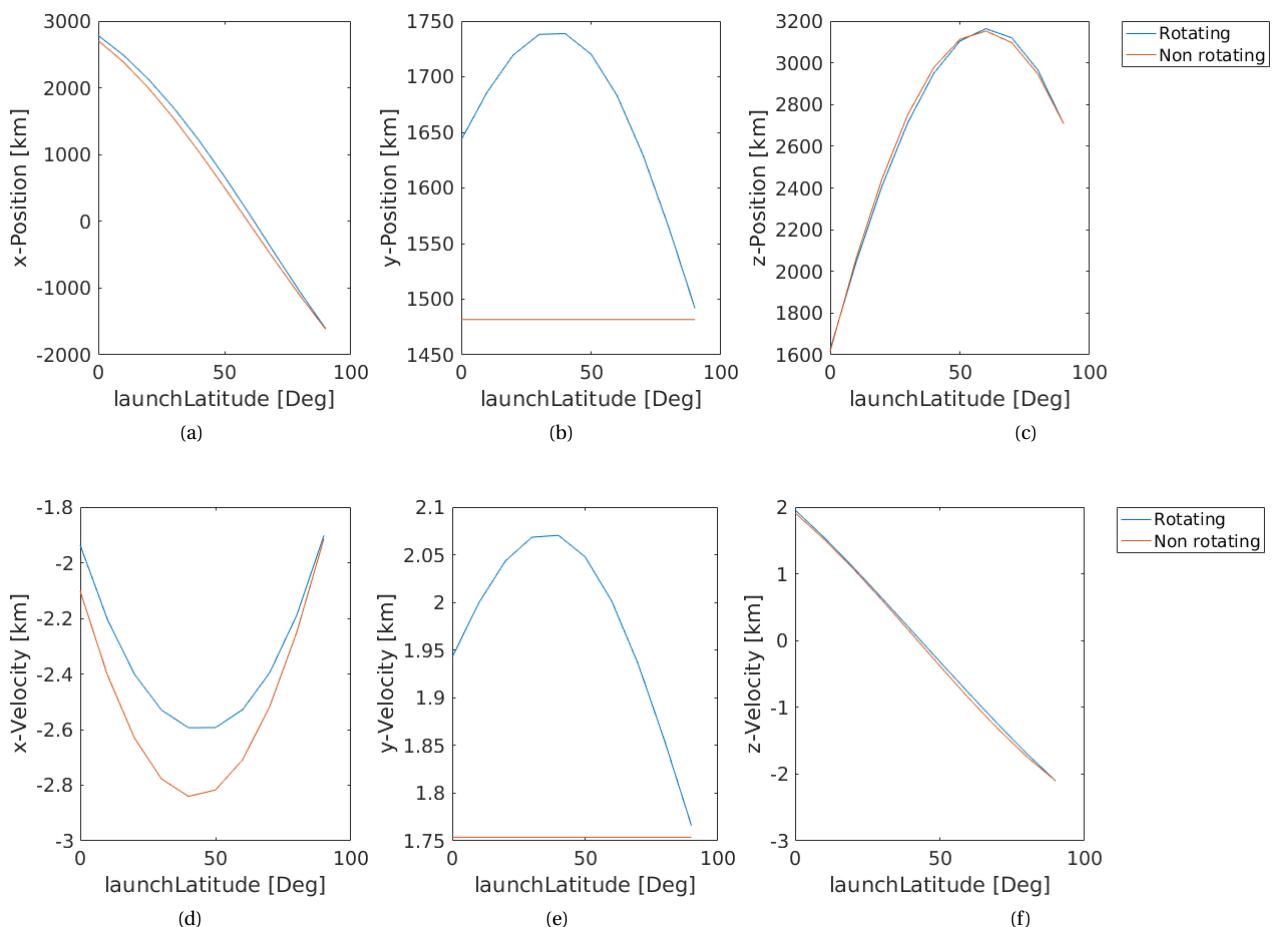


Figure E.9: Launch latitude end characteristics case 1 before circularisation for rotating and non-rotating Mars (a) x-position, (b) y-position, (c) z-position, (d) x-velocity, (e) y-velocity, (f) z-velocity

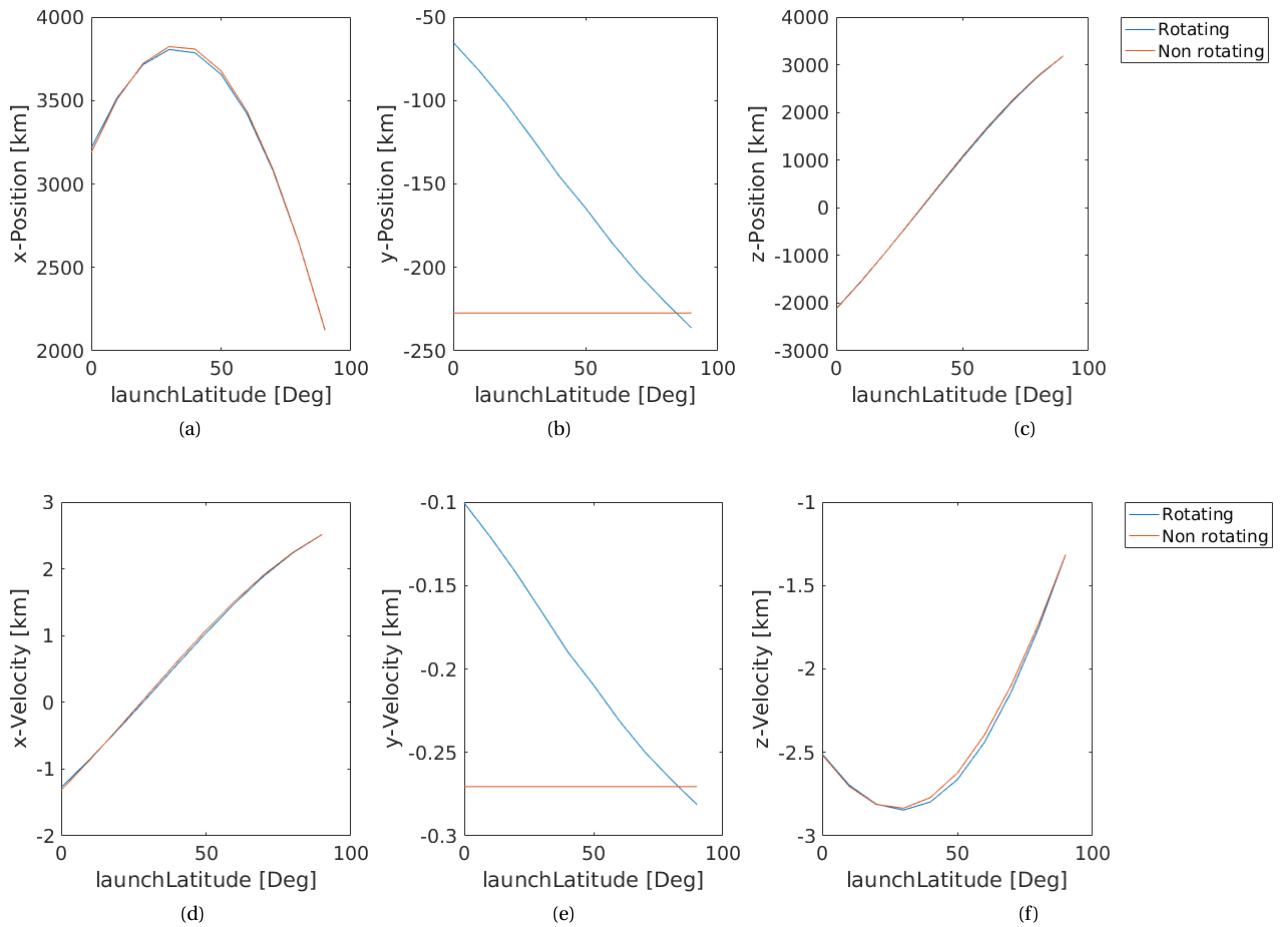


Figure F.10: Launch latitude end characteristics case 2 before circularisation for rotating and non-rotating Mars (a) x-position, (b) y-position, (c) z-position, (d) x-velocity, (e) y-velocity, (f) z-velocity

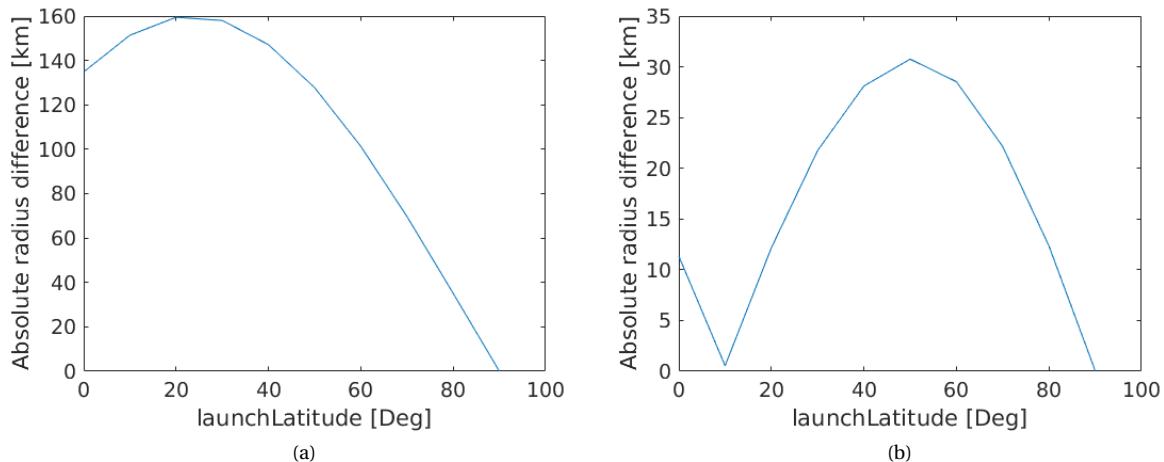


Figure F.11: Launch latitude versus radius difference between a rotating and a non-rotating Mars (a) case 1, (b) case 2

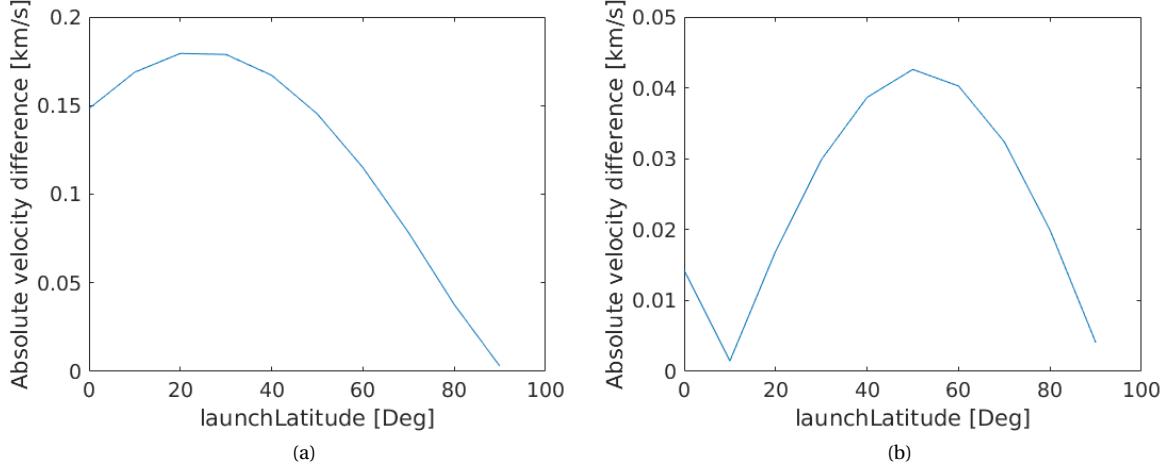


Figure F.12: Launch latitude versus velocity difference between a rotating and a non-rotating Mars (a) case 1, (b) case 2

F.5. LAUNCH LONGITUDE

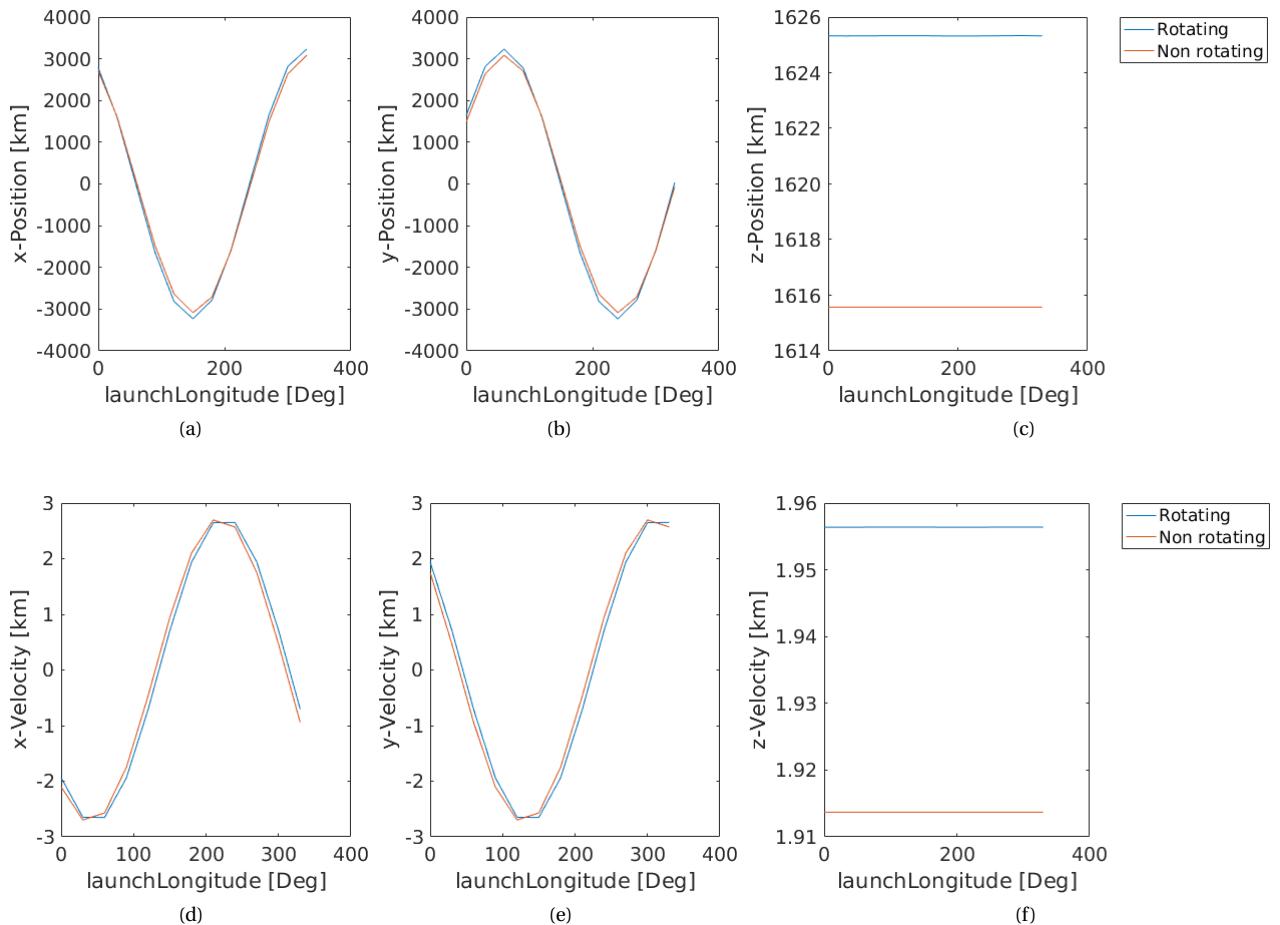


Figure F.13: Launch longitude end characteristics case 1 before circularisation for rotating and non-rotating Mars (a) x-position, (b) y-position, (c) z-position, (d) x-velocity, (e) y-velocity, (f) z-velocity

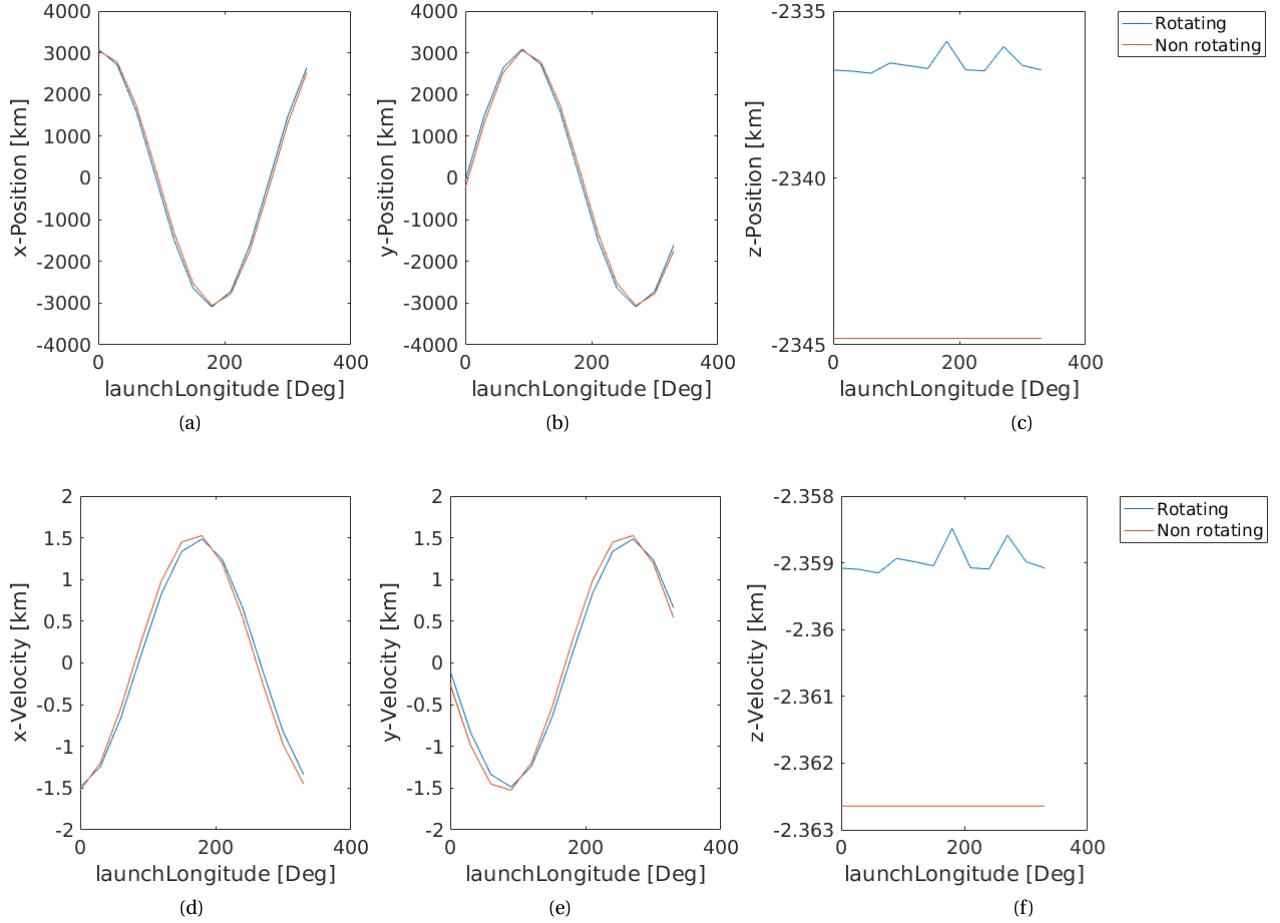


Figure F.14: Launch longitude end characteristics case 2 before circularisation for rotating and non-rotating Mars (a) x-position, (b) y-position, (c) z-position, (d) x-velocity, (e) y-velocity, (f) z-velocity

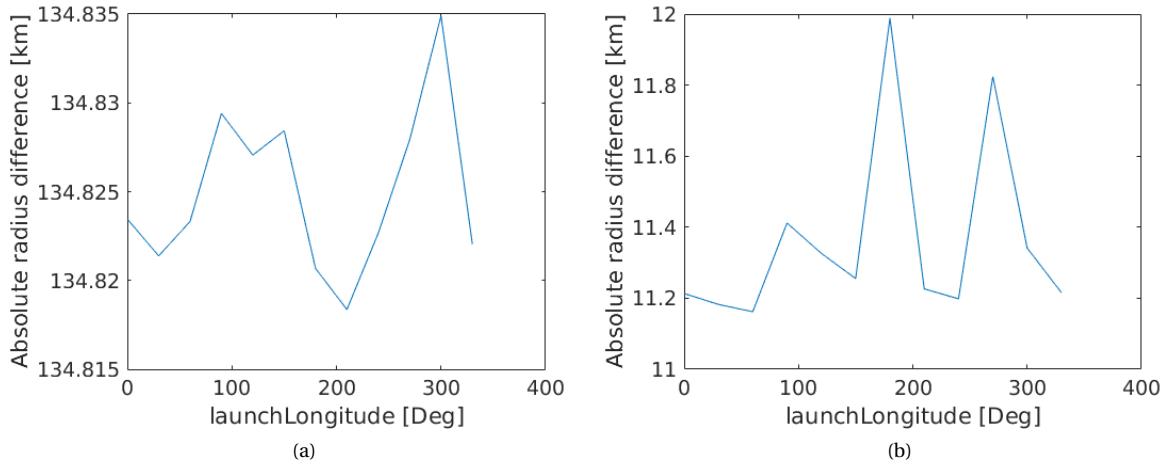


Figure F.15: Launch longitude versus radius difference between a rotating and a non-rotating Mars (a) case 1, (b) case 2

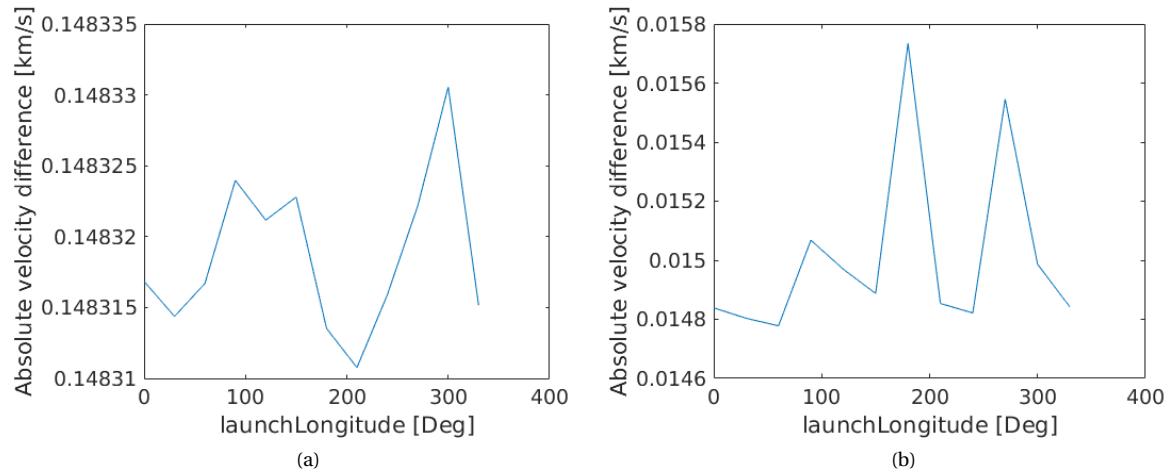


Figure F.16: Launch longitude versus velocity difference between a rotating and a non-rotating Mars (a) case 1, (b) case 2