

# An Experimental Study of Home Gateway Characteristics

**NOKIA**

**Seppo Hätönen**  
**Aki Nyrhinen**  
**Lars Eggert**  
**Stephen Strowes**  
**Pasi Sarolahti**  
**Markku Kojo**

**University of Helsinki**  
**University of Helsinki**  
**Nokia Research Center**  
**University of Glasgow**  
**HIIT**  
**University of Helsinki**

**Nokia** Research Center

1


Company Confidential



# Motivation

- CPE boxes (“home gateways”) are **everywhere**
- their characteristics and behaviors vary widely
- they control the quality and performance of consumer Internet access
- most “standards” are about the control plane – but the data plane counts
- very few studies of home gateway behavior are (publicly) available
- just lots of second-hand hear-say

# Approach

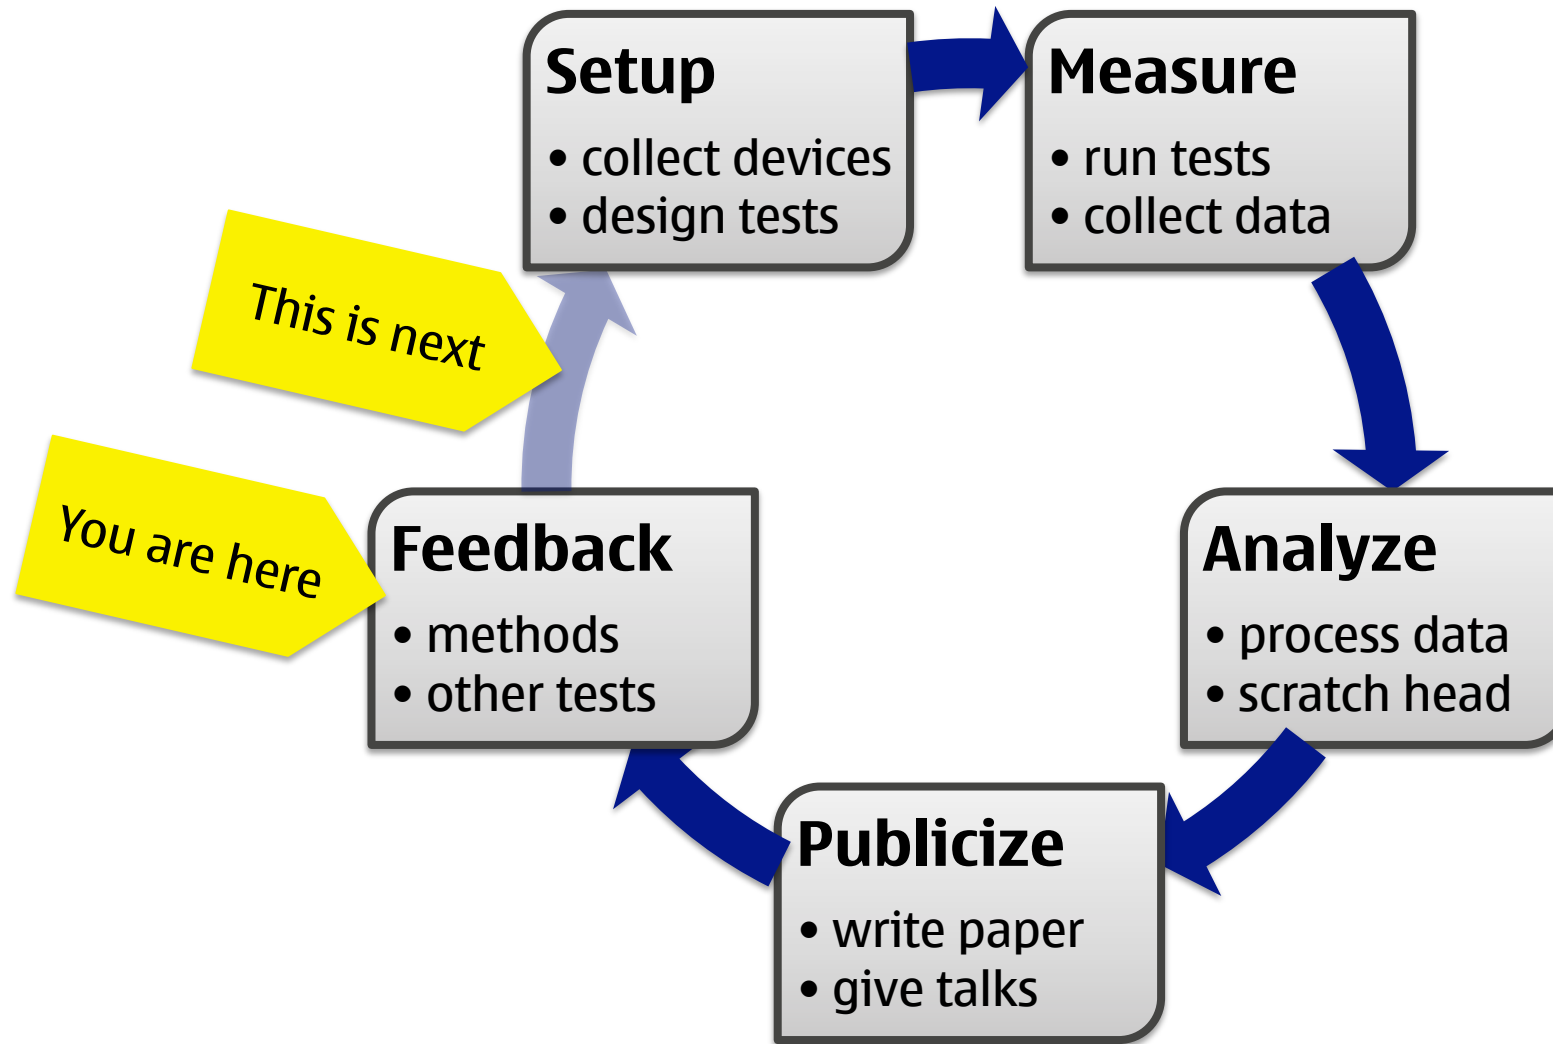


# Setup: Device Collection

- HU and Nokia bought 20 devices to seed the testbed
- another 14 were donated
- 34 devices tested in total
- follow-up studies planned; many more donations in the meantime
- **talk to me if you have a spare box!**

Vendor	Model	Firmware	Tag
A-Link	WNAP	e2.0.9A	<i>al</i>
Apple	Airport Express	7.4.2	<i>ap</i>
Asus	RT-N15	2.0.1.1	<i>as1</i>
Belkin	Wireless N Router	F5D8236-4_WW_3.00.02	<i>be1</i>
	Enhanced N150	F6D4230-4_WW_1.00.03	<i>be2</i>
Buffalo	WZR-AGL300NH	R1.06/B1.05	<i>bu1</i>
	DIR-300	1.03	<i>dl1</i>
	DIR-300	1.04	<i>dl2</i>
	DI-524up	v1.06	<i>dl3</i>
	DI-524	v2.0.4	<i>dl4</i>
D-Link	DIR-100	v1.12	<i>dl5</i>
	DIR-600	v2.01	<i>dl6</i>
	DIR-615	v4.00	<i>dl7</i>
	DIR-635	v2.33EU	<i>dl8</i>
	DI-604	v3.09	<i>dl9</i>
	DI-713P	2.60 build 6a	<i>dl10</i>
Edimax	6104WG	2.63	<i>ed</i>
Jensen	Air:Link 59300	1.15	<i>je</i>
	BEFSR41c2	1.45.11	<i>ls1</i>
	WR54G	v7.00.1	<i>ls2</i>
Linksys	WRT54GL v1.1	v4.30.7	<i>ls3</i>
	WRT54GL-EU	v4.30.7	<i>ls5</i>
	WRT54G	OpenWRT RC5	<i>owrt</i>
	WRT54GL v1.1	tomato 1.27	<i>to</i>
	RP614 v4	V1.0.2_06.29	<i>ng1</i>
Netgear	WGR614 v7	(1.0.13_1.0.13)	<i>ng2</i>
	WGR614 v9	V1.2.6_18.0.17	<i>ng3</i>
	WNR2000-100PES	v.1.0.0.34_29.0.45	<i>ng4</i>
	WGR614 v4	V5.0_07	<i>ng5</i>
Njetwjork	54M	Ver 1.2.6	<i>nw1</i>
SMC Barricade	SMC7004VBR	R1.07	<i>smc</i>
Telewell	TW-3G	V7.04b3	<i>te</i>
Webee	Wireless N Router	e2.0.9D	<i>we</i>
ZyXel	P-335U	V3.60(AMB.2)C0	<i>zyl</i>

# Setup: Testbed

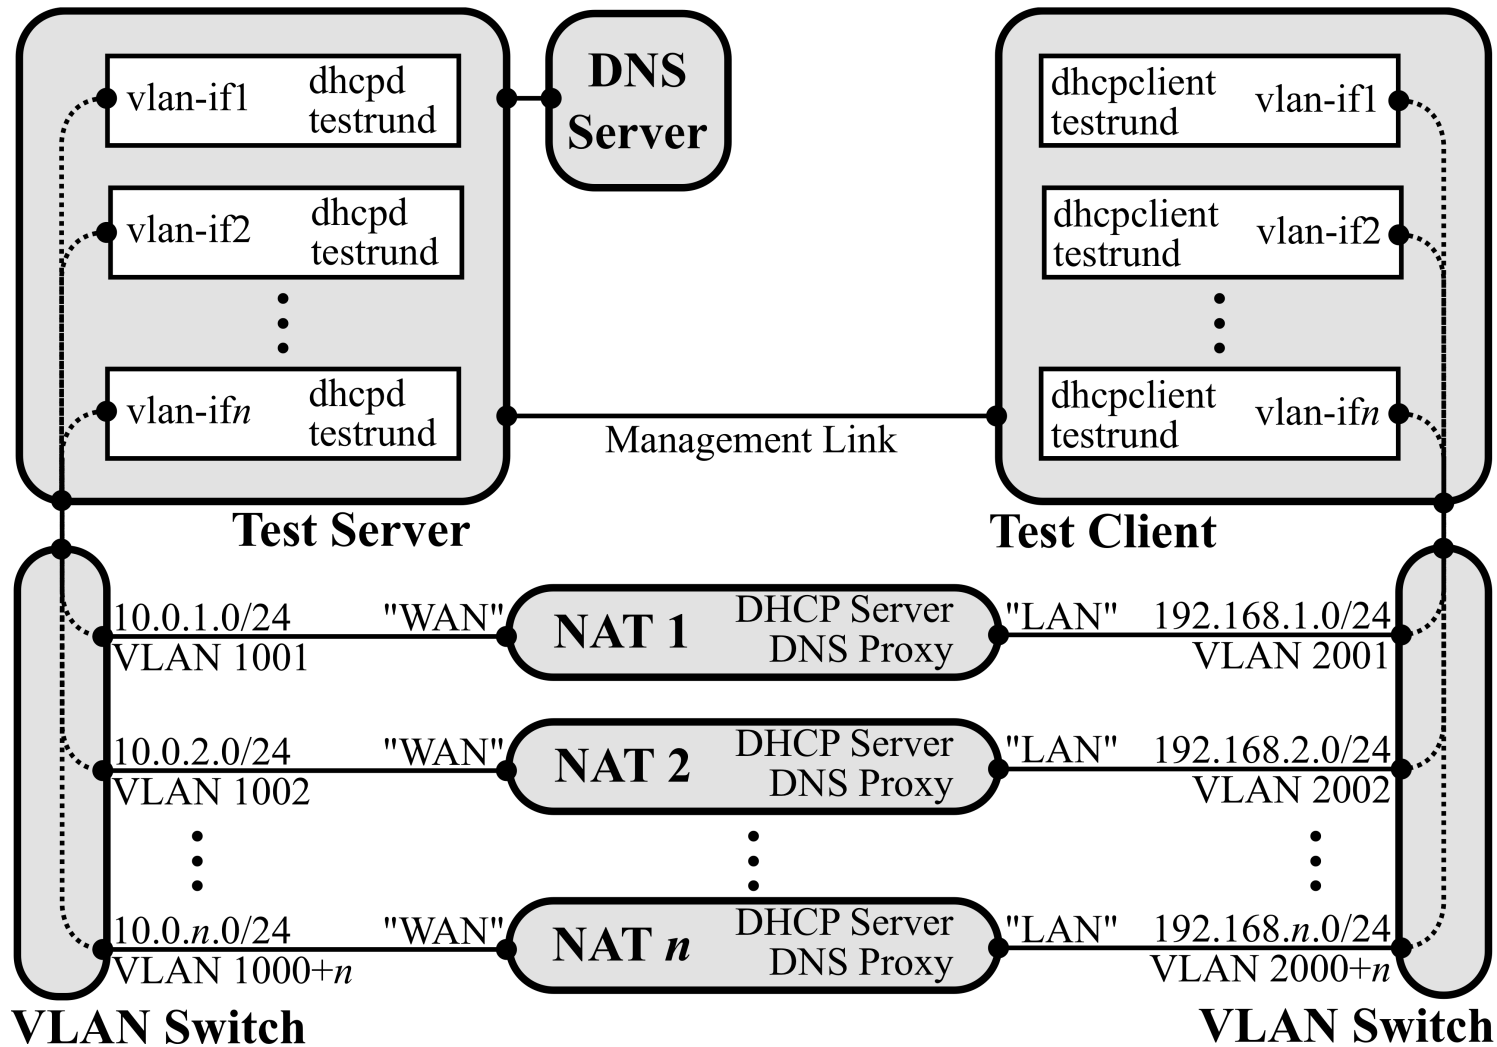


# Tests & Results



# UDP Binding Timeouts

UDP-1: Single packet, outbound only


- measures NAT UDP binding timeout after client sends a single packet
- server sends no return traffic
- **result: very short timeouts (min = 30 sec), almost all less than IETF recommendation**

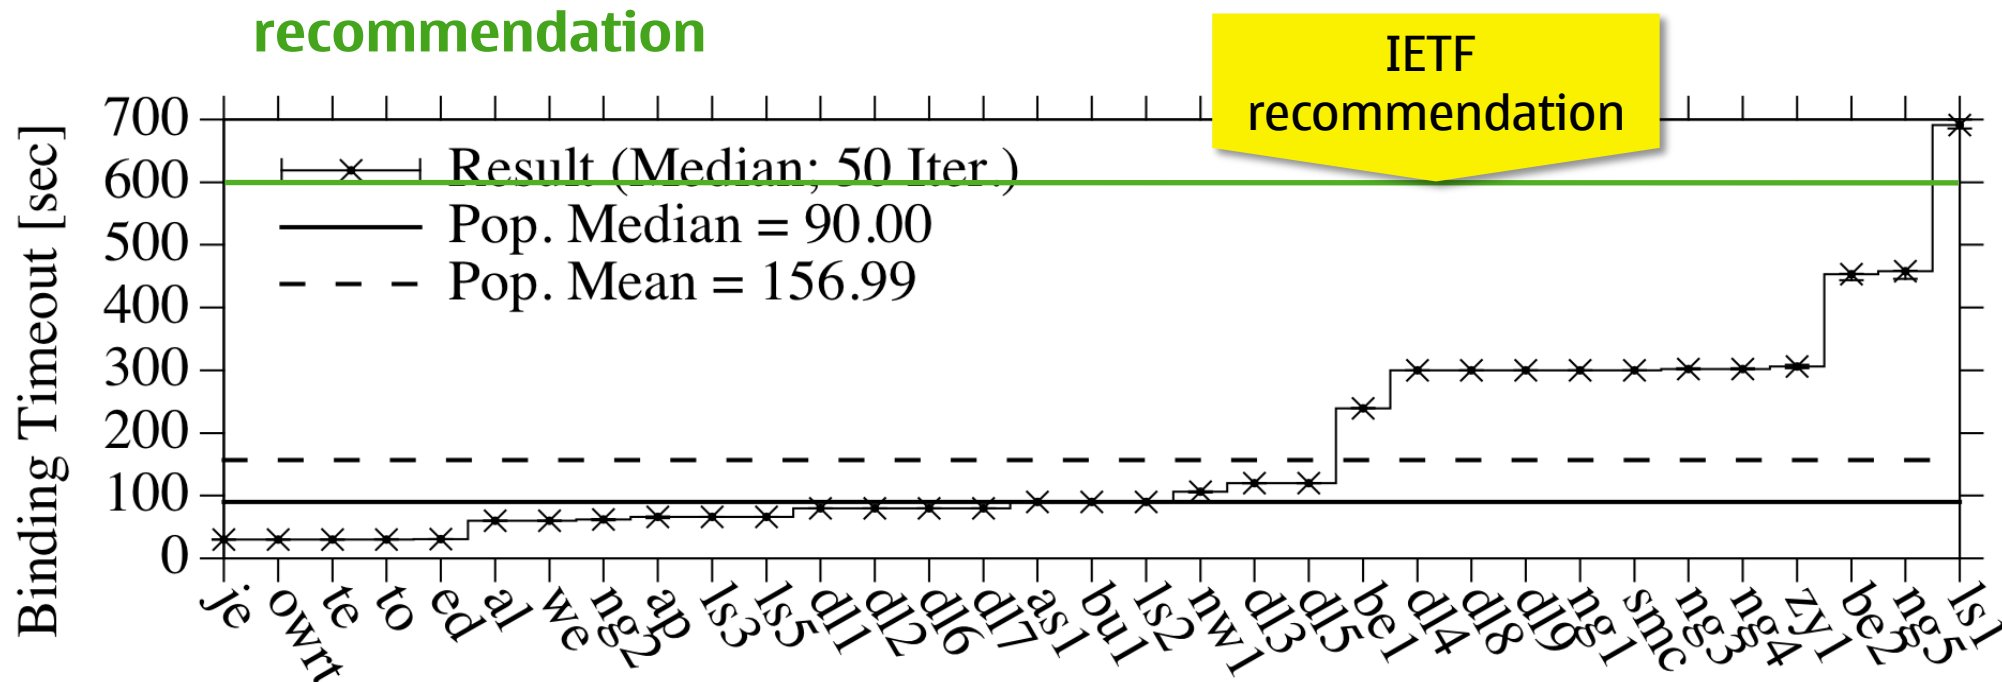

# UDP Binding Timeouts

UDP-2: Single packet outbound, multiple packets in- bound


- client sends a single UDP packet to the test server and then remains silent
- server then sends a stream of responses, increasing delay between each
- **result: longer timeouts overall; some boxes *shorter* compared to UDP-1**

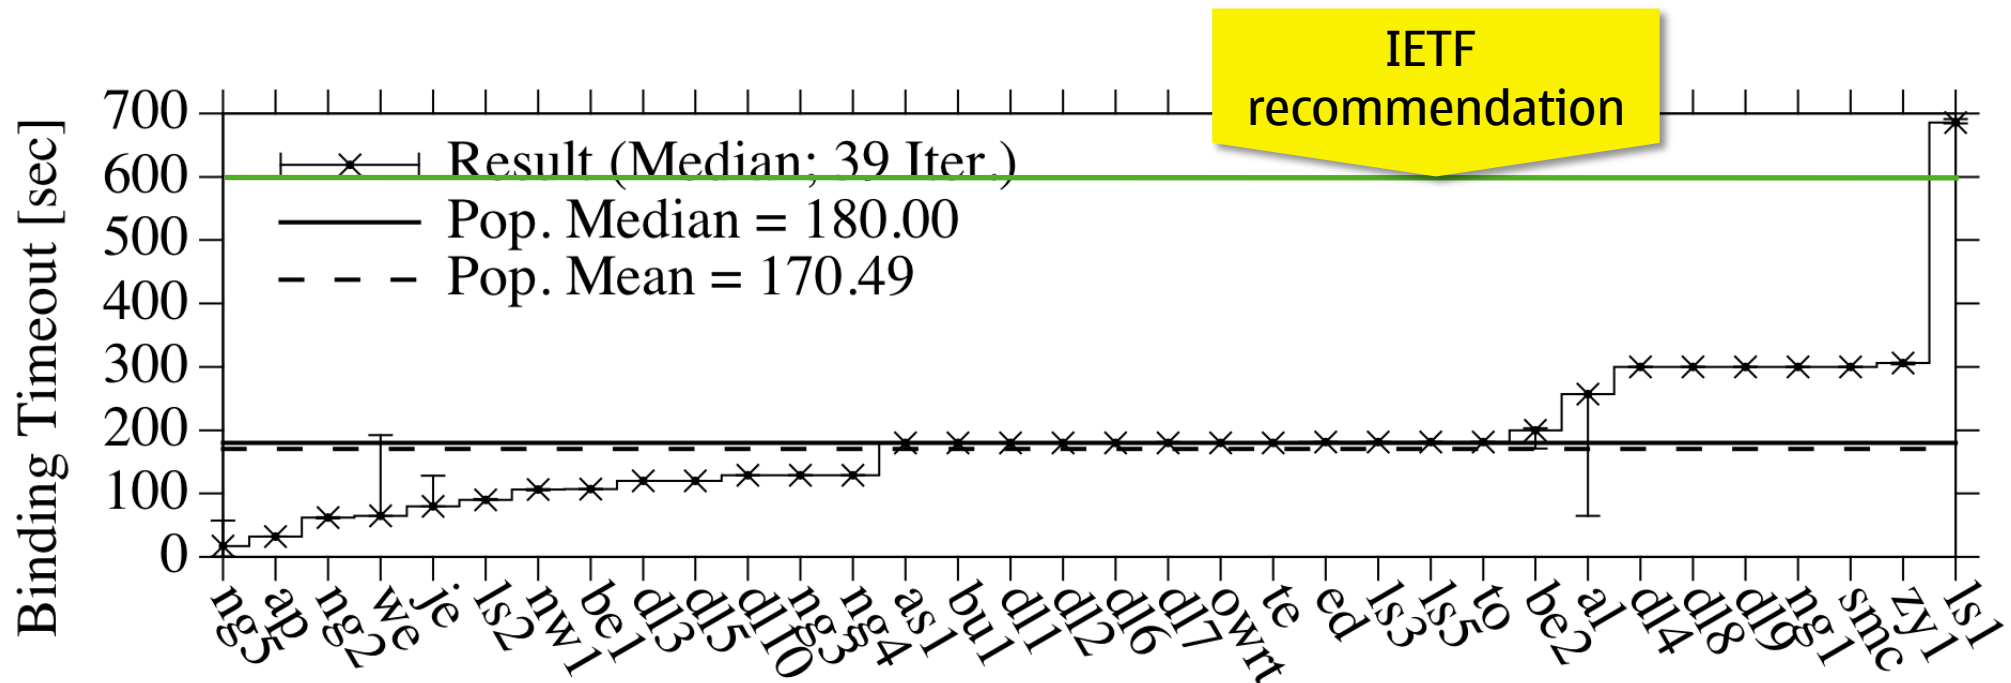




## UDP-3: Multiple packets out- and inbound

- IETF  
recommendation**

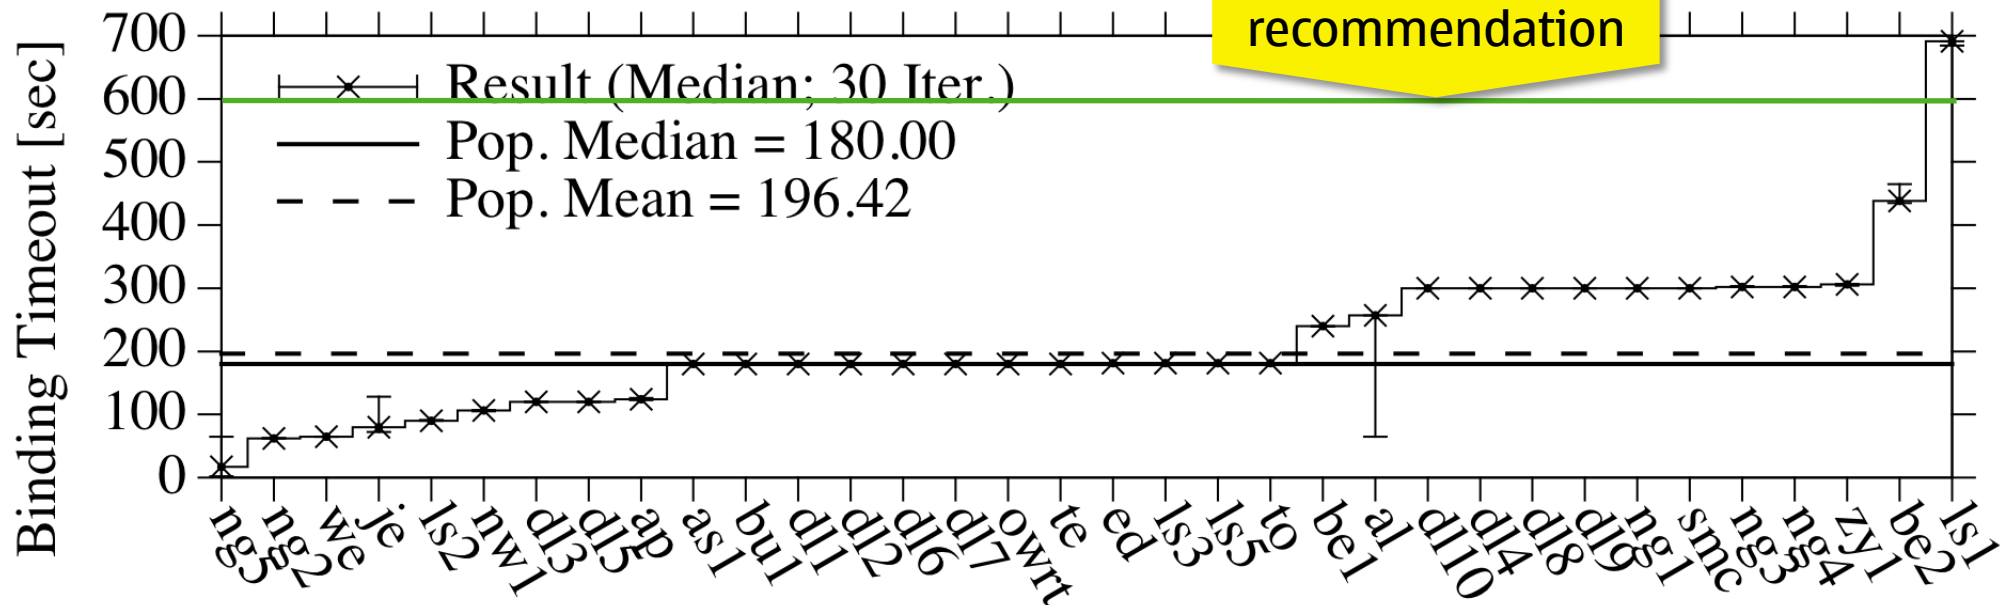


# TCP Binding Timeouts

- similar to UDP-1, except TCP connection (no keep-alives)
- note: log scale and unit different!
- **result: some short timeouts (min = 4min), half less than IETF recommendation**

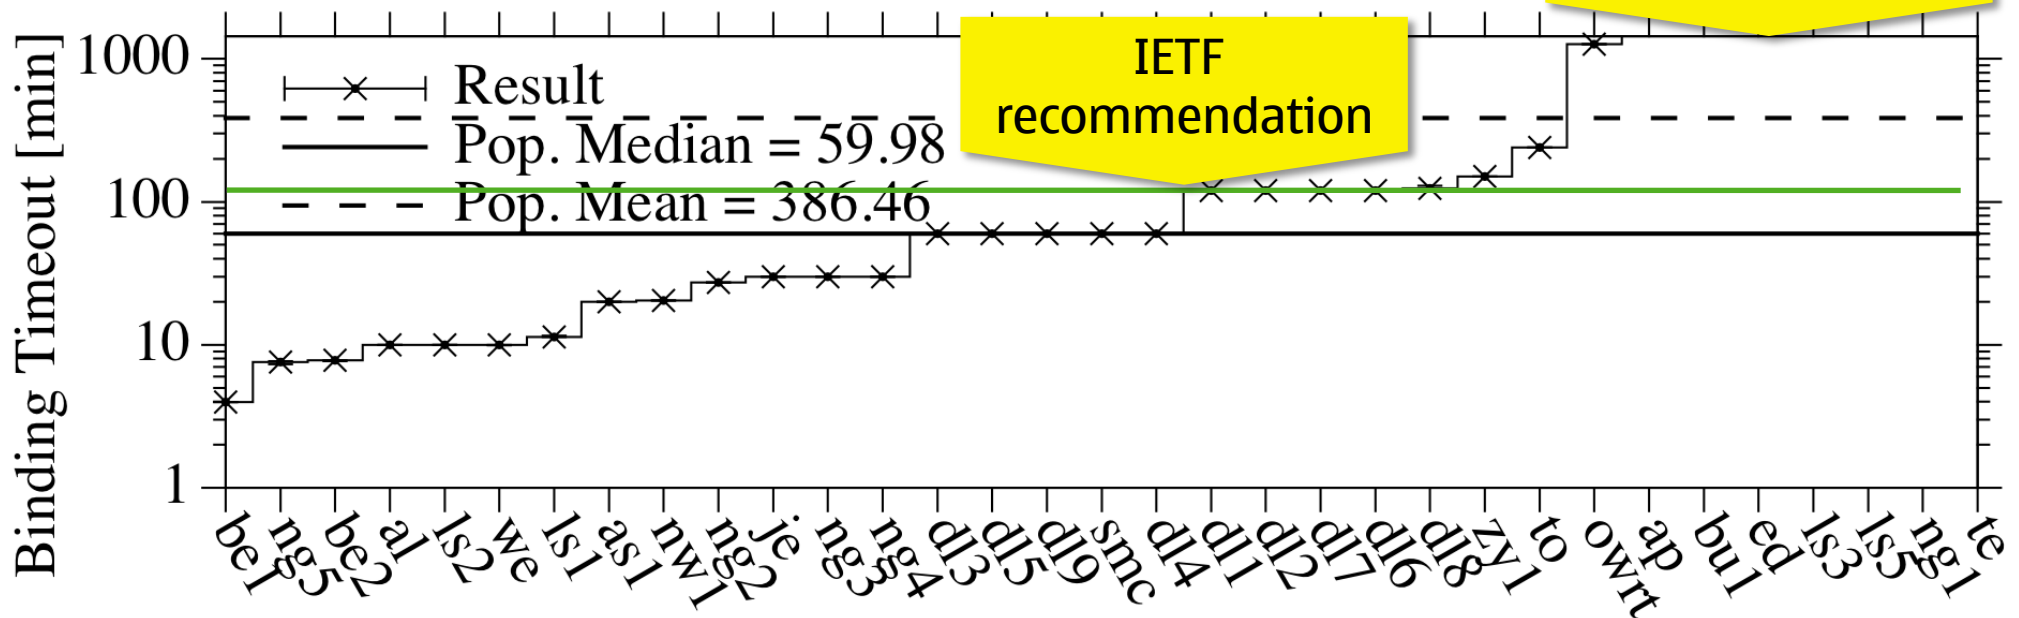


# TCP Throughput

- throughput over of a 100 MB bulk transfer (2x unidirectional, 1x bidirectional)
- **result: 1/3 of boxes reaches max, median in bidirectional case much less than when sending unidirectional, lots of weirdness**

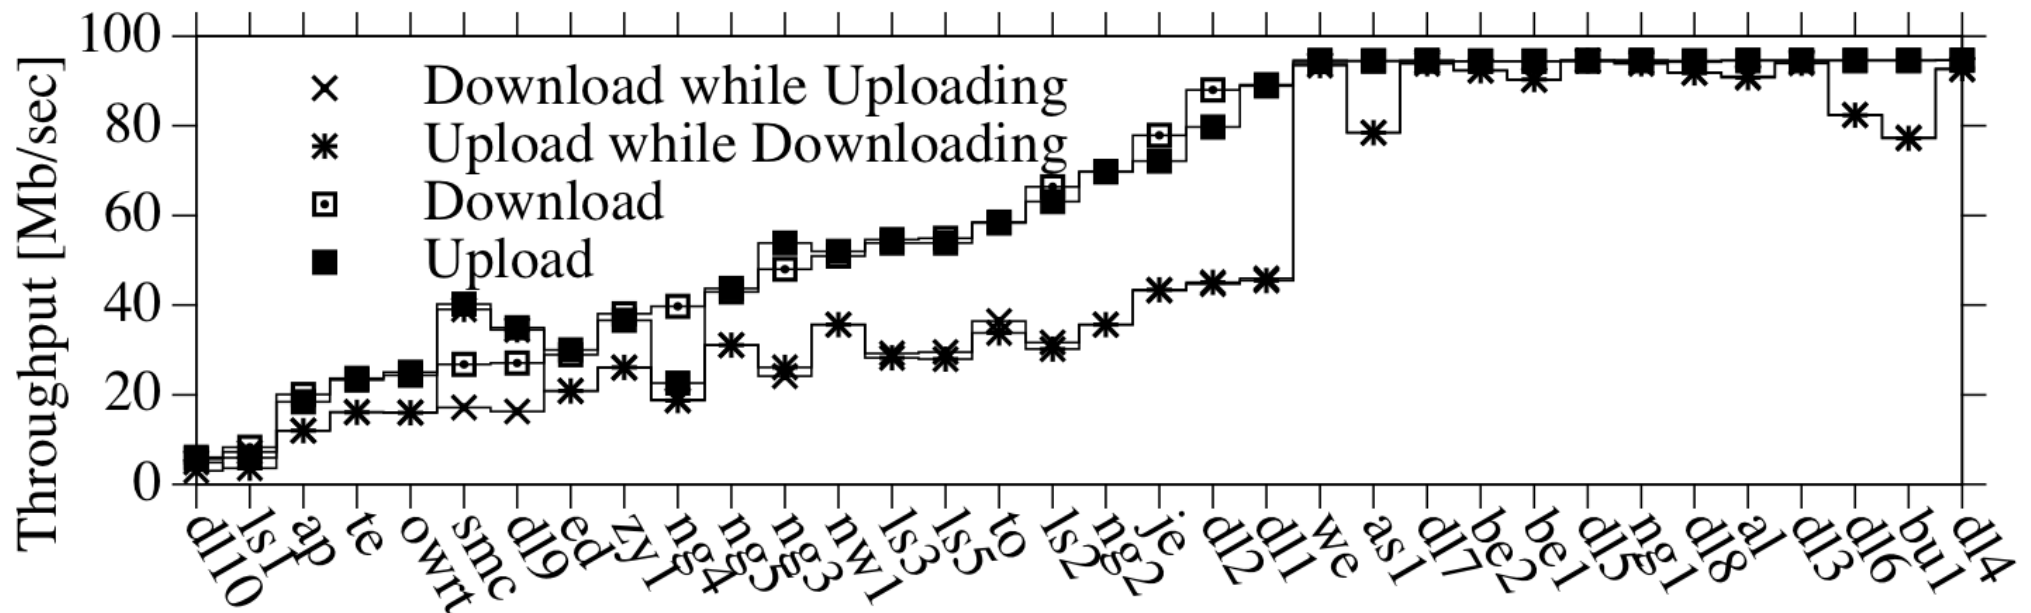


# Queuing Delays

- queuing delay introduced by the box when fully loaded
- **result: mostly OK (< 50 ms); some boxes really bad/weird**

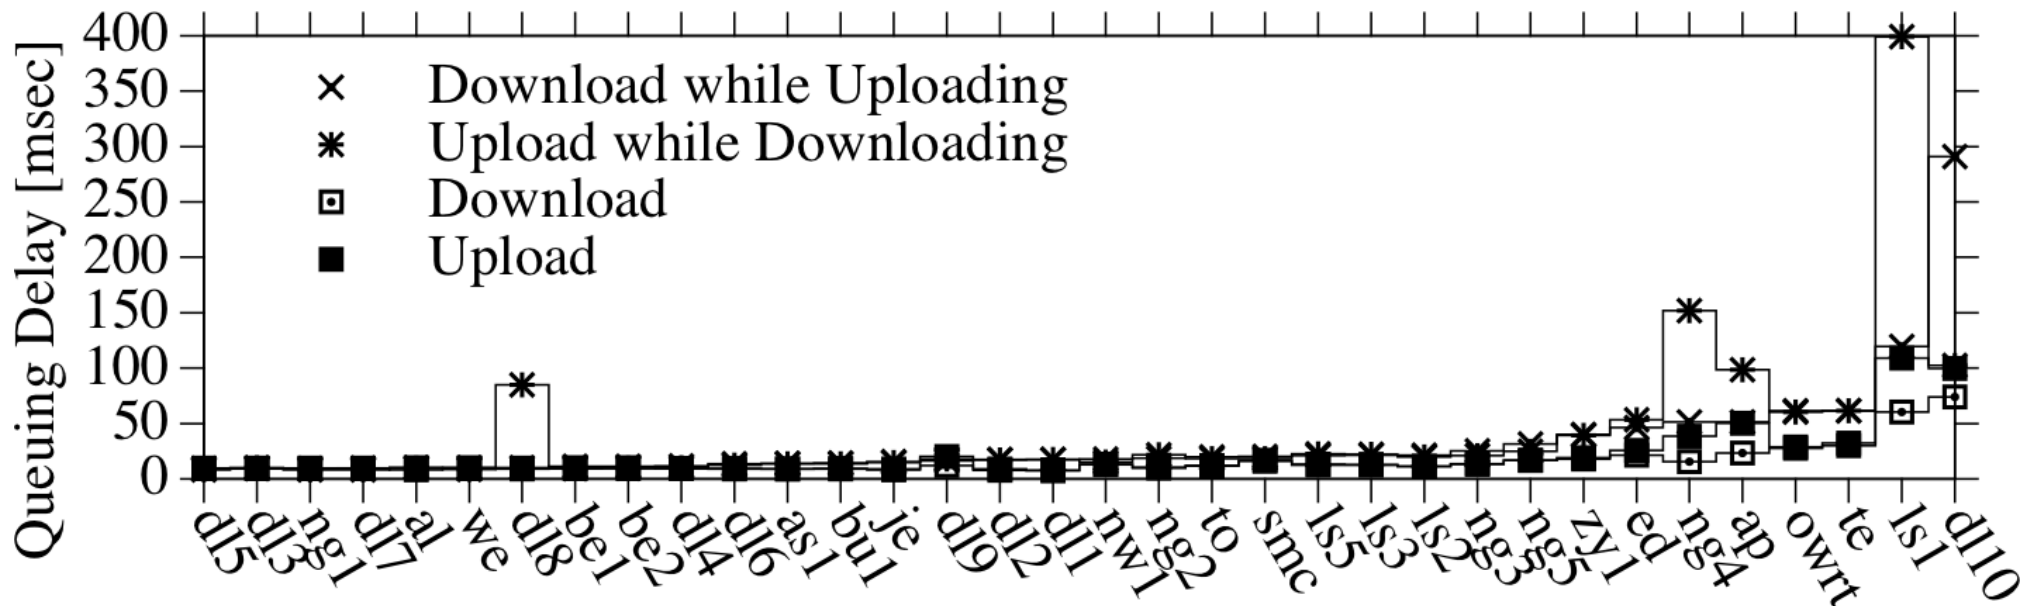

# Max. Number of TCP Bindings

- maximum number of TCP bindings allowed to a single server port
- **result: some very low (16), max. is 1024**

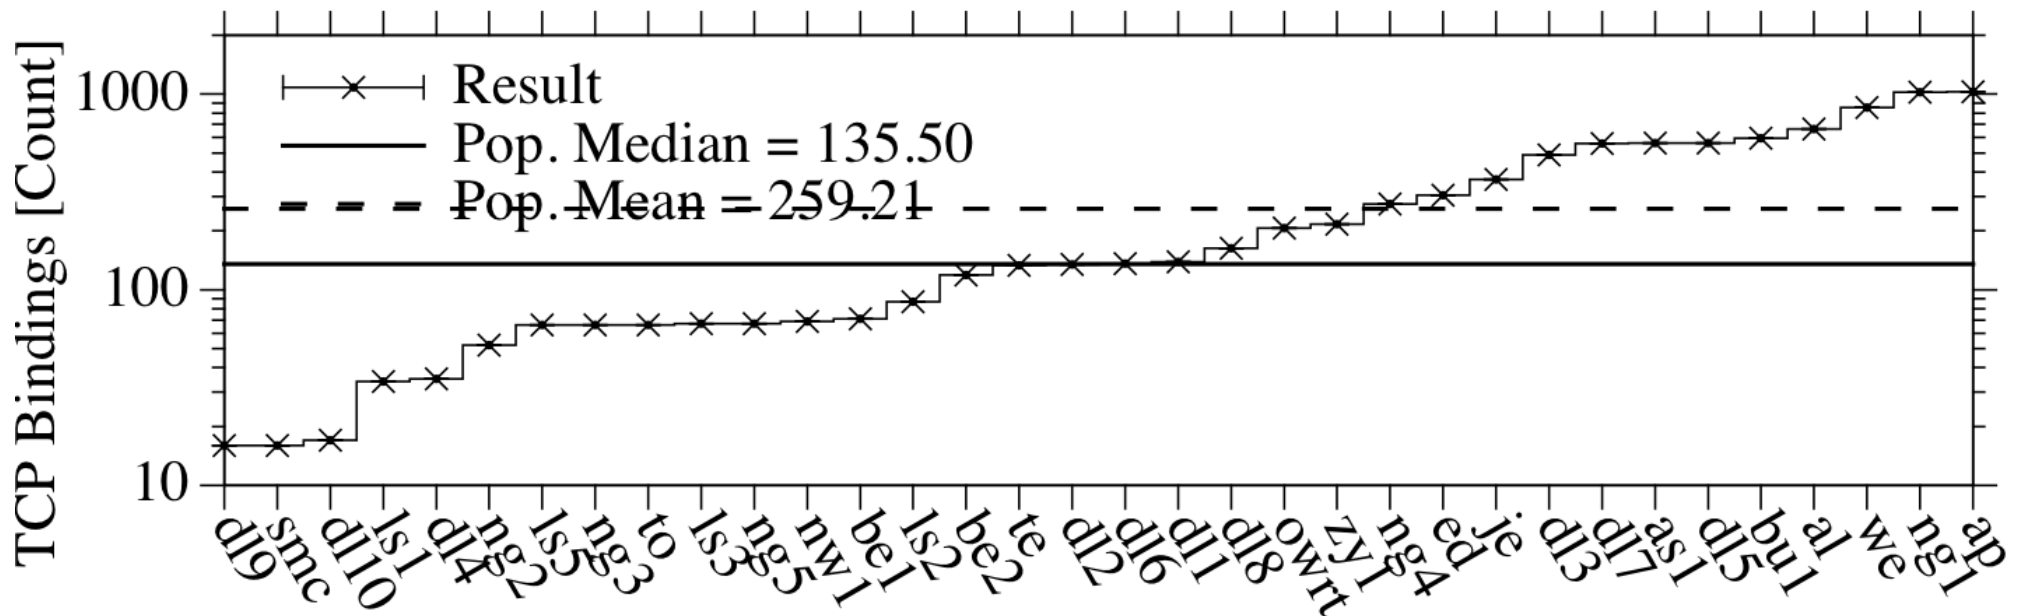

# Other Results

## DCCP & SCTP

- **DCCP**: zilch
- **SCTP**: 18/34 ?!?
- theory: single SCTP association  
“works”, because those 18 devices  
translate just the IP addresses for  
unknown IP protocol numbers
- **need to look deeper**

Tag	DCCP: Conn.	DNS over TCP	DNS over UDP	ICMP: Host Unreach.	SCTP: Conn.	TCP: Reass. Time. Ex.	TCP: Frag. Needed	TCP: Param. Prob.	TCP: Src. Route Fail.	TCP: Source Quench	TCP: TTL Exceeded	TCP: Host Unreach.	TCP: Net Unreach.	TCP: Port Unreach.	TCP: Proto. Unreach.	UDP: Reass. Time Ex.	UDP: Frag. Needed	UDP: Param. Prob.	UDP: Src. Route Fail	UDP: Source Quench	UDP: TTL Exceeded	UDP: Host Unreach.	UDP: Net Unreach.	UDP: Port Unreach.	UDP: Proto. Unreach.
al		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
ap		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
as1		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
be1		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
be2		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
bu1		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
dl1		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
dl10		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
dl2		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
dl3		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
dl4		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
dl5		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
dl6		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
dl7		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
dl8		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
dl9		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
ed		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
je		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
ls1		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
ls2		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
ls3		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
ls5		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
ng1		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
ng2		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
ng3		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
ng4		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
ng5		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
nw1		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
owrt		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
smc		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
te		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
to		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
we		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
zyl		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	

# Other Results

## DNS

- **DNS over UDP**: worked
- **DNS over TCP**: so-so
- 14 accept connections on TCP port 53
- 10 respond to DNS queries
- one box forwards inbound DNS-over-TCP as DNS-over UDP

Tag	DCCP: Conn.	DNS over TCP	DNS over UDP	ICMP: Host Unreach.	SCTP: Conn.	TCP: Reass. Time. Ex.	TCP: Frag. Needed	TCP: Param. Prob.	TCP: Src. Route Fail.	TCP: Source Quench	TCP: TTL Exceeded	TCP: Host Unreach.	TCP: Net Unreach.	TCP: Port Unreach.	TCP: Proto. Unreach.	UDP: Reass. Time Ex.	UDP: Frag. Needed	UDP: Param. Prob.	UDP: Src. Route Fail	UDP: Source Quench	UDP: TTL Exceeded	UDP: Host Unreach.	UDP: Net Unreach.	UDP: Port Unreach.	UDP: Proto. Unreach.
al		•	•	•		•																			
ap		•	•	•		•																			
as1		•	•	•		•																			
be1		•	•	•		•																			
be2		•	•	•		•																			
bu1		•	•	•		•																			
dl1		•	•	•		•																			
dl10		•	•	•		•																			
dl2		•	•	•		•																			
dl3		•	•	•		•																			
dl4		•	•	•		•																			
dl5		•	•	•		•																			
dl6		•	•	•		•																			
dl7		•	•	•		•																			
dl8		•	•	•		•																			
dl9		•	•	•		•																			
ed		•	•	•		•																			
je		•	•	•		•																			
ls1		•	•	•		•																			
ls2		•	•	•		•																			
ls3		•	•	•		•																			
ls5		•	•	•	•	•																			
ng1		•	•	•		•																			
ng2		•	•	•		•																			
ng3		•	•	•		•																			
ng4		•	•	•		•																			
ng5		•	•	•		•																			
nw1		•	•	•		•																			
owrt		•	•	•		•																			
smc		•	•	•		•																			
te		•	•	•		•																			
to		•	•	•		•																			
we		•	•	•		•																			
zyl		•	•	•		•																			

# Other Results


## ICMP handling

- **in a nutshell: many issues**
- one box doesn't translate ICMP *at all*
- all others translate at least "Port unreachable" and "TTL Exceeded"
- one box translates TCP-related ICMP messages into TCP RST
- 16 out of 34 do not correctly translate the transport header contained in the ICMP payload
- two do not correctly translate the IP checksum in the ICMP payload

Tag	DCCP: Conn.	DNS over TCP	DNS over UDP	ICMP: Host Unreach.	SCTP: Conn.	TCP: Reass. Time. Ex.	TCP: Frag. Needed	TCP: Param. Prob.	TCP: Src. Route Fail.	TCP: Source Quench	TCP: TTL Exceeded	TCP: Host Unreach.	TCP: Net Unreach.	TCP: Port Unreach.	TCP: Proto. Unreach.	UDP: Reass. Time Ex.	UDP: Frag. Needed	UDP: Param. Prob.	UDP: Src. Route Fail	UDP: Source Quench	UDP: TTL Exceeded	UDP: Host Unreach.	UDP: Net Unreach.	UDP: Port Unreach.	UDP: Proto. Unreach.
al																									
ap																									
as1																									
be1																									
be2																									
bu1																									
dl1																									
dl10																									
dl2																									
dl3																									
dl4																									
dl5																									
dl6																									
dl7																									
dl8																									
dl9																									
ed																									
je																									
ls1																									
ls2																									
ls3																									
ls5																									
ng1																									
ng2																									
ng3																									
ng4																									
ng5																									
nw1																									
owrt																									
smc																									
te																									
to																									
we																									
zyl																									



# Next Steps: Refine & Expand the Study

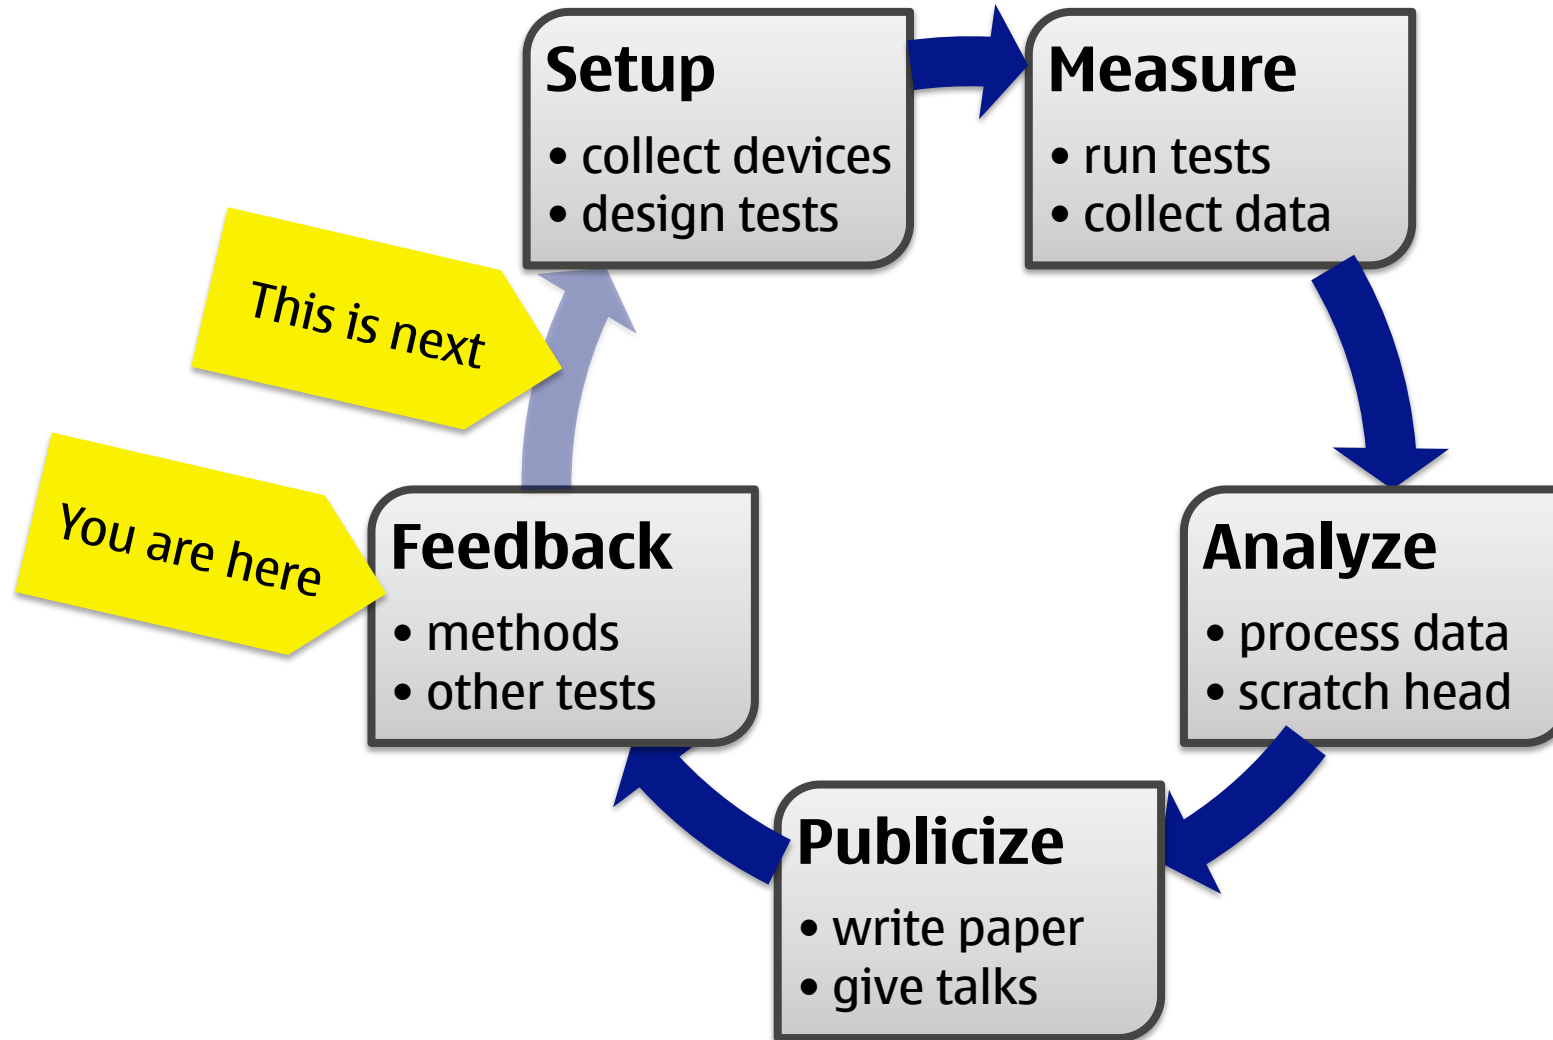

# Related Work

- L. D'Acunto, J. Pouwelse, and H. Sips. **A Measurement of NAT & Firewall Characteristics in Peer to Peer Systems.** In Proc. ASCI Conference, 2009.
- B. Ford, P. Srisuresh, and D. Kegel. **Peer-to-Peer Communication Across Network Address Translators.** In Proc. USENIX Annual Technical Conference, pages 13–13, 2005.
- S. Guha and P. Francis. **Characterization and Measurement of TCP Traversal through NATs and Firewalls.** In Proc. ACM SIGCOMM IMC, pages 199–211, 2005.
- C. Jennings. **NAT Classification Test Results.** Internet-Draft draft-jennings-behave-test-results-04, Internet Engineering Task Force, July 2007. Work in Progress.
- L. Mäkinen and J. Nurminen. **Measurements on the Feasibility of TCP NAT Traversal in Cellular Networks.** In Proc. Conference on Next Generation Internet Networks, pages 261–267, 2008.

# Thank You

**NOKIA**

**Talk to me if you have a spare home gateway to donate to the testbed.**


**[lars.eggert@nokia.com](mailto:lars.eggert@nokia.com)**



# Masterbrand color palette

To prevent printing a hidden slide (like this), de-select "Printing hidden slides" option in print menu.

## Core




R 000	R 068
G 051	G 165
B 204	B 028

## Dark




R 004	R 002	R 54
G 004	G 076	G 53
B 119	B 028	B 52

## Neutral





R 175	R 235
G 212	G 233
B 240	B 216

## Bright



R 249	R 228
G 242	G 014
B 006	B 098

The pink highlight color is to be used sparingly, not in large areas and can only be used as 100%, never as a tint.

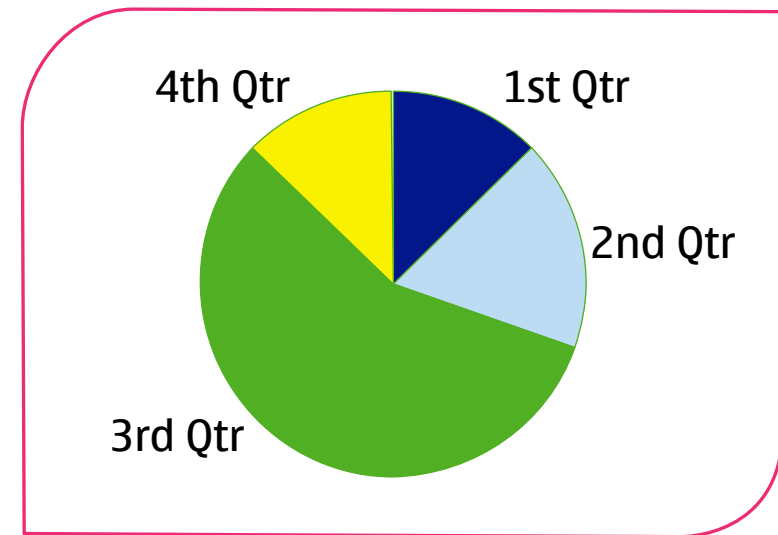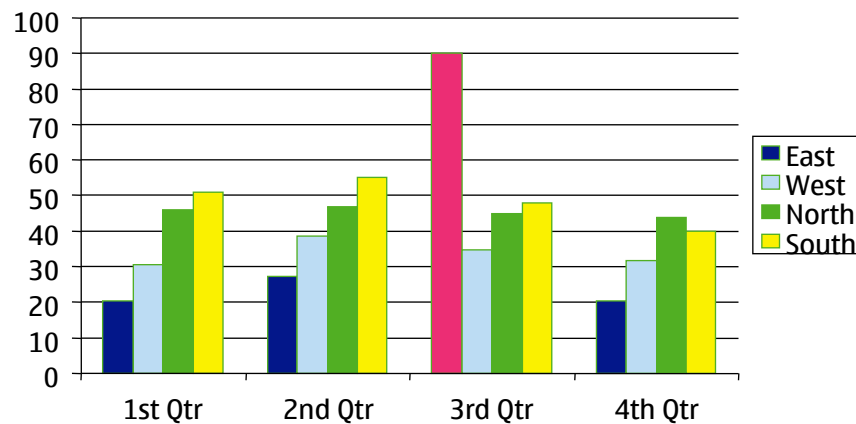

Nokia Research Center

20 Company Confidential

**NOKIA**