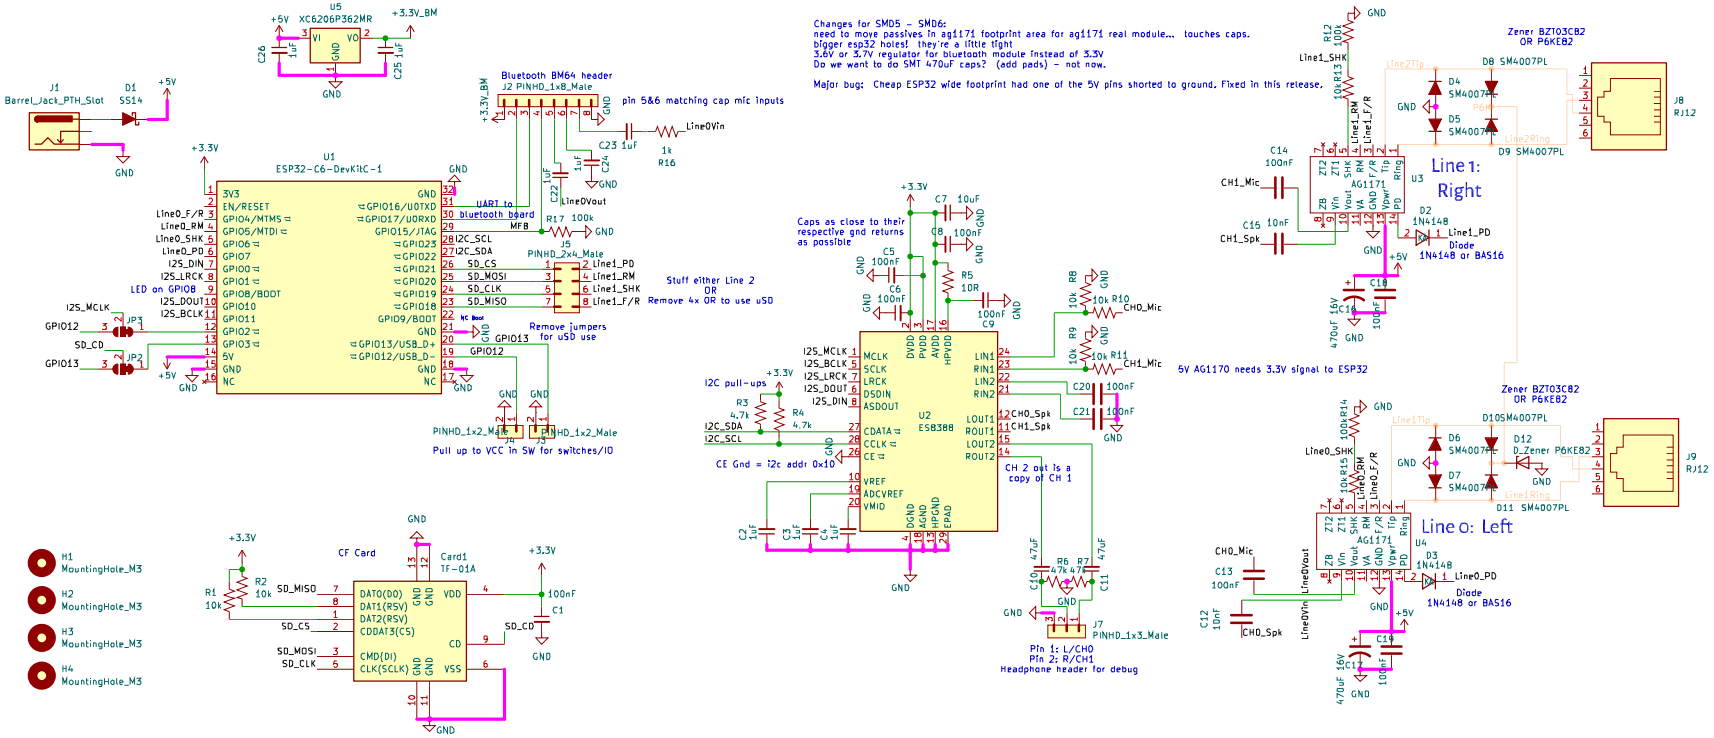

Changes for SMD5 - SMD6:
need to move passives in ag1171 footprint area for ag1171 real module... touches caps.
bigger esp32 holes! they're a little tight
3.6V or 3.7V regulator for bluetooth module instead of 3.3V
Do we want to do SMT 470uF caps? (add pads) - not now.
Major bug: Cheap ESP32 wide footprint had one of the 5V pins shorted to ground. Fixed in this release.
Bluetooth BM64 header
J2 PINHD_1x8_Male
pin 5&6 matching cap mic inputs
UART to bluetooth board
MFB
PINHD_2x4_Male
Stuff either Line 2 OR Remove 4x OR to use uSD
Remove jumpers for uSD use
Pull up to VCC in SW for switches/IO
LED on GPIO8
Caps as close to their respective gnd returns as possible
I2C pull-ups
CE Gnd = I2c addr 0x10
CH 2 out is a copy of CH 1
Headphone header for debug
Pin 1: L/CH0
Pin 2: R/CH1
5V AG1170 needs 3.3V signal to ESP32
Zener BZT03CB2 OR P6KE82
Line 1: Right
Line 0: Left
Diode 1N4148 or BAS16
CF Card
ESP32-C6-DevKitC-1
ES8388
AG1171