因时机器人
INSPIRE-ROBOTS

RH56H1 Series Dexterous Hand

Ultra Compact · Ultimate Power

Smaller · Lighter · More Agile · Powerful · Reliable · Flagship Performance

Height 159.70mm | Width 75.18mm

6	11	0.8s	15N	8KG	1KHz
DOF	Joints	Hand Closing Time	Thumb Fingertip Strength	Passive Payload per Finger	Communication Frequency

400-666-5160
info@inspire-robots.com
www.inspire-robots.com

INSPIRE ROBOTS | Beijing
4F, Building 5, Shougang Park West Ten Winter Olympics Square, Shijingshan District, Beijing

INSPIRE ROBOTS | Shenzhen
Room 5B06, Building 5, Phase 1, Shenzhen Software Park, Nanshan District, Shenzhen

RH56H1

The Dexterous Hand

The H1 Series dexterous hand features an ultra-compact design while delivering equally powerful output.Its metal structure provide exceptional rigidity. Deeply integrated with multi sensors and advanced software algorithms, the hand supports multiple intelligent control modes.With an ultra-compact form factor of 75*159 mm, it delivers 15N thumb fingertip strength and a single-finger static passive load capacity of 8 kg, enabling robust and stable heavy-duty grasping.1 kHz high-speed real-time communication ensures millisecond-level response to commands.It truly redefines high performance in a compact body.

Model	RH56H1-42L-T2(Left hand model) RH56H1-42R-T2(Right hand model)	RH56H1-E6L-T2(Left hand model) RH56H1-E6R-T2(Right hand model)
Control interface	RS485+CANFD	EtherCAT+RS485+CANFD
Degrees of freedom	6	6
Numbers of joints	11	11
Weight	470±10g	470±10g
Operating voltage	24V~48V	24V~48V
Quiescent current	160mA±20mA	160mA±20mA
Peak current	5A @24V	5A @24V
Repeatability	±0.2mm	±0.2mm
Lateral rotation range of thumb	75-165°	75-165°
Hand Closing Time	≤0.8s	≤0.8s
Thumb Fingertip Strength	≥15N	≥15N
Fingertip Strength	≥10N	≥10N
Numbers of fingertip tactile sensors (array)	170（Per finger 34）	170（Per finger 34）
Numbers of palm tactile sensors (array)	90	90
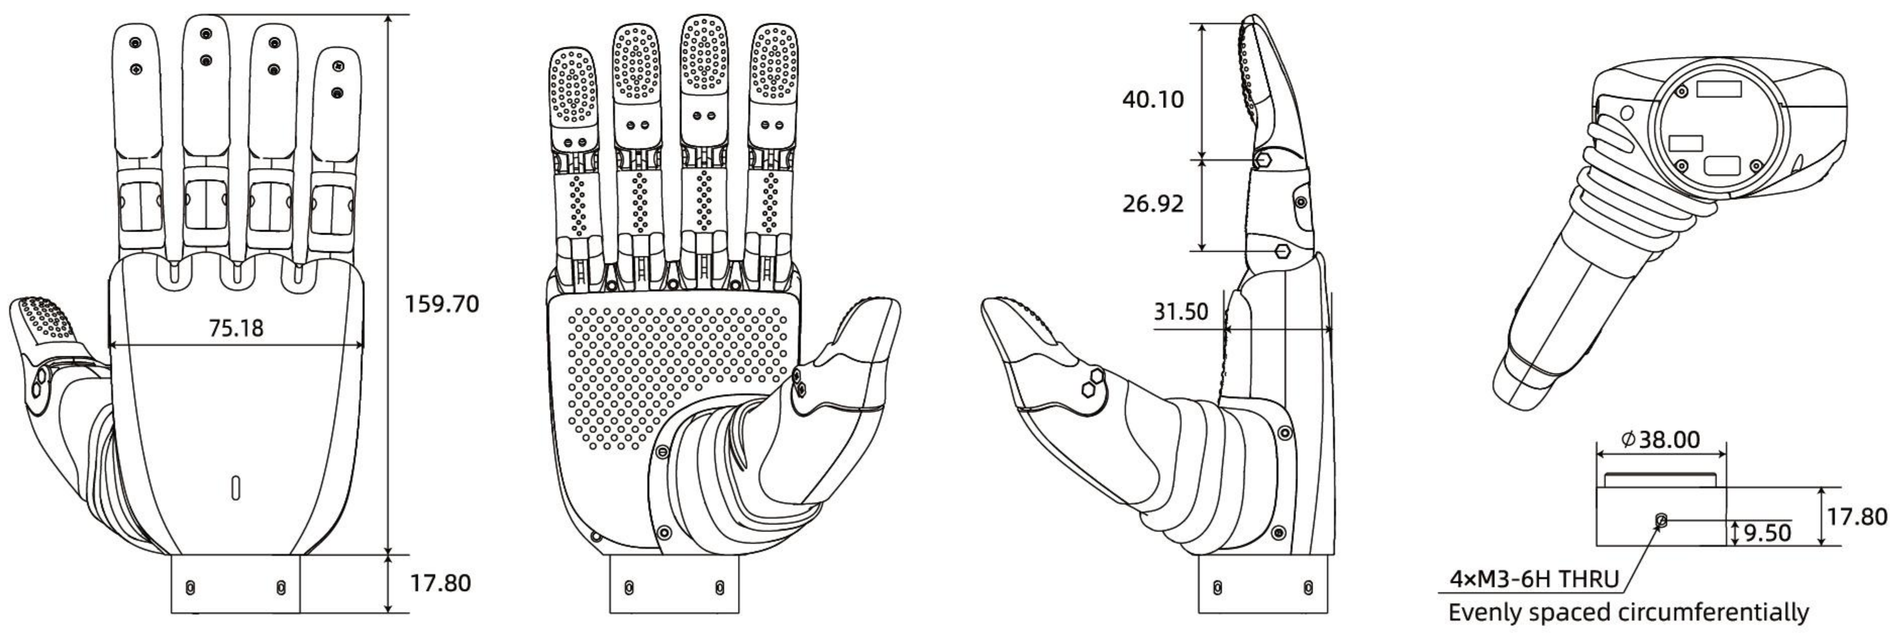
Dimensions