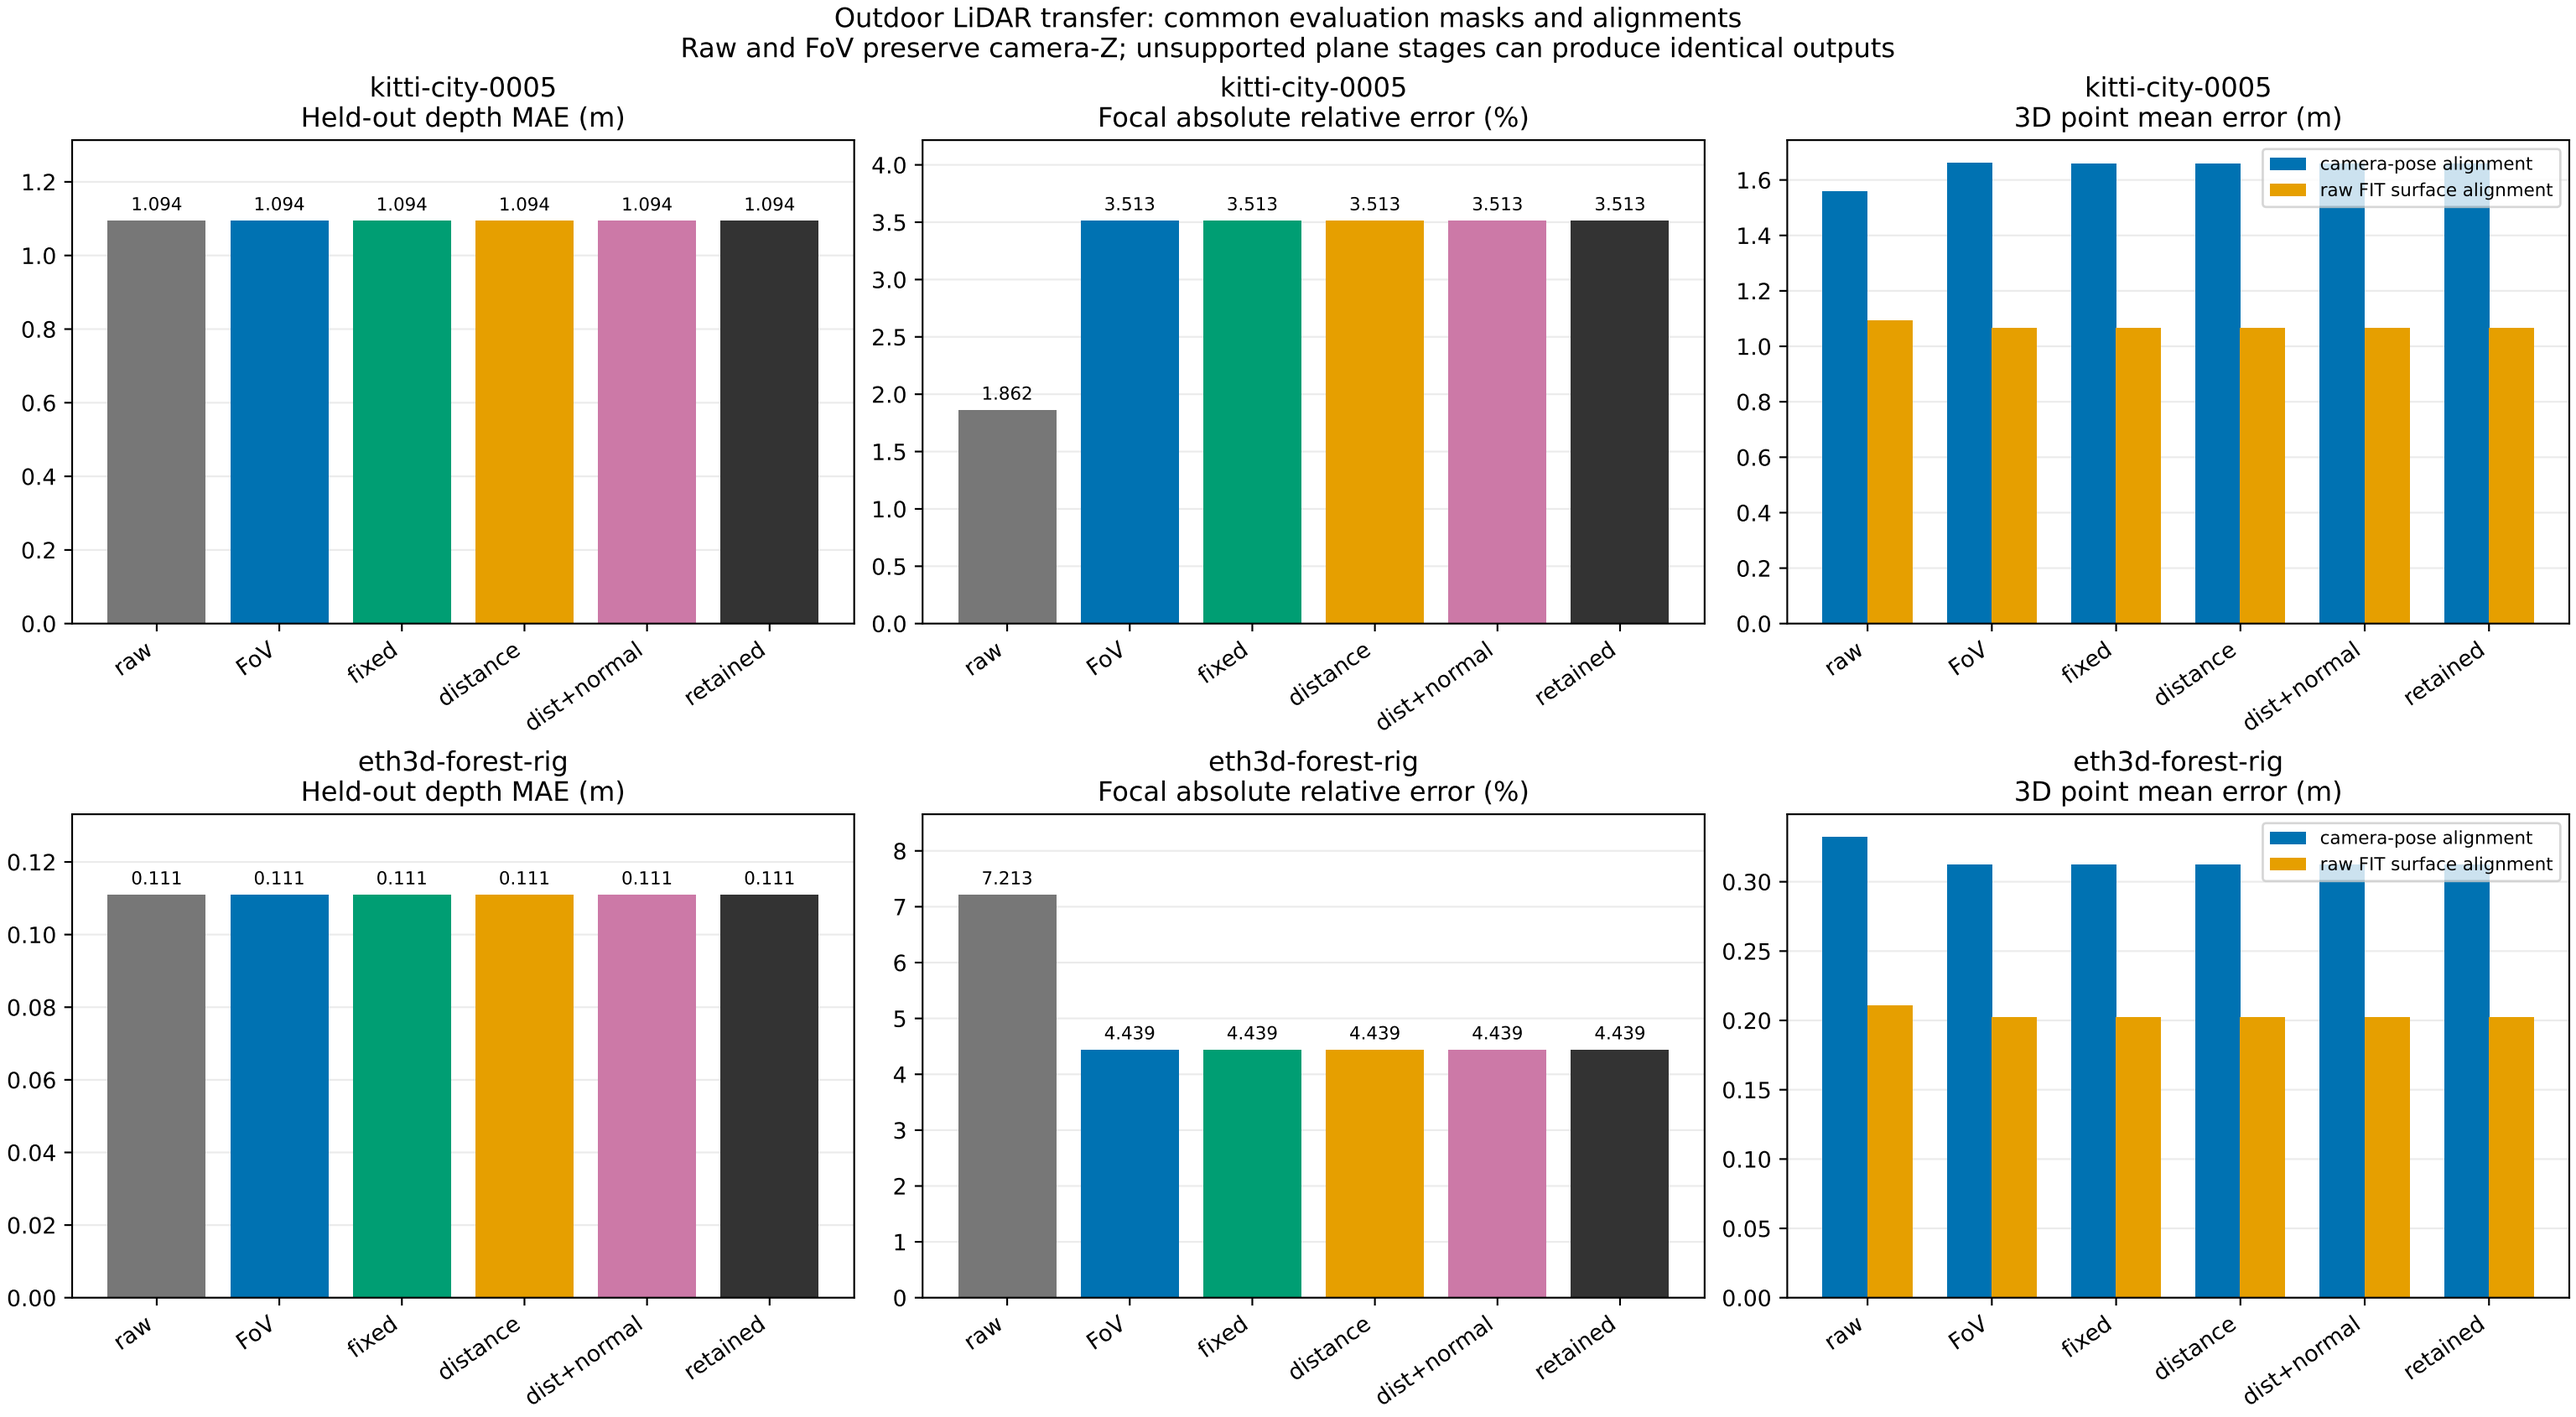
Outdoor LiDAR transfer: common evaluation masks and alignments
Raw and FoV preserve camera-Z; unsupported plane stages can produce identical outputs
kitti-city-0005
Held-out depth MAE (m)
1.094
1.094
1.094
1.094
1.094
1.094
kitti-city-0005
Focal absolute relative error (%)
1.862
3.513
3.513
3.513
3.513
3.513
kitti-city-0005
3D point mean error (m)
camera-pose alignment
raw FIT surface alignment
eth3d-forest-rig
Held-out depth MAE (m)
0.111
0.111
0.111
0.111
0.111
0.111
eth3d-forest-rig
Focal absolute relative error (%)
7.213
4.439
4.439
4.439
4.439
4.439
eth3d-forest-rig
3D point mean error (m)
camera-pose alignment
raw FIT surface alignment
raw
FoV
fixed
distance
dist+normal
retained