


MUR-ROV

SEE MORE IN THE SEA

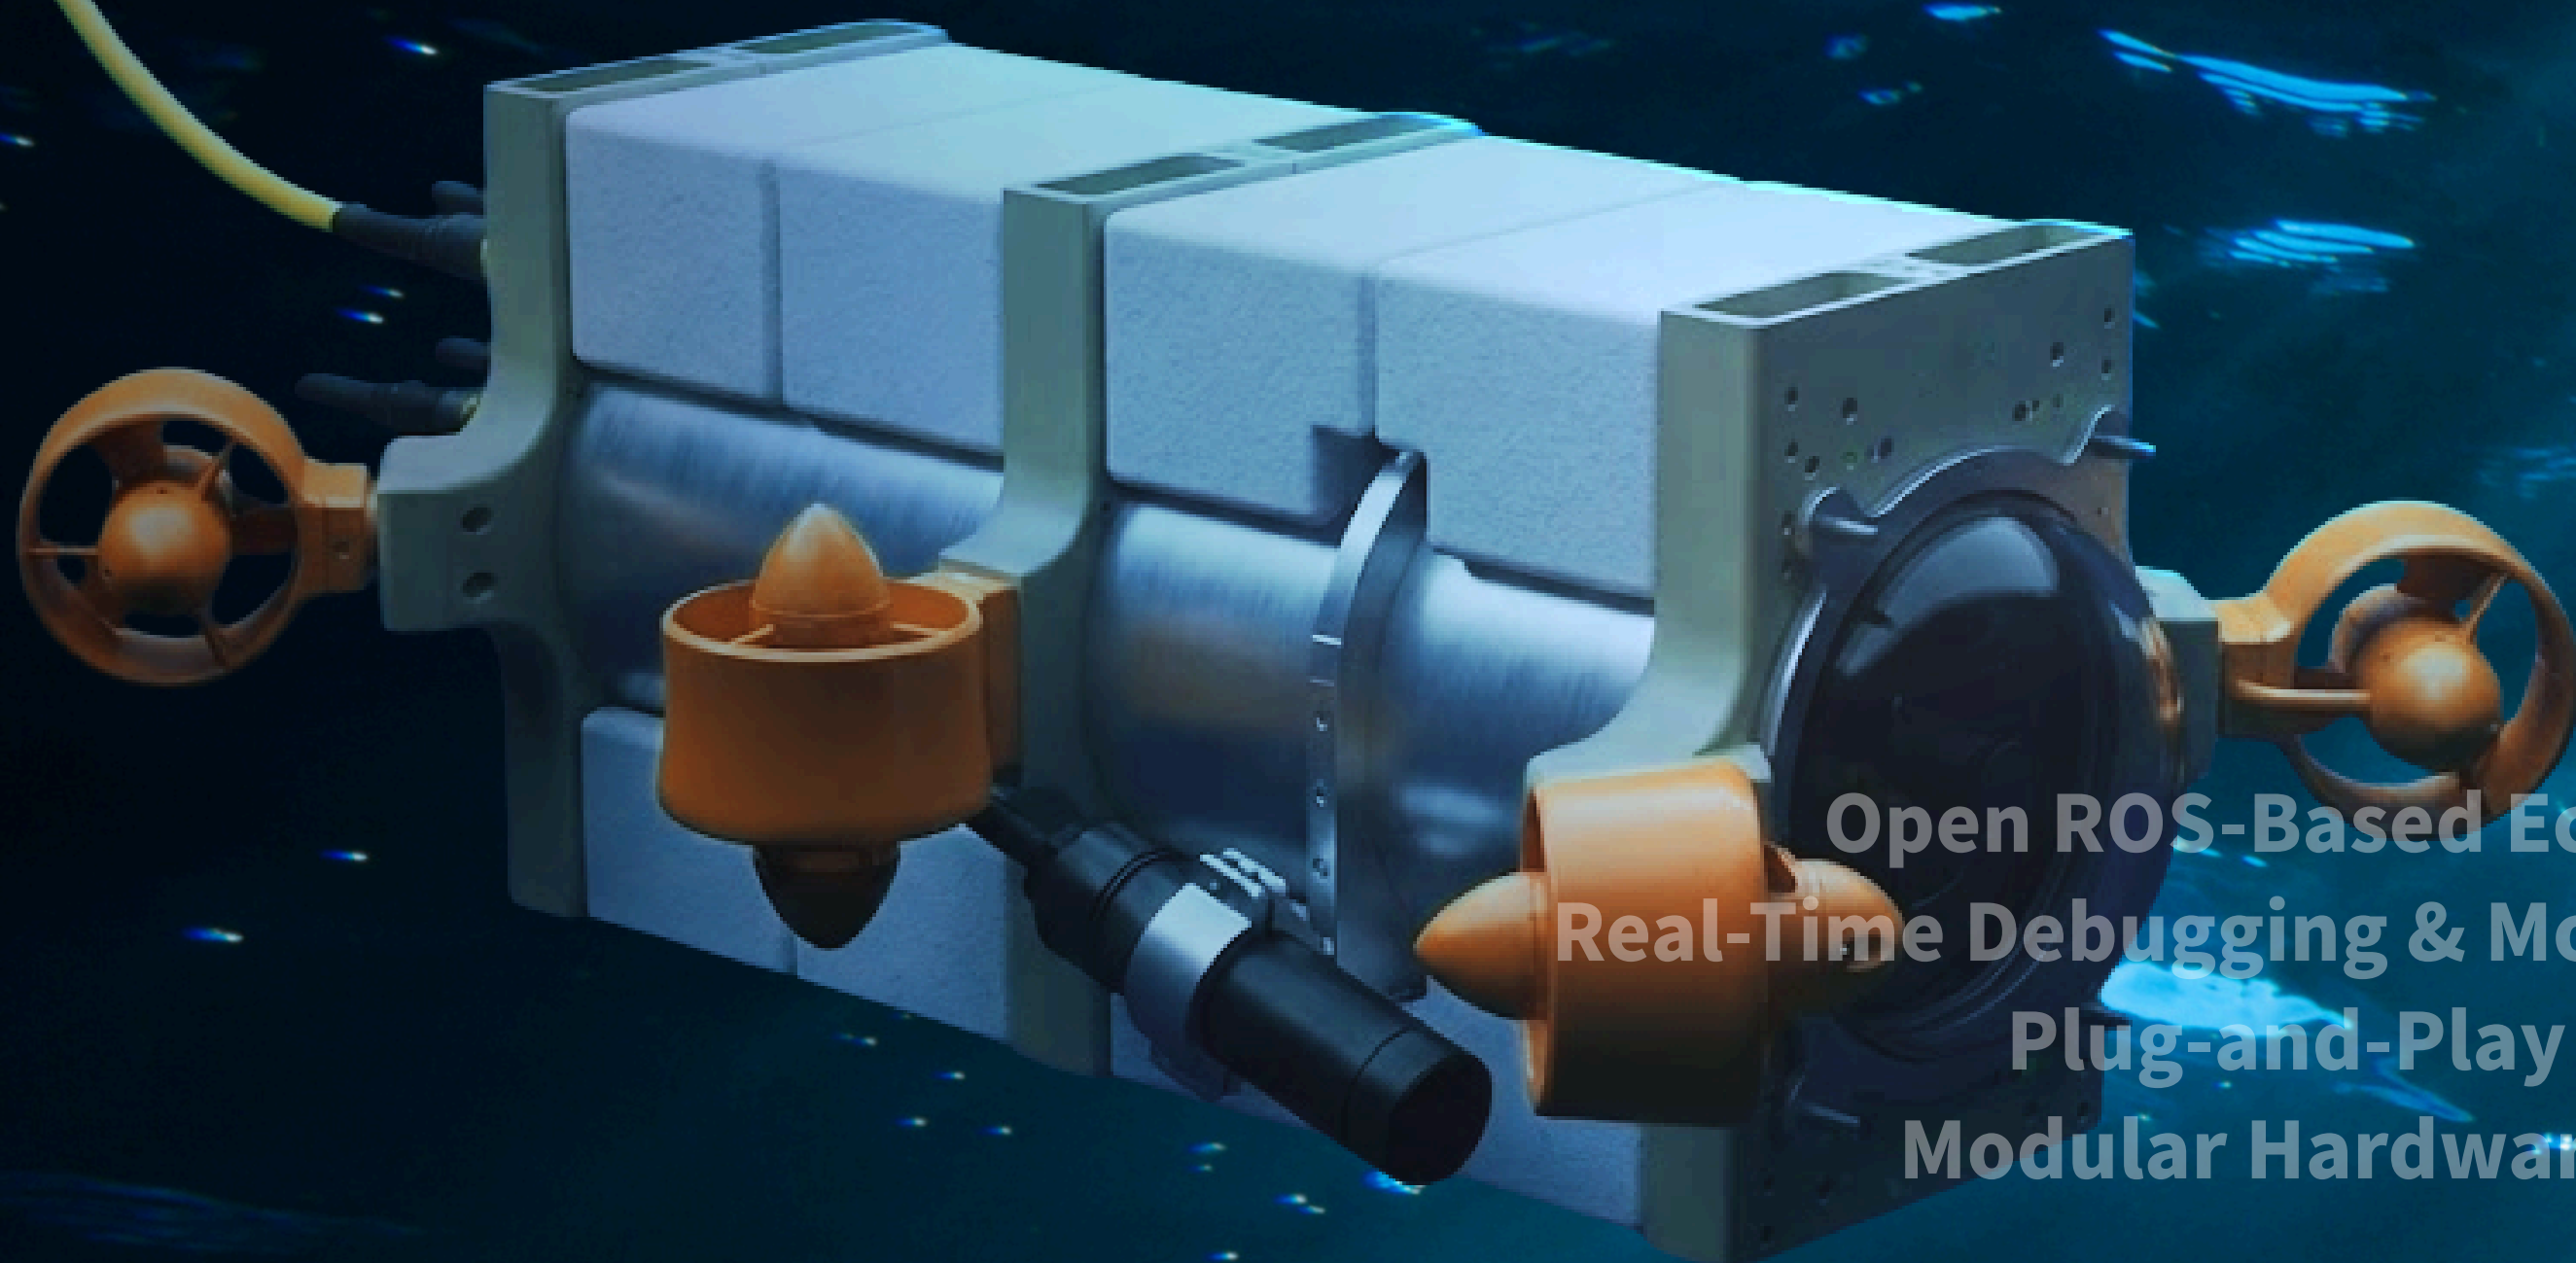

Open ROS-Based Ecosystem
Real-Time Debugging & Monitoring
Plug-and-Play AI Vision
Modular Hardware Design

Physical Specifications

External Dimensions (L × W × H): 562mm × 338mm × 194mm
Unloaded Mass (with counterweight and battery): 10kg
Unloaded Mass (without counterweight and battery): 9.5kg
Pressure Vessel Structural Material: Marine Corrosion-Resistant Aluminum Alloy
End Cap Material: Marine Corrosion-Resistant Aluminum Alloy
Buoyancy Material: Rigid Polyurethane Foam
Main Sealed Chamber External Dimensions: Ø133 mm × 400 mm

Performance Parameters

Maximum Rated Depth: 100 m
Maximum Forward Speed: 1 m/s
Thruster Layout: 4 Horizontal, 2 Vertical
Maximum Thrust (Forward): 20 N
Maximum Thrust (Vertical): 18 N

Sensors

AHRS (IMU & Magnetometer)
Depth Sensor
Leak Detection
Battery Coulomb Counter

Camera and Lighting

Main Camera Resolution: 1920 × 1080
External Auxiliary Camera Resolution: 1920 × 1080
Focal Length: 3.6 mm
Pitch Adjustment Range: Manually Adjustable
Illumination: 1500 lm

Battery

Battery Type: Lithium-ion
Battery Capacity: 88 Wh
Standard Runtime (Normal Operation): ~ 1 h
Standard Runtime (Low-Power Operation): ~ 3 h

Communication and Control

Communication Cable: High-Strength Zero-Buoyancy Cable (Optional Length)
Host Computer Connection: WiFi / Wired Network



Precision
Agriculture



Infrastructure
Maintenance




Public
Safety



Scientific
Research

Application Scenarios

Technical Blueprint

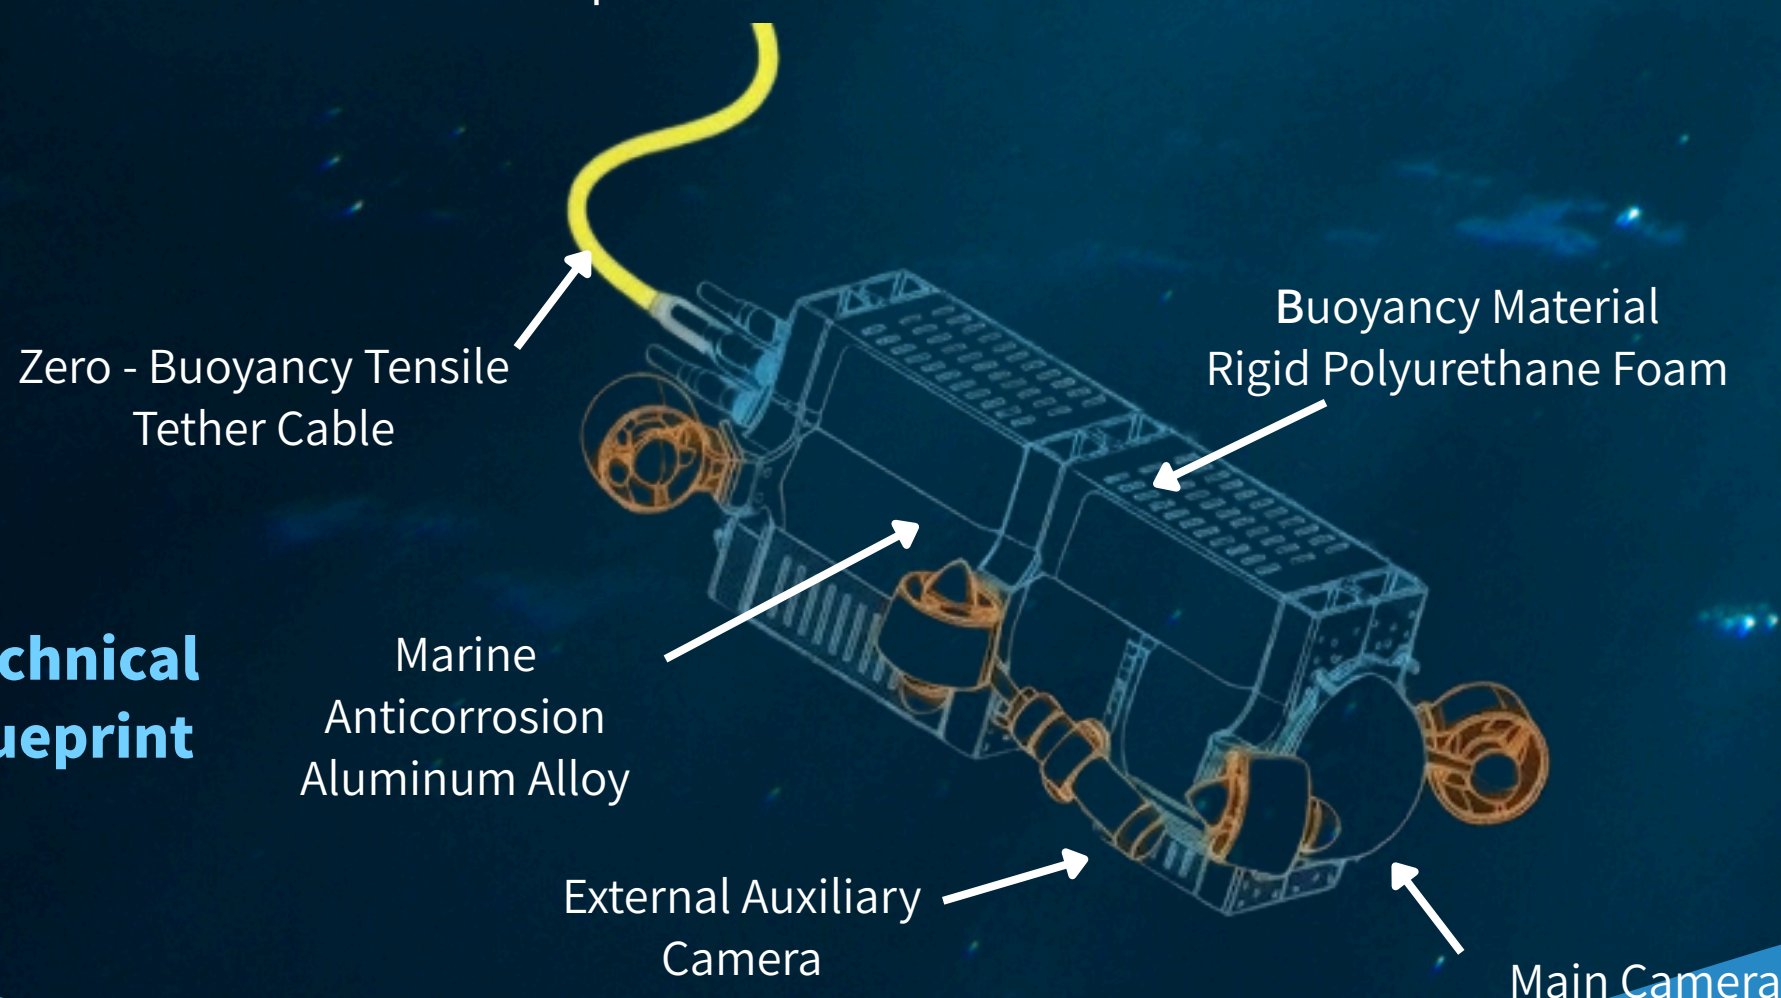

Contact Information

Tel: (852)55134282 / (86)13704510397
E-mail: seamotech@163.com