



RTL Design Sherpa

APB PM/ACPI Micro-Architecture Specification 1.0

January 4, 2026

Table of Contents

1 Pm Acpi Mas Index.....	6
2 APB PM/ACPI - Overview.....	6
2.1 Introduction.....	6
2.2 Key Features.....	6
2.3 Applications.....	6
2.4 Block Diagram.....	7
2.4.1 Figure 1.1: PM/ACPI Block Diagram.....	7
2.5 Timing Diagrams.....	7
2.5.1 Waveform 1.1: Sleep Entry (S3 Suspend).....	7
2.5.2 Waveform 1.2: Wake Event.....	7
2.5.3 Waveform 1.3: PM Timer.....	8
2.5.4 Waveform 1.4: General Purpose Event (GPE).....	8
2.6 Register Summary.....	9
3 APB PM/ACPI - Register Map.....	9
3.1 Register Summary.....	9
3.2 PM1_STS (0x00).....	10
3.3 PM1_EN (0x04).....	10
3.4 PM1_CNT (0x08).....	11
3.5 PM_TMR (0x0C).....	11

List of Figures

Figure 1.1: PM/ACPI Block Diagram.....	7
--	---

List of Tables

No tables in this document.

List of Waveforms

Waveform 1.1: Sleep Entry (S3 Suspend).....	7
Waveform 1.2: Wake Event.....	7
Waveform 1.3: PM Timer.....	8
Waveform 1.4: General Purpose Event (GPE).....	8

1 Pm Acpi Mas Index

Generated: 2026-01-04

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

2 APB PM/ACPI - Overview

2.1 Introduction

The APB PM/ACPI controller provides ACPI-compatible power management functionality with an APB interface. It handles system power states, events, and timer functionality.

2.2 Key Features


- ACPI power management events
- PM1a/PM1b event blocks
- PM1 control block
- PM timer (24-bit, 3.579545 MHz)
- GPE (General Purpose Events) support
- System sleep state control
- Sci/SMI generation

2.3 Applications

- System power management
- Sleep state transitions (S0-S5)
- Wake event handling
- Power button events
- Thermal events

2.4 Block Diagram

2.4.1 Figure 1.1: PM/ACPI Block Diagram

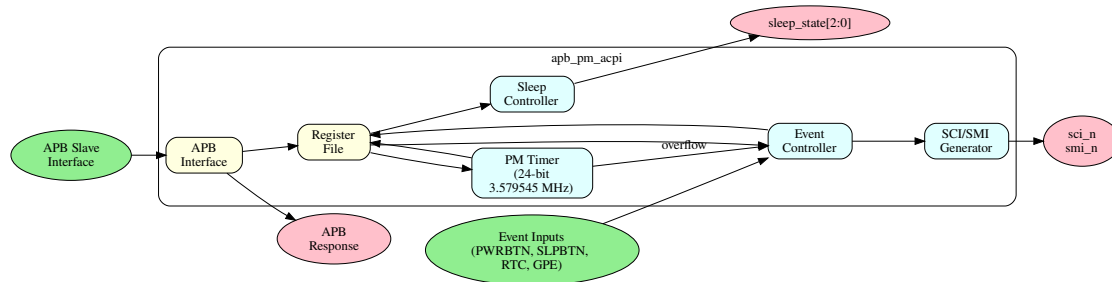


PM/ACPI Block Diagram

2.5 Timing Diagrams

2.5.1 Waveform 1.1: Sleep Entry (S3 Suspend)

Software initiates sleep by writing to PM1_CNT.

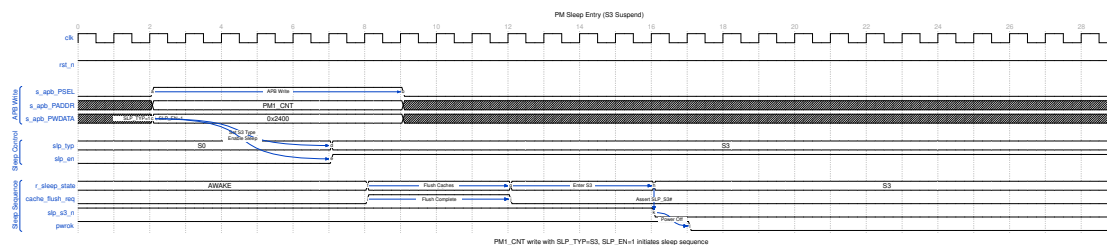

PM Sleep Entry

The sequence: 1. OS writes PM1_CNT with SLP_TYP (sleep type) and SLP_EN (enable) 2. PM controller initiates cache flush 3. Asserts SLP_S3# signal 4. Power removed from non-essential components

2.5.2 Waveform 1.2: Wake Event

Power button or other source triggers wake from sleep.

2.6 Register Summary

Offset	Name	Description
0x00	PM1_STS	PM1 Event Status
0x04	PM1_EN	PM1 Event Enable
0x08	PM1_CNT	PM1 Control
0x0C	PM_TMR	PM Timer (24-bit)
0x10	GPE0_STS	GPE0 Status
0x14	GPE0_EN	GPE0 Enable
0x18	GPE1_STS	GPE1 Status
0x1C	GPE1_EN	GPE1 Enable

Next: [02_architecture.md](#)

RTL Design Sherpa · Learning Hardware Design Through Practice · [GitHub](#) · [Documentation Index](#) · [MIT License](#)

3 APB PM/ACPI - Register Map

3.1 Register Summary

Offset	Name	Access	Description
0x00	PM1_STS	RO/W1C	PM1 Status
0x04	PM1_EN	RW	PM1 Enable
0x08	PM1_CNT	RW	PM1 Control
0x0C	PM_TMR	RO	PM Timer
0x10	GPE0_STS	RO/W1C	GPE0 Status
0x14	GPE0_EN	RW	GPE0 Enable
0x18	GPE1_STS	RO/W1C	GPE1 Status
0x1C	GPE1_EN	RW	GPE1 Enable

3.2 PM1_STS (0x00)

Bit	Name	Access	Description
0	TMR_STS	W1C	Timer overflow status
4	BM_STS	W1C	Bus master status
5	GBL_STS	W1C	Global release status
8	PWRBTN_STS	W1C	Power button status
9	SLPBTN_STS	W1C	Sleep button status
10	RTC_STS	W1C	RTC alarm status
15	WAK_STS	W1C	Wake status

3.3 PM1_EN (0x04)

Bit	Name	Access	Description
0	TMR_EN	RW	Timer overflow enable
5	GBL_EN	RW	Global release enable
8	PWRBTN_EN	RW	Power button enable
9	SLPBTN_EN	RW	Sleep button enable
10	RTC_EN	RW	RTC alarm enable

3.4 PM1_CNT (0x08)

Bit	Name	Access	Description
0	SCI_EN	RW	SCI enable
1	BM_RLD	RW	Bus master reload
2	GBL_RLS	RW	Global release
12:10	SLP_TYP	RW	Sleep type
13	SLP_EN	RW	Sleep enable

3.5 PM_TMR (0x0C)

Bits	Name	Access	Description
23:0	TMR_VAL	RO	Timer value (3.579545 MHz)

Back to: [PM/ACPI Specification Index](#)