



RTL Design Sherpa

RAPIDS Beats Micro-Architecture Specification 0.6

July 2, 2026

Table of Contents

1 Rapids Beats Mas Index.....	34
2 Document Information.....	34
2.1 References.....	34
2.1.1 Related Documents.....	34
2.2 Terminology.....	35
2.3 “Beats” Architecture Concept.....	36
2.4 Revision History.....	37
3 Architecture Overview.....	38
3.1 Overview.....	38
3.1.1 Key Features.....	38
3.1.2 Block Diagram.....	39
3.1.3 Figure 1.1.1: RAPIDS Beats Architecture Block Diagram.....	39
3.2 Data Flow Overview.....	40
3.2.1 Sink Path (Network to Memory).....	40
3.2.2 Figure 1.1.2: Sink Path Data Flow.....	41
3.2.3 Source Path (Memory to Network).....	41
3.2.4 Figure 1.1.3: Source Path Data Flow.....	41
3.3 Key Architectural Decisions.....	42
3.3.1 Beat-Level Tracking.....	42
3.3.2 Concurrent Read/Write.....	42
3.3.3 Virtual FIFOs (Alloc/Drain).....	42
3.4 Module Hierarchy.....	43

3.5 Timing Diagram: Basic Transfer.....	43
3.5.1 Figure 1.1.4: Basic Sink Path Transfer Timing.....	43
3.6 Related Documentation.....	44
4 Top-Level Port List.....	44
4.1 Parameters.....	44
4.1.1 Primary Parameters.....	44
4.1.2 Monitor Bus Parameters.....	45
4.2 Clock and Reset.....	45
4.3 APB Programming Interface.....	45
4.4 Configuration Interface.....	46
4.4.1 Per-Channel Configuration.....	46
4.4.2 Scheduler Configuration.....	46
4.4.3 Descriptor Engine Configuration.....	47
4.4.4 AXI Transfer Configuration.....	47
4.5 Status Interface.....	47
4.6 Sink Path Interface (Network to Memory).....	48
4.6.1 Fill Interface (External to SRAM).....	48
4.6.2 Sink AXI Write Master.....	48
4.7 Source Path Interface (Memory to Network).....	50
4.7.1 Source AXI Read Master.....	50
4.7.2 Drain Interface (SRAM to External).....	50
4.8 Descriptor AXI Master.....	51
4.9 MonBus Interface.....	52
5 Clocks and Reset.....	52

5.1 Clock Domain.....	52
5.1.1 Clock Specifications.....	53
5.1.2 Clock Distribution.....	53
5.2 Reset Specification.....	53
5.2.1 Reset Signal.....	53
5.2.2 Reset Timing Diagram.....	54
5.2.3 Figure 1.3.1: Reset Timing.....	54
5.3 Reset Behavior.....	54
5.3.1 On Reset Assert.....	54
5.3.2 Reset Sequence.....	55
5.4 Configuration During Reset.....	55
5.5 Reset Macros.....	55
5.6 Power-On Reset Considerations.....	56
6 Scheduler Specification.....	56
6.1 Overview.....	56
6.1.1 Key Features.....	56
6.1.2 Block Diagram.....	57
6.1.3 Figure 2.1.1: Scheduler Block Diagram.....	57
6.2 Parameters.....	57
6.3 Port List.....	58
6.3.1 Clock and Reset.....	58
6.3.2 Configuration Interface.....	58
6.3.3 Descriptor Engine Interface.....	59
6.3.4 Data Read Interface.....	59

6.3.5 Data Write Interface.....	60
6.4 FSM States.....	60
6.4.1 Figure 2.1.2: Scheduler FSM State Diagram.....	60
6.4.2 State Encoding.....	61
6.5 Operation.....	62
6.5.1 Descriptor Format.....	62
6.5.2 Transfer Sequence.....	62
6.5.3 Figure 2.1.3: Basic Transfer Timing.....	62
6.6 Error Handling.....	62
6.6.1 Recoverable Write-Progress Timeout.....	63
6.7 MonBus Events.....	63
7 Descriptor Engine Specification.....	64
7.1 Overview.....	64
7.1.1 Key Features.....	64
7.1.2 Block Diagram.....	64
7.1.3 Figure 2.2.1: Descriptor Engine Block Diagram.....	64
7.2 Parameters.....	65
7.3 Port List.....	65
7.3.1 Clock and Reset.....	65
7.3.2 APB Programming Interface.....	66
7.3.3 Configuration Interface.....	66
7.3.4 AXI4 Read Master Interface.....	66
7.3.5 Scheduler Interface.....	67
7.4 FSM States.....	67

7.4.1 Figure 2.2.2: Descriptor Engine FSM.....	67
7.5 Operation.....	68
7.5.1 Descriptor Chain Processing.....	68
7.5.2 Figure 2.2.3: Descriptor Chain Timing.....	68
7.6 Address Range Checking.....	69
7.7 Prefetch and Autonomous Chaining.....	69
7.7.1 Chaining Decision.....	69
7.7.2 Deferred (Throttle-Blocked) Chain Fetch.....	70
8 AXI Read Engine Specification.....	70
8.1 Overview.....	70
8.1.1 Key Features.....	70
8.1.2 Block Diagram.....	71
8.1.3 Figure 2.3.1: AXI Read Engine Block Diagram.....	71
8.2 Parameters.....	71
8.3 Port List.....	72
8.3.1 Clock and Reset.....	72
8.3.2 Scheduler Interface.....	72
8.3.3 AXI4 Read Master Interface.....	72
8.3.4 SRAM Write Interface.....	73
8.4 Operation.....	73
8.4.1 Streaming Pipeline Architecture.....	73
8.4.2 Timing Diagram.....	74
8.4.3 Figure 2.3.2: AXI Read Burst Timing.....	74
8.5 Burst Segmentation.....	74

8.6 Error Handling.....	74
9 AXI Write Engine Specification.....	75
9.1 Overview.....	75
9.1.1 Key Features.....	75
9.1.2 Block Diagram.....	75
9.1.3 Figure 2.4.1: AXI Write Engine Block Diagram.....	75
9.2 Parameters.....	76
9.3 Port List.....	76
9.3.1 Clock and Reset.....	76
9.3.2 Scheduler Interface.....	77
9.3.3 AXI4 Write Master Interface.....	78
9.3.4 SRAM Read Interface.....	78
9.4 Operation.....	79
9.4.1 Write Transaction Phases.....	79
9.4.2 Timing Diagram.....	79
9.4.3 Figure 2.4.2: AXI Write Burst Timing.....	79
9.5 Error Handling.....	80
10 Beats Alloc Control Specification.....	80
10.1 Overview.....	80
10.1.1 Key Features.....	80
10.1.2 Block Diagram.....	81
10.1.3 Figure 2.5.1: Beats Alloc Control Block Diagram.....	81
10.2 Concept: Virtual FIFO.....	81
10.2.1 Use Case: Pre-Allocation for AXI Reads.....	81

10.3 Parameters.....	82
10.4 Port List.....	82
10.4.1 Clock and Reset.....	82
10.4.2 Write Interface (Allocation Requests).....	82
10.4.3 Read Interface (Data Written).....	82
10.4.4 Status Outputs.....	83
10.5 Operation.....	83
10.5.1 Pointer Arithmetic.....	83
10.5.2 Timing Diagram.....	83
10.5.3 Figure 2.5.2: Allocation and Release Timing.....	83
10.6 Integration Example.....	84
11 Beats Drain Control Specification.....	85
11.1 Overview.....	85
11.1.1 Key Features.....	85
11.1.2 Block Diagram.....	85
11.1.3 Figure 2.6.1: Beats Drain Control Block Diagram.....	85
11.2 Concept: Data Availability Tracking.....	85
11.2.1 Complementary Roles.....	86
11.3 Parameters.....	86
11.4 Port List.....	86
11.4.1 Clock and Reset.....	86
11.4.2 Write Interface (Data Written to SRAM).....	86
11.4.3 Read Interface (Drain Requests).....	87
11.4.4 Status Outputs.....	87

11.5 Operation.....	87
11.5.1 Pointer Arithmetic.....	87
11.5.2 Timing Diagram.....	88
11.5.3 Figure 2.6.2: Data Arrival and Drain Timing.....	88
11.6 Integration Example.....	88
11.7 Relationship: alloc_ctrl vs drain_ctrl.....	89
12 Beats Latency Bridge Specification.....	89
12.1 Overview.....	89
12.1.1 Key Features.....	89
12.1.2 Block Diagram.....	90
12.1.3 Figure 2.7.1: Beats Latency Bridge Block Diagram.....	90
12.2 Concept: Why Latency Compensation?.....	90
12.3 Parameters.....	90
12.4 Port List.....	91
12.4.1 Clock and Reset.....	91
12.4.2 Input Interface.....	91
12.4.3 Output Interface.....	91
12.5 Operation.....	92
12.5.1 Timing Diagram.....	92
12.5.2 Figure 2.7.2: Latency Bridge Timing (Depth=2).....	92
12.6 Integration Context.....	92
12.7 Design Considerations.....	93
13 Beats Scheduler Group Specification.....	93
13.1 Overview.....	93

13.1.1 Key Features.....	93
13.1.2 Block Diagram.....	94
13.1.3 Figure 3.1.1: Beats Scheduler Group Block Diagram.....	94
13.2 Parameters.....	94
13.3 Port List.....	95
13.3.1 Clock and Reset.....	95
13.3.2 APB Programming Interface.....	95
13.3.3 Configuration Interface.....	95
13.3.4 Descriptor AXI Master Interface.....	96
13.3.5 Scheduler Data Interfaces.....	96
13.3.6 Status.....	97
13.3.7 MonBus Interface.....	97
13.4 Internal Architecture.....	98
14 Beats Scheduler Group Array Specification.....	98
14.1 Overview.....	98
14.1.1 Key Features.....	98
14.1.2 Block Diagram.....	99
14.1.3 Figure 3.2.1: Beats Scheduler Group Array Block Diagram.....	99
14.2 Parameters.....	100
14.3 Port List.....	100
14.3.1 Clock and Reset.....	100
14.3.2 Per-Channel APB Programming.....	101
14.3.3 Per-Channel Configuration.....	101
14.3.4 Shared Descriptor AXI Master Interface.....	102

14.3.5 Per-Channel Scheduler Data Interfaces.....	102
14.3.6 Aggregate Status.....	103
14.3.7 Unified MonBus Interface.....	103
14.4 AXI Arbitration.....	104
14.4.1 Figure 3.2.2: Descriptor AXI Arbitration Sequence.....	104
14.5 MonBus Aggregation.....	104
14.6 Integration Context.....	105
15 Sink Data Path Specification.....	106
15.1 Overview.....	106
15.1.1 Key Features.....	106
15.1.2 Block Diagram.....	106
15.1.3 Figure 3.3.1: Sink Data Path Block Diagram.....	106
15.2 Parameters.....	107
15.3 Data Flow.....	107
15.3.1 Figure 3.3.2: Sink Path Data Flow Sequence.....	107
15.4 Timing Diagram.....	108
15.4.1 Figure 3.3.3: Sink Path Transfer Timing.....	108
15.5 Interface Summary.....	109
15.5.1 Fill Interface (Input).....	109
15.5.2 Scheduler Interface.....	109
16 Sink Data Path AXIS Wrapper Specification.....	110
16.1 Overview.....	110
16.1.1 Key Features.....	110
16.1.2 Block Diagram.....	110

16.1.3 Figure 3.4.1: Sink Data Path AXIS Block Diagram.....	110
16.2 Parameters.....	111
16.3 Port List.....	112
16.3.1 Clock and Reset.....	112
16.3.2 AXI-Stream Slave Interface.....	112
16.3.3 Space Allocation Interface.....	112
16.3.4 Scheduler Interface.....	113
16.3.5 AXI Write Master Interface.....	113
16.4 Signal Mapping.....	114
16.4.1 Figure 3.4.2: AXIS to Fill Interface Mapping.....	114
16.5 Timing Diagram.....	114
16.5.1 Figure 3.4.3: AXIS Ingress Timing.....	114
16.6 Usage Notes.....	115
17 Sink SRAM Controller Specification.....	115
17.1 Overview.....	115
17.1.1 Key Features.....	115
17.1.2 Block Diagram.....	116
17.1.3 Figure 3.5.1: Sink SRAM Controller Block Diagram.....	116
17.2 Parameters.....	117
17.3 Port List.....	117
17.3.1 Clock and Reset.....	117
17.3.2 Per-Channel Fill Interface.....	117
17.3.3 Arbitrated Drain Interface (to AXI Write Engine).....	118
17.3.4 Per-Channel Status.....	118

17.4 Arbitration Logic.....	119
17.4.1 Figure 3.5.2: Channel Arbitration Timing.....	119
17.5 Integration with AXI Write Engine.....	119
18 Sink SRAM Controller Unit Specification.....	120
18.1 Overview.....	120
18.1.1 Key Features.....	120
18.1.2 Block Diagram.....	120
18.1.3 Figure 3.6.1: Sink SRAM Controller Unit Block Diagram.....	120
18.2 Parameters.....	122
18.3 Port List.....	122
18.3.1 Clock and Reset.....	122
18.3.2 Fill Interface (from Network).....	122
18.3.3 Drain Interface (to AXI Write Engine).....	123
18.3.4 Status.....	123
18.4 Internal Architecture.....	124
18.4.1 Figure 3.6.2: Internal Data Flow.....	124
18.5 Timing Diagram.....	124
18.5.1 Figure 3.6.3: Fill and Drain Timing.....	124
18.6 Virtual FIFO Concept.....	125
18.6.1 Figure 3.6.4: Virtual FIFO Operation.....	125
18.7 Integration Example.....	125
19 Source Data Path Specification.....	126
19.1 Overview.....	126
19.1.1 Key Features.....	126

19.1.2 Block Diagram.....	127
19.1.3 Figure 3.7.1: Source Data Path Block Diagram.....	127
19.2 Parameters.....	127
19.3 Data Flow.....	128
19.3.1 Figure 3.7.2: Source Path Data Flow Sequence.....	128
19.4 Port List.....	129
19.4.1 Clock and Reset.....	129
19.4.2 Scheduler Interface.....	129
19.4.3 AXI Read Master Interface.....	129
19.4.4 Drain Interface (Output to Network).....	130
19.5 Timing Diagram.....	130
19.5.1 Figure 3.7.3: Source Path Transfer Timing.....	130
19.6 Integration Example.....	131
20 Source Data Path AXIS Wrapper Specification.....	132
20.1 Overview.....	132
20.1.1 Key Features.....	132
20.1.2 Block Diagram.....	132
20.1.3 Figure 3.8.1: Source Data Path AXIS Block Diagram.....	132
20.2 Parameters.....	133
20.3 Port List.....	134
20.3.1 Clock and Reset.....	134
20.3.2 Scheduler Interface.....	134
20.3.3 AXI Read Master Interface.....	134
20.3.4 AXI-Stream Master Interface.....	135

20.4 Signal Mapping.....	135
20.4.1 Figure 3.8.2: Drain to AXIS Interface Mapping.....	135
20.5 Timing Diagram.....	136
20.5.1 Figure 3.8.3: AXIS Egress Timing.....	136
20.6 Usage Notes.....	136
20.7 Integration Example.....	136
21 Source SRAM Controller Specification.....	137
21.1 Overview.....	138
21.1.1 Key Features.....	138
21.1.2 Block Diagram.....	138
21.1.3 Figure 3.9.1: Source SRAM Controller Block Diagram.....	138
21.2 Parameters.....	139
21.3 Port List.....	139
21.3.1 Clock and Reset.....	139
21.3.2 Per-Channel Fill Interface (from AXI Read Engine).....	140
21.3.3 Arbitrated Drain Interface (to Network).....	140
21.3.4 Per-Channel Status.....	141
21.4 Arbitration Logic.....	141
21.4.1 Figure 3.9.2: Source Channel Arbitration.....	141
21.5 Comparison: Sink vs Source SRAM Controller.....	141
21.6 Integration Example.....	142
22 Source SRAM Controller Unit Specification.....	143
22.1 Overview.....	143
22.1.1 Key Features.....	143

22.1.2 Block Diagram.....	143
22.1.3 Figure 3.10.1: Source SRAM Controller Unit Block Diagram.....	143
22.2 Parameters.....	144
22.3 Port List.....	145
22.3.1 Clock and Reset.....	145
22.3.2 Fill Interface (from AXI Read Engine).....	145
22.3.3 Drain Interface (to Network).....	145
22.3.4 Status.....	146
22.4 Internal Architecture.....	146
22.4.1 Figure 3.10.2: Internal Data Flow.....	146
22.5 Comparison: Sink vs Source Unit.....	147
22.6 Timing Diagram.....	147
22.6.1 Figure 3.10.3: Source Unit Fill and Drain Timing.....	147
22.7 Integration Example.....	148
23 RAPIDS Core Beats Specification.....	149
23.1 Overview.....	149
23.1.1 Key Features.....	149
23.1.2 Block Diagram.....	149
23.1.3 Figure 3.11.1: RAPIDS Core Beats Block Diagram.....	149
23.2 Parameters.....	150
23.3 Port List.....	151
23.3.1 Clock and Reset.....	151
23.3.2 Per-Channel APB Programming.....	151
23.3.3 Per-Channel Configuration.....	152

23.3.4 Descriptor AXI Master Interface.....	152
23.3.5 Sink AXI Write Master Interface.....	153
23.3.6 Source AXI Read Master Interface.....	154
23.3.7 Sink Fill Interface (or AXIS Slave).....	154
23.3.8 Source Drain Interface (or AXIS Master).....	154
23.3.9 Unified MonBus Interface.....	155
23.3.10 Aggregate Status.....	155
23.4 Data Flow.....	156
23.4.1 Figure 3.11.2: RAPIDS Core Complete Data Flow.....	156
23.5 MonBus Aggregation.....	156
23.6 Integration Example.....	157
24 RAPIDS Registers Specification.....	159
24.1 Overview.....	159
24.2 Base Register Map (0x100-0x3FF).....	159
24.2.1 Key Register Fields.....	161
24.3 Monitor Register Map (rapids_mon_regs @ 0x1000).....	162
25 RAPIDS Config Block Specification.....	163
25.1 Overview.....	163
25.2 Mapping Groups.....	164
25.2.1 Base Configuration.....	164
25.2.2 Monitor Configuration (hwif_out.MON.*).	164
25.2.3 Performance and Observation.....	164
26 RAPIDS Beats Top Specification.....	165
26.1 Overview.....	165

26.2 Integration Datapath.....	165
26.2.1 Figure 3.14.1: RAPIDS Beats Top Integration.....	165
26.2.2 Address Decode.....	166
26.3 AXI Monitors (USE_AXI_MONITORS).....	166
26.4 Parameters.....	167
26.5 Top-Level Interfaces.....	167
27 Interface Overview.....	168
27.1 External Interfaces.....	169
27.1.1 AXI4 Master Interfaces.....	169
27.1.2 Streaming Interfaces.....	169
27.1.3 Control/Monitor Interfaces.....	169
27.2 Interface Documentation.....	170
27.3 Interface Signal Naming Conventions.....	170
28 AXI4 Interface Specification.....	170
28.1 Overview.....	171
28.2 Descriptor AXI Master Interface.....	171
28.2.1 Purpose.....	171
28.2.2 Signal Table.....	171
28.2.3 Transaction Characteristics.....	172
28.2.4 Timing Diagram.....	172
28.2.5 Figure 4.1.1: Descriptor Fetch Timing.....	172
28.3 Sink AXI Write Master Interface.....	173
28.3.1 Purpose.....	173
28.3.2 Signal Table.....	173

28.3.3 Transaction Characteristics.....	174
28.3.4 Timing Diagram.....	174
28.3.5 Figure 4.1.2: Sink AXI Write Burst Timing.....	174
28.4 Source AXI Read Master Interface.....	174
28.4.1 Purpose.....	174
28.4.2 Signal Table.....	175
28.4.3 Transaction Characteristics.....	175
28.4.4 Timing Diagram.....	176
28.4.5 Figure 4.1.3: Source AXI Read Burst Timing.....	176
28.5 AXI Protocol Compliance.....	176
28.5.1 Supported Features.....	176
28.5.2 Error Handling.....	177
29 AXI-Stream Interface Specification.....	177
29.1 Overview.....	177
29.2 AXIS Sink Slave Interface.....	177
29.2.1 Purpose.....	177
29.2.2 Signal Table.....	177
29.2.3 Signal Details.....	178
29.2.4 Timing Diagram.....	179
29.2.5 Figure 4.2.1: AXIS Sink Slave Timing.....	179
29.2.6 Backpressure.....	179
29.3 AXIS Source Master Interface.....	179
29.3.1 Purpose.....	179
29.3.2 Signal Table.....	179

29.3.3 Timing Diagram.....	180
29.3.4 Figure 4.2.2: AXIS Source Master Timing.....	180
29.3.5 Flow Control.....	180
29.4 AXIS vs Custom Fill/Drain Interfaces.....	181
29.4.1 Comparison.....	181
29.4.2 Selection Guide.....	181
29.5 Configuration Parameters.....	181
30 MonBus Interface Specification.....	182
30.1 Overview.....	182
30.2 MonBus Signal Interface.....	182
30.2.1 Signal Table.....	182
30.2.2 Handshaking Protocol.....	182
30.2.3 Timing Diagram.....	182
30.2.4 Figure 4.3.1: MonBus Packet Transfer Timing.....	182
30.3 MonBus Packet Format.....	183
30.3.1 64-bit Packet Structure.....	183
30.3.2 Figure 4.3.2: MonBus Packet Format.....	183
30.4 Packet Types.....	183
30.4.1 Type Code Definitions.....	183
30.4.2 Payload Formats by Type.....	184
30.5 MonBus Source Aggregation.....	185
30.5.1 RAPIDS Core MonBus Sources.....	185
30.5.2 Aggregation Hierarchy.....	186
30.5.3 Figure 4.3.3: MonBus Aggregation Tree.....	186

30.6 Integration Guidelines.....	186
30.6.1 Consumer Requirements.....	186
30.6.2 Recommended Consumer Patterns.....	186
30.7 Timing Requirements.....	187
31 Product Requirements Document (PRD).....	188
31.1 RAPIDS - Rapid AXI Programmable In-band Descriptor System.....	188
31.2 1. Executive Summary.....	188
31.2.1 1.1 Quick Stats.....	188
31.2.2 1.2 Subsystem Goals.....	188
31.3 2. Documentation Structure.....	188
31.3.1  Complete RAPIDS Specification.....	188
31.3.2  Known Issues.....	189
31.3.3  Other Documentation.....	190
31.4 2.4 Organizational Standards - RAPIDS Code Location.....	190
31.4.1 Code Organization Principle.....	190
31.4.2 RAPIDS Directory Structure.....	190
31.4.3 What Goes Where?.....	191
31.4.4 Import Pattern for RAPIDS Tests.....	191
31.4.5 Benefits of This Organization.....	192
31.4.6 Compliance Status.....	192
31.5 3. Architecture Overview.....	192
31.5.1 3.1 Top-Level Block Diagram.....	192
31.5.2 3.2 Data Flow.....	193
31.6 4. Key Features.....	193

31.6.1 4.1 Descriptor-Based Operation.....	193
31.6.2 4.2 Data Path Features.....	193
31.6.3 4.3 Scheduler Features.....	194
31.6.4 4.4 Monitoring Integration.....	194
31.7 5. Interfaces.....	194
31.7.1 5.1 External Interfaces.....	194
31.7.2 5.2 Configuration Parameters.....	195
31.8 6. Use Cases.....	196
31.8.1 6.1 DMA-Style Transfers.....	196
31.8.2 6.2 Network Packet Processing.....	196
31.8.3 6.3 Custom Data Path Acceleration.....	196
31.9 7. Test Coverage.....	196
31.9.1 7.1 Current Status.....	196
31.9.2 7.2 Test Strategy.....	197
31.10 8. Known Issues Summary.....	197
31.10.1 8.1 Critical Issues.....	197
31.10.2 8.2 Medium Priority Issues.....	198
31.11 9. Integration Guidelines.....	198
31.11.1 9.1 Quick Start.....	198
31.11.2 9.2 Configuration Steps.....	199
31.12 10. Development Status.....	199
31.12.1 10.1 Current Phase.....	199
31.12.2 10.2 Roadmap.....	200
31.13 11. Performance Characteristics.....	200

31.13.1 11.1 Throughput.....	200
31.13.2 11.2 Latency.....	200
31.13.3 11.3 Resource Utilization.....	200
31.14 12. Verification Infrastructure.....	200
31.14.1 12.1 Test Organization.....	200
31.14.2 12.2 CocoTB Framework.....	201
31.14.3 12.2.1 MANDATORY: BFM Usage for FUB Tests.....	201
31.14.4 12.3 Test File Structure (Standard Pattern).....	202
31.15 13. Quick Reference.....	207
31.15.1 13.1 Key Files.....	207
31.15.2 13.2 Commands.....	207
31.16 14. Success Criteria.....	208
31.16.1 14.1 Functional.....	208
31.16.2 14.2 Quality.....	208
31.16.3 14.3 Documentation.....	208
31.17 15. Educational Value.....	208
31.18 15. Attribution and Contribution Guidelines.....	209
31.18.1 15.1 Git Commit Attribution.....	209
31.19 16. Documentation Generation.....	209
31.19.1 16.1 Generating PDF/DOCX from Specification.....	209
31.20 16.2 PDF Generation Location.....	210
31.21 17. References.....	211
31.21.1 16.1 Internal Documentation.....	211
31.21.2 16.2 Related Subsystems.....	211

31.21.3 16.3 External References.....	211
31.22 Navigation.....	211
32 Claude Code Guide: RAPIDS Subsystem.....	212
32.1 Quick Context.....	212
32.2  Global Requirements Reference.....	212
32.3 Critical Rules for This Subsystem.....	213
32.3.1 Rule #0: Attribution Format for Git Commits.....	213
32.3.2 Rule #0.1: Testbench Location and Test Structure (MANDATORY).....	213
32.3.3 Rule #0.5: Three Mandatory TB Methods (MANDATORY).....	215
32.3.4 Rule #0.75: Audit Signal Naming BEFORE Writing Testbenches.....	216
32.3.5 Rule #1: MANDATORY BFM Usage for FUB-Level Tests.....	217
32.3.6 Rule #2: Always Reference Detailed Specification.....	220
32.3.7 Rule #3: Know the Known Issues.....	220
32.3.8 Rule #4: RAPIDS is Complex - Understand Block Interactions.....	220
32.3.9 Rule #5: Test Strategy is Multi-Layered.....	221
32.4 Architecture Quick Reference.....	221
32.4.1 Block Organization.....	221
32.4.2 Module Quick Reference.....	222
32.4.3 Interface Summary.....	223
32.5 Common User Questions and Responses.....	223
32.5.1 Q: “How does the scheduler work?”.....	223
32.5.2 Q: “How do I configure RAPIDS?”.....	224
32.5.3 Q: “What’s the data flow for network to memory transfer?”.....	225

32.5.4 Q: “What’s the credit counter bug and how does exponential encoding work?”	225
32.5.5 Q: “How do I run RAPIDS tests?”	226
32.6 Integration Patterns.....	227
32.6.1 Pattern 1: Basic RAPIDS Instantiation.....	227
32.6.2 Pattern 2: Configuration Sequence.....	228
32.6.3 Pattern 3: MonBus Integration.....	229
32.7 Anti-Patterns to Catch.....	229
32.7.1 ✗ Anti-Pattern 1: Not Understanding Exponential Credit Encoding... ..	229
32.7.2 ✗ Anti-Pattern 2: Insufficient SRAM Depth.....	230
32.7.3 ✗ Anti-Pattern 3: No MonBus Downstream Handling.....	230
32.7.4 ✗ Anti-Pattern 4: Testing Individual Blocks in Isolation.....	230
32.8 Debugging Workflow.....	230
32.8.1 Issue: Scheduler Not Processing Descriptors.....	230
32.8.2 Issue: Data Path Stalls.....	231
32.8.3 Issue: MonBus Packets Not Generated.....	231
32.9 Testing Guidance.....	231
32.9.1 Test Organization.....	231
32.9.2 Running Tests.....	232
32.9.3 Test Coverage Status.....	232
32.10 Key Documentation Links.....	233
32.10.1 Always Reference These.....	233
32.11 Quick Commands.....	233
32.12 Verification Patterns and Best Practices.....	234

32.12.1 Pattern: Continuous Background Monitoring.....	234
32.12.2 Pattern: Using Existing CocoTBFramework Components.....	235
32.12.3 Test Scalability Patterns.....	237
32.13 Documentation Generation.....	239
32.13.1 Generating PDF/DOCX from Specification.....	239
32.14 PDF Generation Location.....	241
32.15 Remember.....	241

List of Figures

Figure 1.1.1: RAPIDS Beats Architecture Block Diagram.....	39
Figure 1.1.2: Sink Path Data Flow.....	41
Figure 1.1.3: Source Path Data Flow.....	41
Figure 1.1.4: Basic Sink Path Transfer Timing.....	43
Figure 1.3.1: Reset Timing.....	54
Figure 2.1.1: Scheduler Block Diagram.....	57
Figure 2.1.2: Scheduler FSM State Diagram.....	60
Figure 2.1.3: Basic Transfer Timing.....	62
Figure 2.2.1: Descriptor Engine Block Diagram.....	64
Figure 2.2.2: Descriptor Engine FSM.....	67
Figure 2.2.3: Descriptor Chain Timing.....	68
Figure 2.3.1: AXI Read Engine Block Diagram.....	71
Figure 2.3.2: AXI Read Burst Timing.....	74
Figure 2.4.1: AXI Write Engine Block Diagram.....	75
Figure 2.4.2: AXI Write Burst Timing.....	79
Figure 2.5.1: Beats Alloc Control Block Diagram.....	81
Figure 2.5.2: Allocation and Release Timing.....	83
Figure 2.6.1: Beats Drain Control Block Diagram.....	85
Figure 2.6.2: Data Arrival and Drain Timing.....	88
Figure 2.7.1: Beats Latency Bridge Block Diagram.....	90
Figure 2.7.2: Latency Bridge Timing (Depth=2).....	92
Figure 3.1.1: Beats Scheduler Group Block Diagram.....	94
Figure 3.2.1: Beats Scheduler Group Array Block Diagram.....	99
Figure 3.2.2: Descriptor AXI Arbitration Sequence.....	104
Figure 3.3.1: Sink Data Path Block Diagram.....	106
Figure 3.3.2: Sink Path Data Flow Sequence.....	107
Figure 3.3.3: Sink Path Transfer Timing.....	108
Figure 3.4.1: Sink Data Path AXIS Block Diagram.....	110
Figure 3.4.2: AXIS to Fill Interface Mapping.....	114
Figure 3.4.3: AXIS Ingress Timing.....	114
Figure 3.5.1: Sink SRAM Controller Block Diagram.....	116
Figure 3.5.2: Channel Arbitration Timing.....	119
Figure 3.6.1: Sink SRAM Controller Unit Block Diagram.....	120
Figure 3.6.2: Internal Data Flow.....	124
Figure 3.6.3: Fill and Drain Timing.....	124
Figure 3.6.4: Virtual FIFO Operation.....	125

Figure 3.7.1: Source Data Path Block Diagram.....	127
Figure 3.7.2: Source Path Data Flow Sequence.....	128
Figure 3.7.3: Source Path Transfer Timing.....	130
Figure 3.8.1: Source Data Path AXIS Block Diagram.....	132
Figure 3.8.2: Drain to AXIS Interface Mapping.....	135
Figure 3.8.3: AXIS Egress Timing.....	136
Figure 3.9.1: Source SRAM Controller Block Diagram.....	138
Figure 3.9.2: Source Channel Arbitration.....	141
Figure 3.10.1: Source SRAM Controller Unit Block Diagram.....	143
Figure 3.10.2: Internal Data Flow.....	146
Figure 3.10.3: Source Unit Fill and Drain Timing.....	147
Figure 3.11.1: RAPIDS Core Beats Block Diagram.....	149
Figure 3.11.2: RAPIDS Core Complete Data Flow.....	156
Figure 3.14.1: RAPIDS Beats Top Integration.....	165
Figure 4.1.1: Descriptor Fetch Timing.....	172
Figure 4.1.2: Sink AXI Write Burst Timing.....	174
Figure 4.1.3: Source AXI Read Burst Timing.....	176
Figure 4.2.1: AXIS Sink Slave Timing.....	179
Figure 4.2.2: AXIS Source Master Timing.....	180
Figure 4.3.1: MonBus Packet Transfer Timing.....	182
Figure 4.3.2: MonBus Packet Format.....	183
Figure 4.3.3: MonBus Aggregation Tree.....	186

List of Tables

Table 1: Table 0.1: Related Documents and Specifications.....	34
Table 2: Table 0.2: RAPIDS Beats MAS Document Revision History.....	37
Table 3: Table 1.1.1: Beat Granularity Examples.....	42
Table 4: Table 1.2.3: Clock and Reset Signals.....	45
Table 5: Table 1.2.4: APB Programming Interface.....	45
Table 6: Table 1.2.5: Per-Channel Configuration.....	46
Table 7: Table 1.2.6: Scheduler Configuration.....	46
Table 8: Table 1.2.7: Descriptor Engine Configuration.....	47
Table 9: Table 1.2.8: AXI Transfer Configuration.....	47
Table 10: Table 1.2.9: Status Interface.....	47
Table 11: Table 1.2.10: Sink Fill Interface.....	48
Table 12: Table 1.2.11: Sink AXI Write Master Interface.....	48
Table 13: Table 1.2.12: Source AXI Read Master Interface.....	50
Table 14: Table 1.2.13: Source Drain Interface.....	50
Table 15: Table 1.2.14: Descriptor AXI Master Interface.....	51
Table 16: Table 1.2.15: MonBus Interface.....	52
Table 17: Table 1.3.1: Clock Specifications.....	53
Table 18: Table 1.3.2: Reset Specifications.....	53
Table 19: Table 1.3.3: Reset States.....	54
Table 20: Table 1.3.4: Configuration Timing Requirements.....	55
Table 21: Table 2.1.2: Clock and Reset.....	58
Table 22: Table 2.1.3: Configuration Interface.....	58
Table 23: Table 2.1.4: Descriptor Engine Interface.....	59
Table 24: Table 2.1.5: Data Read Interface.....	59
Table 25: Table 2.1.6: Data Write Interface.....	60
Table 26: Table 2.1.7: FSM State Encoding.....	61
Table 27: Table 2.1.8: Error Handling.....	62
Table 28: Table 2.1.9: MonBus Event Codes.....	63
Table 29: Table 2.2.2: Clock and Reset.....	65
Table 30: Table 2.2.3: APB Programming Interface.....	66
Table 31: Table 2.2.4: Configuration Interface.....	66
Table 32: Table 2.2.5: AXI4 Read Master Interface.....	66
Table 33: Table 2.2.6: Scheduler Interface.....	67
Table 34: Table 2.3.2: Clock and Reset.....	72
Table 35: Table 2.3.3: Scheduler Interface.....	72
Table 36: Table 2.3.4: AXI4 Read Master Interface.....	72

Table 37: Table 2.3.5: SRAM Write Interface.....	73
Table 38: Table 2.3.6: Error Handling.....	74
Table 39: Table 2.4.2: Clock and Reset.....	76
Table 40: Table 2.4.3: Scheduler Interface.....	77
Table 41: Table 2.4.4: AXI4 Write Master Interface.....	78
Table 42: Table 2.4.5: SRAM Read Interface.....	78
Table 43: Table 2.4.6: Error Handling.....	80
Table 44: Table 2.5.2: Clock and Reset.....	82
Table 45: Table 2.5.3: Write Interface.....	82
Table 46: Table 2.5.4: Read Interface.....	82
Table 47: Table 2.5.5: Status Outputs.....	83
Table 48: Table 2.6.2: Clock and Reset.....	86
Table 49: Table 2.6.3: Write Interface.....	86
Table 50: Table 2.6.4: Read Interface.....	87
Table 51: Table 2.6.5: Status Outputs.....	87
Table 52: Table 2.6.6: alloc_ctrl vs drain_ctrl Comparison.....	89
Table 53: Table 2.7.2: Clock and Reset.....	91
Table 54: Table 2.7.3: Input Interface.....	91
Table 55: Table 2.7.4: Output Interface.....	91
Table 56: Table 2.7.5: Bridge Depth Selection.....	93
Table 57: Table 3.1.2: Clock and Reset.....	95
Table 58: Table 3.1.3: APB Programming Interface.....	95
Table 59: Table 3.1.4: Configuration Interface.....	95
Table 60: Table 3.1.5: Descriptor AXI Master Interface.....	96
Table 61: Table 3.1.6: Scheduler Data Interfaces.....	96
Table 62: Table 3.1.7: Status Interface.....	97
Table 63: Table 3.1.8: MonBus Interface.....	97
Table 64: Table 3.2.2: Clock and Reset.....	100
Table 65: Table 3.2.3: APB Programming Interface.....	101
Table 66: Table 3.2.4: Per-Channel Configuration.....	101
Table 67: Table 3.2.5: Shared Descriptor AXI Master Interface.....	102
Table 68: Table 3.2.6: Per-Channel Scheduler Data Interfaces.....	102
Table 69: Table 3.2.7: Aggregate Status.....	103
Table 70: Table 3.2.8: Unified MonBus Interface.....	103
Table 71: Table 3.2.9: MonBus Source Assignment.....	104
Table 72: Table 3.3.2: Fill Interface.....	109
Table 73: Table 3.3.3: Scheduler Interface.....	109
Table 74: Table 3.4.2: Clock and Reset.....	112

Table 75: Table 3.4.3: AXI-Stream Slave Interface.....	112
Table 76: Table 3.4.4: Space Allocation Interface.....	112
Table 77: Table 3.4.5: Scheduler Interface.....	113
Table 78: Table 3.4.6: AXI Write Master Interface.....	113
Table 79: Table 3.5.2: Clock and Reset.....	117
Table 80: Table 3.5.3: Per-Channel Fill Interface.....	117
Table 81: Table 3.5.4: Arbitrated Drain Interface.....	118
Table 82: Table 3.5.5: Per-Channel Status.....	118
Table 83: Table 3.6.2: Clock and Reset.....	122
Table 84: Table 3.6.3: Fill Interface.....	122
Table 85: Table 3.6.4: Drain Interface.....	123
Table 86: Table 3.6.5: Status Interface.....	123
Table 87: Table 3.7.2: Clock and Reset.....	129
Table 88: Table 3.7.3: Scheduler Interface.....	129
Table 89: Table 3.7.4: AXI Read Master Interface.....	129
Table 90: Table 3.7.5: Drain Interface.....	130
Table 91: Table 3.8.2: Clock and Reset.....	134
Table 92: Table 3.8.3: Scheduler Interface.....	134
Table 93: Table 3.8.4: AXI Read Master Interface.....	134
Table 94: Table 3.8.5: AXI-Stream Master Interface.....	135
Table 95: Table 3.9.2: Clock and Reset.....	139
Table 96: Table 3.9.3: Per-Channel Fill Interface.....	140
Table 97: Table 3.9.4: Arbitrated Drain Interface.....	140
Table 98: Table 3.9.5: Per-Channel Status.....	141
Table 99: Table 3.9.6: Sink vs Source Controller Comparison.....	141
Table 100: Table 3.10.2: Clock and Reset.....	145
Table 101: Table 3.10.3: Fill Interface.....	145
Table 102: Table 3.10.4: Drain Interface.....	145
Table 103: Table 3.10.5: Status Interface.....	146
Table 104: Table 3.10.6: Sink vs Source Unit Comparison.....	147
Table 105: Table 3.11.2: Clock and Reset.....	151
Table 106: Table 3.11.3: APB Programming Interface.....	151
Table 107: Table 3.11.4: Per-Channel Configuration.....	152
Table 108: Table 3.11.5: Descriptor AXI Master Interface.....	152
Table 109: Table 3.11.6: Sink AXI Write Master Interface.....	153
Table 110: Table 3.11.7: Source AXI Read Master Interface.....	154
Table 111: Table 3.11.8: Sink Fill Interface.....	154
Table 112: Table 3.11.9: Source Drain Interface.....	154

Table 113: Table 3.11.10: Unified MonBus Interface.....	155
Table 114: Table 3.11.11: Aggregate Status.....	155
Table 115: Table 3.11.12: MonBus Source Assignment.....	156
Table 116: Table 3.12.1: Base Register Map.....	159
Table 117: Table 3.12.2: Monitor Register Map (base 0x1000).....	162
Table 118: Table 3.13.1: Monitor Register-to-Config Mapping.....	164
Table 119: Table 3.14.1: Top-Level Address Decode.....	166
Table 120: Table 3.14.3: Top-Level Interfaces.....	167
Table 121: Table 4.0.1: AXI4 Master Interfaces.....	169
Table 122: Table 4.0.2: Streaming Interfaces.....	169
Table 123: Table 4.0.3: Control and Monitor Interfaces.....	169
Table 124: Table 4.0.4: Signal Naming Conventions.....	170
Table 125: Table 4.1.1: Descriptor AXI Master Interface Signals.....	171
Table 126: Table 4.1.2: Descriptor AXI Transaction Characteristics.....	172
Table 127: Table 4.1.3: Sink AXI Write Master Interface Signals.....	173
Table 128: Table 4.1.4: Sink AXI Write Transaction Characteristics.....	174
Table 129: Table 4.1.5: Source AXI Read Master Interface Signals.....	175
Table 130: Table 4.1.6: Source AXI Read Transaction Characteristics.....	175
Table 131: Table 4.1.7: AXI Feature Support.....	176
Table 132: Table 4.2.1: AXIS Sink Slave Interface Signals.....	177
Table 133: Table 4.2.2: TID Channel Mapping.....	178
Table 134: Table 4.2.3: TKEEP Configuration.....	179
Table 135: Table 4.2.4: AXIS Source Master Interface Signals.....	179
Table 136: Table 4.2.5: Interface Comparison.....	181
Table 137: Table 4.2.6: Interface Selection Guide.....	181
Table 138: Table 4.3.1: MonBus Interface Signals.....	182
Table 139: Table 4.3.2: MonBus Packet Fields.....	183
Table 140: Table 4.3.3: MonBus Packet Types.....	183
Table 141: Table 4.3.4: Descriptor Packet Payload.....	184
Table 142: Table 4.3.5: Scheduler Packet Payload.....	184
Table 143: Table 4.3.6: AXI Event Packet Payload.....	185
Table 144: Table 4.3.7: Error Packet Payload.....	185
Table 145: Table 4.3.8: MonBus Source Assignment.....	185
Table 146: Table 4.3.9: MonBus Timing Parameters.....	187

List of Waveforms

No waveforms in this document.

1

Rapids Beats Mas Index

Generated: 2026-07-02

RTL Design Sherpa · Learning Hardware Design Through Practice GitHub · Documentation Index · MIT License

2

Document Information

This document describes the RAPIDS “Beats” architecture, a Phase 1 implementation of the Rapid AXI Programmable In-band Descriptor System. The beats architecture provides network-to-memory and memory-to-network data transfer capabilities using descriptor-based DMA with 8-channel support. It emphasizes “beat-level” tracking for precise flow control and latency management.

2.1

References

2.1.1

Related Documents

Table 0.1: Related Documents and Specifications

Source	Title	Version
RTL Design Sherpa	RAPIDS Product Requirements Document	1.0
RTL Design Sherpa	RAPIDS Original Specification	0.25
RTL Design Sherpa	STREAM MAS (Reference Architecture)	0.90
ARM	AMBA AXI and ACE Protocol Specification	IHI0022H
ARM	AMBA AXI-Stream Protocol	IHI0051A

Source	Title	Version
	Specification	

2.2 Terminology

AXIS

AXI-Stream. ARM's streaming protocol for high-bandwidth, low-latency data transfer without addressing.

AXI4

Version 4 of the AXI protocol, supporting burst transfers up to 256 beats.

Beat

A single data transfer within an AXI burst. For RAPIDS with 512-bit data width, one beat = 64 bytes.

Beats Architecture

The Phase 1 RAPIDS implementation that tracks transfers at beat granularity for precise flow control.

Burst

A group of consecutive data transfers (beats) initiated by a single address phase.

Channel

One of 8 independent DMA channels in RAPIDS. Each channel has its own descriptor chain and SRAM buffer allocation.

Descriptor

A 256-bit data structure containing transfer parameters: address, length, channel ID, and control flags.

Descriptor Chain

A linked list of descriptors where each descriptor points to the next, enabling scatter-gather operations.

DMA

Direct Memory Access. Hardware-controlled data movement between memory locations without CPU intervention.

FUB

Functional Unit Block. A self-contained RTL module with defined interfaces and testbench.

Latency Bridge

A module that provides buffering to compensate for pipeline latency between alloc/drain controllers.

MAC

Macro. An integration-level block that instantiates and connects multiple FUBs.

MonBus

Monitor Bus. A 64-bit internal bus for performance monitoring and debug event reporting.

RAPIDS

Rapid AXI Programmable In-band Descriptor System. A DMA accelerator for network-to-memory transfers.

Sink Path

The data path from network (AXIS slave) to system memory (AXI write master).

Source Path

The data path from system memory (AXI read master) to network (AXIS master).

SRAM

Static Random Access Memory. Used for internal data buffering between network and memory interfaces.

Virtual FIFO

A tracking mechanism (alloc_ctrl/drain_ctrl) that manages SRAM space without moving actual data.

2.3 “Beats” Architecture Concept

The “beats” architecture name reflects the key design decision to track all transfers at **beat granularity** (data-width units) rather than byte or chunk granularity:

1. **Beat-level Allocation:** Space is allocated in beats (e.g., 64-byte units for 512-bit datapath)
2. **Beat-level Drain:** Data availability is tracked in beats
3. **Beat-level Latency:** The latency bridge compensates for pipeline delays in beat counts

4. Beat-level Completion: AXI engines report completion in beats

This simplifies the math and aligns naturally with AXI burst semantics where each beat represents one data-width transfer.

2.4 Revision History

Revisions follow the convention x.y, where x is the major version and y is the minor version.

Table 0.2: RAPIDS Beats MAS Document Revision History

Rev	Date	Author	Notes
0.25	2025-01-10	seang	Initial RAPIDS Beats MAS structure
0.6	2026-07-02	seang	Resynced to RTL: scheduler recoverable write-progress timeout (cfg_sched_timeout_limit, strike escalation, scheduler_idle excludes CH_ERROR) and B-response commit gating; functional descriptor prefetch (cfg_prefetch_enable/cfg_fifo_threshold, deferred chaining); AXI write engine COMMIT strobes; commit/timeout-limit plumbing through rapids_core_beats; added

Rev	Date	Author	Notes
			rapids_regs register block (monitors @ 0x1000), rapids_config_block, and rapids_beats_top integration with the MonBus AXI-Lite group

Last Updated: 2026-07-02

RTL Design Sherpa · Learning Hardware Design Through Practice GitHub · Documentation Index · MIT License

3 Architecture Overview


Module: rapids_core_beats.sv **Location:** projects/components/rapids/rtl/macro_beats/ **Status:** Implemented **Last Updated:** 2025-01-10

3.1 Overview

The RAPIDS “Beats” architecture is a Phase 1 implementation providing network-to-memory and memory-to-network data transfer capabilities. The name “beats” reflects the design decision to track all transfers at beat granularity (data-width units) for simplified flow control.

3.1.1 Key Features

- **8 Independent Channels:** Each channel has its own descriptor chain and SRAM allocation
- **Separate Data Paths:** Sink (network-to-memory) and source (memory-to-network) paths
- **Beat-Level Tracking:** All flow control operates at beat granularity

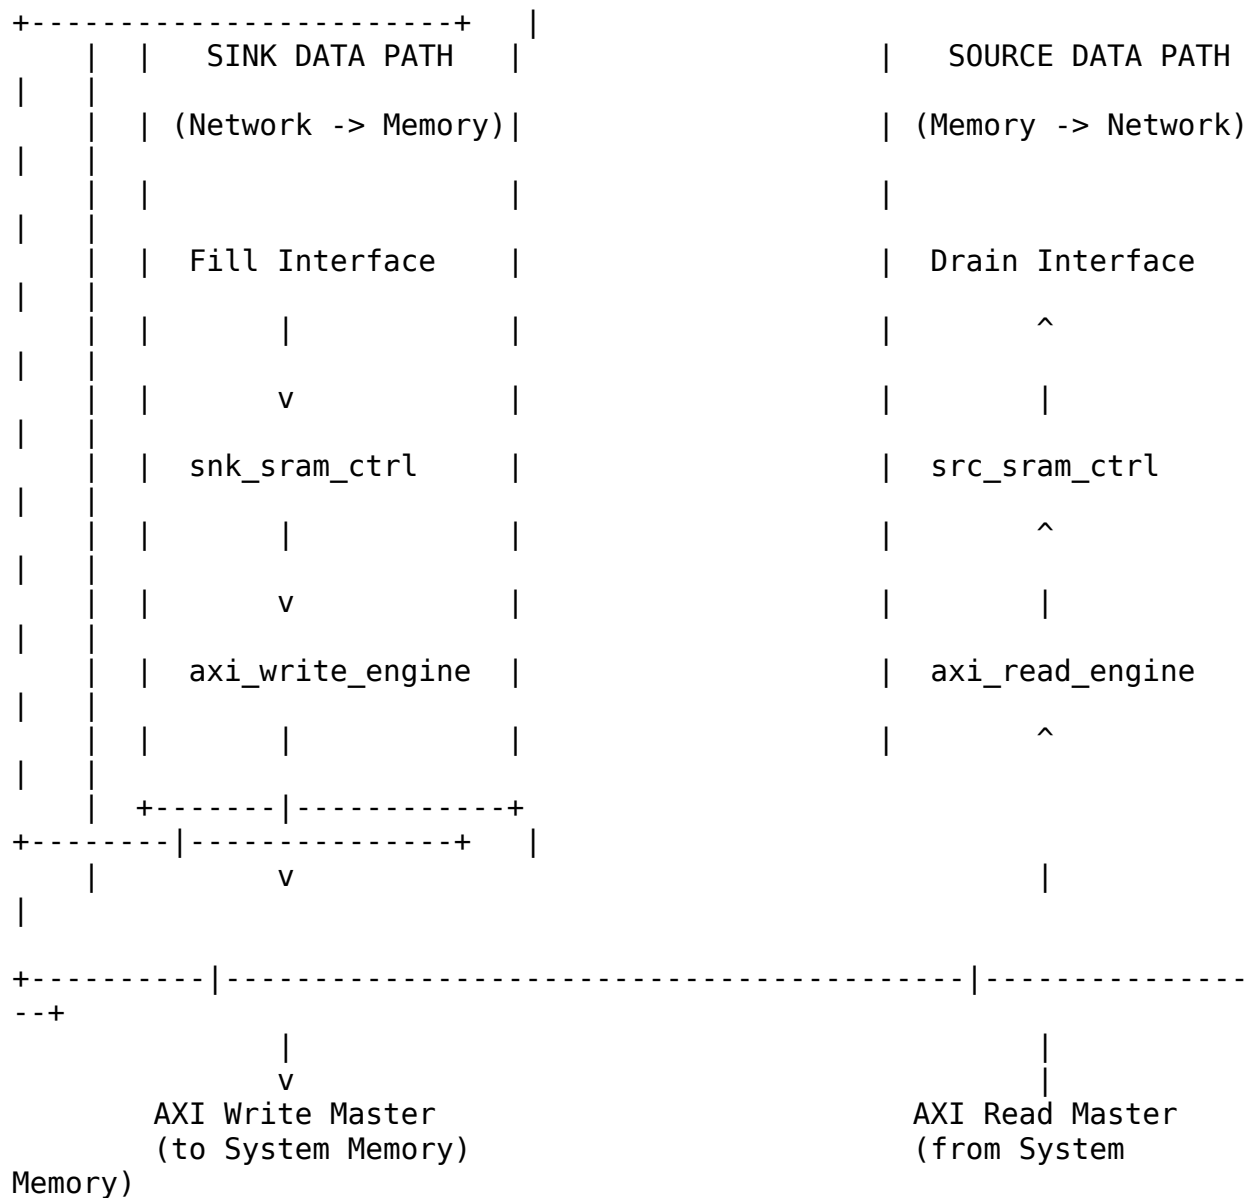


Source: [01_architecture_block.mmd](#)

3.2 Data Flow Overview

3.2.1 Sink Path (Network to Memory)

The sink path receives data from an external source (via Fill interface) and writes it to system memory:

3.2.2 Figure 1.1.2: Sink Path Data Flow

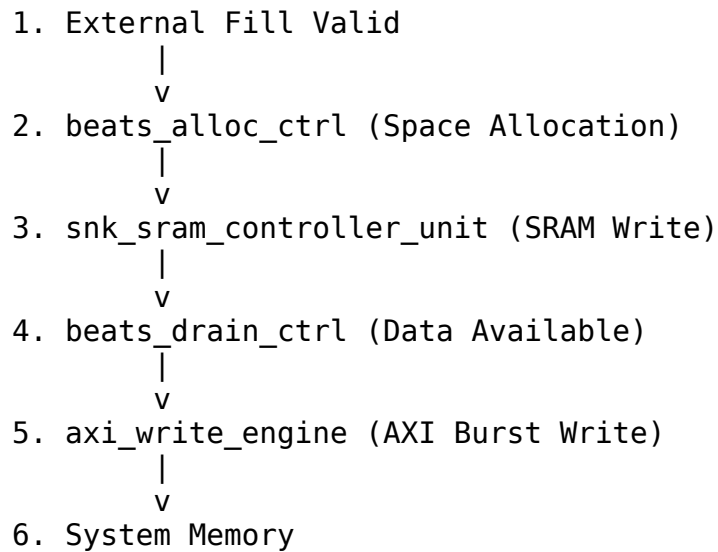


Source: [01_sink_path_flow.mmd](#)

3.2.3 Source Path (Memory to Network)

The source path reads data from system memory and sends it to an external destination (via Drain interface):

3.2.4 Figure 1.1.3: Source Path Data Flow

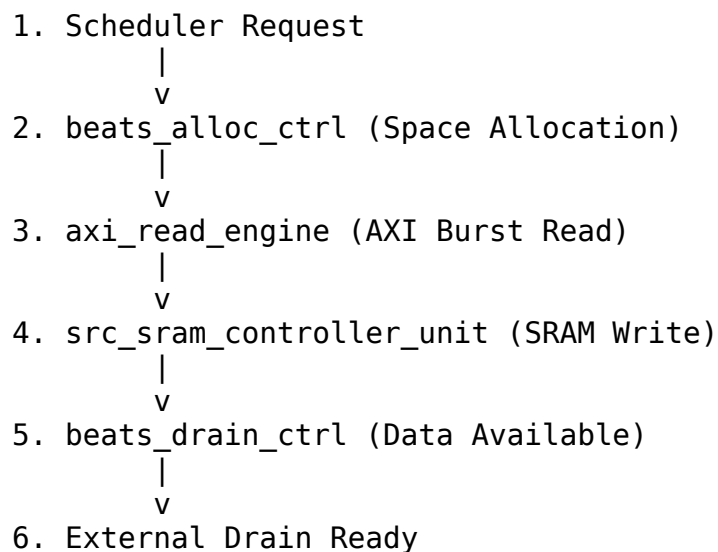

Source: [01_source_path_flow.mmd](#)

3.3 Key Architectural Decisions

3.3.1 Beat-Level Tracking

All flow control uses beat granularity:

Table 1.1.1: Beat Granularity Examples

Operation	Granularity	Example (512-bit DW)
Space allocation	Beats	Request 8 beats = 512 bytes
Data availability	Beats	16 beats ready = 1024 bytes
AXI burst length	Beats	ARLEN=15 = 16 beats
Latency compensation	Beats	2-beat pipeline delay

3.3.2 Concurrent Read/Write

To prevent deadlock with large transfers:

Example: 100MB transfer with 2KB SRAM buffer

Sequential operation (WRONG):

1. Read 100MB -> DEADLOCK at 2KB (SRAM full, can't complete read)

Concurrent operation (CORRECT):


1. Read starts filling SRAM -> SRAM becomes full (2KB)
2. Read pauses (natural backpressure)
3. Write drains SRAM -> SRAM has free space
4. Read resumes -> Both continue until 100MB complete

3.3.3 Virtual FIFOs (Alloc/Drain)

The `alloc_ctrl` and `drain_ctrl` modules are “virtual FIFOs” that track space/data without storing actual data:


- **beats_alloc_ctrl:** Tracks allocated space (write pointer advances on allocation, read pointer on actual write)
 - **beats_drain_ctrl:** Tracks available data (write pointer advances on data arrival, read pointer on drain)
-

3.4 Module Hierarchy

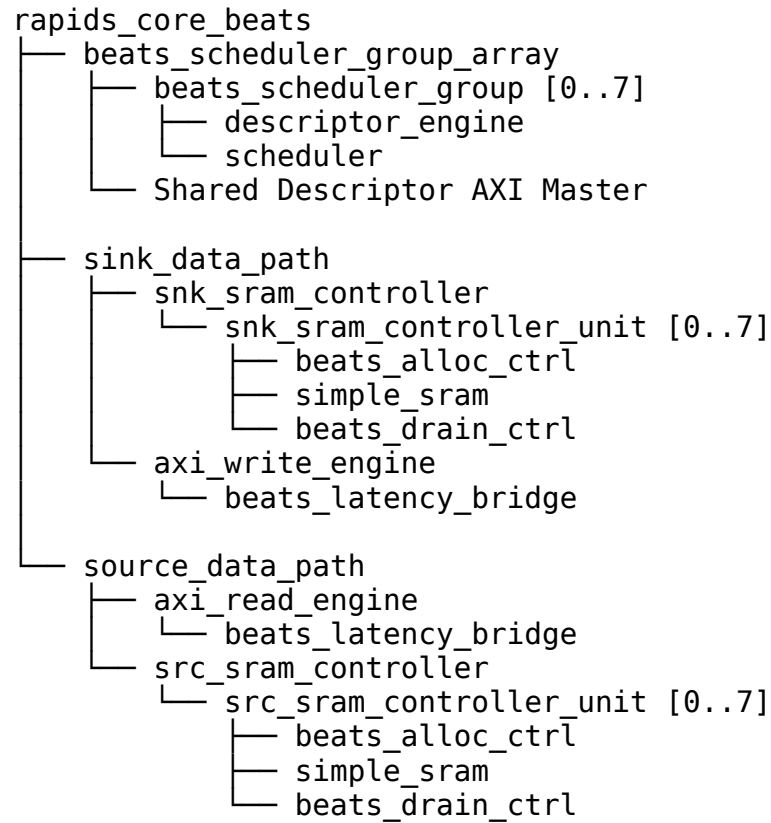

3.5 Timing Diagram: Basic Transfer

3.5.1 Figure 1.1.4: Basic Sink Path Transfer Timing

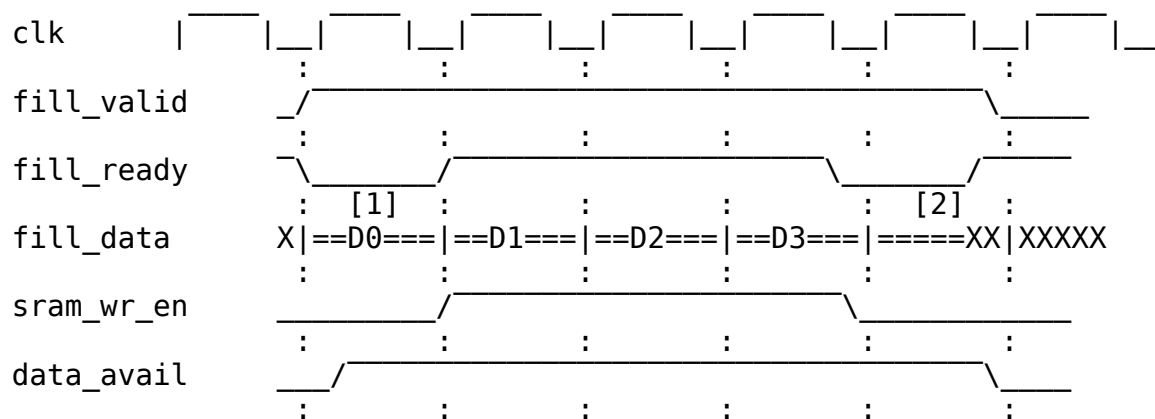

```
[1] = fill_ready deasserted (SRAM full or allocation pending)
[2] = fill_ready deasserted (end of burst)
```

TODO: Replace with simulation-generated waveform showing actual signals

3.6 Related Documentation

- [Top-Level Port List](#) - Complete port specification
 - [Clocks and Reset](#) - Timing requirements
 - [Beats Scheduler Group](#) - Scheduler integration
 - [Sink Data Path](#) - Sink path details
-

Last Updated: 2025-01-10

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

4 Top-Level Port List

Module: rapids_core_beats.sv **Location:** projects/components/rapids/rtl/macro_beats/ **Status:** Implemented **Last Updated:** 2025-01-10

4.1 Parameters

4.1.1 Primary Parameters

```
parameter int NUM_CHANNELS = 8;           // Number of DMA
channels
parameter int CHAN_WIDTH = $clog2(NUM_CHANNELS);
parameter int ADDR_WIDTH = 64;           // Address bus width
parameter int DATA_WIDTH = 512;        // Data bus width
parameter int AXI_ID_WIDTH = 8;          // AXI ID width
parameter int SRAM_DEPTH = 512;         // SRAM depth per
channel
parameter int SEG_COUNT_WIDTH = $clog2(SRAM_DEPTH) + 1;
parameter int PIPELINE = 0;              // Pipeline stages
```

```

parameter int AR_MAX_OUTSTANDING = 8;           // Max outstanding AR
transactions
parameter int AW_MAX_OUTSTANDING = 8;           // Max outstanding AW
transactions
parameter int W_PHASE_FIFO_DEPTH = 64;          // Write data FIFO depth
parameter int B_PHASE_FIFO_DEPTH = 16;          // Write response FIFO
depth

```

: Table 1.2.1: Primary Parameters

4.1.2 Monitor Bus Parameters

```

parameter int DESC_MON_BASE_AGENT_ID = 16;      // 0x10 - Descriptor
Engines (16-23)
parameter int SCHED_MON_BASE_AGENT_ID = 48;     // 0x30 - Schedulers
(48-55)
parameter int DESC_AXI_MON_AGENT_ID = 8;        // 0x08 - Descriptor AXI
Master Monitor
parameter int MON_UNIT_ID = 1;                  // 0x1
parameter int MON_MAX_TRANSACTIONS = 16;

```

: Table 1.2.2: Monitor Bus Parameters

4.2 Clock and Reset

Table 1.2.3: Clock and Reset Signals

Signal	Direction	Width	Description
clk	input	1	System clock (100-500 MHz)
rst_n	input	1	Active-low asynchronous reset

4.3 APB Programming Interface

Table 1.2.4: APB Programming Interface

Signal	Direction	Width	Description
apb_valid	input	NC	Per-channel kick-off valid
apb_ready	output	NC	Per-channel

Signal	Direction	Width	Description
apb_addr	input	NC x AW	ready Per-channel descriptor start address

4.4 Configuration Interface

4.4.1 Per-Channel Configuration

Table 1.2.5: Per-Channel Configuration

Signal	Direction	Width	Description
cfg_channel_enable	input	NC	Enable each channel
cfg_channel_reset	input	NC	Per-channel soft reset

4.4.2 Scheduler Configuration

Table 1.2.6: Scheduler Configuration

Signal	Direction	Width	Description
cfg_sched_enable	input	1	Global scheduler enable
cfg_sched_timeout_cycles	input	16	Timeout threshold in cycles
cfg_sched_timeout_enable	input	1	Enable timeout detection
cfg_sched_error_enable	input	1	Enable error reporting
cfg_sched_completion_enable	input	1	Enable completion reporting
cfg_sched_performance_enable	input	1	Enable performance monitoring

4.4.3 Descriptor Engine Configuration

Table 1.2.7: Descriptor Engine Configuration

Signal	Direction	Width	Description
cfg_desceng_enable	input	1	Global descriptor engine enable
cfg_desceng_prefetch	input	1	Enable descriptor prefetching
cfg_desceng_fifo_thresh	input	4	Prefetch FIFO threshold
cfg_desceng_addr0_base	input	AW	Address range 0 base
cfg_desceng_addr0_limit	input	AW	Address range 0 limit
cfg_desceng_addr1_base	input	AW	Address range 1 base
cfg_desceng_addr1_limit	input	AW	Address range 1 limit

4.4.4 AXI Transfer Configuration

Table 1.2.8: AXI Transfer Configuration

Signal	Direction	Width	Description
cfg_axi_reader_burst_length	input	8	AXI read burst length (beats)
cfg_axi_writer_burst_length	input	8	AXI write burst length (beats)

4.5 Status Interface

Table 1.2.9: Status Interface

Signal	Direction	Width	Description
system_idle	output	1	All components idle
descriptor_e	output	NC	Per-channel descriptor

Signal	Direction	Width	Description
engine_idle			engine idle
scheduler_idle	output	NC	Per-channel scheduler idle
scheduler_state	output	NC x 7	Per-channel FSM state (one-hot)
sched_error	output	NC	Per-channel error flag

4.6 Sink Path Interface (Network to Memory)

4.6.1 Fill Interface (External to SRAM)

Table 1.2.10: Sink Fill Interface

Signal	Direction	Width	Description
snk_fill_all_oc_req	input	1	Allocation request
snk_fill_all_oc_size	input	8	Size in beats to allocate
snk_fill_all_oc_id	input	CIW	Channel ID for allocation
snk_fill_space_free	output	NC x SCW	Available space per channel
snk_fill_valid	input	1	Fill data valid
snk_fill_ready	output	1	Ready to accept fill data
snk_fill_data	input	DW	Fill data
snk_fill_last	input	1	Last beat of fill burst
snk_fill_id	input	CIW	Fill channel ID

4.6.2 Sink AXI Write Master

Table 1.2.11: Sink AXI Write Master Interface

Signal	Direction	Width	Description
m_snk_axi_wid	output	IW	Write address ID

Signal	Direction	Width	Description
m_snk_axi_awa ddr	output	AW	Write address
m_snk_axi_awl en	output	8	Burst length (beats - 1)
m_snk_axi_aws ize	output	3	Burst size
m_snk_axi_awb urst	output	2	Burst type
m_snk_axi_awv alid	output	1	Write address valid
m_snk_axi_awr eady	input	1	Write address ready
m_snk_axi_wda ta	output	DW	Write data
m_snk_axi_wst rb	output	DW/8	Write strobes
m_snk_axi_wla st	output	1	Last write beat
m_snk_axi_wva lid	output	1	Write data valid
m_snk_axi_wre ady	input	1	Write data ready
m_snk_axi_bid	input	IW	Response ID
m_snk_axi_bre sp	input	2	Write response
m_snk_axi_bva lid	input	1	Response valid
m_snk_axi_bre ady	output	1	Response ready

4.7 Source Path Interface (Memory to Network)

4.7.1 Source AXI Read Master

Table 1.2.12: Source AXI Read Master Interface

Signal	Direction	Width	Description
m_src_axi_ari d	output	IW	Read address ID
m_src_axi_ara ddr	output	AW	Read address
m_src_axi_arl en	output	8	Burst length (beats - 1)
m_src_axi_ars ize	output	3	Burst size
m_src_axi_arb urst	output	2	Burst type
m_src_axi_arv alid	output	1	Read address valid
m_src_axi_arr eady	input	1	Read address ready
m_src_axi_rid	input	IW	Read data ID
m_src_axi_rda ta	input	DW	Read data
m_src_axi_rre sp	input	2	Read response
m_src_axi_rla st	input	1	Last read beat
m_src_axi_rva lid	input	1	Read data valid
m_src_axi_rre ady	output	1	Read data ready

4.7.2 Drain Interface (SRAM to External)

Table 1.2.13: Source Drain Interface

Signal	Direction	Width	Description
src_drain_val id	output	1	Drain data valid

Signal	Direction	Width	Description
src_drain_ready	input	1	External ready for drain
src_drain_data	output	DW	Drain data
src_drain_last	output	1	Last beat of drain burst
src_drain_id	output	CIW	Drain channel ID

4.8 Descriptor AXI Master

Table 1.2.14: Descriptor AXI Master Interface

Signal	Direction	Width	Description
m_desc_axi_arid	output	IW	Read address ID
m_desc_axi_araddr	output	AW	Read address
m_desc_axi_arlen	output	8	Burst length
m_desc_axi_arsize	output	3	Burst size
m_desc_axi_arburst	output	2	Burst type
m_desc_axi_arvalid	output	1	Read address valid
m_desc_axi_arready	input	1	Read address ready
m_desc_axi_rid	input	IW	Read data ID
m_desc_axi_rdata	input	256	Descriptor data (256-bit)
m_desc_axi_rresp	input	2	Read response
m_desc_axi_rlast	input	1	Last read beat
m_desc_axi_rv	input	1	Read data

Signal	Direction	Width	Description
alid			valid
m_desc_axi_rr eady	output	1	Read data ready

4.9 MonBus Interface

Table 1.2.15: MonBus Interface

Signal	Direction	Width	Description
monbus_valid	output	1	Monitor packet valid
monbus_ready	input	1	Monitor consumer ready
monbus_data	output	64	Monitor packet data

Last Updated: 2025-01-10

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

5 Clocks and Reset

Module: rapids_core_beats.sv **Location:** projects/components/rapids/rtl/macro_beats/ **Status:** Implemented **Last Updated:** 2025-01-10

5.1 Clock Domain


RAPIDS Beats operates in a single clock domain for simplified design and maximum throughput.

5.1.1 Clock Specifications

Table 1.3.1: Clock Specifications

Parameter	Specification
Clock Signal	clk (also axi_aclk in some submodules)
Frequency Range	100 - 500 MHz
Duty Cycle	45% - 55%
Clock Jitter	< 100 ps peak-to-peak

5.1.2 Clock Distribution

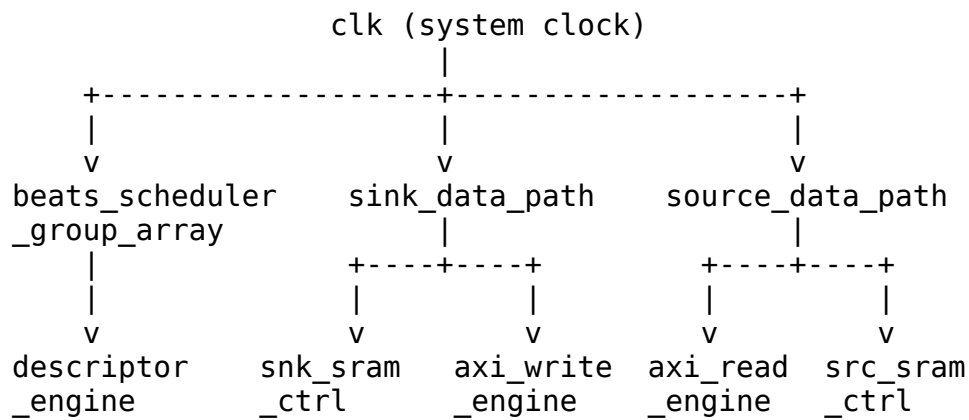

5.2 Reset Specification

RAPIDS uses asynchronous assert, synchronous deassert reset methodology.

5.2.1 Reset Signal


Table 1.3.2: Reset Specifications

Parameter	Specification
Reset Signal	rst_n (also axi_aresetn in some submodules)
Polarity	Active-low
Assert	Asynchronous (immediate)
Deassert	Synchronous (on rising clock edge)
Minimum Duration	10 clock cycles

Parameter	Specification
-----------	---------------

5.2.2 Reset Timing Diagram

5.2.3 Figure 1.3.1: Reset Timing

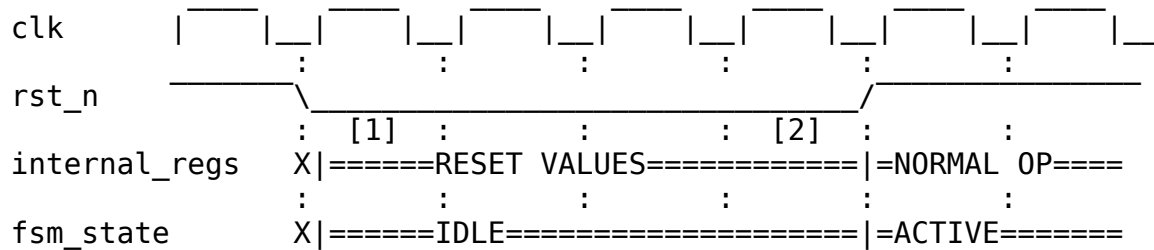

[1] = Reset asserted (asynchronous)

[2] = Reset deasserted (synchronous to clock rising edge)

TODO: Replace with simulation-generated waveform

5.3 Reset Behavior

5.3.1 On Reset Assert

All modules initialize to known states:

Table 1.3.3: Reset States

Component	Reset State
Scheduler FSM	IDLE
Descriptor Engine	IDLE, FIFOs empty
AXI Read Engine	Idle, no outstanding transactions
AXI Write Engine	Idle, no outstanding transactions
SRAM Pointers	All zeros
Alloc/Drain Controllers	Empty, full space available
MonBus	No packets pending

5.3.2 Reset Sequence

1. External reset asserted ($\text{rst_n} = 0$)
 - All flip-flops async reset
 - All outputs driven to safe states
 - No AXI transactions
 2. System stabilization (minimum 10 cycles)
 - Clock running and stable
 - Configuration registers programmed (optional)
 3. Reset deasserted ($\text{rst_n} = 1$, sync to clk rising edge)
 - FSMs begin operation
 - Ready to accept descriptors/data
-

5.4 Configuration During Reset

Some configuration signals MUST be stable before reset deassertion:

Table 1.3.4: Configuration Timing Requirements

Signal	Requirement
$\text{cfg_channel_enable}$	Stable before $\text{rst_n}=1$
$\text{cfg_sched_timeout_cycles}$	Stable before $\text{rst_n}=1$
$\text{cfg_axi_rd_xfer_beats}$	Stable before $\text{rst_n}=1$
$\text{cfg_axi_wr_xfer_beats}$	Stable before $\text{rst_n}=1$

5.5 Reset Macros

RAPIDS uses standardized reset macros from `reset_defs.svh`:

```
`include "reset_defs.svh"

// Standard reset pattern
`ALWAYS_FF_RST(clk, rst_n,
  if (`RST_ASSERTED(rst_n)) begin
    r_state <= IDLE;
    r_counter <= '0;
  end else begin
    r_state <= w_next_state;
    r_counter <= w_next_counter;
```

) **end**

5.6 Power-On Reset Considerations

- External reset should be held for minimum 10 clock cycles after clock is stable
 - Configuration registers should be programmed before or during reset
 - No AXI transactions until reset is deasserted and channels are enabled
-

Last Updated: 2025-01-10

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

6 Scheduler Specification

Module: scheduler.sv **Location:** projects/components/rapids/rtl/fub_beats/ **Status:** Implemented **Last Updated:** 2025-01-10

6.1 Overview

The Scheduler coordinates descriptor-based data transfers for a single RAPIDS channel. It receives descriptors from the descriptor engine, parses transfer parameters, and coordinates read/write operations through the data paths.


6.1.1 Key Features

- **Descriptor Processing:** Parses 256-bit descriptors for transfer parameters
- **Beat-Based Tracking:** All lengths tracked in beats (data-width units)
- **Concurrent Read/Write:** Simultaneous read and write to prevent deadlock
- **Timeout Detection:** Configurable watchdog for stalled transfers
- **MonBus Integration:** State transition and error event reporting

- **Error Aggregation:** Combines errors from descriptor engine and data paths

6.1.2 Block Diagram

6.1.3 Figure 2.1.1: Scheduler Block Diagram

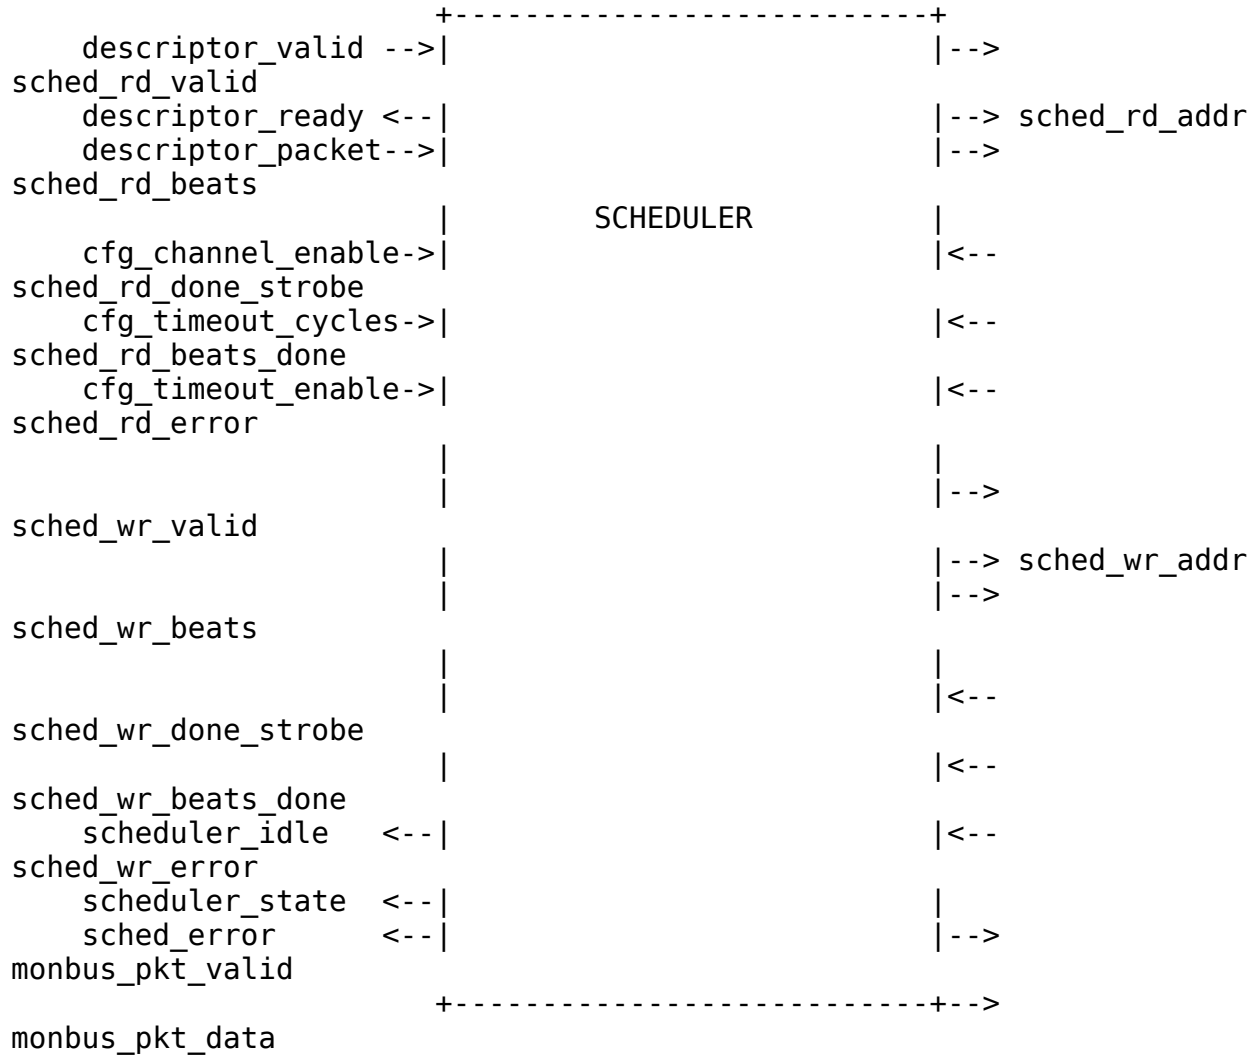

Source: [02_scheduler_block.mmd](#)

6.2 Parameters

```

parameter int CHANNEL_ID = 0;           // Channel identifier
parameter int NUM_CHANNELS = 8;         // Total channels in
system
  
```

```

parameter int CHAN_WIDTH = $clog2(NUM_CHANNELS); // Channel ID width
parameter int ADDR_WIDTH = 64; // Address bus width
parameter int DATA_WIDTH = 512; // Data bus width
(beats)

// Monitor Bus Parameters
parameter logic [7:0] MON_AGENT_ID = 8'h30; // RAPIDS Scheduler
Agent ID
parameter logic [3:0] MON_UNIT_ID = 4'h1; // Unit identifier
parameter logic [5:0] MON_CHANNEL_ID = 6'h0; // Base channel ID

// Descriptor Width
parameter int DESC_WIDTH = 256; // RAPIDS descriptor
width

```

: Table 2.1.1: Scheduler Parameters

6.3 Port List

6.3.1 Clock and Reset

Table 2.1.2: Clock and Reset

Signal	Direction	Width	Description
clk	input	1	System clock
rst_n	input	1	Active-low asynchronous reset

6.3.2 Configuration Interface

Table 2.1.3: Configuration Interface

Signal	Direction	Width	Description
cfg_channel_enable	input	1	Enable this channel
cfg_channel_reset	input	1	Channel soft reset
cfg_sched_timeout_cycles	input	32	Write-progress timeout window (cycles)
cfg_sched_timeout_limit	input	8	Consecutive-timeout windows before fatal

Signal	Direction	Width	Description
cfg_sched_timeout_enable	input	1	escalation (0 = never) Enable timeout detection

6.3.3 Descriptor Engine Interface

Table 2.1.4: Descriptor Engine Interface

Signal	Direction	Width	Description
descriptor_valid	input	1	Descriptor valid
descriptor_ready	output	1	Ready to accept descriptor
descriptor_packet	input	256	256-bit descriptor
descriptor_error	input	1	Error from descriptor engine

6.3.4 Data Read Interface

Table 2.1.5: Data Read Interface

Signal	Direction	Width	Description
sched_rd_valid	output	1	Read request valid
sched_rd_addr	output	AW	Source address
sched_rd_beats	output	32	Beats to read
sched_rd_done_strobe	input	1	Read complete strobe
sched_rd_beats_done	input	32	Beats completed
sched_rd_error	input	1	Read error

6.3.5 Data Write Interface

Table 2.1.6: Data Write Interface


Signal	Direction	Width	Description
sched_wr_val id	output	1	Write request valid (gated on remaining ISSUE beats)
sched_wr_add r	output	AW	Destination address
sched_wr_bea ts	output	32	Beats to write
sched_wr_don e_strobe	input	1	Write AW-issue strobe (burst accepted on AW)
sched_wr_bea ts_done	input	32	Beats issued this strobe
sched_wr_com mit_strobe	input	1	Write COMMIT strobe (B response received)
sched_wr_com mit_beats	input	32	Beats committed this strobe
sched_wr_err or	input	1	Write error


Completion is gated on write-data COMMIT, not AW issue. The scheduler maintains two independent beat counters for the write side:

- `r_write_beats_remaining` decrements on `sched_wr_done_strobe` (AW handshake) and drives the destination address and `sched_wr_valid` (writes are requested only while ISSUE beats remain).
- `r_write_beats_to_commit` decrements on `sched_wr_commit_strobe` (B response). A transfer is considered write-complete only when this counter reaches zero (`w_write_complete`), so a channel is never reported done until every issued burst has been acknowledged on the B channel.

6.4 FSM States

6.4.1 Figure 2.1.2: Scheduler FSM State Diagram



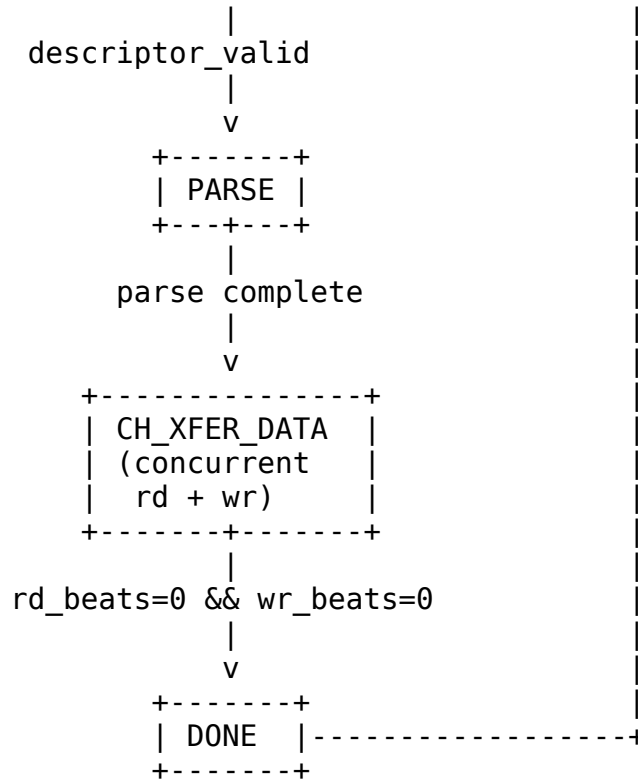

Source: [02_scheduler_fsm.mmd](#)

6.4.2 State Encoding

Table 2.1.7: FSM State Encoding

State	Encoding	Description
IDLE	7'b0000001	Waiting for descriptor
PARSE	7'b0000010	Parsing descriptor fields
CH_XFER_DATA	7'b0000100	Concurrent read/write transfer
DONE	7'b0001000	Transfer complete, MonBus report
ERROR	7'b0010000	Error handling
TIMEOUT	7'b0100000	Timeout occurred
SOFT_RESET	7'b1000000	Soft reset handling


6.5 Operation

6.5.1 Descriptor Format

Bits [63:0] - src_addr: Source memory address
Bits [127:64] - dst_addr: Destination memory address
Bits [159:128] - length: Transfer length in beats
Bits [191:160] - next_ptr: Next descriptor pointer (0 = last)
Bits [195:192] - channel_id: Channel identifier
Bits [196] - last: Last descriptor flag
Bits [197] - gen_irq: Generate interrupt
Bits [255:198] - reserved

6.5.2 Transfer Sequence

6.5.3 Figure 2.1.3: Basic Transfer Timing

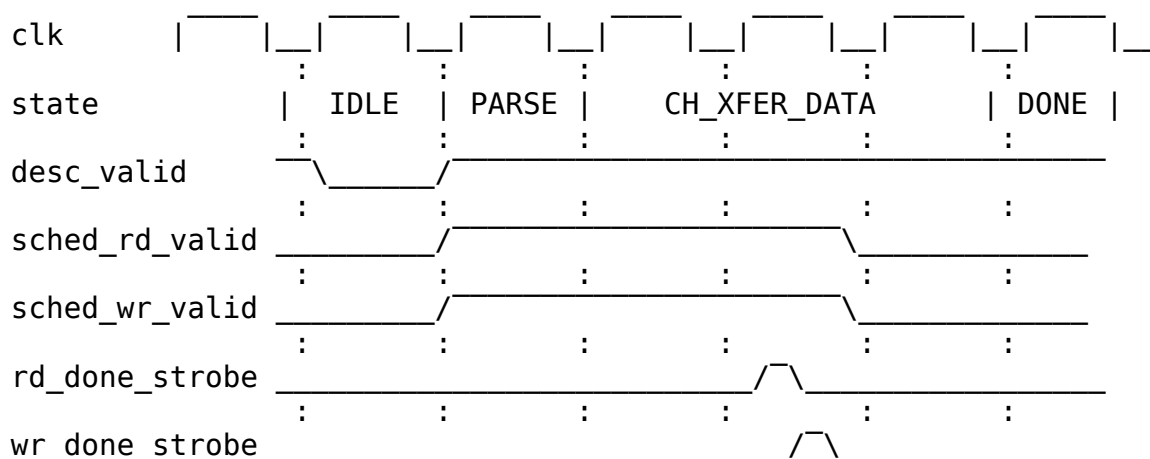

TODO: Replace with simulation-generated waveform

6.6 Error Handling

Table 2.1.8: Error Handling

Error Source	Detection	Response
Descriptor engine	descriptor_error	Transition to CH_ERROR state
Read engine	sched_rd_error	Set sticky error flag
Write engine	sched_wr_error	Set sticky error flag
Write-progress timeout	Recoverable, escalates	See below

Error Source	Detection	Response
	after limit	

6.6.1 Recoverable Write-Progress Timeout

The write-progress watchdog is recoverable and only escalates to a fatal fault after a configurable number of consecutive stalled windows:

1. **Window counting:** `r_timeout_counter` increments while `sched_wr_valid` && `!sched_wr_ready` (a write request is stalled). The window expires when it reaches `cfg_sched_timeout_cycles`.
2. **Re-arm:** On expiry the counter re-arms (resets to 0) and the scheduler keeps waiting; a single expired window is not fatal.
3. **Strike counting:** `r_timeout_strikes` (8-bit) increments once per expired window. Any write progress – `sched_wr_done_strobe` (AW issue) or `sched_wr_commit_strobe` (B response) – clears both the window counter and the strike counter.
4. **Escalation:** When `cfg_sched_timeout_limit` $\neq 0$ and `r_timeout_strikes` $\geq$ `cfg_sched_timeout_limit`, the channel escalates to a sticky `CH_ERROR` (surfaced on `sched_error`). Total time to escalate is approximately `cfg_sched_timeout_limit * cfg_sched_timeout_cycles`.
5. **Never-escalate mode:** `cfg_sched_timeout_limit` $= 0$ is a pure soft timeout – the event may be reported, but the channel never faults.

scheduler_idle excludes `CH_ERROR`. Only `CH_IDLE` (with no active channel reset) is reported idle; a faulted channel in `CH_ERROR` is deliberately NOT reported idle so a wedged channel cannot read back as idle. The fault is surfaced via `sched_error` instead.

6.7 MonBus Events

Table 2.1.9: MonBus Event Codes

Event Code	Description
0x01	Descriptor received
0x02	Transfer started
0x03	Transfer complete
0x04	Error occurred
0x05	Timeout

Last Updated: 2026-07-02

RTL Design Sherpa · Learning Hardware Design Through Practice GitHub · Documentation Index · MIT License

7 Descriptor Engine Specification

Module: descriptor_engine.sv **Location:** projects/components/rapids/rtl/fub_beats/
Status: Implemented **Last Updated:** 2025-01-10

7.1 Overview


The Descriptor Engine fetches and manages 256-bit descriptors from memory via AXI4. It maintains a prefetch FIFO to hide memory latency and provides parsed descriptors to the scheduler.

7.1.1 Key Features

- **AXI4 Descriptor Fetch:** Single-beat 256-bit reads
- **Prefetch FIFO:** Configurable depth for latency hiding
- **Address Range Checking:** Validates descriptor addresses
- **Error Detection:** Address violations, AXI errors
- **MonBus Integration:** Fetch events and error reporting

7.1.2 Block Diagram

7.1.3 Figure 2.2.1: Descriptor Engine Block Diagram

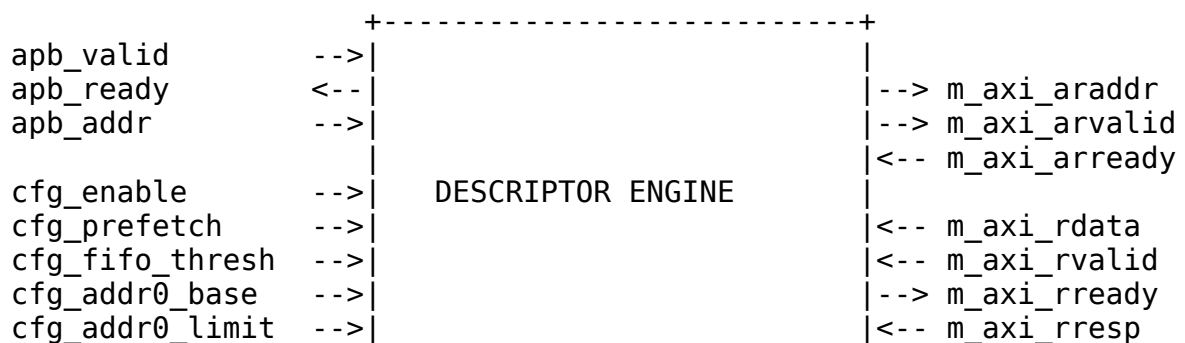


```

        descriptor_valid <--|
        descriptor_ready -->|
monbus_pkt_valid          |
        descriptor_packet<--|
monbus_pkt_data           |
        descriptor_error <--|
                           +-----+

```

Source: [02_descriptor_engine_block.mmd](#)

7.2 Parameters

```

parameter int CHANNEL_ID = 0;           // Channel identifier
parameter int NUM_CHANNELS = 8;         // Total channels
parameter int ADDR_WIDTH = 64;         // Address bus width
parameter int FIFO_DEPTH = 4;          // Prefetch FIFO
depth

```

```

// Monitor Bus Parameters
parameter logic [7:0] MON_AGENT_ID = 8'h10; // Descriptor Engine
Agent ID
parameter logic [3:0] MON_UNIT_ID = 4'h1;   // Unit identifier

```

: Table 2.2.1: Descriptor Engine Parameters

7.3 Port List

7.3.1 Clock and Reset

Table 2.2.2: Clock and Reset

Signal	Direction	Width	Description
clk	input	1	System clock
rst_n	input	1	Active-low asynchronous reset

7.3.2 APB Programming Interface

Table 2.2.3: APB Programming Interface

Signal	Direction	Width	Description
apb_valid	input	1	Kick-off valid (start descriptor chain)
apb_ready	output	1	Ready to accept kick-off
apb_addr	input	AW	First descriptor address

7.3.3 Configuration Interface

Table 2.2.4: Configuration Interface

Signal	Direction	Width	Description
cfg_prefetch_enable	input	1	Enable prefetch chaining (0 = on-demand, ~1 ahead)
cfg_fifo_threshold	input	4	Prefetch depth (descriptors buffered ahead when enabled)
cfg_addr0_base	input	AW	Valid address range 0 base
cfg_addr0_limit	input	AW	Valid address range 0 limit
cfg_addr1_base	input	AW	Valid address range 1 base
cfg_addr1_limit	input	AW	Valid address range 1 limit

7.3.4 AXI4 Read Master Interface

Table 2.2.5: AXI4 Read Master Interface

Signal	Direction	Width	Description
m_axi_araddr	output	AW	Read address

Signal	Direction	Width	Description
m_axi_arvalid	output	1	Address valid
m_axi_arready	input	1	Address ready
m_axi_rdata	input	256	Read data (descriptor)
m_axi_rvalid	input	1	Data valid
m_axi_rready	output	1	Data ready
m_axi_rresp	input	2	Read response


7.3.5 Scheduler Interface


Table 2.2.6: Scheduler Interface

Signal	Direction	Width	Description
descriptor_valid	output	1	Descriptor valid
descriptor_ready	input	1	Scheduler ready
descriptor_packet	output	256	Parsed descriptor
descriptor_error	output	1	Error flag

7.4 FSM States

7.4.1 Figure 2.2.2: Descriptor Engine FSM

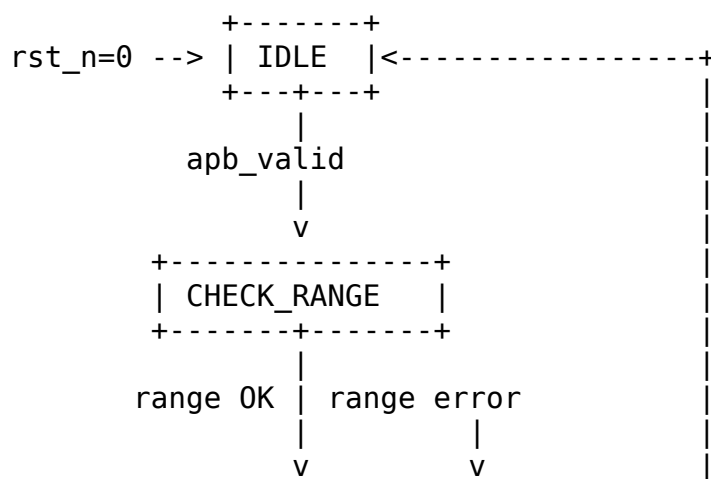

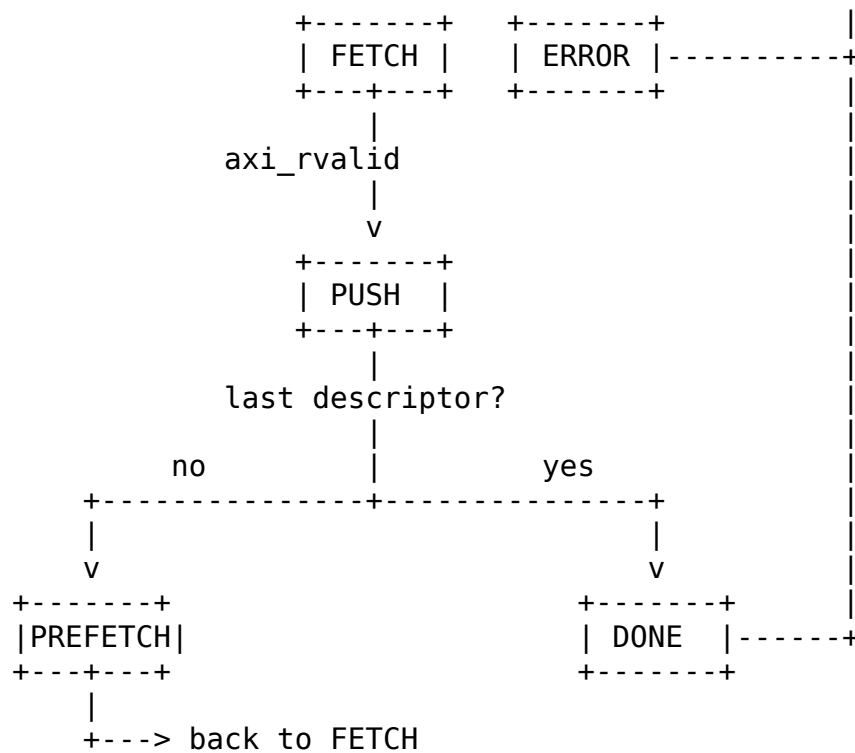


Source: [02_descriptor_engine_fsm.mmd](#)

7.5 Operation

7.5.1 Descriptor Chain Processing

7.5.2 Figure 2.2.3: Descriptor Chain Timing

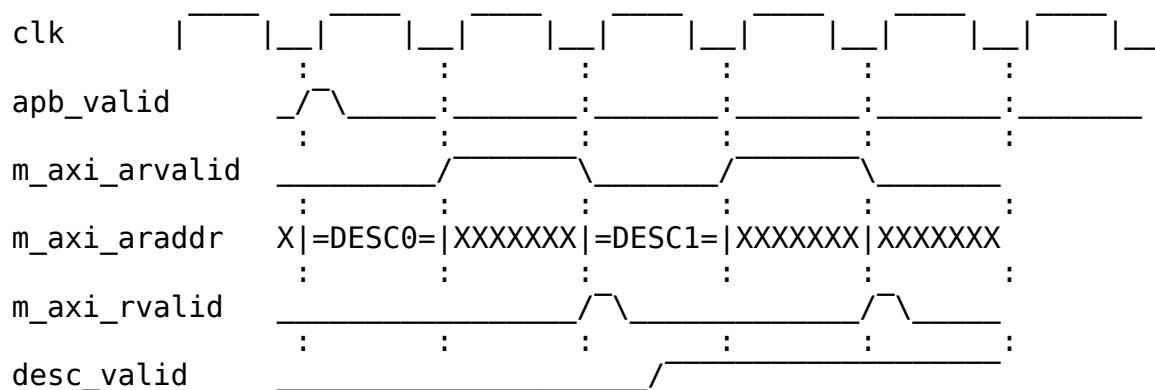

TODO: Replace with simulation-generated waveform

7.6 Address Range Checking

Descriptors must fall within configured valid address ranges:

```
Valid if: (addr >= cfg_addr0_base && addr <= cfg_addr0_limit)
          || (addr >= cfg_addr1_base && addr <= cfg_addr1_limit)
```

Invalid addresses generate an error and halt the descriptor chain.

7.7 Prefetch and Autonomous Chaining

`cfg_prefetch_enable` and `cfg_fifo_threshold` are functional prefetch controls (previously declared-but-unused, which left chaining permanently greedy). They throttle how far ahead the engine fetches chained descriptors by comparing the output descriptor FIFO occupancy (`w_desc_fifo_count`) against a computed `w_prefetch_limit`:

```
if      (!cfg_prefetch_enable)      w_prefetch_limit = 1;    // on-
demand
else if (cfg_fifo_threshold == 0)    w_prefetch_limit = 1;    // guard
(0 would stall)
else                                  w_prefetch_limit =
cfg_fifo_threshold;
```

```
w_prefetch_allows = (w_desc_fifo_count < w_prefetch_limit);
```

- **Prefetch OFF (`cfg_prefetch_enable = 0`):** limit forced to 1, so a chained fetch is only allowed when the output FIFO has drained – the engine stays roughly one descriptor ahead of the scheduler (on-demand).
- **Prefetch ON:** the engine buffers up to `cfg_fifo_threshold` descriptors ahead.

7.7.1 Chaining Decision

A chain fetch issues immediately when all of the following hold:

```
w_should_chain = w_chain_eligible    // valid non-last descriptor, in
range, no error
                && w_desc_committed  // current descriptor accepted
into output FIFO
                && w_prefetch_allows // occupancy below prefetch
limit
                && w_desc_addr_fifo_wr_ready; // address FIFO has a
slot
```

7.7.2 Deferred (Throttle-Blocked) Chain Fetch

If a descriptor commits and is chain-eligible but the fetch cannot issue this cycle (throttled by `w_prefetch_allows`, or the address FIFO is full), the owed fetch is recorded rather than dropped:

- `r_chain_pending` is set and the next-descriptor pointer is held in `r_pending_chain_addr`.
 - The deferred fetch is reissued (`w_pending_push_fire`) once the output FIFO drains enough that `w_prefetch_allows` is true again and the address FIFO has a slot, clearing `r_chain_pending`.
-

Last Updated: 2026-07-02

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

8 AXI Read Engine Specification

Module: `axi_read_engine.sv` **Location:** `projects/components/rapids/rtl/fub_beats/`
Status: Implemented **Last Updated:** 2025-01-10

8.1 Overview


The AXI Read Engine performs burst reads from system memory and writes data to the SRAM buffer. It operates as a streaming pipeline with no FSM, maximizing throughput through continuous data flow.

8.1.1 Key Features

- **Streaming Pipeline:** No FSM - pure streaming architecture
- **Multi-Channel Support:** Channel ID passed through AXI ID field
- **Configurable Burst Length:** Up to 256 beats per burst
- **Latency Compensation:** Integrated `beats_latency_bridge`
- **Error Handling:** AXI RRESP error detection and reporting

8.1.2 Block Diagram

8.1.3 Figure 2.3.1: AXI Read Engine Block Diagram

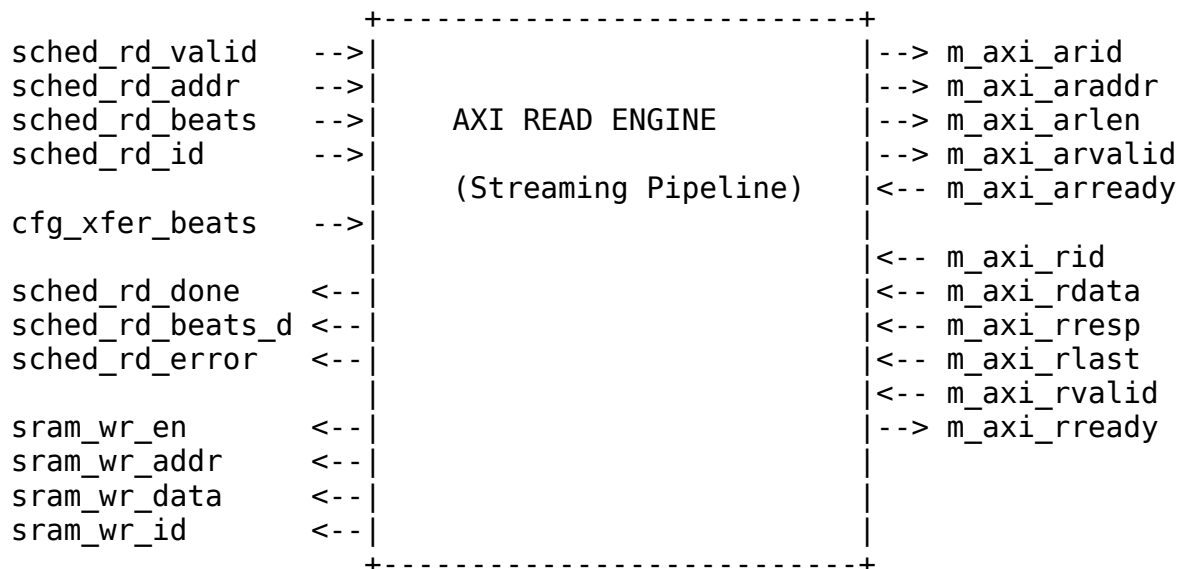

Source: [02_axi_read_engine_block.mmd](#)

8.2 Parameters

```

parameter int NUM_CHANNELS = 8;           // Number of channels
parameter int ADDR_WIDTH = 64;           // Address bus width
parameter int DATA_WIDTH = 512;         // Data bus width
parameter int AXI_ID_WIDTH = 8;          // AXI ID width
parameter int MAX_OUTSTANDING = 8;       // Max outstanding AR
transactions
parameter int PIPELINE = 0;              // Pipeline stages

// Derived
parameter int CHAN_WIDTH = $clog2(NUM_CHANNELS);

```

: Table 2.3.1: AXI Read Engine Parameters

8.3 Port List

8.3.1 Clock and Reset

Table 2.3.2: Clock and Reset

Signal	Direction	Width	Description
clk	input	1	System clock
rst_n	input	1	Active-low reset

8.3.2 Scheduler Interface

Table 2.3.3: Scheduler Interface

Signal	Direction	Width	Description
sched_rd_valid	input	1	Read request valid
sched_rd_addr	input	AW	Source address
sched_rd_beats	input	32	Total beats to read
sched_rd_id	input	CW	Channel ID
sched_rd_done_strobe	output	1	Burst complete strobe
sched_rd_beats_done	output	32	Beats completed
sched_rd_error	output	1	Error flag

8.3.3 AXI4 Read Master Interface

Table 2.3.4: AXI4 Read Master Interface

Signal	Direction	Width	Description
m_axi_arid	output	IW	Read address ID
m_axi_araddr	output	AW	Read address
m_axi_arlen	output	8	Burst length (beats - 1)
m_axi_arsize	output	3	Burst size

Signal	Direction	Width	Description
m_axi_arburst	output	2	Burst type (INCR)
m_axi_arvalid	output	1	Address valid
m_axi_arready	input	1	Address ready
m_axi_rid	input	IW	Read data ID
m_axi_rdata	input	DW	Read data
m_axi_rresp	input	2	Read response
m_axi_rlast	input	1	Last beat
m_axi_rvalid	input	1	Data valid
m_axi_rready	output	1	Data ready

8.3.4 SRAM Write Interface


Table 2.3.5: SRAM Write Interface

Signal	Direction	Width	Description
sram_wr_en	output	1	SRAM write enable
sram_wr_addr	output	AW	SRAM write address
sram_wr_data	output	DW	SRAM write data
sram_wr_id	output	CW	Channel ID for data

8.4 Operation


8.4.1 Streaming Pipeline Architecture

The AXI read engine uses a **streaming pipeline** with no FSM:

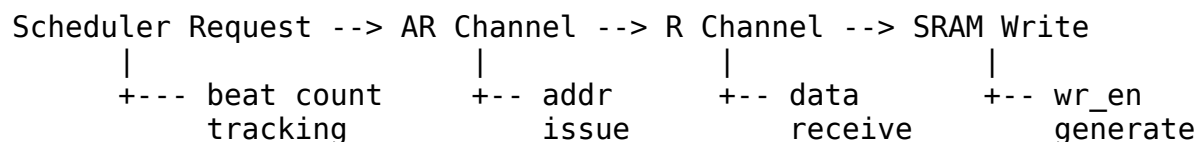

8.4.2 Timing Diagram

8.4.3 Figure 2.3.2: AXI Read Burst Timing

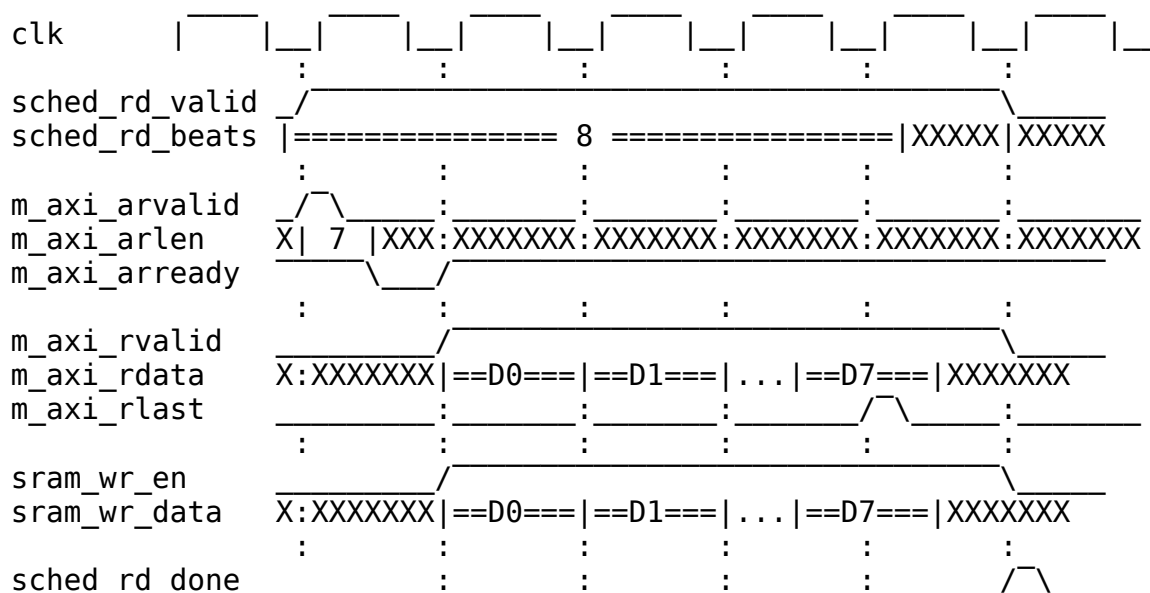

TODO: Replace with simulation-generated waveform

8.5 Burst Segmentation

Large transfers are segmented into AXI-compliant bursts:

Total beats = 256

cfg_xfer_beats = 64

Bursts issued:

AR[0]: addr=0x1000, len=63 (64 beats)

AR[1]: addr=0x2000, len=63 (64 beats)

AR[2]: addr=0x3000, len=63 (64 beats)

AR[3]: addr=0x4000, len=63 (64 beats)

8.6 Error Handling

Table 2.3.6: Error Handling

Error	Detection	Response
AXI SLVERR	m_axi_rresp ==	Set sched_rd_error,

Error	Detection	Response
	2'b10	continue
AXI DECERR	m_axi_rresp == 2'b11	Set sched_rd_error, continue

Last Updated: 2025-01-10

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

9 AXI Write Engine Specification

Module: axi_write_engine.sv **Location:** projects/components/rapids/rtl/fub_beats/
Status: Implemented **Last Updated:** 2025-01-10

9.1 Overview


The AXI Write Engine reads data from SRAM and performs burst writes to system memory. It operates as a streaming pipeline and includes write response handling for completion tracking.

9.1.1 Key Features

- **Streaming Pipeline:** No FSM - pure streaming architecture
- **Multi-Channel Support:** Channel ID in AXI ID field
- **Write Response Tracking:** B channel completion handling
- **Configurable Burst Length:** Up to 256 beats per burst
- **Latency Compensation:** Integrated beats_latency_bridge

9.1.2 Block Diagram

9.1.3 Figure 2.4.1: AXI Write Engine Block Diagram

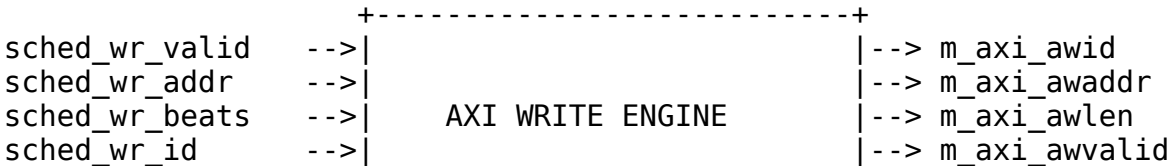

```

        (Streaming Pipeline)
    cfg_xfer_beats    --> | <-- m_axi_awready
                        | --> m_axi_wdata
    sched_wr_done     <-- | --> m_axi_wstrb
    sched_wr_beats_d  <-- | --> m_axi_wlast
    sched_wr_error    <-- | --> m_axi_wvalid
                        | <-- m_axi_wready
    sram_rd_en        <-- |
    sram_rd_addr      <-- | <-- m_axi_bid
    sram_rd_data      --> | <-- m_axi_bresp
    sram_rd_id        <-- | <-- m_axi_bvalid
                        | --> m_axi_bready
                        +-----+

```

Source: [02_axi_write_engine_block.mmd](#)

9.2 Parameters

```

parameter int NUM_CHANNELS = 8;           // Number of channels
parameter int ADDR_WIDTH = 64;           // Address bus width
parameter int DATA_WIDTH = 512;         // Data bus width
parameter int AXI_ID_WIDTH = 8;          // AXI ID width
parameter int MAX_OUTSTANDING = 8;        // Max outstanding AW
transactions
parameter int W_FIFO_DEPTH = 64;          // Write data FIFO
depth
parameter int B_FIFO_DEPTH = 16;          // Write response
FIFO depth
parameter int PIPELINE = 0;              // Pipeline stages

// Derived
parameter int CHAN_WIDTH = $clog2(NUM_CHANNELS);

```

: Table 2.4.1: AXI Write Engine Parameters

9.3 Port List

9.3.1 Clock and Reset

Table 2.4.2: Clock and Reset

Signal	Direction	Width	Description
clk	input	1	System clock

Signal	Direction	Width	Description
rst_n	input	1	Active-low reset

9.3.2 Scheduler Interface

Table 2.4.3: Scheduler Interface

Signal	Direction	Width	Description
sched_wr_val id	input	1	Write request valid
sched_wr_add r	input	AW	Destination address
sched_wr_bea ts	input	32	Total beats to write
sched_wr_id	input	CW	Channel ID
sched_wr_don e_strobe	output	NC	AW-issue strobe (pulses on AW handshake)
sched_wr_bea ts_done	output	NC*32	Beats issued this strobe (awlen + 1)
sched_wr_com mit_strobe	output	NC	COMMIT strobe (pulses on B response)
sched_wr_com mit_beats	output	NC*32	Beats committed this strobe
sched_wr_err or	output	1	Error flag

Two completion strobes per channel. The engine reports write progress to the scheduler at two points, letting the scheduler gate completion on data actually landing in memory:

- sched_wr_done_strobe / sched_wr_beats_done pulse when the **AW command handshakes** (m_axi_awvalid && m_axi_awready); the beat count is taken directly from m_axi_awlen + 1. This advances the scheduler's destination address (ISSUE tracking).
- sched_wr_commit_strobe / sched_wr_commit_beats pulse when the matching **B response** arrives (m_axi_bvalid && m_axi_bready for the channel); the beat count is recovered from the per-channel B-phase transaction FIFO. This is the COMMIT the scheduler uses to declare the transfer complete.

9.3.3 AXI4 Write Master Interface

Table 2.4.4: AXI4 Write Master Interface

Signal	Direction	Width	Description
m_axi_awid	output	IW	Write address ID
m_axi_awaddr	output	AW	Write address
m_axi_awlen	output	8	Burst length (beats - 1)
m_axi_awsz	output	3	Burst size
m_axi_awburst	output	2	Burst type (INCR)
m_axi_awvalid	output	1	Address valid
m_axi_awready	input	1	Address ready
m_axi_wdata	output	DW	Write data
m_axi_wstrb	output	DW/8	Write strobes
m_axi_wlast	output	1	Last beat
m_axi_wvalid	output	1	Data valid
m_axi_wready	input	1	Data ready
m_axi_bid	input	IW	Response ID
m_axi_bresp	input	2	Write response
m_axi_bvalid	input	1	Response valid
m_axi_bready	output	1	Response ready

9.3.4 SRAM Read Interface

Table 2.4.5: SRAM Read Interface

Signal	Direction	Width	Description
sram_rd_en	output	1	SRAM read enable
sram_rd_addr	output	AW	SRAM read address
sram_rd_data	input	DW	SRAM read data

Signal	Direction	Width	Description
sram_rd_id	output	CW	Channel ID for read

9.4 Operation


9.4.1 Write Transaction Phases

AXI writes have three phases that can overlap:

Phase 1: AW (Address)	Phase 2: W (Data)	Phase 3: B (Response)
 +-- Issue address response before data completion	 +-- Stream data from SRAM	 +-- Receive track

9.4.2 Timing Diagram

9.4.3 Figure 2.4.2: AXI Write Burst Timing

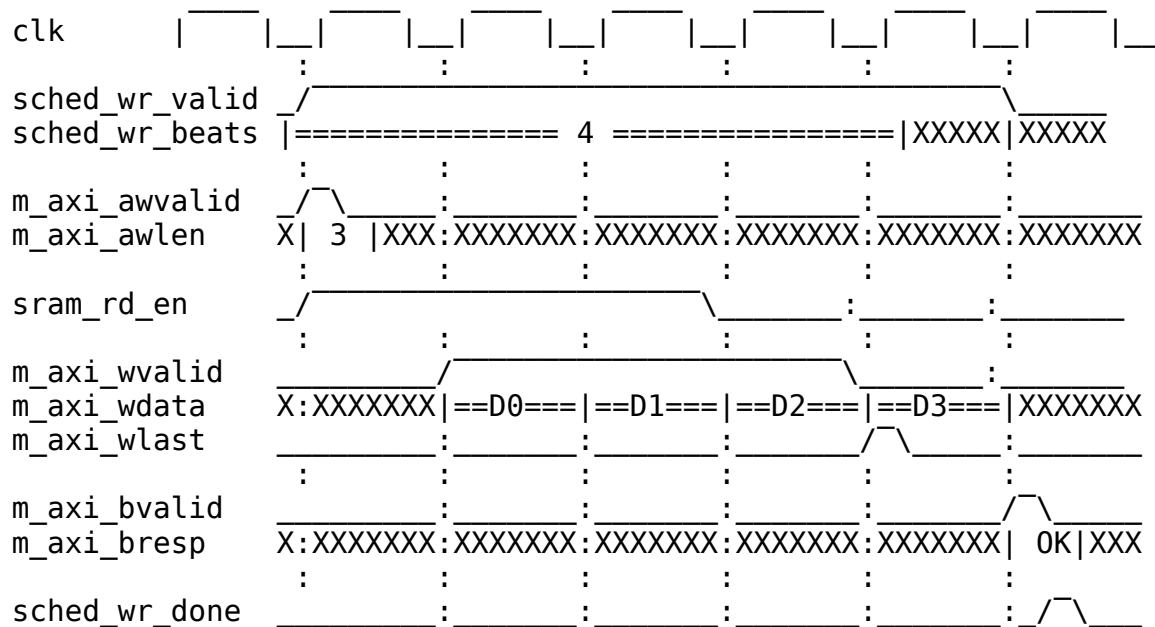

TODO: Replace with simulation-generated waveform

9.5 Error Handling

Table 2.4.6: Error Handling

Error	Detection	Response
AXI SLVERR	<code>m_axi_bresp == 2'b10</code>	Set <code>sched_wr_error</code>
AXI DECERR	<code>m_axi_bresp == 2'b11</code>	Set <code>sched_wr_error</code>

Last Updated: 2026-07-02

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

10 Beats Alloc Control Specification

Module: `beats_alloc_ctrl.sv` **Location:** `projects/components/rapids/rtl/fub_beats/`
Status: Implemented **Last Updated:** 2025-01-10

10.1 Overview


The Beats Alloc Control is a “virtual FIFO” that tracks space allocation without storing actual data. It uses FIFO pointer logic to manage pre-allocation for AXI engines, preventing race conditions between allocation and actual data arrival.

10.1.1 Key Features

- **Virtual FIFO:** Pointer tracking without data storage
- **Variable-Size Allocation:** Supports multi-beat allocation requests
- **Single-Beat Release:** Data writes release one beat at a time
- **Status Flags:** Full, almost full, empty, almost empty
- **Space Tracking:** Reports available space for flow control

10.1.2 Block Diagram

10.1.3 Figure 2.5.1: Beats Alloc Control Block Diagram

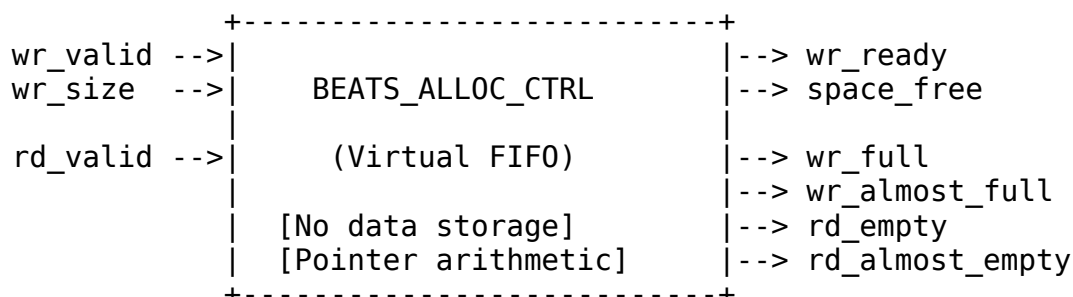

Source: [02_beats_alloc_ctrl_block.mmd](#)

10.2 Concept: Virtual FIFO

Unlike a traditional FIFO that stores data, `beats_alloc_ctrl` only tracks **space reservations**:

Traditional FIFO: Virtual FIFO (`alloc_ctrl`):

`wr_data --> [storage] -> rd_data` `wr_size --> [pointers] --> space_free`

Data moves through FIFO

Only pointers move, no data

10.2.1 Use Case: Pre-Allocation for AXI Reads

1. AXI engine requests N beats of space
 - `alloc_ctrl.wr_valid = 1`
 - `alloc_ctrl.wr_size = N`
 - `wr_ptr` advances by N
2. As AXI read data arrives (1 beat at a time)
 - `alloc_ctrl.rd_valid = 1` (each beat)
 - `rd_ptr` advances by 1
3. Space becomes available again
 - `space_free` reflects available capacity

10.3 Parameters

```
parameter int DEPTH = 512; // Virtual FIFO depth
parameter int ALMOST_WR_MARGIN = 1; // Almost full margin
parameter int ALMOST_RD_MARGIN = 1; // Almost empty margin
parameter int REGISTERED = 1; // Registered outputs

// Derived
parameter int AW = $clog2(DEPTH); // Address width
```

: Table 2.5.1: Beats Alloc Control Parameters

10.4 Port List

10.4.1 Clock and Reset

Table 2.5.2: Clock and Reset

Signal	Direction	Width	Description
axi_aclk	input	1	System clock
axi_aresetn	input	1	Active-low reset

10.4.2 Write Interface (Allocation Requests)

Table 2.5.3: Write Interface

Signal	Direction	Width	Description
wr_valid	input	1	Allocate space
wr_size	input	8	Number of beats to allocate
wr_ready	output	1	Space available for allocation

10.4.3 Read Interface (Data Written)

Table 2.5.4: Read Interface

Signal	Direction	Width	Description
rd_valid	input	1	One beat of

Signal	Direction	Width	Description
rd_ready	output	1	data written Not full (can accept)

10.4.4 Status Outputs

Table 2.5.5: Status Outputs

Signal	Direction	Width	Description
space_free	output	AW+1	Available space in beats
wr_full	output	1	No space available
wr_almost_full	output	1	Near full
rd_empty	output	1	No allocations pending
rd_almost_empty	output	1	Near empty

10.5 Operation

10.5.1 Pointer Arithmetic


$\text{space_free} = \text{DEPTH} - (\text{wr_ptr} - \text{rd_ptr})$

Full condition: $\text{wr_ptr} - \text{rd_ptr} \geq \text{DEPTH}$

Empty condition: $\text{wr_ptr} == \text{rd_ptr}$

10.5.2 Timing Diagram

10.5.3 Figure 2.5.2: Allocation and Release Timing

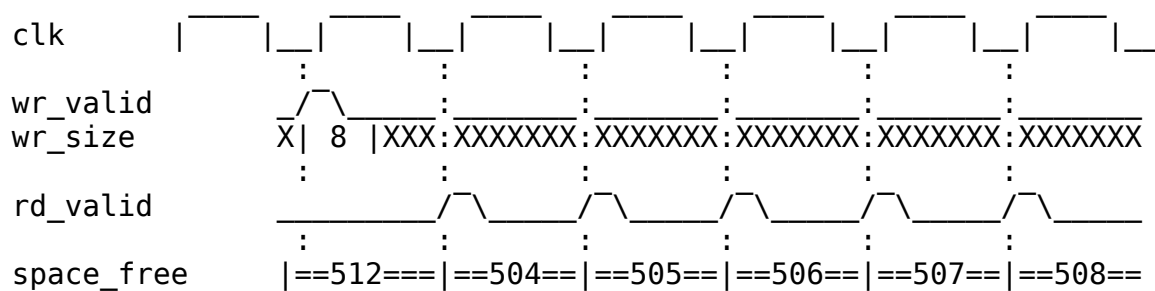

	:	:	:	:	:	:
wr_ptr	== 0 ==	== 8 ==	== 8 ==	== 8 ==	== 8 ==	== 8 ==
rd_ptr	== 0 ==	== 0 ==	== 1 ==	== 2 ==	== 3 ==	== 4 ==

TODO: Replace with simulation-generated waveform showing actual flow control

10.6 Integration Example

```
// Source path: Pre-allocate SRAM space before AXI read
beats_alloc_ctrl #(
    .DEPTH(SRAM_DEPTH),
    .ALMOST_WR_MARGIN(8)
) u_src_alloc (
    .axi_aclk      (clk),
    .axi_aresetn   (rst_n),

    // Scheduler allocates space before issuing AXI read
    .wr_valid      (sched_rd_valid),
    .wr_size       (sched_rd_beats[7:0]),
    .wr_ready      (alloc_ready),

    // AXI read data arrival releases allocation
    .rd_valid      (m_axi_rvalid && m_axi_rready),
    .rd_ready      (), // Not used for single-beat

    // Status
    .space_free    (sram_space_available),
    .wr_full       (sram_full),
    .wr_almost_full(sram_almost_full)
);
```

Last Updated: 2025-01-10

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

11 Beats Drain Control Specification

Module: beats_drain_ctrl.sv **Location:** projects/components/rapids/rtl/fub_beats/
Status: Implemented **Last Updated:** 2025-01-10

11.1 Overview


The Beats Drain Control is a “virtual FIFO” that tracks data availability without storing actual data. It complements beats_alloc_ctrl by tracking when data has been written to SRAM and is available for draining.

11.1.1 Key Features

- **Virtual FIFO:** Pointer tracking without data storage
- **Single-Beat Write:** Data arrivals tracked one beat at a time
- **Variable-Size Drain:** Supports multi-beat drain requests
- **Status Flags:** Full, almost full, empty, almost empty
- **Data Availability:** Reports beats available for drain

11.1.2 Block Diagram

11.1.3 Figure 2.6.1: Beats Drain Control Block Diagram

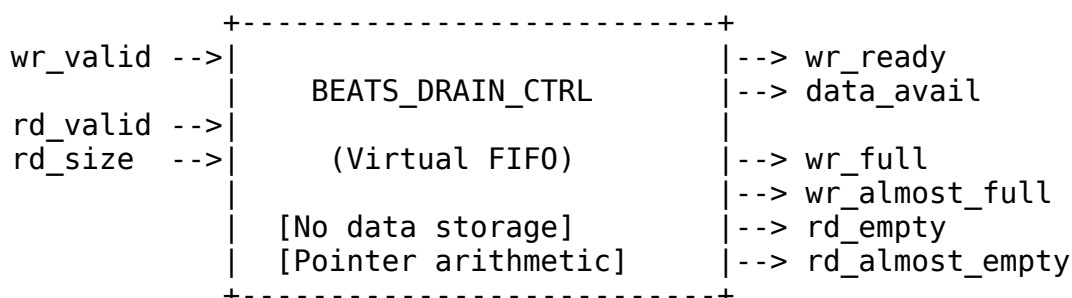

Source: [02_beats_drain_ctrl_block.mmd](#)

11.2 Concept: Data Availability Tracking

The drain_ctrl tracks when data has been written to SRAM:

alloc_ctrl: Tracks SPACE reservations (allocation -> actual write)
drain_ctrl: Tracks DATA availability (data write -> drain request)

11.2.1 Complementary Roles

Source Path:

1. Scheduler allocates space (alloc_ctrl.wr)
2. AXI reads data into SRAM
3. Data written to SRAM (drain_ctrl.wr)
4. Drain consumer reads (drain_ctrl.rd)

Sink Path:

1. Fill allocates space (alloc_ctrl.wr)
2. Fill writes to SRAM (alloc_ctrl.rd)
3. Data available in SRAM (drain_ctrl.wr)
4. AXI write drains SRAM (drain_ctrl.rd)

11.3 Parameters

```
parameter int DEPTH = 512;           // Virtual FIFO depth
parameter int ALMOST_WR_MARGIN = 1;  // Almost full margin
parameter int ALMOST_RD_MARGIN = 1;  // Almost empty margin
parameter int REGISTERED = 1;        // Registered outputs

// Derived
parameter int AW = $clog2(DEPTH);    // Address width
```

: Table 2.6.1: Beats Drain Control Parameters

11.4 Port List

11.4.1 Clock and Reset

Table 2.6.2: Clock and Reset

Signal	Direction	Width	Description
axi_aclk	input	1	System clock
axi_aresetn	input	1	Active-low reset

11.4.2 Write Interface (Data Written to SRAM)

Table 2.6.3: Write Interface

Signal	Direction	Width	Description
wr_valid	input	1	One beat

Signal	Direction	Width	Description
wr_ready	output	1	written to SRAM Can track more data

11.4.3 Read Interface (Drain Requests)

Table 2.6.4: Read Interface

Signal	Direction	Width	Description
rd_valid	input	1	Drain request
rd_size	input	8	Number of beats to drain
rd_ready	output	1	Data available for drain

11.4.4 Status Outputs

Table 2.6.5: Status Outputs

Signal	Direction	Width	Description
data_avail	output	AW+1	Beats available to drain
wr_full	output	1	Tracking full
wr_almost_full	output	1	Near full
rd_empty	output	1	No data to drain
rd_almost_empty	output	1	Near empty

11.5 Operation

11.5.1 Pointer Arithmetic


$\text{data_avail} = \text{wr_ptr} - \text{rd_ptr}$

Full condition: $\text{wr_ptr} - \text{rd_ptr} \geq \text{DEPTH}$

Empty condition: $\text{wr_ptr} == \text{rd_ptr}$

11.5.2 Timing Diagram

11.5.3 Figure 2.6.2: Data Arrival and Drain Timing

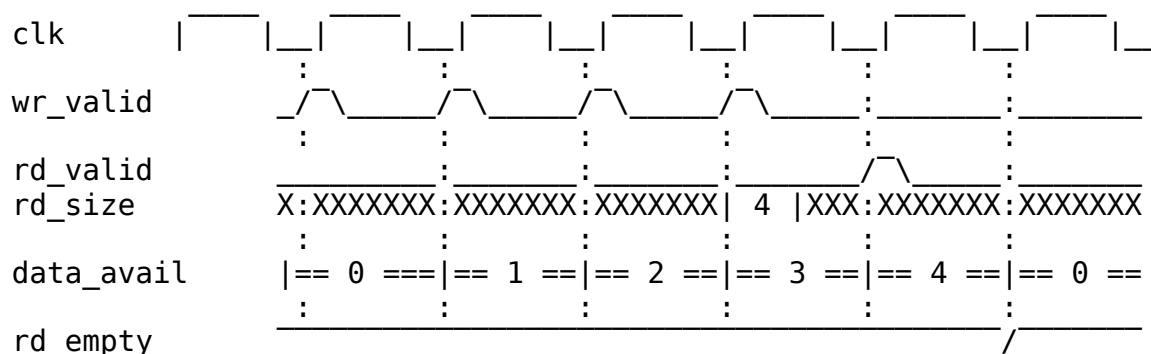

TODO: Replace with simulation-generated waveform showing actual flow control

11.6 Integration Example

// Sink path: Track data availability for AXI write engine

beats_drain_ctrl #(
 .DEPTH(SRAM_DEPTH),
 .ALMOST_RD_MARGIN(8)
) u_snk_drain (
 .axi_aclk (clk),
 .axi_aresetn (rst_n),

 // Fill writes data to SRAM
 .wr_valid (fill_valid && fill_ready),
 .wr_ready (), *// Single-beat, always ready*

 // AXI write engine drains data
 .rd_valid (axi_wr_drain_req),
 .rd_size (axi_wr_burst_len),
 .rd_ready (data_ready_for_drain),

 // Status
 .data_avail (beats_to_write),
 .rd_empty (no_data_to_write)
);

11.7 Relationship: alloc_ctrl vs drain_ctrl

Table 2.6.6: alloc_ctrl vs drain_ctrl Comparison

Aspect	beats_alloc_ctrl	beats_drain_ctrl
Tracks	Space reservations	Data availability
Write port	Multi-beat allocation	Single-beat arrival
Read port	Single-beat release	Multi-beat drain
Output	space_free	data_avail
Use case	Pre-allocate before fill	Know when to drain

Last Updated: 2025-01-10

RTL Design Sherpa · Learning Hardware Design Through Practice · GitHub · Documentation Index · MIT License

12 Beats Latency Bridge Specification

Module: beats_latency_bridge.sv **Location:** projects/components/rapids/rtl/fub_beats/ **Status:** Implemented **Last Updated:** 2025-01-10

12.1 Overview


The Beats Latency Bridge provides buffering to compensate for pipeline latency between alloc_ctrl and drain_ctrl in the SRAM controller. It prevents race conditions where drain signals arrive before allocation is complete.

12.1.1 Key Features

- **Latency Compensation:** Buffers requests to match pipeline delays
- **Configurable Depth:** Matches expected pipeline latency
- **Flow Control:** Standard valid/ready handshaking
- **Pass-Through Data:** Preserves beat count and channel ID

12.1.2 Block Diagram

12.1.3 Figure 2.7.1: Beats Latency Bridge Block Diagram

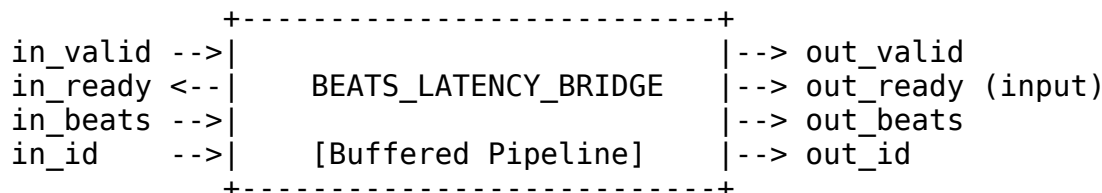


Source: [02_beats_latency_bridge_block.mmd](#)


12.2 Concept: Why Latency Compensation?

The SRAM controller has a timing challenge:

Without Bridge:

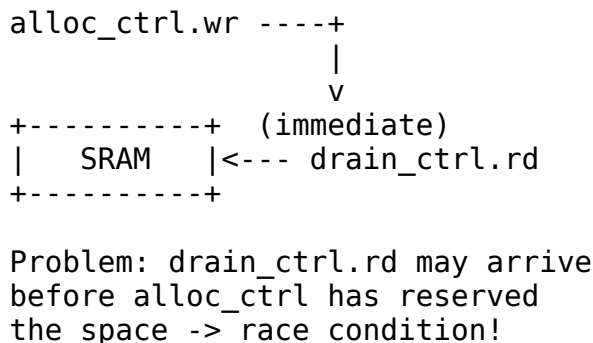

With Bridge:

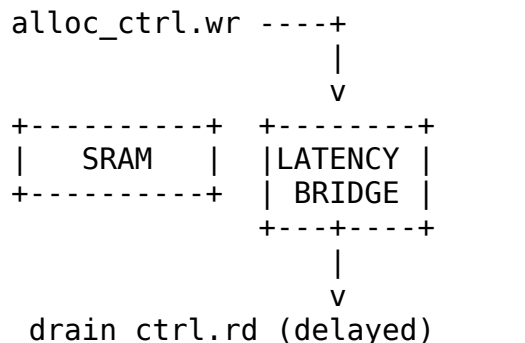

Solution: Bridge delays drain
signals to match alloc timing

12.3 Parameters

```
parameter int DEPTH = 4;           // Bridge FIFO depth
parameter int BEATS_WIDTH = 8;     // Beat count width
parameter int ID_WIDTH = 3;        // Channel ID width
parameter int REGISTERED = 1;      // Registered outputs
```

: Table 2.7.1: Beats Latency Bridge Parameters

12.4 Port List

12.4.1 Clock and Reset

Table 2.7.2: Clock and Reset

Signal	Direction	Width	Description
clk	input	1	System clock
rst_n	input	1	Active-low reset

12.4.2 Input Interface

Table 2.7.3: Input Interface

Signal	Direction	Width	Description
in_valid	input	1	Input request valid
in_ready	output	1	Bridge ready to accept
in_beats	input	BEATS_WIDTH	Beat count
in_id	input	ID_WIDTH	Channel ID

12.4.3 Output Interface


Table 2.7.4: Output Interface

Signal	Direction	Width	Description
out_valid	output	1	Output request valid
out_ready	input	1	Downstream ready
out_beats	output	BEATS_WIDTH	Beat count (delayed)
out_id	output	ID_WIDTH	Channel ID (delayed)

12.5 Operation

12.5.1 Timing Diagram

12.5.2 Figure 2.7.2: Latency Bridge Timing (Depth=2)

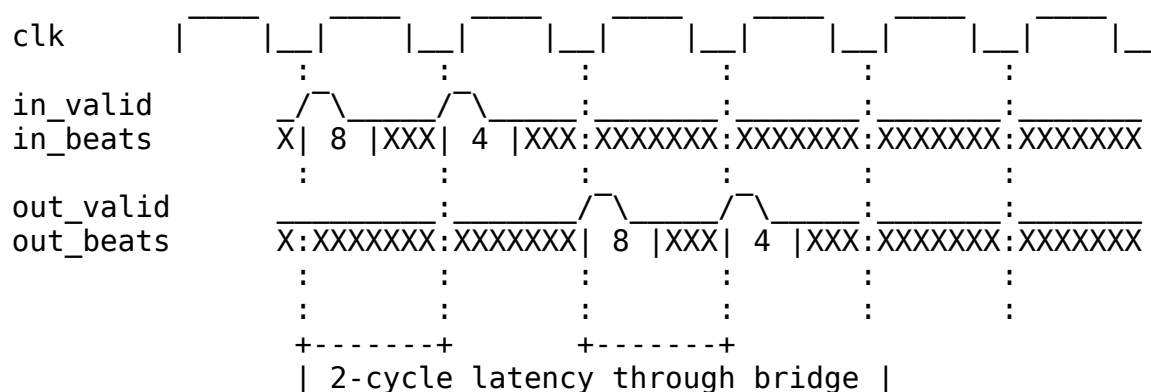

TODO: Replace with simulation-generated waveform

12.6 Integration Context

The latency bridge is used within the SRAM controller:

```
// In snk_sram_controller_unit
beats_alloc_ctrl u_alloc (
    // Allocation on fill requests
    .wr_valid      (fill_valid),
    .wr_size       (fill_size),
    // Release on actual data write
    .rd_valid      (sram_wr_complete)
);

beats_latency_bridge u_bridge (
    // Input from SRAM write path
    .in_valid      (sram_wr_complete),
    .in_beats      (beats_written),
    // Output to drain controller (delayed)
    .out_valid     (drain_trigger),
    .out_beats     (drain_beats)
);

beats_drain_ctrl u_drain (
    // Delayed notification of data available
    .wr_valid      (drain_trigger),
```

```

    // Drain requests from write engine
    .rd_valid      (axi_drain_req),
    .rd_size       (axi_drain_size)
);

```

12.7 Design Considerations

Table 2.7.5: Bridge Depth Selection

Depth	Use Case	Latency
2	Minimal pipeline	2 cycles
4	Standard pipeline	4 cycles
8	Deep pipeline	8 cycles

The bridge depth should match the maximum pipeline latency from alloc_ctrl write to SRAM data being valid for drain_ctrl.

Last Updated: 2025-01-10

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

13 Beats Scheduler Group Specification

Module: beats_scheduler_group.sv **Location:** projects/components/rapids/rtl/macro_beats/ **Status:** Implemented **Last Updated:** 2025-01-10

13.1 Overview

The Beats Scheduler Group wraps a single channel's scheduler and descriptor engine together with MonBus aggregation. It provides a clean integration point for the scheduler_group_array.


13.1.1 Key Features

- **Single Channel Integration:** One scheduler + one descriptor engine

- **MonBus Aggregation:** Combines scheduler and descriptor engine MonBus outputs
- **Configuration Pass-Through:** Routes configuration to both sub-modules
- **Status Aggregation:** Combined idle and error status

13.1.2 Block Diagram

13.1.3 Figure 3.1.1: Beats Scheduler Group Block Diagram

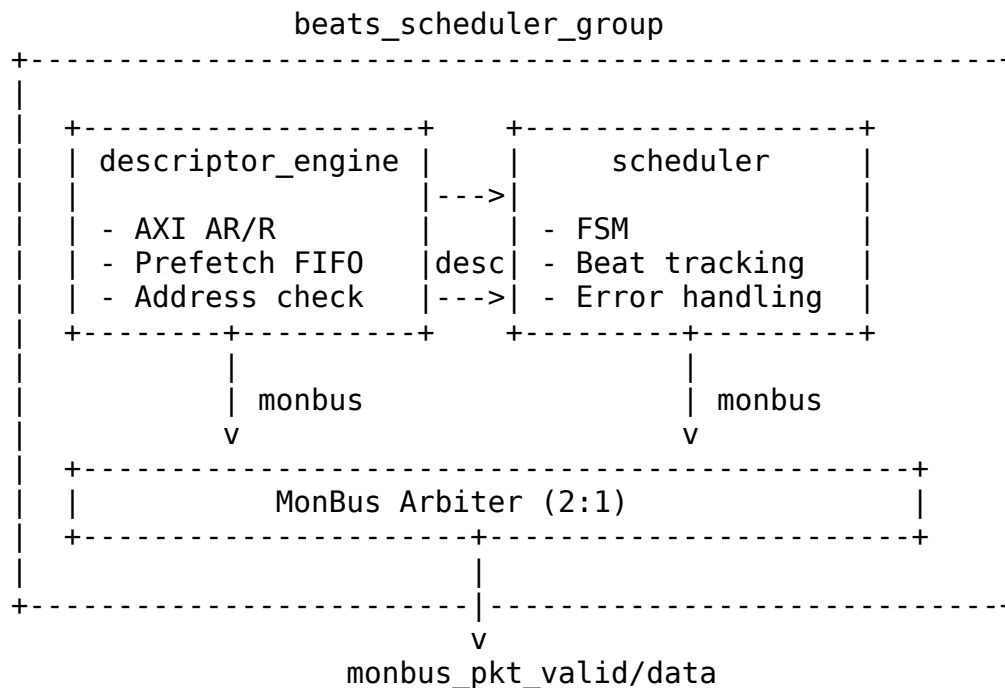

Source: [03_beats_scheduler_group_block.mmd](#)

13.2 Parameters

```

parameter int CHANNEL_ID = 0;           // Channel identifier
parameter int NUM_CHANNELS = 8;         // Total channels
parameter int ADDR_WIDTH = 64;          // Address bus width
parameter int DATA_WIDTH = 512;        // Data bus width

// Monitor Bus Parameters
parameter int DESC_MON_AGENT_ID = 16 + CHANNEL_ID; // Descriptor
engine agent
parameter int SCHED_MON_AGENT_ID = 48 + CHANNEL_ID; // Scheduler agent
parameter int MON_UNIT_ID = 1;
  
```

13.3 Port List

13.3.1 Clock and Reset

Table 3.1.2: Clock and Reset

Signal	Direction	Width	Description
clk	input	1	System clock
rst_n	input	1	Active-low reset

13.3.2 APB Programming Interface

Table 3.1.3: APB Programming Interface

Signal	Direction	Width	Description
apb_valid	input	1	Channel kick-off
apb_ready	output	1	Ready for kick-off
apb_addr	input	AW	First descriptor address

13.3.3 Configuration Interface

Table 3.1.4: Configuration Interface

Signal	Direction	Width	Description
cfg_channel_enable	input	1	Enable channel
cfg_channel_reset	input	1	Soft reset
cfg_sched_timeout_cycles	input	32	Write-progress timeout window (cycles)
cfg_sched_timeout_limit	input	8	Consecutive-timeout windows before fatal escalation (0 = never)

Signal	Direction	Width	Description
cfg_sched_timeout_enable	input	1	Enable timeout
cfg_desceng_enable	input	1	Enable descriptor engine
cfg_desceng_prefetch	input	1	Enable prefetch chaining
cfg_desceng_fifo_thresh	input	4	Prefetch threshold
cfg_desceng_addr0_base	input	AW	Address range 0 base
cfg_desceng_addr0_limit	input	AW	Address range 0 limit

13.3.4 Descriptor AXI Master Interface

Table 3.1.5: Descriptor AXI Master Interface

Signal	Direction	Width	Description
m_axi_arvalid	output	1	AR channel valid
m_axi_arready	input	1	AR channel ready
m_axi_araddr	output	AW	AR address
m_axi_rvalid	input	1	R channel valid
m_axi_rready	output	1	R channel ready
m_axi_rdata	input	256	R data (descriptor)
m_axi_rresp	input	2	R response

13.3.5 Scheduler Data Interfaces

Table 3.1.6: Scheduler Data Interfaces

Signal	Direction	Width	Description
sched_rd_val_id	output	1	Read request
sched_rd_addr	output	AW	Read address

Signal	Direction	Width	Description
sched_rd_beats	output	32	Read beats
sched_rd_done_strobe	input	1	Read complete
sched_wr_valid	output	1	Write request
sched_wr_address	output	AW	Write address
sched_wr_beats	output	32	Write beats
sched_wr_done_strobe	input	1	Write AW-issue strobe
sched_wr_commit_strobe	input	1	Write COMMIT strobe (B response)
sched_wr_commit_beats	input	32	Beats committed this strobe

13.3.6 Status

Table 3.1.7: Status Interface

Signal	Direction	Width	Description
scheduler_idle	output	1	Scheduler idle
descriptor_engine_idle	output	1	Descriptor engine idle
scheduler_state	output	7	FSM state
sched_error	output	1	Error flag

13.3.7 MonBus Interface

Table 3.1.8: MonBus Interface

Signal	Direction	Width	Description
monbus_pkt_valid	output	1	Packet valid
monbus_pkt_ready	input	1	Consumer ready
monbus_pkt_data	output	64	Packet data

13.4 Internal Architecture

Internal Signal Flow:

```
apb_valid/addr -----> descriptor_engine -----> scheduler
                        |                               |
                        desc_valid/packet                |
                        |                               |
                        +--> descriptor_ready <--+
```

MonBus Aggregation:

```
desc_engine.monbus_pkt -----+
                             |---> round_robin_arbiter ---> monbus_out
scheduler.monbus_pkt -----+
```

Last Updated: 2026-07-02

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

14 Beats Scheduler Group Array Specification

Module: beats_scheduler_group_array.sv **Location:** projects/components/rapids/rtl/macro_beats/ **Status:** Implemented **Last Updated:** 2025-01-10

14.1 Overview

The Beats Scheduler Group Array instantiates 8 scheduler groups with a shared descriptor AXI master and unified MonBus output. It provides the complete scheduler infrastructure for all RAPIDS channels.

14.1.1 Key Features


- **8-Channel Array:** One scheduler_group per channel


- **Shared Descriptor AXI:** Round-robin arbitration for descriptor fetches
- **Unified MonBus:** Aggregates 9 MonBus sources (8 scheduler + 1 arbiter)
- **Per-Channel Configuration:** Individual enable/reset per channel
- **Aggregate Status:** Combined idle and error flags

14.1.2 Block Diagram

14.1.3 Figure 3.2.1: Beats Scheduler Group Array Block Diagram

beats_scheduler_group_array

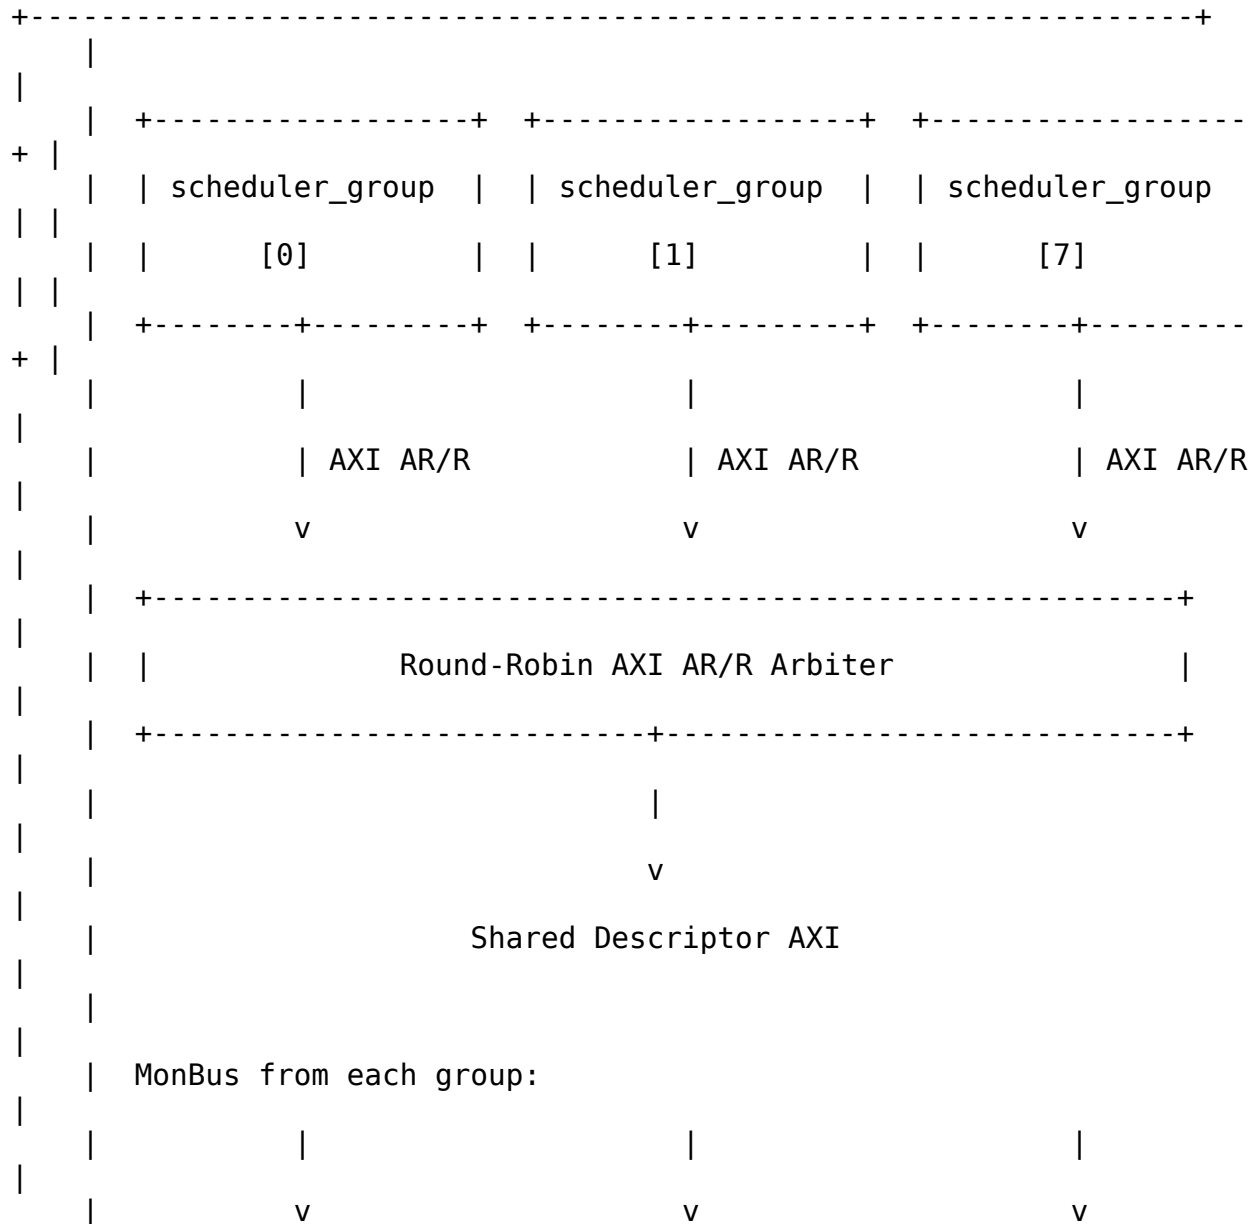

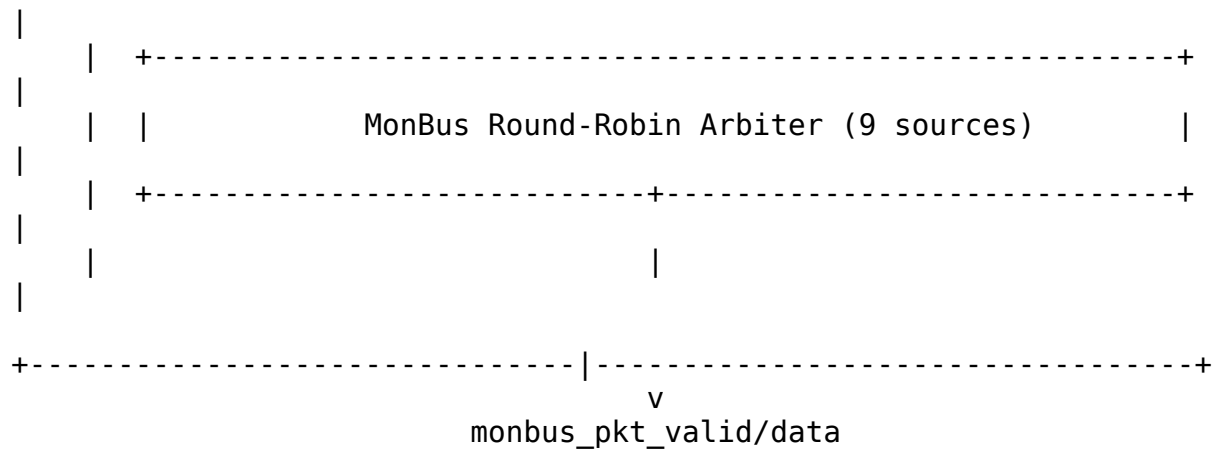

Source: [03_beats_scheduler_group_array_block.mmd](#)

14.2 Parameters

```

parameter int NUM_CHANNELS = 8;           // Number of channels
parameter int ADDR_WIDTH = 64;           // Address bus width
parameter int DATA_WIDTH = 512;         // Data bus width
parameter int DESC_DATA_WIDTH = 256;      // Descriptor width

// AXI ID Management
parameter int AXI_ID_WIDTH = 8;          // ID field width
parameter int MAX_OUTSTANDING = 8;       // Outstanding
descriptors

// Monitor Bus Parameters
parameter int MON_UNIT_ID = 1;           // Unit ID for MonBus

```

: Table 3.2.1: Beats Scheduler Group Array Parameters

14.3 Port List

14.3.1 Clock and Reset

Table 3.2.2: Clock and Reset

Signal	Direction	Width	Description
clk	input	1	System clock
rst_n	input	1	Active-low

Signal	Direction	Width	Description
			reset

14.3.2 Per-Channel APB Programming

Table 3.2.3: APB Programming Interface

Signal	Direction	Width	Description
apb_valid	input	NC	Channel kick-off (per-channel)
apb_ready	output	NC	Ready for kick-off
apb_addr	input	NC*AW	First descriptor address

14.3.3 Per-Channel Configuration

Table 3.2.4: Per-Channel Configuration

Signal	Direction	Width	Description
cfg_channel_enable	input	NC	Enable per channel
cfg_channel_reset	input	NC	Soft reset per channel
cfg_sched_timeout_cycles	input	NC*16	Timeout threshold
cfg_sched_timeout_enable	input	NC	Enable timeout
cfg_desceng_enable	input	NC	Enable descriptor engine
cfg_desceng_prefetch	input	NC	Enable prefetching
cfg_desceng_fifo_thresh	input	NC*4	Prefetch threshold
cfg_desceng_addr0_base	input	NC*AW	Address range 0 base
cfg_desceng_addr1_base	input	NC*AW	Address range

Signal	Direction	Width	Description
ddr0_limit			0 limit

14.3.4 Shared Descriptor AXI Master Interface

Table 3.2.5: Shared Descriptor AXI Master Interface

Signal	Direction	Width	Description
m_axi_arvalid	output	1	AR channel valid
m_axi_arready	input	1	AR channel ready
m_axi_araddr	output	AW	AR address
m_axi_arid	output	ID_W	Transaction ID
m_axi_arlen	output	8	Burst length
m_axi_arsize	output	3	Burst size
m_axi_arburst	output	2	Burst type
m_axi_rvalid	input	1	R channel valid
m_axi_rready	output	1	R channel ready
m_axi_rdata	input	256	R data
m_axi_rid	input	ID_W	Response ID
m_axi_rresp	input	2	R response
m_axi_rlast	input	1	Last beat

14.3.5 Per-Channel Scheduler Data Interfaces

Table 3.2.6: Per-Channel Scheduler Data Interfaces

Signal	Direction	Width	Description
sched_rd_valid	output	NC	Read request per channel
sched_rd_addr	output	NC*AW	Read address
sched_rd_beats	output	NC*32	Read beats
sched_rd_done_strobe	input	NC	Read complete

Signal	Direction	Width	Description
sched_wr_valid	output	NC	Write request per channel
sched_wr_addr	output	NC*AW	Write address
sched_wr_beats	output	NC*32	Write beats
sched_wr_done_strobe	input	NC	Write complete

14.3.6 Aggregate Status

Table 3.2.7: Aggregate Status

Signal	Direction	Width	Description
all_channels_idle	output	1	All channels idle
scheduler_idle	output	NC	Per-channel scheduler idle
descriptor_engine_idle	output	NC	Per-channel desc eng idle
scheduler_state	output	NC*7	FSM states
sched_error	output	NC	Error flags


14.3.7 Unified MonBus Interface

Table 3.2.8: Unified MonBus Interface

Signal	Direction	Width	Description
monbus_pkt_valid	output	1	Packet valid
monbus_pkt_ready	input	1	Consumer ready
monbus_pkt_data	output	64	Packet data

14.4 AXI Arbitration

14.4.1 Figure 3.2.2: Descriptor AXI Arbitration Sequence

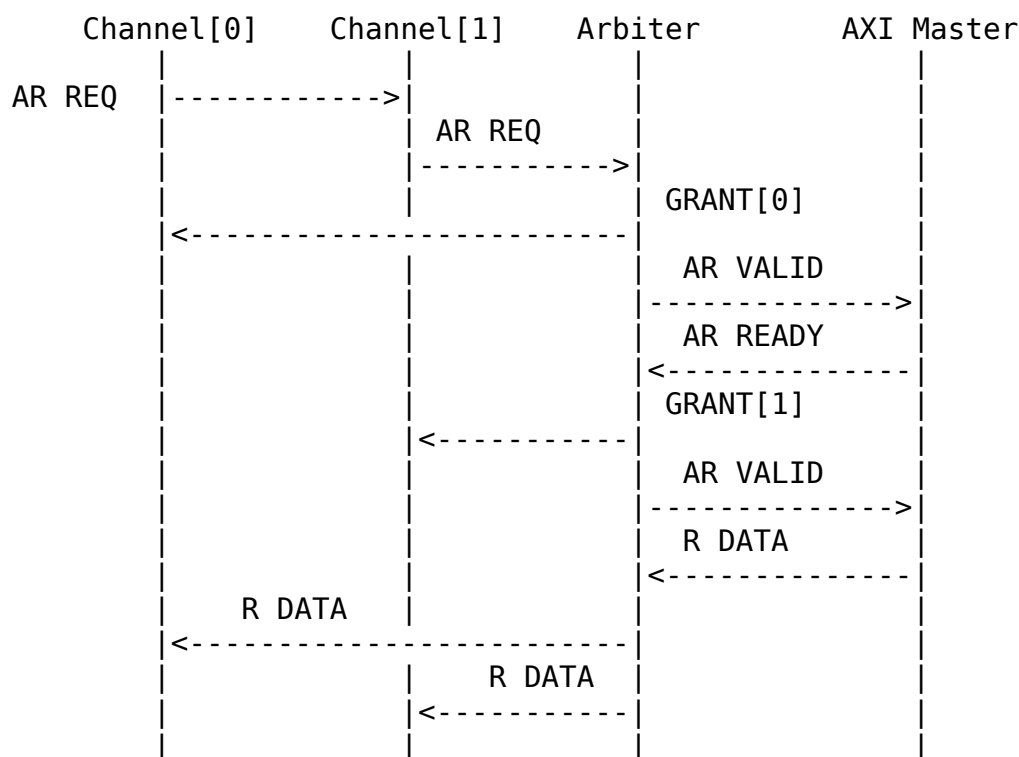

Source: [03_scheduler_group_array_arbitration.mmd](#)

14.5 MonBus Aggregation

The unified MonBus output aggregates 9 sources using round-robin arbitration:

Table 3.2.9: MonBus Source Assignment

Source ID	Origin	Description
0-7	scheduler_group[0:7]	Per-channel aggregated MonBus
8	AXI Arbiter	Arbitration events

Each scheduler_group provides a single MonBus output that combines both scheduler and descriptor engine packets (2:1 internal arbitration).

14.6 Integration Context

```
beats_scheduler_group_array #(
    .NUM_CHANNELS(8),
    .ADDR_WIDTH(64),
    .DATA_WIDTH(512)
) u_scheduler_array (
    .clk                (clk),
    .rst_n              (rst_n),

    // APB programming (per-channel)
    .apb_valid          (apb_kick_valid),
    .apb_ready          (apb_kick_ready),
    .apb_addr           (apb_kick_addr),

    // Configuration (per-channel)
    .cfg_channel_enable (cfg_ch_enable),
    .cfg_sched_timeout_cycles(cfg_timeout_cycles),
    // ... additional config ...

    // Shared descriptor AXI
    .m_axi_arvalid      (desc_axi_arvalid),
    .m_axi_arready      (desc_axi_arready),
    .m_axi_araddr       (desc_axi_araddr),
    .m_axi_rvalid       (desc_axi_rvalid),
    .m_axi_rready       (desc_axi_rready),
    .m_axi_rdata        (desc_axi_rdata),

    // Per-channel scheduler outputs
    .sched_rd_valid     (sched_rd_valid),
    .sched_rd_addr      (sched_rd_addr),
    .sched_rd_beats     (sched_rd_beats),
    .sched_rd_done_strobe (sched_rd_done_strobe),
    .sched_wr_valid     (sched_wr_valid),
    .sched_wr_addr      (sched_wr_addr),
    .sched_wr_beats     (sched_wr_beats),
    .sched_wr_done_strobe (sched_wr_done_strobe),

    // Status
    .all_channels_idle  (all_schedulers_idle),

    // Unified MonBus
    .monbus_pkt_valid   (sched_array_monbus_valid),
    .monbus_pkt_ready   (sched_array_monbus_ready),
    .monbus_pkt_data    (sched_array_monbus_data)
);
```

Last Updated: 2025-01-10

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

15 Sink Data Path Specification

Module: `sink_data_path.sv` **Location:** `projects/components/rapids/rtl/macro_beats/`
Status: Implemented **Last Updated:** 2025-01-10

15.1 Overview


The Sink Data Path integrates the SRAM controller and AXI write engine for network-to-memory transfers. Data enters through the fill interface, is buffered in SRAM, and is written to system memory via AXI4.


15.1.1 Key Features

- **8-Channel SRAM Controller:** Per-channel buffering with flow control
- **AXI Write Engine:** Streaming burst writes to system memory
- **Beat-Level Tracking:** Precise flow control at beat granularity
- **Scheduler Integration:** Receives transfer requests from scheduler

15.1.2 Block Diagram

15.1.3 Figure 3.3.1: Sink Data Path Block Diagram

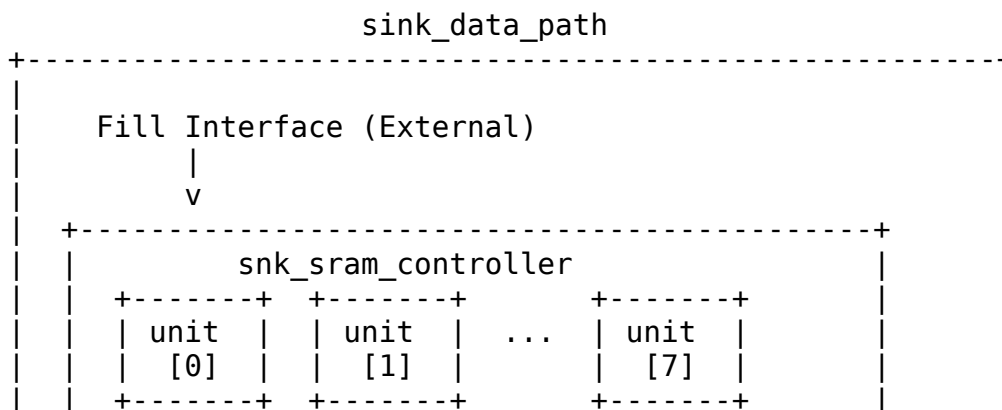

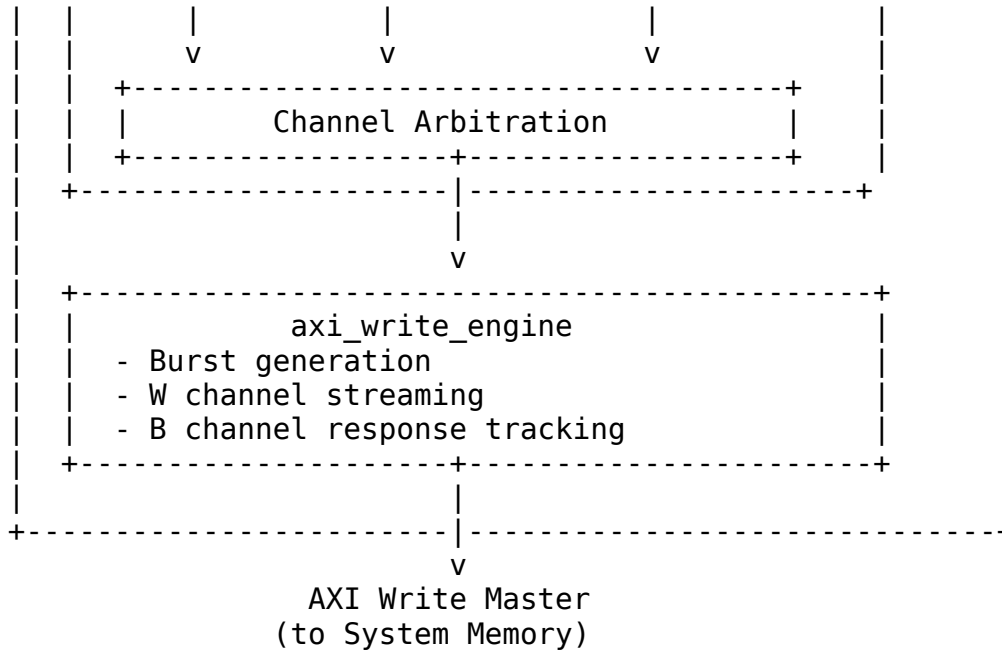

Source: [03_sink_data_path_block.mmd](#)

15.2 Parameters

```

parameter int NUM_CHANNELS = 8;
parameter int ADDR_WIDTH = 64;
parameter int DATA_WIDTH = 512;
parameter int AXI_ID_WIDTH = 8;
parameter int SRAM_DEPTH = 512;
parameter int AW_MAX_OUTSTANDING = 8;
parameter int W_PHASE_FIFO_DEPTH = 64;
parameter int B_PHASE_FIFO_DEPTH = 16;


```

: Table 3.3.1: Sink Data Path Parameters

15.3 Data Flow

15.3.1 Figure 3.3.2: Sink Path Data Flow Sequence


1. Fill Request
 - snk_fill_alloc_req = 1
 - snk_fill_alloc_size = N (beats to allocate)
 - snk_fill_alloc_id = channel

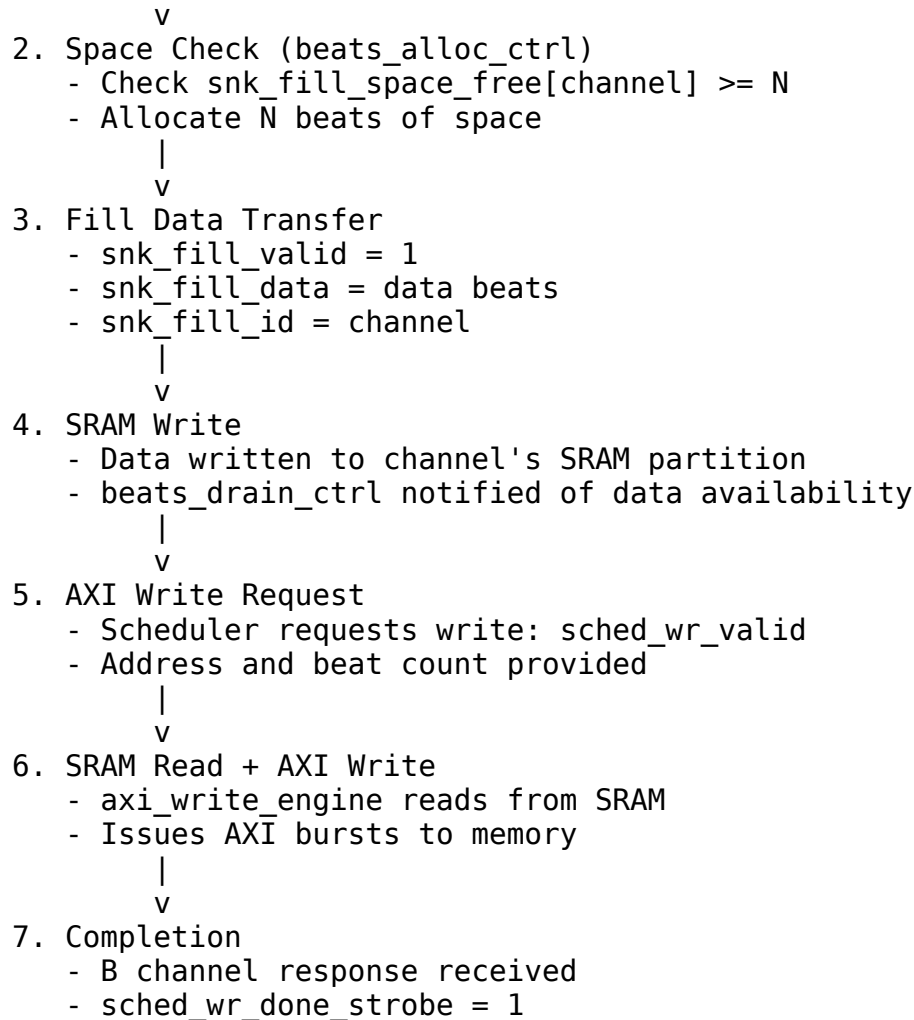


Source: [03_sink_data_flow.mmd](#)

15.4 Timing Diagram

15.4.1 Figure 3.3.3: Sink Path Transfer Timing

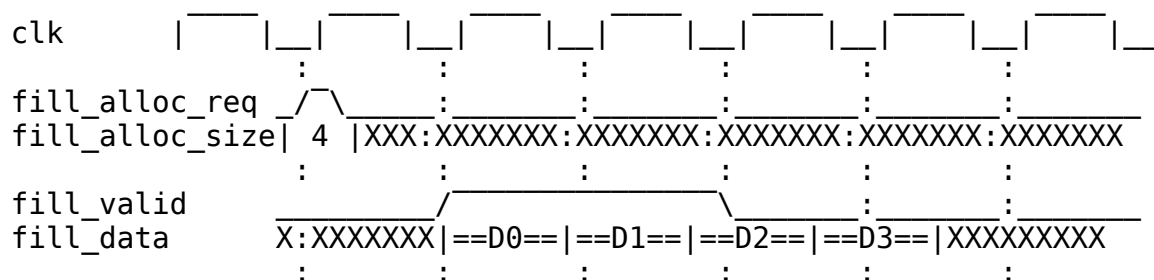

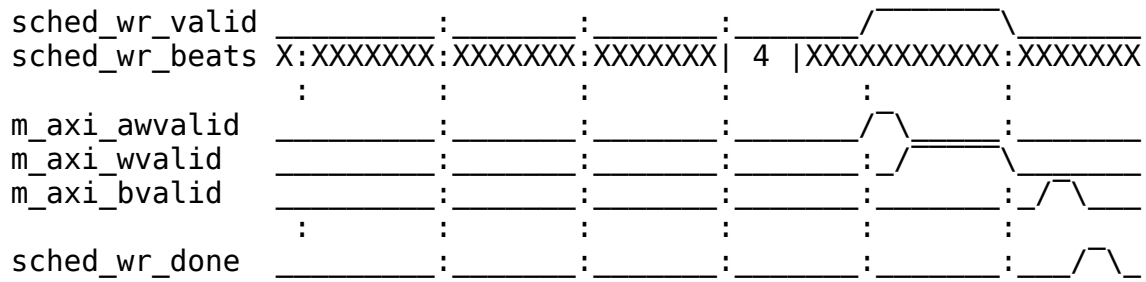

TODO: Replace with simulation-generated waveform showing complete sink transfer

15.5 Interface Summary

15.5.1 Fill Interface (Input)

Table 3.3.2: Fill Interface

Signal	Direction	Description
snk_fill_alloc_req	input	Allocation request
snk_fill_alloc_size	input	Beats to allocate
snk_fill_alloc_id	input	Channel ID
snk_fill_space_free	output	Available space per channel
snk_fill_valid	input	Data valid
snk_fill_ready	output	Ready for data
snk_fill_data	input	Fill data
snk_fill_last	input	Last beat
snk_fill_id	input	Channel ID

15.5.2 Scheduler Interface

Table 3.3.3: Scheduler Interface

Signal	Direction	Description
sched_wr_valid	input	Write request
sched_wr_addr	input	Destination address
sched_wr_beats	input	Beats to write
sched_wr_id	input	Channel ID

Signal	Direction	Description
sched_wr_done_strobe	output	Write complete
sched_wr_beats_done	output	Beats completed
sched_wr_error	output	Error flag

Last Updated: 2025-01-10

16 Sink Data Path AXIS Wrapper Specification

Module: sink_data_path_axis.sv **Location:** projects/components/rapids/rtl/macro_beats/ **Status:** Implemented **Last Updated:** 2025-01-10

16.1 Overview


The Sink Data Path AXIS wrapper adds an AXI-Stream slave interface to the sink data path, enabling standard AXIS ingress for network-to-memory transfers.


16.1.1 Key Features

- **AXI-Stream Slave Interface:** Standard AXIS for data ingress
- **Per-Channel TID Mapping:** AXIS TID maps to fill channel ID
- **TLAST to Last Mapping:** Packet boundary tracking
- **Core Sink Integration:** Wraps sink_data_path module

16.1.2 Block Diagram

16.1.3 Figure 3.4.1: Sink Data Path AXIS Block Diagram

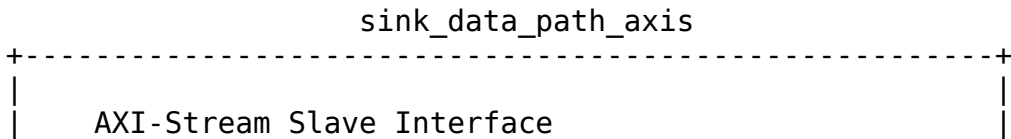

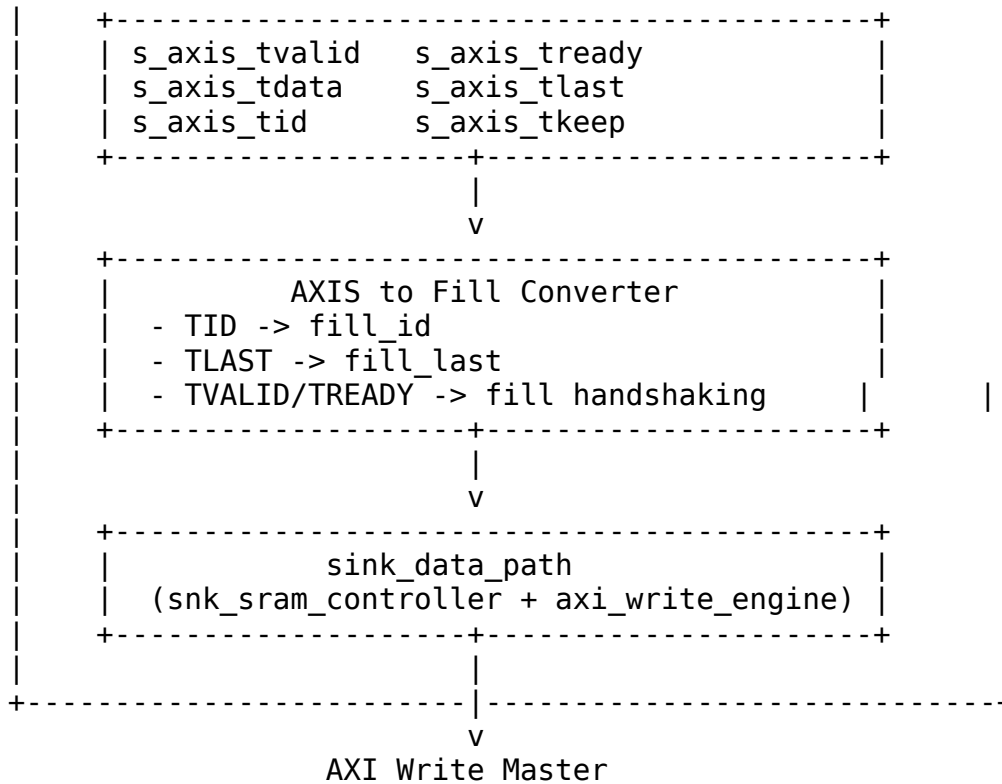

Source: [03_sink_data_path_axis_block.mmd](#)

16.2 Parameters

```

parameter int NUM_CHANNELS = 8;
parameter int ADDR_WIDTH = 64;
parameter int DATA_WIDTH = 512;
parameter int AXI_ID_WIDTH = 8;
parameter int SRAM_DEPTH = 512;
parameter int TID_WIDTH = 3; // log2(NUM_CHANNELS)
parameter int TDEST_WIDTH = 1;
parameter int TUSER_WIDTH = 1;
  
```

: Table 3.4.1: Sink Data Path AXIS Parameters

16.3 Port List

16.3.1 Clock and Reset

Table 3.4.2: Clock and Reset

Signal	Direction	Width	Description
clk	input	1	System clock
rst_n	input	1	Active-low reset

16.3.2 AXI-Stream Slave Interface

Table 3.4.3: AXI-Stream Slave Interface

Signal	Direction	Width	Description
s_axis_tvalid	input	1	Data valid
s_axis_tready	output	1	Ready for data
s_axis_tdata	input	DATA_WIDTH	Data payload
s_axis_tkeep	input	DATA_WIDTH/ 8	Byte enables
s_axis_tlast	input	1	Last beat of packet
s_axis_tid	input	TID_WIDTH	Stream ID (channel)
s_axis_tdest	input	TDEST_WIDTH	Destination
s_axis_tuser	input	TUSER_WIDTH	User sideband

16.3.3 Space Allocation Interface

Table 3.4.4: Space Allocation Interface

Signal	Direction	Width	Description
snk_alloc_req	input	1	Allocation request
snk_alloc_size	input	16	Beats to allocate
snk_alloc_id	input	3	Channel ID
snk_space_free	output	NC*16	Available space per

Signal	Direction	Width	Description
			channel

16.3.4 Scheduler Interface

Table 3.4.5: Scheduler Interface

Signal	Direction	Width	Description
sched_wr_valid	input	1	Write request
sched_wr_addr	input	AW	Destination address
sched_wr_beats	input	32	Beats to write
sched_wr_id	input	3	Channel ID
sched_wr_done_strobe	output	1	Write complete
sched_wr_beats_done	output	32	Beats completed
sched_wr_error	output	1	Error flag

16.3.5 AXI Write Master Interface


Table 3.4.6: AXI Write Master Interface

Signal	Direction	Width	Description
m_axi_awvalid	output	1	AW channel valid
m_axi_awready	input	1	AW channel ready
m_axi_awaddr	output	AW	Write address
m_axi_awlen	output	8	Burst length
m_axi_awsz	output	3	Burst size
m_axi_awburst	output	2	Burst type
m_axi_awid	output	ID_W	Transaction ID
m_axi_wvalid	output	1	W channel valid
m_axi_wready	input	1	W channel

Signal	Direction	Width	Description
			ready
m_axi_wdata	output	DW	Write data
m_axi_wstrb	output	DW/8	Write strobes
m_axi_wlast	output	1	Last beat
m_axi_bvalid	input	1	B channel valid
m_axi_bready	output	1	B channel ready
m_axi_bresp	input	2	Write response
m_axi_bid	input	ID_W	Response ID

16.4 Signal Mapping


16.4.1 Figure 3.4.2: AXIS to Fill Interface Mapping

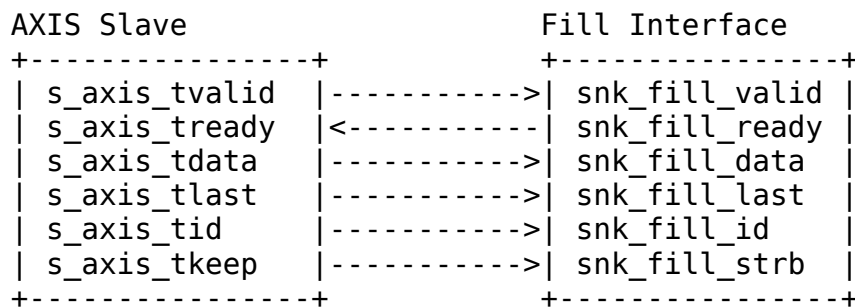


Source: [03_sink_axis_mapping.mmd](#)

16.5 Timing Diagram

16.5.1 Figure 3.4.3: AXIS Ingress Timing

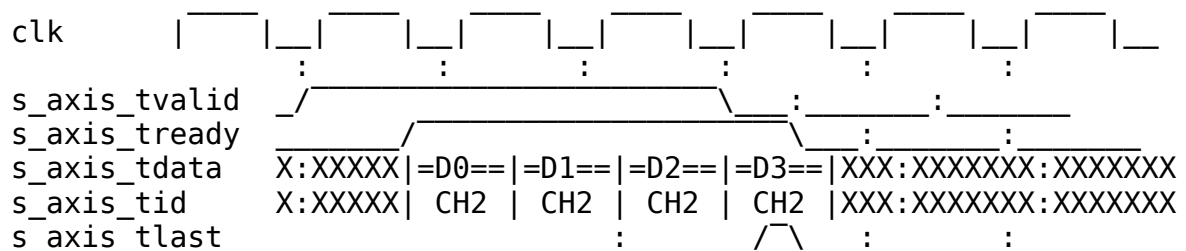

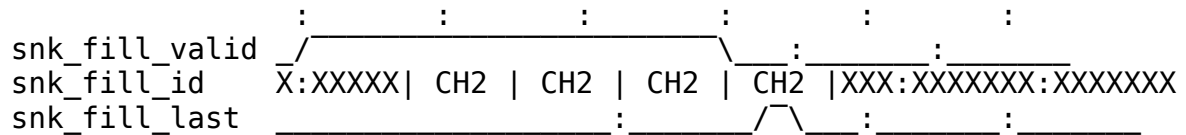

TODO: Replace with simulation-generated waveform showing AXIS packet reception

16.6 Usage Notes

1. **TID Usage:** AXIS TID directly maps to channel ID for multi-channel routing
2. **Allocation Required:** Space must be allocated via `snk_alloc_*` before AXIS data arrives
3. **Backpressure:** `s_axis_tready` deasserts when SRAM space exhausted
4. **Packet Boundaries:** TLAST marks end of AXIS packets, mapped to `fill_last`

Last Updated: 2025-01-10

RTL Design Sherpa · Learning Hardware Design Through Practice GitHub · Documentation Index · MIT License

17 Sink SRAM Controller Specification

Module: `snk_sram_controller.sv` **Location:** `projects/components/rapids/rtl/macro_beats/` **Status:** Implemented **Last Updated:** 2025-01-10

17.1 Overview

The Sink SRAM Controller manages 8 SRAM controller units, providing per-channel buffering with channel arbitration for the shared AXI write engine.

17.1.1 Key Features

- **8-Channel SRAM Array:** Instantiates 8 `snk_sram_controller_unit` modules
- **Channel Arbitration:** Round-robin access to shared AXI write engine

Source: [03_snk_sram_controller_block.mmd](#)

17.2 Parameters

```
parameter int NUM_CHANNELS = 8;
parameter int DATA_WIDTH = 512;
parameter int SRAM_DEPTH = 512; // Per-channel depth
parameter int ADDR_WIDTH = $clog2(SRAM_DEPTH);
```

: Table 3.5.1: Sink SRAM Controller Parameters

17.3 Port List

17.3.1 Clock and Reset

Table 3.5.2: Clock and Reset

Signal	Direction	Width	Description
clk	input	1	System clock
rst_n	input	1	Active-low reset

17.3.2 Per-Channel Fill Interface

Table 3.5.3: Per-Channel Fill Interface

Signal	Direction	Width	Description
snk_fill_allo c_req	input	NC	Allocation request per channel
snk_fill_allo c_size	input	NC*16	Beats to allocate
snk_fill_spac e_free	output	NC*16	Available space per channel

Signal	Direction	Width	Description
snk_fill_valid	input	NC	Fill data valid
snk_fill_ready	output	NC	Ready for fill data
snk_fill_data	input	NC*DW	Fill data
snk_fill_last	input	NC	Last beat marker

17.3.3 Arbitrated Drain Interface (to AXI Write Engine)

Table 3.5.4: Arbitrated Drain Interface

Signal	Direction	Width	Description
drain_req	output	1	Drain request (any channel)
drain_gnt	input	1	Drain grant
drain_id	output	3	Granted channel ID
drain_beats	output	16	Beats available to drain
sram_rd_en	input	1	SRAM read enable
sram_rd_addr	input	AW	SRAM read address
sram_rd_data	output	DW	SRAM read data

17.3.4 Per-Channel Status


Table 3.5.5: Per-Channel Status

Signal	Direction	Width	Description
channel_data_avail	output	NC	Data available per channel
channel_empty	output	NC	Channel empty flags
channel_full	output	NC	Channel full

Signal	Direction	Width	Description
			flags

17.4 Arbitration Logic

17.4.1 Figure 3.5.2: Channel Arbitration Timing

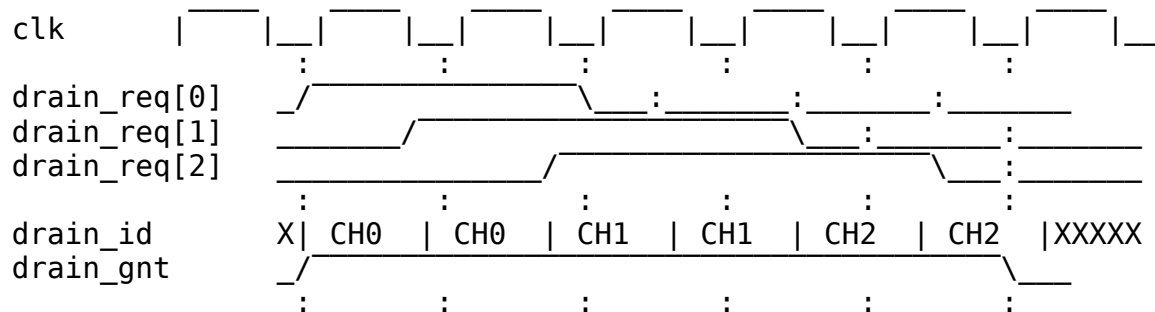

TODO: Replace with simulation-generated waveform showing round-robin arbitration

17.5 Integration with AXI Write Engine

```
snk_sram_controller #(
    .NUM_CHANNELS(8),
    .DATA_WIDTH(512),
    .SRAM_DEPTH(512)
) u_snk_sram_ctrl (
    .clk                (clk),
    .rst_n              (rst_n),

    // Per-channel fill interface
    .snk_fill_alloc_req (fill_alloc_req),
    .snk_fill_alloc_size (fill_alloc_size),
    .snk_fill_space_free (fill_space_free),
    .snk_fill_valid      (fill_valid),
    .snk_fill_ready      (fill_ready),
    .snk_fill_data        (fill_data),
    .snk_fill_last        (fill_last),

    // Arbitrated drain interface
    .drain_req            (sram_drain_req),
    .drain_gnt            (sram_drain_gnt),
    .drain_id             (sram_drain_id),
    .drain_beats           (sram_drain_beats),
```

```

.sram_rd_en          (sram_rd_en),
.sram_rd_addr        (sram_rd_addr),
.sram_rd_data        (sram_rd_data),

// Status
.channel_data_avail   (channel_data_avail),
.channel_empty        (channel_empty),
.channel_full         (channel_full)
);

```

Last Updated: 2025-01-10

RTL Design Sherpa · Learning Hardware Design Through Practice · [GitHub](#) · [Documentation Index](#) · [MIT License](#)

18 Sink SRAM Controller Unit Specification

Module: snk_sram_controller_unit.sv **Location:** projects/components/rapids/rtl/macro_beats/ **Status:** Implemented **Last Updated:** 2025-01-10

18.1 Overview

The Sink SRAM Controller Unit manages a single channel's SRAM buffer with beat-level flow control using virtual FIFOs (alloc_ctrl and drain_ctrl).


18.1.1 Key Features


- **Single-Channel SRAM:** Dedicated SRAM buffer for one channel
- **Virtual FIFO Flow Control:** beats_alloc_ctrl + beats_drain_ctrl
- **Latency Bridge:** Compensates for pipeline timing
- **Simple SRAM:** No reset on memory, only on control logic

18.1.2 Block Diagram

18.1.3 Figure 3.6.1: Sink SRAM Controller Unit Block Diagram

snk_sram_controller_unit

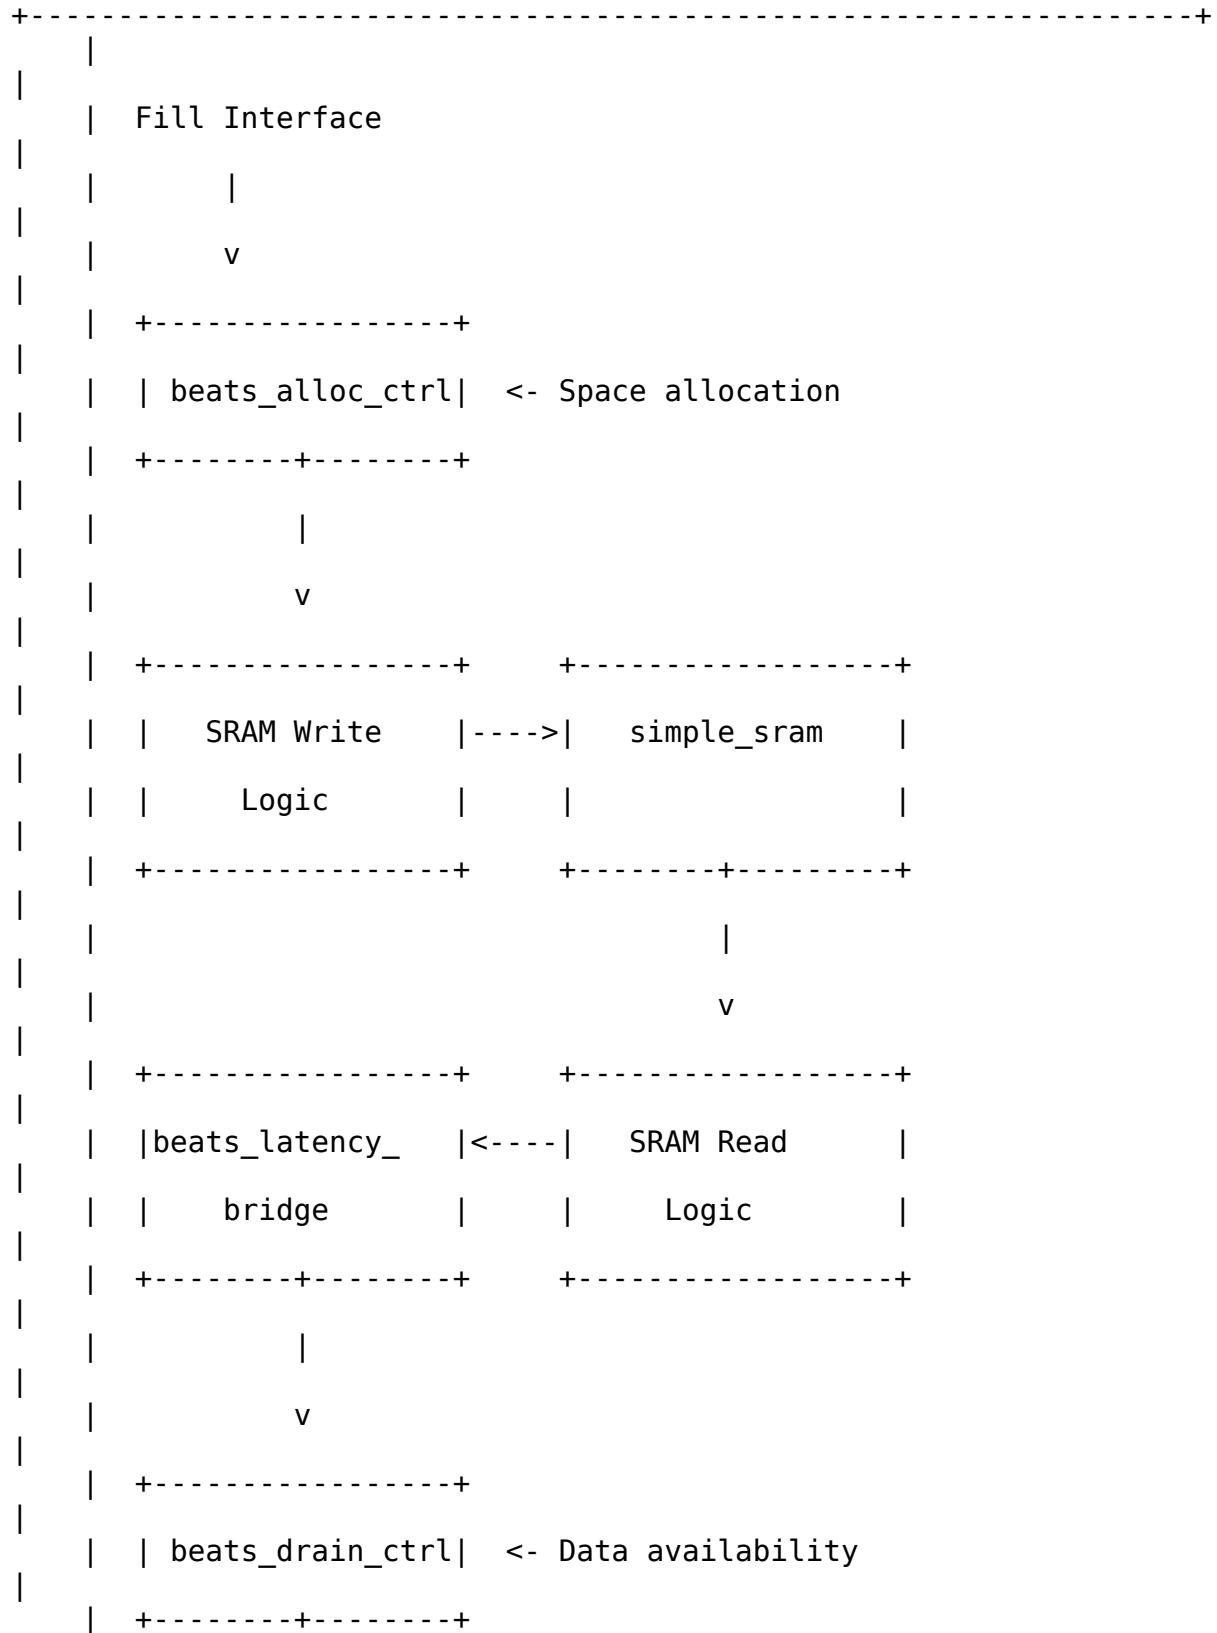

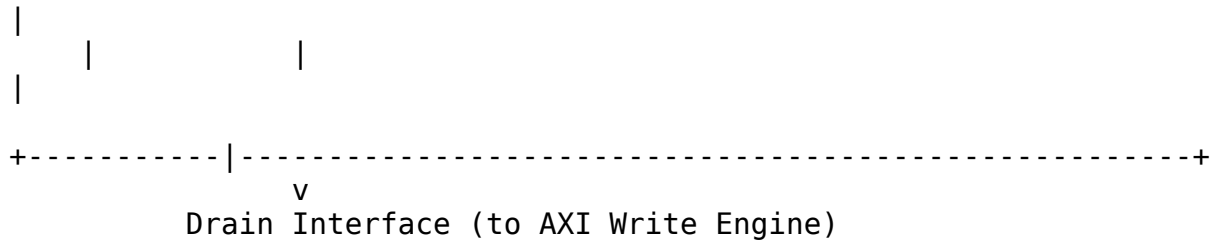

Source: [03_snk_sram_controller_unit_block.mmd](#)

18.2 Parameters

```
parameter int DATA_WIDTH = 512;
parameter int SRAM_DEPTH = 512;
parameter int ADDR_WIDTH = $clog2(SRAM_DEPTH);
parameter int LATENCY_BRIDGE_DEPTH = 4;
```

: Table 3.6.1: Sink SRAM Controller Unit Parameters

18.3 Port List

18.3.1 Clock and Reset

Table 3.6.2: Clock and Reset

Signal	Direction	Width	Description
clk	input	1	System clock
rst_n	input	1	Active-low reset

18.3.2 Fill Interface (from Network)

Table 3.6.3: Fill Interface

Signal	Direction	Width	Description
fill_alloc_req	input	1	Allocate space
fill_alloc_size	input	16	Beats to allocate
fill_space_free	output	16	Available space

Signal	Direction	Width	Description
fill_valid	input	1	Fill data valid
fill_ready	output	1	Ready for fill data
fill_data	input	DW	Fill data
fill_last	input	1	Last beat marker

18.3.3 Drain Interface (to AXI Write Engine)

Table 3.6.4: Drain Interface

Signal	Direction	Width	Description
drain_req	output	1	Data available to drain
drain_gnt	input	1	Drain grant
drain_beats	output	16	Beats available
sram_rd_en	input	1	SRAM read enable
sram_rd_addr	input	AW	SRAM read address
sram_rd_data	output	DW	SRAM read data

18.3.4 Status

Table 3.6.5: Status Interface

Signal	Direction	Width	Description
data_avail	output	1	Data available flag
empty	output	1	Buffer empty
full	output	1	Buffer full

18.4 Internal Architecture

18.4.1 Figure 3.6.2: Internal Data Flow

Fill Path:

```

fill_alloc_req -----> beats_alloc_ctrl -----> wr_ptr management
fill_valid/data -----> | -----> SRAM write
fill_ready <----- | <----- space_free > 0

```

Drain Path:


```

SRAM read <----- | <----- sram_rd_en
|
v
beats_latency_bridge -----+-----> timing compensation
|
v
beats_drain_ctrl -----+-----> data_avail tracking
|
v
drain_req -----> channel arbiter

```

18.5 Timing Diagram

18.5.1 Figure 3.6.3: Fill and Drain Timing

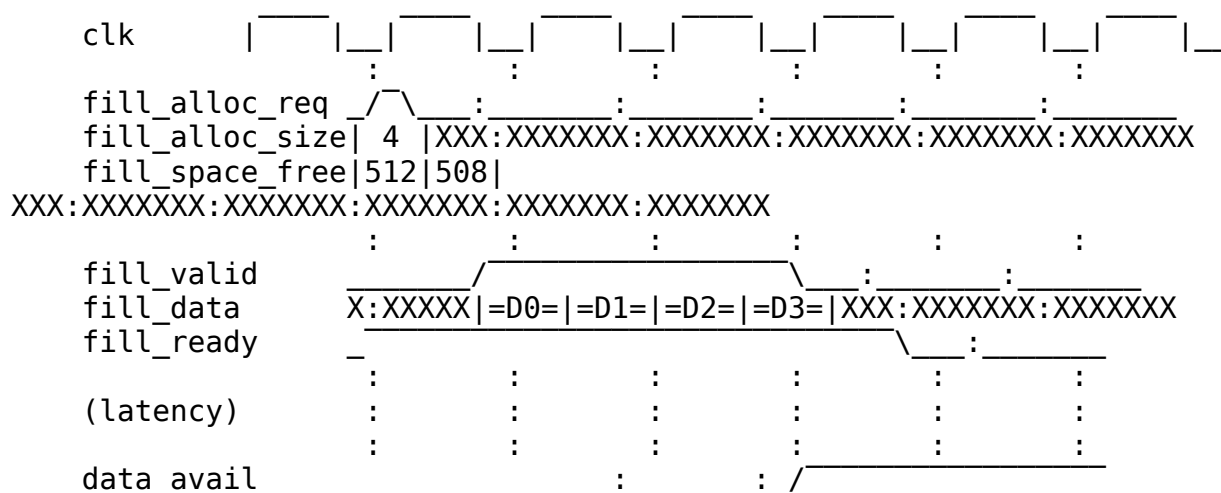

```

drain_req      _____:_____:_____/_____
drain_beats    X:XXXXXXXX:XXXXXXXX:XXXXXXX| 4 |XXXXXXXXXX:XXXXXXX


```

TODO: Replace with simulation-generated waveform showing complete fill-to-drain flow

18.6 Virtual FIFO Concept

The controller uses “virtual FIFOs” - pointer-based flow control without duplicating data storage:

18.6.1 Figure 3.6.4: Virtual FIFO Operation

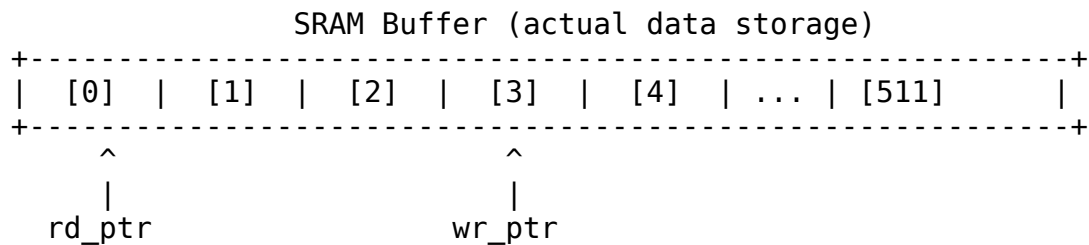

beats_alloc_ctrl: Tracks wr_ptr, manages free space
beats_drain_ctrl: Tracks rd_ptr, manages data availability

No data duplication - just pointer arithmetic!

18.7 Integration Example

```

snk_sram_controller_unit #(
    .DATA_WIDTH(512),
    .SRAM_DEPTH(512),
    .LATENCY_BRIDGE_DEPTH(4)
) u_snk_sram_unit (
    .clk          (clk),
    .rst_n        (rst_n),

    // Fill interface
    .fill_alloc_req    (fill_alloc_req[ch]),
    .fill_alloc_size   (fill_alloc_size[ch]),
    .fill_space_free   (fill_space_free[ch]),
    .fill_valid        (fill_valid[ch]),
    .fill_ready        (fill_ready[ch]),
    .fill_data         (fill_data[ch]),
    .fill_last         (fill_last[ch]),

    // Drain interface

```

```

        .drain_req          (drain_req[ch]),
        .drain_gnt         (drain_gnt[ch]),
        .drain_beats       (drain_beats[ch]),
        .sram_rd_en        (sram_rd_en[ch]),
        .sram_rd_addr      (sram_rd_addr[ch]),
        .sram_rd_data      (sram_rd_data[ch]),

        // Status
        .data_avail        (data_avail[ch]),
        .empty             (empty[ch]),
        .full              (full[ch])
    );

```

Last Updated: 2025-01-10

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

19 Source Data Path Specification

Module: source_data_path.sv **Location:**

projects/components/rapids/rtl/macro_beats/ **Status:** Implemented **Last Updated:** 2025-01-10

19.1 Overview


The Source Data Path integrates the AXI read engine and SRAM controller for memory-to-network transfers. Data is read from system memory via AXI4, buffered in SRAM, and delivered through the drain interface to the network.

19.1.1 Key Features

- **AXI Read Engine:** Streaming burst reads from system memory
- **8-Channel SRAM Controller:** Per-channel buffering with flow control
- **Beat-Level Tracking:** Precise flow control at beat granularity
- **Scheduler Integration:** Receives transfer requests from scheduler

19.1.2 Block Diagram

19.1.3 Figure 3.7.1: Source Data Path Block Diagram

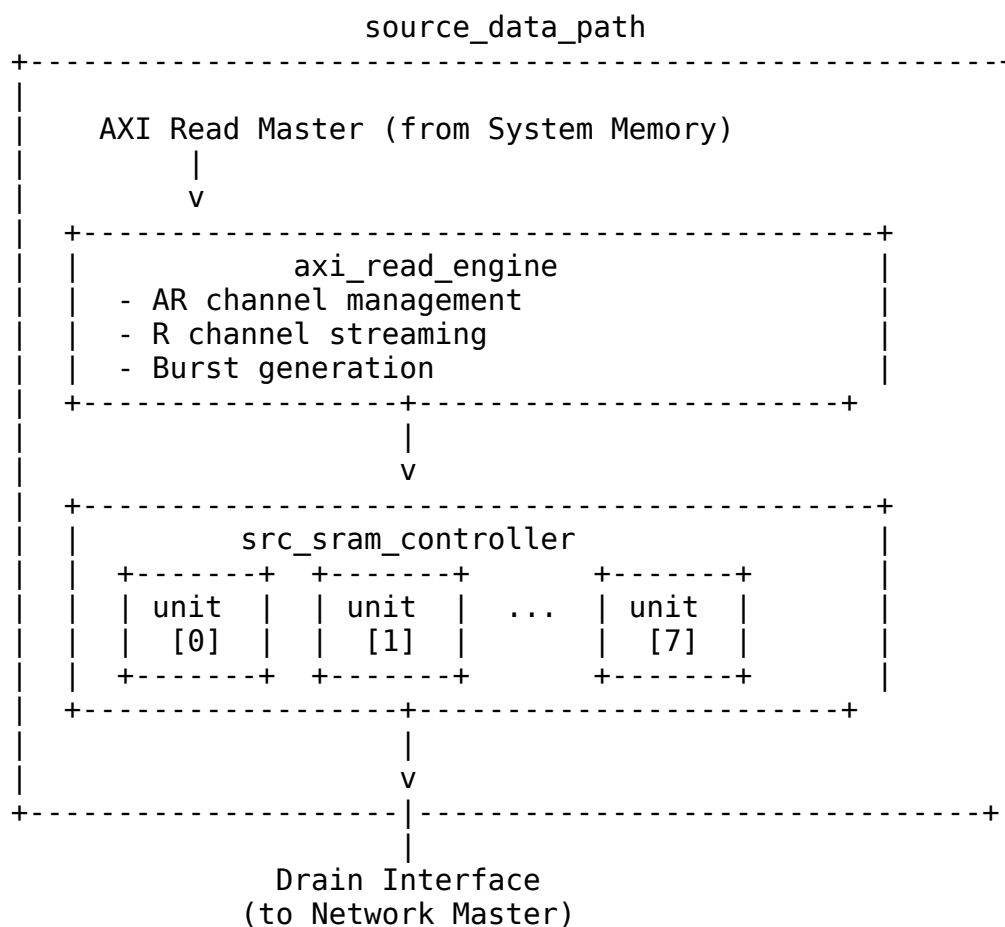

Source: [03_source_data_path_block.mmd](#)

19.2 Parameters

```
parameter int NUM_CHANNELS = 8;
parameter int ADDR_WIDTH = 64;
parameter int DATA_WIDTH = 512;
parameter int AXI_ID_WIDTH = 8;
parameter int SRAM_DEPTH = 512;
parameter int AR_MAX_OUTSTANDING = 8;
parameter int R_PHASE_FIFO_DEPTH = 64;
```

: Table 3.7.1: Source Data Path Parameters

19.3 Data Flow

19.3.1 Figure 3.7.2: Source Path Data Flow Sequence

1. Scheduler Read Request
 - sched_rd_valid = 1
 - sched_rd_addr = source address
 - sched_rd_beats = N
 - sched_rd_id = channel

|
v
2. Space Check (beats_alloc_ctrl)
 - Check src_drain_space_free[channel] >= N
 - Allocate N beats of space

|
v
3. AXI Read Transaction
 - axi_read_engine issues AR
 - m_axi_araddr = sched_rd_addr
 - m_axi_arlen = calculated from beats

|
v
4. R Channel Data
 - Data arrives on m_axi_rdata
 - Written to channel's SRAM partition

|
v
5. SRAM Write Complete
 - beats_drain_ctrl notified via latency bridge
 - Data available for drain

|
v
6. Drain Interface
 - src_drain_valid = 1
 - Data delivered to network master

|
v
7. Completion
 - sched_rd_done_strobe = 1
 - Scheduler notified of completion

Source: [03_source_data_flow.mmd](#)

19.4 Port List

19.4.1 Clock and Reset

Table 3.7.2: Clock and Reset

Signal	Direction	Width	Description
clk	input	1	System clock
rst_n	input	1	Active-low reset

19.4.2 Scheduler Interface

Table 3.7.3: Scheduler Interface

Signal	Direction	Width	Description
sched_rd_valid	input	1	Read request
sched_rd_addr	input	AW	Source address
sched_rd_beats	input	32	Beats to read
sched_rd_id	input	3	Channel ID
sched_rd_done_strobe	output	1	Read complete
sched_rd_beats_done	output	32	Beats completed
sched_rd_error	output	1	Error flag

19.4.3 AXI Read Master Interface

Table 3.7.4: AXI Read Master Interface

Signal	Direction	Width	Description
m_axi_arvalid	output	1	AR channel valid
m_axi_arready	input	1	AR channel ready
m_axi_araddr	output	AW	Read address
m_axi_arlen	output	8	Burst length
m_axi_arsize	output	3	Burst size

Signal	Direction	Width	Description
m_axi_arburst	output	2	Burst type
m_axi_arid	output	ID_W	Transaction ID
m_axi_rvalid	input	1	R channel valid
m_axi_rready	output	1	R channel ready
m_axi_rdata	input	DW	Read data
m_axi_rresp	input	2	Read response
m_axi_rid	input	ID_W	Response ID
m_axi_rlast	input	1	Last beat


19.4.4 Drain Interface (Output to Network)

Table 3.7.5: Drain Interface

Signal	Direction	Width	Description
src_drain_val id	output	1	Drain data valid
src_drain_rea dy	input	1	Ready for drain data
src_drain_dat a	output	DW	Drain data
src_drain_las t	output	1	Last beat marker
src_drain_id	output	3	Channel ID
src_drain_dat a_avail	output	NC*16	Available data per channel

19.5 Timing Diagram

19.5.1 Figure 3.7.3: Source Path Transfer Timing

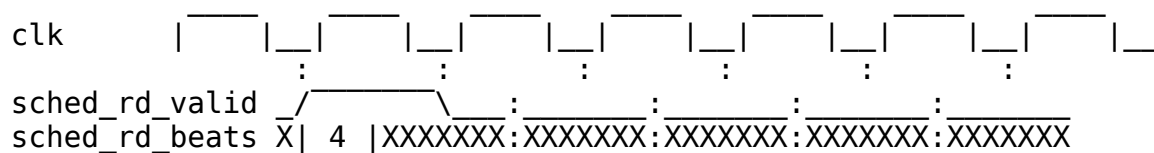

```

sched_rd_addr  X|ADDR|XXXXXXXX:XXXXXXXX:XXXXXXXX:XXXXXXXX:XXXXXXXX
                :           :           :           :           :
m_axi_arvalid  _____/_____ : _____ : _____ : _____
m_axi_arlen    X:XXXXXX| 3 |XXX:XXXXXXXX:XXXXXXXX:XXXXXXXX:XXXXXXXX
                :           :           :           :           :
m_axi_rvalid   _____/_____ : _____ : _____ : _____
m_axi_rdata    X:XXXXXXXX|=D0|=D1|=D2|=D3|=XXX:XXXXXXXX
m_axi_rlast    _____/_____ : _____ : _____ : _____
                :           :           :           :           :
src_drain_valid _____/_____ : _____ : _____ : _____
src_drain_data X:XXXXXXXX:XXXXXXXX:XXXXXXXX|=D0|=D1|=D2|=D3|=
                :           :           :           :           :
sched_rd_done  _____ : _____/_____

```

TODO: Replace with simulation-generated waveform showing complete source transfer

19.6 Integration Example

```

source_data_path #(
    .NUM_CHANNELS(8),
    .ADDR_WIDTH(64),
    .DATA_WIDTH(512),
    .SRAM_DEPTH(512)
) u_source_path (
    .clk                (clk),
    .rst_n              (rst_n),

    // Scheduler interface
    .sched_rd_valid     (sched_rd_valid),
    .sched_rd_addr      (sched_rd_addr),
    .sched_rd_beats      (sched_rd_beats),
    .sched_rd_id         (sched_rd_id),
    .sched_rd_done_strobe (sched_rd_done_strobe),
    .sched_rd_beats_done (sched_rd_beats_done),
    .sched_rd_error      (sched_rd_error),

    // AXI read master
    .m_axi_arvalid       (src_axi_arvalid),
    .m_axi_arready       (src_axi_arready),
    .m_axi_araddr        (src_axi_araddr),
    .m_axi_arlen         (src_axi_arlen),
    .m_axi_rvalid        (src_axi_rvalid),
    .m_axi_rready        (src_axi_rready),
    .m_axi_rdata         (src_axi_rdata),
    .m_axi_rlast         (src_axi_rlast),

```

```

// Drain interface
.src_drain_valid      (src_drain_valid),
.src_drain_ready      (src_drain_ready),
.src_drain_data        (src_drain_data),
.src_drain_last        (src_drain_last),
.src_drain_id          (src_drain_id),
.src_drain_data_avail  (src_data_avail)
);

```

Last Updated: 2025-01-10

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

20 Source Data Path AXIS Wrapper Specification

Module: source_data_path_axis.sv **Location:**

projects/components/rapids/rtl/macro_beats/ **Status:** Implemented **Last Updated:** 2025-01-10

20.1 Overview


The Source Data Path AXIS wrapper adds an AXI-Stream master interface to the source data path, enabling standard AXIS egress for memory-to-network transfers.


20.1.1 Key Features

- **AXI-Stream Master Interface:** Standard AXIS for data egress
- **Per-Channel TID Mapping:** Drain channel ID maps to AXIS TID
- **TLAST Generation:** Packet boundary marking
- **Core Source Integration:** Wraps source_data_path module

20.1.2 Block Diagram

20.1.3 Figure 3.8.1: Source Data Path AXIS Block Diagram



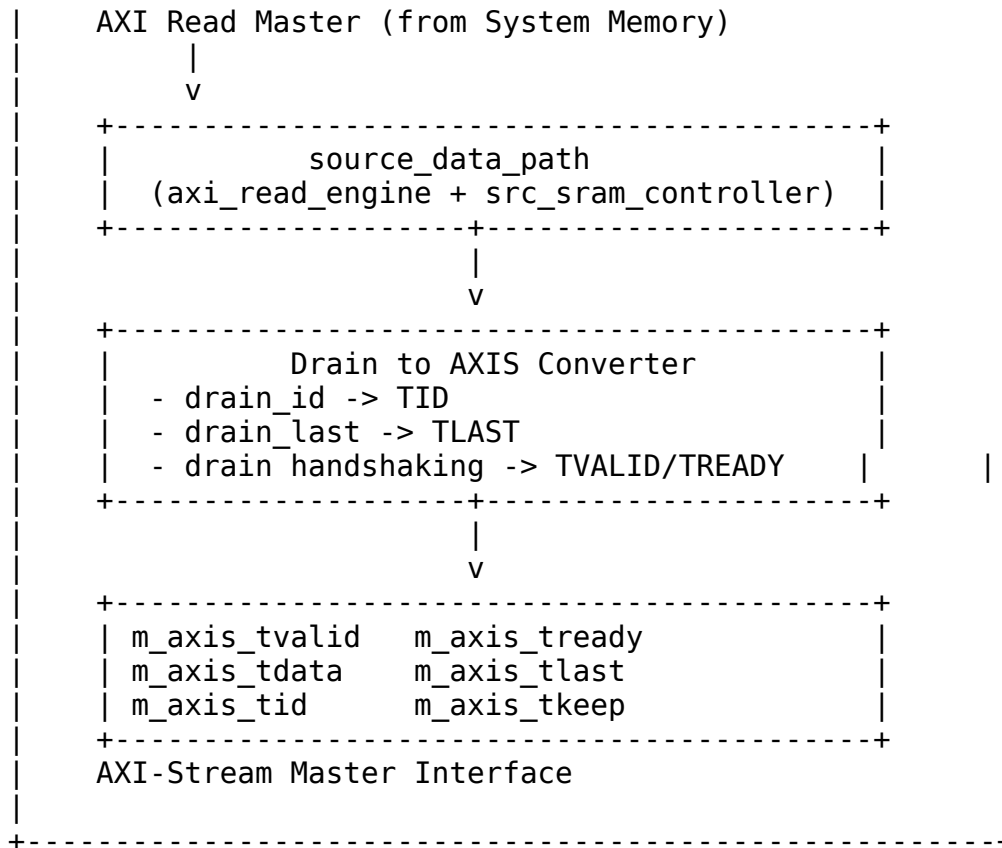

Source: [03_source_data_path_axis_block.mmd](#)

20.2 Parameters

```

parameter int NUM_CHANNELS = 8;
parameter int ADDR_WIDTH = 64;
parameter int DATA_WIDTH = 512;
parameter int AXI_ID_WIDTH = 8;
parameter int SRAM_DEPTH = 512;
parameter int TID_WIDTH = 3;           // log2(NUM_CHANNELS)
parameter int TDEST_WIDTH = 1;
parameter int TUSER_WIDTH = 1;

```

: Table 3.8.1: Source Data Path AXIS Parameters

20.3 Port List

20.3.1 Clock and Reset

Table 3.8.2: Clock and Reset

Signal	Direction	Width	Description
clk	input	1	System clock
rst_n	input	1	Active-low reset

20.3.2 Scheduler Interface

Table 3.8.3: Scheduler Interface

Signal	Direction	Width	Description
sched_rd_valid	input	1	Read request
sched_rd_addr	input	AW	Source address
sched_rd_beats	input	32	Beats to read
sched_rd_id	input	3	Channel ID
sched_rd_done_strobe	output	1	Read complete
sched_rd_beats_done	output	32	Beats completed
sched_rd_error	output	1	Error flag

20.3.3 AXI Read Master Interface

Table 3.8.4: AXI Read Master Interface

Signal	Direction	Width	Description
m_axi_arvalid	output	1	AR channel valid
m_axi_arready	input	1	AR channel ready
m_axi_araddr	output	AW	Read address
m_axi_arlen	output	8	Burst length
m_axi_arsize	output	3	Burst size

Signal	Direction	Width	Description
m_axi_arburst	output	2	Burst type
m_axi_arid	output	ID_W	Transaction ID
m_axi_rvalid	input	1	R channel valid
m_axi_rready	output	1	R channel ready
m_axi_rdata	input	DW	Read data
m_axi_rresp	input	2	Read response
m_axi_rid	input	ID_W	Response ID
m_axi_rlast	input	1	Last beat


20.3.4 AXI-Stream Master Interface

Table 3.8.5: AXI-Stream Master Interface

Signal	Direction	Width	Description
m_axis_tvalid	output	1	Data valid
m_axis_tready	input	1	Ready for data
m_axis_tdata	output	DATA_WIDTH	Data payload
m_axis_tkeep	output	DATA_WIDTH/8	Byte enables
m_axis_tlast	output	1	Last beat of packet
m_axis_tid	output	TID_WIDTH	Stream ID (channel)
m_axis_tdest	output	TDEST_WIDTH	Destination
m_axis_tuser	output	TUSER_WIDTH	User sideband

20.4 Signal Mapping

20.4.1 Figure 3.8.2: Drain to AXIS Interface Mapping

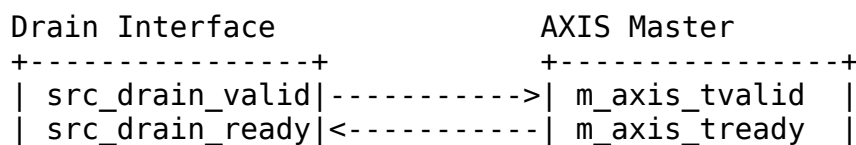


src_drain_data	----->	m_axis_tdata	
src_drain_last	----->	m_axis_tlast	
src_drain_id	----->	m_axis_tid	
src_drain_strb	----->	m_axis_tkeep	
+-----+		+-----+	

Source: [03_source_axis_mapping.mmd](#)

20.5 Timing Diagram

20.5.1 Figure 3.8.3: AXIS Egress Timing

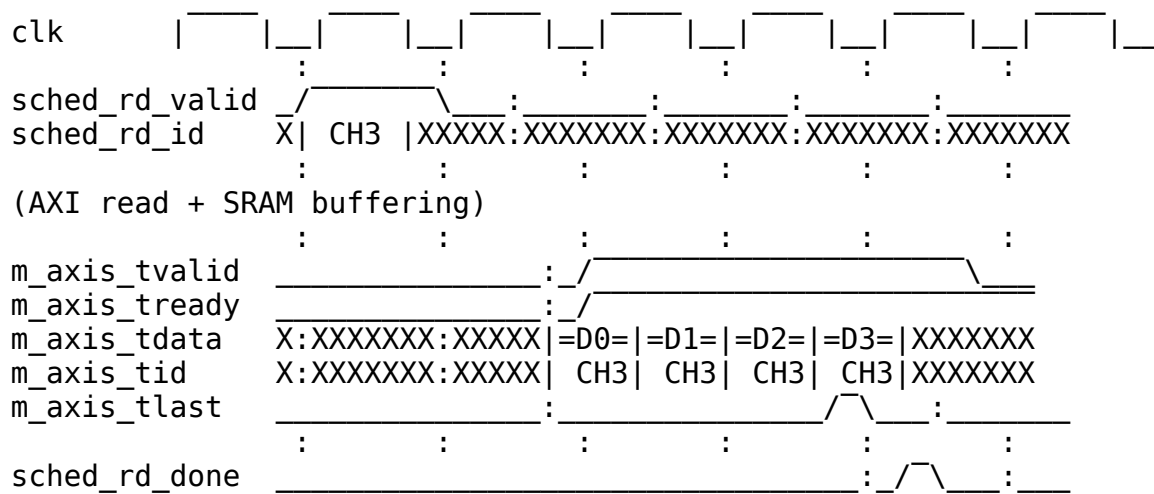

TODO: Replace with simulation-generated waveform showing AXIS packet transmission

20.6 Usage Notes

1. **TID Generation:** Drain channel ID directly maps to AXIS TID
 2. **TLAST Generation:** Drain last signal maps to AXIS TLAST
 3. **Backpressure:** Network TREADY backpressure propagates to SRAM drain
 4. **Packet Boundaries:** TLAST marks end of AXIS packets
-

20.7 Integration Example

```
source_data_path_axis #(
    .NUM_CHANNELS(8),
```



```

        .ADDR_WIDTH(64),
        .DATA_WIDTH(512),
        .TID_WIDTH(3)
    ) u_source_axis (
        .clk                (clk),
        .rst_n              (rst_n),

        // Scheduler interface
        .sched_rd_valid     (sched_rd_valid),
        .sched_rd_addr      (sched_rd_addr),
        .sched_rd_beats     (sched_rd_beats),
        .sched_rd_id        (sched_rd_id),
        .sched_rd_done_strobe (sched_rd_done_strobe),

        // AXI read master
        .m_axi_arvalid      (src_axi_arvalid),
        .m_axi_arready      (src_axi_arready),
        .m_axi_araddr       (src_axi_araddr),
        .m_axi_rvalid       (src_axi_rvalid),
        .m_axi_rready       (src_axi_rready),
        .m_axi_rdata        (src_axi_rdata),

        // AXIS master
        .m_axis_tvalid      (network_tvalid),
        .m_axis_tready      (network_tready),
        .m_axis_tdata       (network_tdata),
        .m_axis_tlast       (network_tlast),
        .m_axis_tid         (network_tid)
    );

```

Last Updated: 2025-01-10

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

21 Source SRAM Controller Specification

Module: src_sram_controller.sv **Location:**

projects/components/rapids/rtl/macro_beats/ **Status:** Implemented **Last Updated:** 2025-01-10

21.1 Overview

The Source SRAM Controller manages 8 SRAM controller units for the source data path, providing per-channel buffering with channel arbitration for data delivery to the network.


21.1.1 Key Features


- **8-Channel SRAM Array:** Instantiates 8 `src_sram_controller_unit` modules
- **Channel Arbitration:** Round-robin access for drain requests
- **Flow Control Integration:** Per-channel `alloc_ctrl` and `drain_ctrl`
- **Data Availability Tracking:** Reports available data per channel

21.1.2 Block Diagram

21.1.3 Figure 3.9.1: Source SRAM Controller Block Diagram

`src_sram_controller`

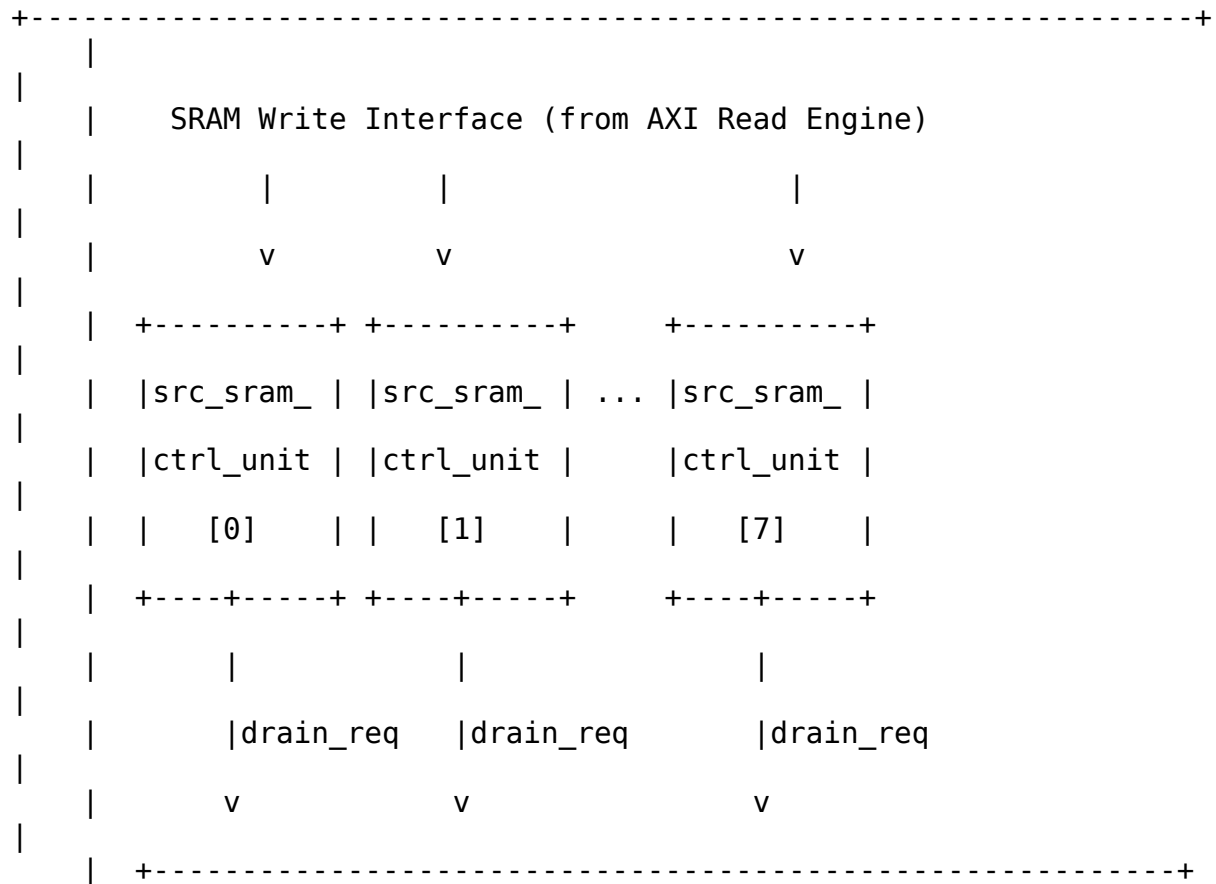

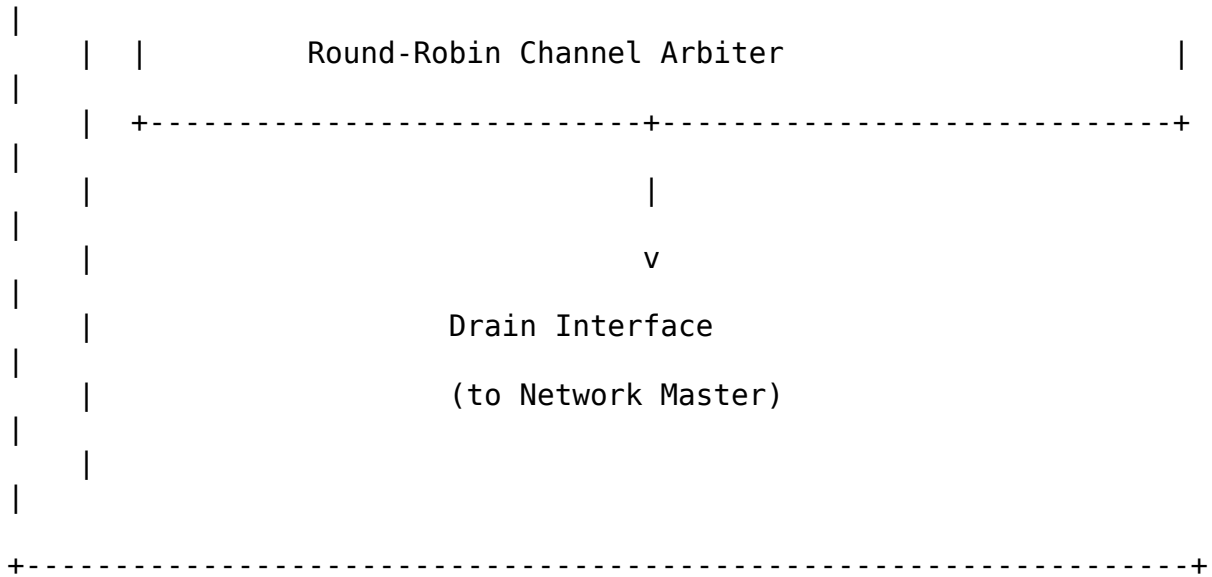

Source: [03_src_sram_controller_block.mmd](#)

21.2 Parameters

```

parameter int NUM_CHANNELS = 8;
parameter int DATA_WIDTH = 512;
parameter int SRAM_DEPTH = 512; // Per-channel depth
parameter int ADDR_WIDTH = $clog2(SRAM_DEPTH);
  
```

: Table 3.9.1: Source SRAM Controller Parameters

21.3 Port List

21.3.1 Clock and Reset

Table 3.9.2: Clock and Reset

Signal	Direction	Width	Description
clk	input	1	System clock
rst_n	input	1	Active-low reset

21.3.2 Per-Channel Fill Interface (from AXI Read Engine)

Table 3.9.3: Per-Channel Fill Interface

Signal	Direction	Width	Description
src_fill_allo c_req	input	NC	Allocation request per channel
src_fill_allo c_size	input	NC*16	Beats to allocate
src_fill_spac e_free	output	NC*16	Available space per channel
src_fill_vali d	input	NC	Fill data valid
src_fill_read y	output	NC	Ready for fill data
src_fill_data	input	NC*DW	Fill data
src_fill_last	input	NC	Last beat marker

21.3.3 Arbitrated Drain Interface (to Network)

Table 3.9.4: Arbitrated Drain Interface

Signal	Direction	Width	Description
drain_valid	output	1	Drain data valid
drain_ready	input	1	Ready for drain
drain_data	output	DW	Drain data
drain_id	output	3	Source channel ID
drain_last	output	1	Last beat of transfer


21.3.4 Per-Channel Status

Table 3.9.5: Per-Channel Status

Signal	Direction	Width	Description
channel_data_avail	output	NC*16	Data available per channel
channel_empty	output	NC	Channel empty flags
channel_full	output	NC	Channel full flags

21.4 Arbitration Logic

21.4.1 Figure 3.9.2: Source Channel Arbitration

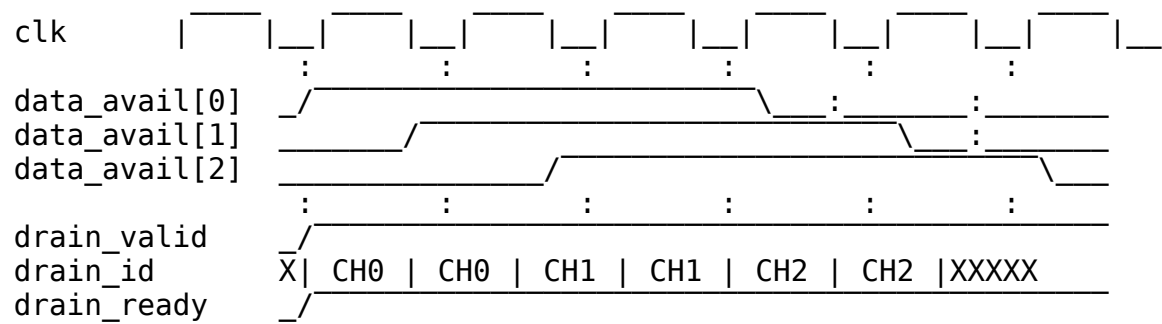

TODO: Replace with simulation-generated waveform showing round-robin drain

21.5 Comparison: Sink vs Source SRAM Controller

Table 3.9.6: Sink vs Source Controller Comparison

Aspect	Sink Controller	Source Controller
Fill Source	Network ingress	AXI read data
Drain Destination	AXI write engine	Network egress
Fill Interface	Per-channel from network	Per-channel from AXI R
Drain Interface	Arbitrated SRAM read	Arbitrated drain to network

Aspect	Sink Controller	Source Controller
Primary Use	Network -> Memory	Memory -> Network

21.6 Integration Example

```
src_sram_controller #(
    .NUM_CHANNELS(8),
    .DATA_WIDTH(512),
    .SRAM_DEPTH(512)
) u_src_sram_ctrl (
    .clk                (clk),
    .rst_n              (rst_n),

    // Per-channel fill interface (from AXI read engine)
    .src_fill_alloc_req (fill_alloc_req),
    .src_fill_alloc_size (fill_alloc_size),
    .src_fill_space_free (fill_space_free),
    .src_fill_valid      (fill_valid),
    .src_fill_ready      (fill_ready),
    .src_fill_data        (fill_data),
    .src_fill_last        (fill_last),

    // Arbitrated drain interface (to network)
    .drain_valid          (src_drain_valid),
    .drain_ready          (src_drain_ready),
    .drain_data           (src_drain_data),
    .drain_id             (src_drain_id),
    .drain_last           (src_drain_last),

    // Status
    .channel_data_avail   (channel_data_avail),
    .channel_empty        (channel_empty),
    .channel_full         (channel_full)
);
```

Last Updated: 2025-01-10

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

22 Source SRAM Controller Unit Specification

Module: `src_sram_controller_unit.sv` **Location:**

`projects/components/rapids/rtl/macro_beats/` **Status:** Implemented **Last Updated:** 2025-01-10

22.1 Overview


The Source SRAM Controller Unit manages a single channel's SRAM buffer for the source data path, with beat-level flow control using virtual FIFOs.


22.1.1 Key Features

- **Single-Channel SRAM:** Dedicated SRAM buffer for one channel
- **Virtual FIFO Flow Control:** `beats_alloc_ctrl` + `beats_drain_ctrl`
- **Latency Bridge:** Compensates for pipeline timing
- **Simple SRAM:** No reset on memory, only on control logic

22.1.2 Block Diagram

22.1.3 Figure 3.10.1: Source SRAM Controller Unit Block Diagram

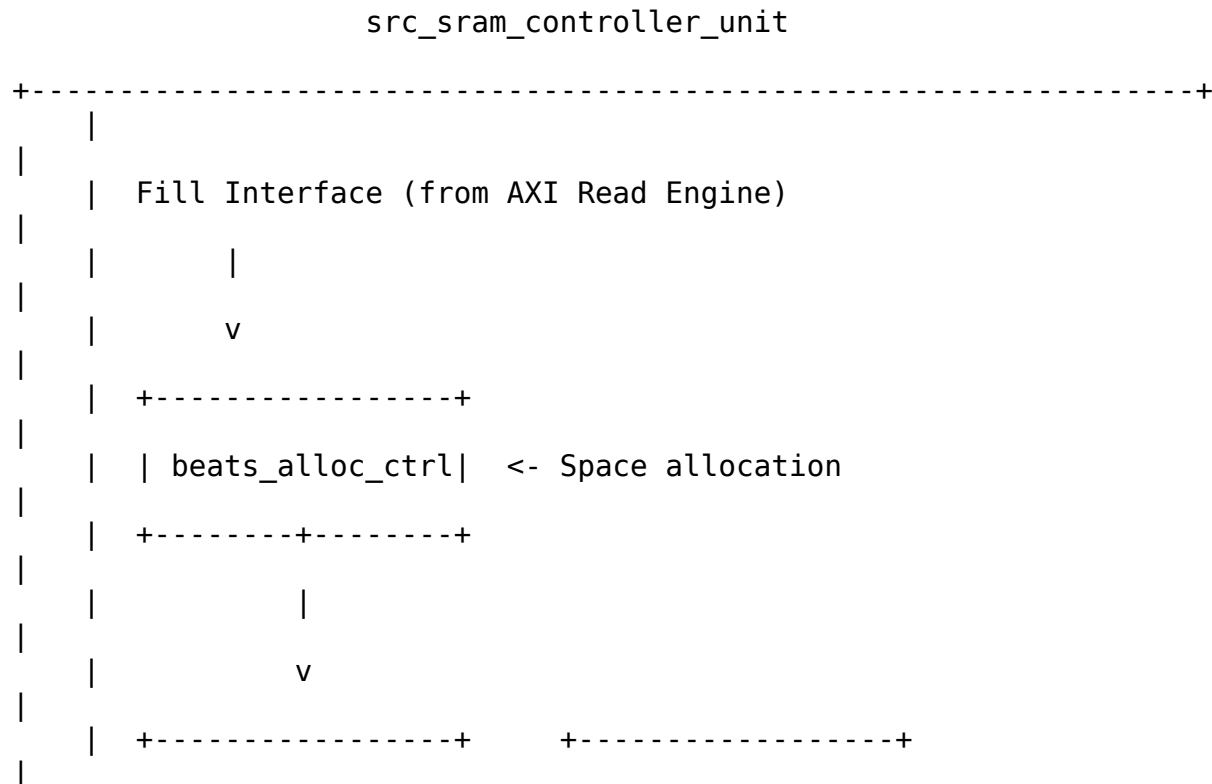

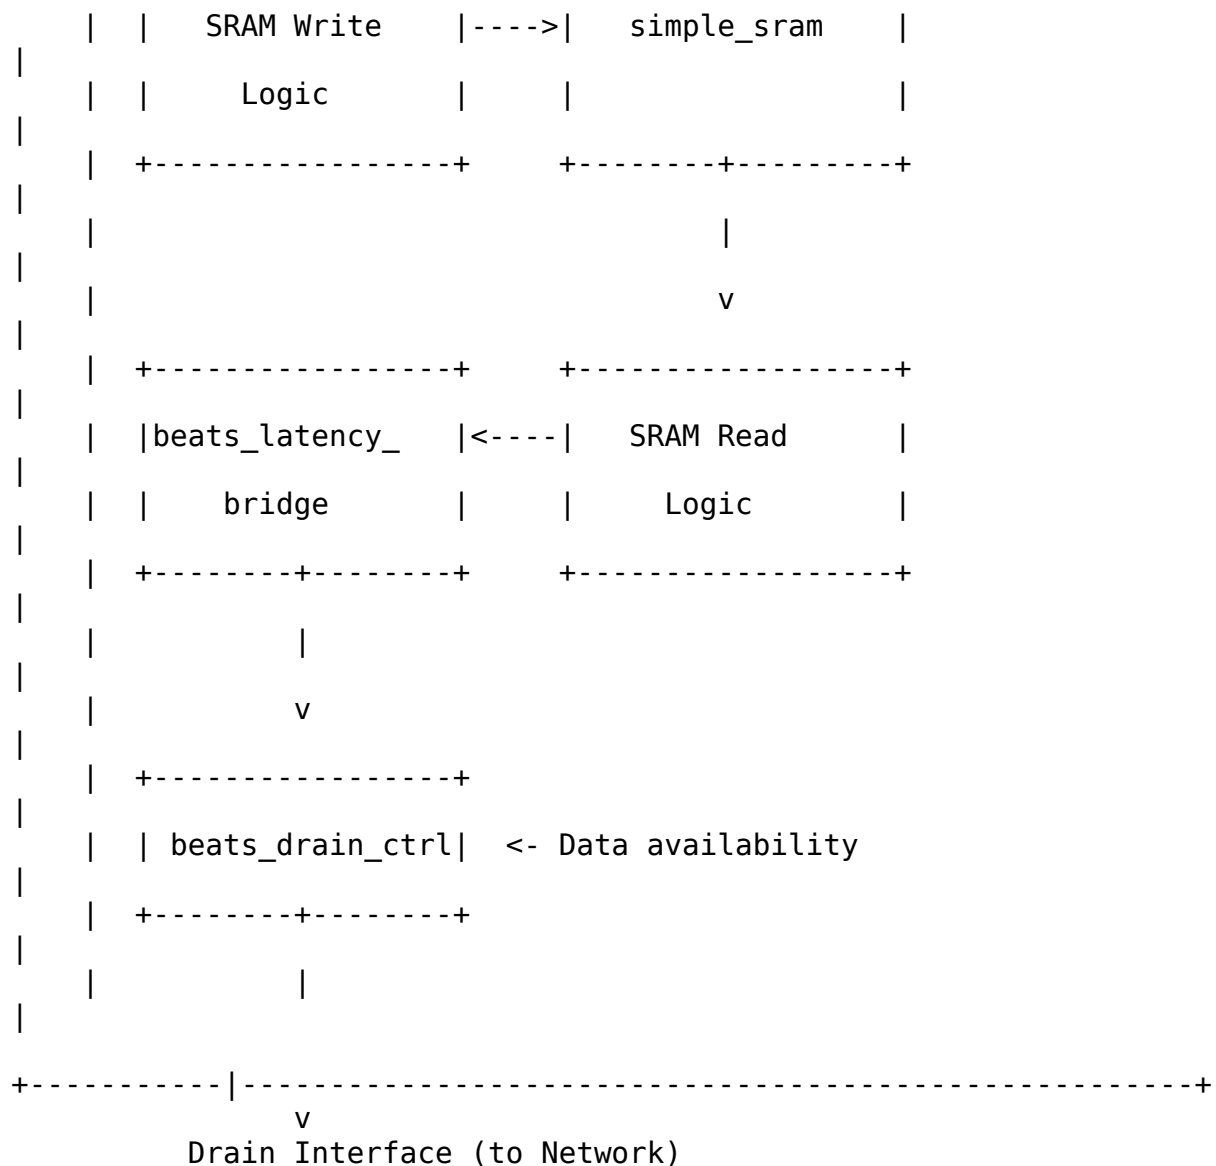

Source: [03_src_sram_controller_unit_block.mmd](#)

22.2 Parameters

```

parameter int DATA_WIDTH = 512;
parameter int SRAM_DEPTH = 512;
parameter int ADDR_WIDTH = $clog2(SRAM_DEPTH);
parameter int LATENCY_BRIDGE_DEPTH = 4;

```

: Table 3.10.1: Source SRAM Controller Unit Parameters

22.3 Port List

22.3.1 Clock and Reset

Table 3.10.2: Clock and Reset

Signal	Direction	Width	Description
clk	input	1	System clock
rst_n	input	1	Active-low reset

22.3.2 Fill Interface (from AXI Read Engine)

Table 3.10.3: Fill Interface

Signal	Direction	Width	Description
fill_alloc_req	input	1	Allocate space
fill_alloc_size	input	16	Beats to allocate
fill_space_free	output	16	Available space
fill_valid	input	1	Fill data valid
fill_ready	output	1	Ready for fill data
fill_data	input	DW	Fill data
fill_last	input	1	Last beat marker

22.3.3 Drain Interface (to Network)

Table 3.10.4: Drain Interface

Signal	Direction	Width	Description
drain_req	output	1	Data available to drain
drain_gnt	input	1	Drain grant from arbiter
drain_beats	output	16	Beats available
drain_valid	output	1	Drain data

Signal	Direction	Width	Description
			valid
drain_ready	input	1	Network ready
drain_data	output	DW	Drain data
drain_last	output	1	Last beat marker

22.3.4 Status

Table 3.10.5: Status Interface

Signal	Direction	Width	Description
data_avail	output	16	Data available count
empty	output	1	Buffer empty
full	output	1	Buffer full

22.4 Internal Architecture

22.4.1 Figure 3.10.2: Internal Data Flow

Fill Path (from AXI Read Engine):

```

fill_alloc_req -----> beats_alloc_ctrl -----> wr_ptr management
fill_valid/data -----> | -----> SRAM write
fill_ready <----- | <----- space_free > 0

```

Drain Path (to Network):

```

SRAM read <----- | <----- drain_gnt && drain_ready
|
v
beats_latency_bridge -----+-----> timing compensation
|
v
beats_drain_ctrl -----+-----> data_avail tracking
|
v

```


22.7 Integration Example

```
src_sram_controller_unit #(
    .DATA_WIDTH(512),
    .SRAM_DEPTH(512),
    .LATENCY_BRIDGE_DEPTH(4)
) u_src_sram_unit (
    .clk                (clk),
    .rst_n              (rst_n),

    // Fill interface (from AXI read engine)
    .fill_alloc_req     (fill_alloc_req[ch]),
    .fill_alloc_size    (fill_alloc_size[ch]),
    .fill_space_free    (fill_space_free[ch]),
    .fill_valid         (fill_valid[ch]),
    .fill_ready         (fill_ready[ch]),
    .fill_data          (fill_data[ch]),
    .fill_last          (fill_last[ch]),

    // Drain interface (to network)
    .drain_req          (drain_req[ch]),
    .drain_gnt          (drain_gnt[ch]),
    .drain_beats        (drain_beats[ch]),
    .drain_valid        (drain_valid[ch]),
    .drain_ready        (drain_ready[ch]),
    .drain_data         (drain_data[ch]),
    .drain_last         (drain_last[ch]),

    // Status
    .data_avail         (data_avail[ch]),
    .empty              (empty[ch]),
    .full               (full[ch])
);
```

Last Updated: 2025-01-10

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

23 RAPIDS Core Beats Specification

Module: rapids_core_beats.sv **Location:** projects/components/rapids/rtl/macro_beats/ **Status:** Implemented **Last Updated:** 2025-01-10

23.1 Overview


The RAPIDS Core Beats module is the top-level integration of the “beats” architecture, combining the scheduler group array with sink and source data paths.


23.1.1 Key Features

- **Complete RAPIDS Core:** Scheduler array + sink path + source path
- **8-Channel Architecture:** Full multi-channel support
- **Unified MonBus:** Aggregated monitoring from all subsystems
- **Configurable Parameters:** Data width, address width, SRAM depths

23.1.2 Block Diagram

23.1.3 Figure 3.11.1: RAPIDS Core Beats Block Diagram

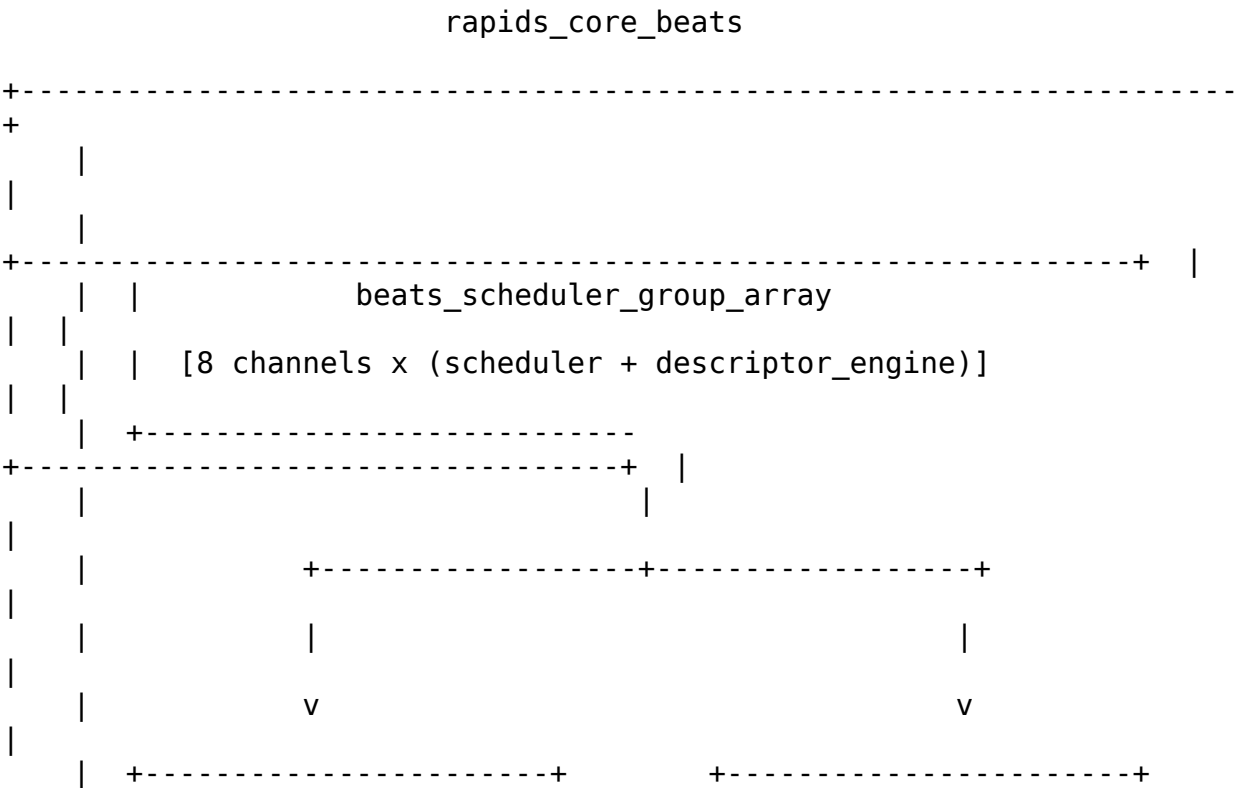

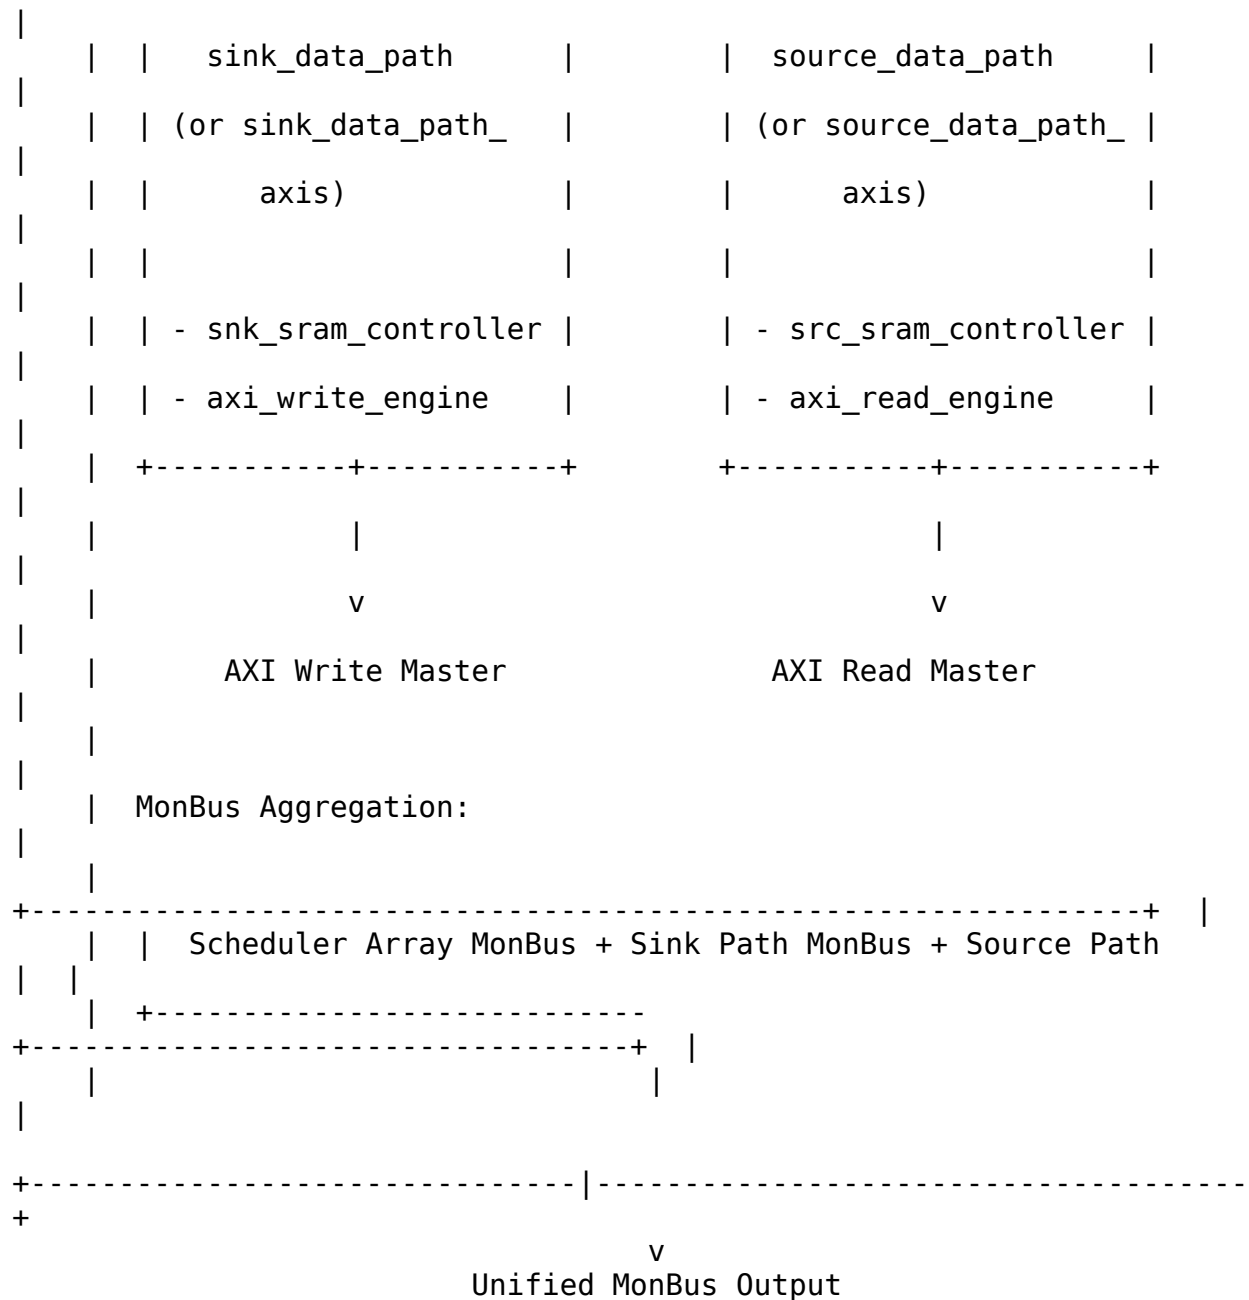

Source: [03_rapids_core_beats_block.mmd](#)

23.2 Parameters

```

parameter int NUM_CHANNELS = 8;
parameter int ADDR_WIDTH = 64;
parameter int DATA_WIDTH = 512;

```

```

parameter int DESC_DATA_WIDTH = 256;
parameter int AXI_ID_WIDTH = 8;
parameter int SRAM_DEPTH = 512;

// AXI Parameters
parameter int AR_MAX_OUTSTANDING = 8;
parameter int AW_MAX_OUTSTANDING = 8;
parameter int R_PHASE_FIFO_DEPTH = 64;
parameter int W_PHASE_FIFO_DEPTH = 64;
parameter int B_PHASE_FIFO_DEPTH = 16;

// MonBus Parameters
parameter int MON_UNIT_ID = 1;

// Feature Enables
parameter bit ENABLE_AXIS_WRAPPERS = 0;           // Use AXIS
interfaces

```

: Table 3.11.1: RAPIDS Core Beats Parameters

23.3 Port List

23.3.1 Clock and Reset

Table 3.11.2: Clock and Reset

Signal	Direction	Width	Description
clk	input	1	System clock
rst_n	input	1	Active-low reset

23.3.2 Per-Channel APB Programming

Table 3.11.3: APB Programming Interface

Signal	Direction	Width	Description
apb_valid	input	NC	Channel kick-off (per-channel)
apb_ready	output	NC	Ready for kick-off
apb_addr	input	NC*AW	First descriptor

Signal	Direction	Width	Description
			address

23.3.3 Per-Channel Configuration

Table 3.11.4: Per-Channel Configuration

Signal	Direction	Width	Description
cfg_channel_enable	input	NC	Enable per channel
cfg_channel_reset	input	NC	Soft reset per channel
cfg_sched_timeout_cycles	input	32	Write-progress timeout window (cycles)
cfg_sched_timeout_limit	input	8	Consecutive-timeout windows before fatal escalation (0 = never)
cfg_sched_timeout_enable	input	NC	Enable timeout
cfg_desceng_enable	input	NC	Enable descriptor engine
cfg_desceng_prefetch	input	NC	Enable prefetch chaining

cfg_sched_timeout_limit is passed straight through to the beats_scheduler_group_array instance (recoverable-timeout escalation, see the [Scheduler](#) FUB). The write-side COMMIT strobes (sched_wr_commit_strobe / sched_wr_commit_beats) generated by the sink data path's axi_write_engine_beats are routed internally from the sink data path up into the scheduler array so completion is gated on B responses.

23.3.4 Descriptor AXI Master Interface

Table 3.11.5: Descriptor AXI Master Interface

Signal	Direction	Width	Description
desc_m_axi_ar_valid	output	1	AR channel valid
desc_m_axi_ar_ready	input	1	AR channel ready
desc_m_axi_ar_addr	output	AW	AR address
desc_m_axi_rvalid	input	1	R channel

Signal	Direction	Width	Description
			valid
desc_m_axi_rr eady	output	1	R channel ready
desc_m_axi_rd ata	input	256	R data

23.3.5 Sink AXI Write Master Interface

Table 3.11.6: Sink AXI Write Master Interface

Signal	Direction	Width	Description
snk_m_axi_awv alid	output	1	AW channel valid
snk_m_axi_awr eady	input	1	AW channel ready
snk_m_axi_awa ddr	output	AW	Write address
snk_m_axiawl en	output	8	Burst length
snk_m_axi_wva lid	output	1	W channel valid
snk_m_axi_wre ady	input	1	W channel ready
snk_m_axi_wda ta	output	DW	Write data
snk_m_axi_wla st	output	1	Last beat
snk_m_axi_bva lid	input	1	B channel valid
snk_m_axi_bre ady	output	1	B channel ready
snk_m_axi_bre sp	input	2	Write response

23.3.6 Source AXI Read Master Interface

Table 3.11.7: Source AXI Read Master Interface

Signal	Direction	Width	Description
src_m_axi_arvalid	output	1	AR channel valid
src_m_axi_arready	input	1	AR channel ready
src_m_axi_araddr	output	AW	Read address
src_m_axi_arlength	output	8	Burst length
src_m_axi_rvalid	input	1	R channel valid
src_m_axi_rready	output	1	R channel ready
src_m_axi_rdata	input	DW	Read data
src_m_axi_rlast	input	1	Last beat

23.3.7 Sink Fill Interface (or AXIS Slave)

Table 3.11.8: Sink Fill Interface

Signal	Direction	Width	Description
snk_fill_valid	input	1	Fill data valid
snk_fill_ready	output	1	Ready for fill
snk_fill_data	input	DW	Fill data
snk_fill_id	input	3	Channel ID
snk_fill_last	input	1	Last beat

23.3.8 Source Drain Interface (or AXIS Master)

Table 3.11.9: Source Drain Interface

Signal	Direction	Width	Description
src_drain_valid	output	1	Drain data valid

Signal	Direction	Width	Description
src_drain_ready	input	1	Ready for drain
src_drain_data	output	DW	Drain data
src_drain_id	output	3	Channel ID
src_drain_last	output	1	Last beat

23.3.9 Unified MonBus Interface

Table 3.11.10: Unified MonBus Interface

Signal	Direction	Width	Description
monbus_pkt_valid	output	1	Packet valid
monbus_pkt_ready	input	1	Consumer ready
monbus_pkt_data	output	64	Packet data


23.3.10 Aggregate Status

Table 3.11.11: Aggregate Status

Signal	Direction	Width	Description
all_channels_idle	output	1	All channels idle
scheduler_idle	output	NC	Per-channel scheduler idle
sink_idle	output	1	Sink path idle
source_idle	output	1	Source path idle
error_flags	output	32	Combined error flags

23.4 Data Flow

23.4.1 Figure 3.11.2: RAPIDS Core Complete Data Flow

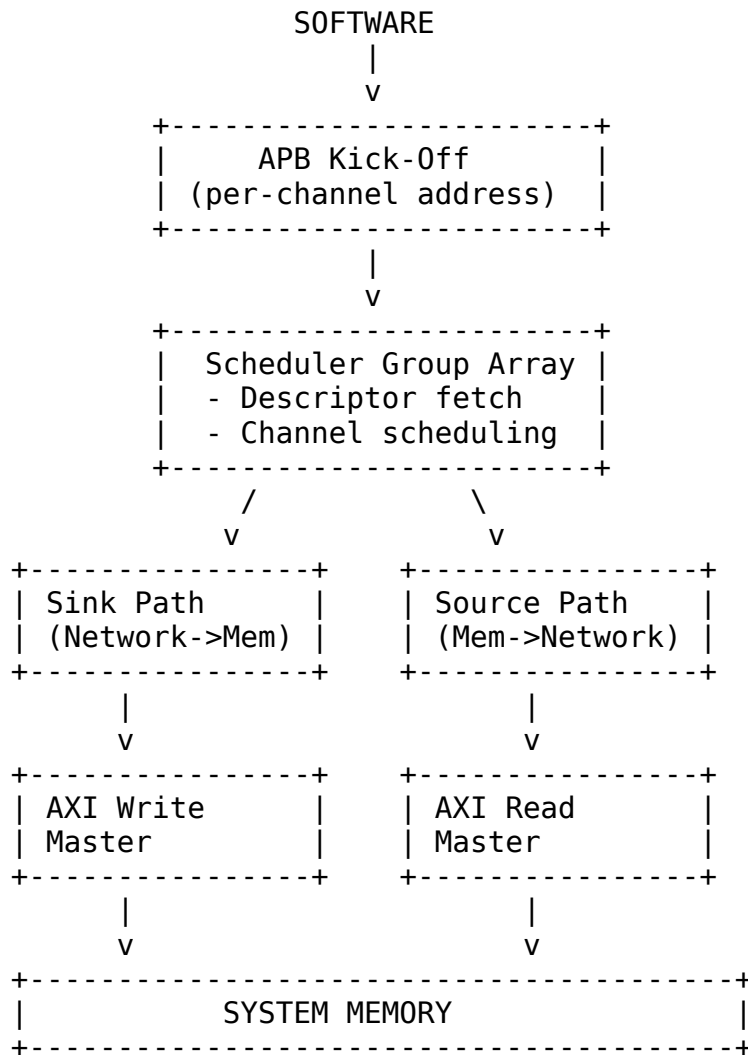

23.5 MonBus Aggregation

The unified MonBus output aggregates sources from all subsystems:

Table 3.11.12: MonBus Source Assignment

Source Range	Origin	Description
0-15	Scheduler Array	Per-channel scheduler + desc

Source Range	Origin	Description
		engine
16-23	Sink Data Path	Sink SRAM controllers
24-31	Source Data Path	Source SRAM controllers
32	AXI Write Engine	Write completions
33	AXI Read Engine	Read completions

23.6 Integration Example

```

rapids_core_beats #(
    .NUM_CHANNELS(8),
    .ADDR_WIDTH(64),
    .DATA_WIDTH(512),
    .SRAM_DEPTH(512),
    .ENABLE_AXIS_WRAPPERS(0)
) u_rapids_core (
    .clk                (clk),
    .rst_n              (rst_n),

    // APB kick-off
    .apb_valid          (apb_kick_valid),
    .apb_ready          (apb_kick_ready),
    .apb_addr           (apb_kick_addr),

    // Configuration
    .cfg_channel_enable (cfg_ch_enable),
    .cfg_sched_timeout_cycles(cfg_timeout),

    // Descriptor AXI
    .desc_m_axi_arvalid  (desc_arvalid),
    .desc_m_axi_arready  (desc_arready),
    .desc_m_axi_araddr   (desc_araddr),
    .desc_m_axi_rvalid   (desc_rvalid),
    .desc_m_axi_rready   (desc_rready),
    .desc_m_axi_rdata    (desc_rdata),

    // Sink AXI write
    .snk_m_axi_awvalid   (snk_awvalid),
    .snk_m_axi_awready   (snk_awready),
    .snk_m_axi_awaddr    (snk_awaddr),

```

```

.snk_m_axi_wvalid      (snk_wvalid),
.snk_m_axi_wready      (snk_wready),
.snk_m_axi_wdata       (snk_wdata),
.snk_m_axi_bvalid      (snk_bvalid),
.snk_m_axi_bready      (snk_bready),

// Source AXI read
.snk_m_axi_arvalid      (src_arvalid),
.snk_m_axi_arready      (src_arready),
.snk_m_axi_araddr       (src_araddr),
.snk_m_axi_rvalid       (src_rvalid),
.snk_m_axi_rready       (src_rready),
.snk_m_axi_rdata        (src_rdata),

// Sink fill interface
.snk_fill_valid         (network_rx_valid),
.snk_fill_ready         (network_rx_ready),
.snk_fill_data          (network_rx_data),
.snk_fill_id            (network_rx_id),

// Source drain interface
.src_drain_valid        (network_tx_valid),
.src_drain_ready        (network_tx_ready),
.src_drain_data         (network_tx_data),
.src_drain_id           (network_tx_id),

// MonBus
.monbus_pkt_valid       (mon_valid),
.monbus_pkt_ready       (mon_ready),
.monbus_pkt_data        (mon_data),

// Status
.all_channels_idle      (rapids_idle)
);

```

Note: rapids_core_beats is a core-level block. The register interface, configuration mapping, and top-level integration (APB slave, descriptor kick-off, AXI monitors, and the MonBus AXI-Lite group) are provided by the rapids_regs, rapids_config_block, and rapids_beats_top modules – see [RAPIDS Registers](#), [RAPIDS Config Block](#), and [RAPIDS Beats Top](#).

Last Updated: 2026-07-02

24 RAPIDS Registers Specification

Module: `rapids_regs.sv` (generated) **Source:** `projects/components/rapids/rtl/macro_beats/rapids_regs.rdl`, `rapids_mon_regs.rdl` **Generated:** `projects/components/rapids/regs/generated/rtl/rapids_regs.sv` **Status:** Implemented (PeakRDL-generated)

24.1 Overview

`rapids_regs` is the PeakRDL-generated register block for the RAPIDS Beats top-level. It exposes configuration and status through a single command/response CPU interface and drives the hardware via a `hwif_out` structure that `rapids_config_block` maps onto the core/monitor `cfg_*` signals.

A single addrmap (one APB slave) contains two regfiles:

- **Base config/status** registers at `0x100-0x3FF`.
- A nested **`rapids_mon_regs`** monitor regfile at base `0x1000`, decoded under `hwif_out.MON.*` (all DAXMON / RDMON / WRMON / MON_FIFO and per-monitor performance registers).

Because the monitor regfile lives at `0x1000`, the register-block address decode requires at least **13 bits** (`cpuif_addr` is a 13-bit compare in the generated RTL). The APB address bus feeding the block (`APB_ADDR_WIDTH`) must therefore be ≥ 13 to reach the monitor regfile.

24.2 Base Register Map (0x100-0x3FF)

Table 3.12.1: Base Register Map

Offset	Name	Access	Description
0x100	GLOBAL_CTR L	RW	GLOBAL_EN[0], GLOBAL_RST[1] (self-clearing)
0x104	GLOBAL_STA	RO	SYSTEM_IDLE[0] (all

Offset	Name	Access	Description
	TUS		channels idle)
0x108	VERSION	RO	MINOR[7:0]=0x5A, MAJOR[15:8], NUM_CHANNELS[23:16]=0x08
0x120	CHANNEL_ENABLE	RW	CH_EN[7:0] per-channel enable
0x124	CHANNEL_RESET	RW	CH_RST[7:0] per-channel reset (self-clearing)
0x140	CHANNEL_IDLE	RO	CH_IDLE[7:0] per-channel idle
0x144	DESC_ENGINE_IDLE	RO	Per-channel descriptor-engine idle
0x148	SCHEDULER_IDLE	RO	Per-channel scheduler idle (excludes CH_ERROR)
0x150-0x16C	CH_STATE[0..7].STATE	RO	Per-channel FSM state (stride 0x4)
0x170	SCHED_ERROR	RO	Per-channel sticky scheduler error
0x174	AXI_RD_COMPLETE	RO	Per-channel read-complete flags
0x178	AXI_WR_COMPLETE	RO	Per-channel write-complete flags
0x200	SCHED_TIMEOUT_CYCLES	RW	TIMEOUT_CYCLES[31:0] write-progress window (reset 1000)
0x204	SCHED_CONFIG	RW	SCHED_EN, TIMEOUT_EN, ERR_EN, COMPL_EN, PERF_EN
0x208	SCHED_TIMEOUT_LIMIT	RW	LIMIT[7:0] consecutive-timeout escalation limit (reset 4, 0 = never)
0x220	DESCENG_CONFIG	RW	DESCENG_EN[0], PREFETCH_EN[1], FIFO_THRESH[5:2] (reset 8)
0x224	DESCENG_ADDR	RW	Descriptor address range 0

Offset	Name	Access	Description
	DR0_BASE		base [31:0]
0x228	DESCENG_AD DR0_LIMIT	RW	Descriptor address range 0 limit [31:0]
0x22C	DESCENG_AD DR1_BASE	RW	Descriptor address range 1 base [31:0]
0x230	DESCENG_AD DR1_LIMIT	RW	Descriptor address range 1 limit [31:0]
0x2A0	AXI_XFER_C ONFIG	RW	AXI transfer sizing configuration
0x2B0	PERF_CONFI G	RW	Performance profiler configuration
0x2C0	OBS_CTRL	RW	Observation mux control (channel/category select)
0x2C4	OBS_FLAGS	RO	Observation flags
0x2C8	OBS_DATA0	RO	Observation data word 0
0x2CC	OBS_DATA1	RO	Observation data word 1
0x35C	PERF_CH_SE L	RW	Performance channel select
0x378	HIST_SEL	RW	Histogram bucket select
0x37C	HIST_DATA	RO	Histogram bucket data
0x380	HIST_TOTAL	RO	Histogram total count

24.2.1 Key Register Fields

SCHED_TIMEOUT_LIMIT (0x208) – LIMIT[7:0] sets the number of consecutive write-progress timeout windows a channel tolerates before the recoverable timeout escalates to a fatal, sticky CH_ERROR. 0 = never escalate (pure soft timeout). Total time to escalate is approximately LIMIT × TIMEOUT_CYCLES. Reset value is 4.

DESCENG_CONFIG (0x220) – PREFETCH_EN[1] and FIFO_THRESH[5:2] control the now-functional descriptor prefetch: prefetch off = on-demand chaining (~1 ahead), prefetch on = buffer up to FIFO_THRESH descriptors ahead.

24.3 Monitor Register Map (rapids_mon_regs @ 0x1000)

The monitor regfile is instantiated at base 0x1000 under hwif_out.MON.*. It holds the MonBus FIFO status, the three AXI-monitor configuration groups (DAXMON = descriptor monitor, RDMON = read monitor, WRMON = write monitor), and per-monitor performance counters.

Table 3.12.2: Monitor Register Map (base 0x1000)

Offset	Name	Access	Description
0x1000	MON.MON_FIFO_STATUS	RO	MonBus capture/error FIFO status
0x1004	MON.MON_FIFO_COUNT	RO	MonBus FIFO occupancy
0x10C0	MON.DAXMON_ENABLE	RW	Descriptor-monitor enables (incl. COMPRESS_EN)
0x10C4	MON.DAXMON_TIMEOUT	RW	Descriptor-monitor timeout cycles
0x10C8	MON.DAXMON_LATENCY_THRESHOLD	RW	Descriptor-monitor latency threshold
0x10CC	MON.DAXMON_PKT_MASK	RW	Descriptor-monitor packet mask
0x10D0	MON.DAXMON_ERR_CFG	RW	Descriptor-monitor error select/mask
0x10D4-0x10DC	MON.DAXMON_MASK1/2/3	RW	Descriptor-monitor category masks
0x10E0-0x10FC	MON.RDMON_*	RW	Read-monitor config (same layout as DAXMON)
0x1100-0x111C	MON.WRMON_*	RW	Write-monitor config (same layout as DAXMON)
0x1150-0x1178	MON.DAXMON_PERF_*	RO/RW	Descriptor-monitor performance counters
0x1180-0x11A8	MON.RDMON_PERF_*	RO/RW	Read-monitor performance counters
0x11B0-0x11D8	MON.WRMON_PERF_*	RO/RW	Write-monitor performance counters
0x11E0-0x11EC	MON.{RD,WR}MON	RO	Per-channel producer/backpressure/star

Offset	Name	Access	Description
	<code>_PERF_CH_*</code>		ve/idle
0x11F0	<code>MON.RDMON_PERF_CH_OV_ERFLOW</code>	RO	Read-monitor per-channel overflow
0x11F4	<code>MON.WRMON_PERF_CH_OV_ERFLOW</code>	RO	Write-monitor per-channel overflow

Each `*_ENABLE` register carries `MON_EN`, `ERR_EN`, `COMPL_EN`, `TIMEOUT_EN` (and `COMPRESS_EN` on the write monitor); each `*_PERF_*` group provides window, producer, backpressure, starve, idle, beat, byte (lo/hi), and burst counters.

Last Updated: 2026-07-02

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

25 RAPIDS Config Block Specification

Module: `rapids_config_block.sv` **Location:** `projects/components/rapids/rtl/macro_beats/` **Status:** Implemented

25.1 Overview

`rapids_config_block` is a combinational adapter that maps the register block's `hwif_out` structure onto the flat `cfg_*` signals consumed by `rapids_core_beats` and the AXI monitors. It contains no state; every output is a direct assignment (with a small number of width expansions and global-enable gates).

The monitor registers arrive under `hwif_out.MON.*`; base configuration and status arrive at the top level of `hwif_out`.

25.2 Mapping Groups

25.2.1 Base Configuration

Routes scheduler, channel, and descriptor-engine configuration to the core:

- `cfg_channel_enable = CHANNEL_ENABLE.CH_EN & {8{GLOBAL_CTRL.GLOBAL_EN}}` (per-channel enable gated by the global master enable).
- `cfg_sched_timeout_cycles = SCHED_TIMEOUT_CYCLES.TIMEOUT_CYCLES` (32-bit).
- `cfg_sched_timeout_limit = SCHED_TIMEOUT_LIMIT.LIMIT` (8-bit, direct).
- `cfg_desceng_*` from `DESCENG_CONFIG` (enable / prefetch / FIFO threshold).
- Descriptor address ranges (`cfg_desceng_addr{0,1}_{base,limit}`) are zero-extended from the 32-bit register fields to the 64-bit `ADDR_WIDTH`.

25.2.2 Monitor Configuration (hwif_out.MON.*)

Three parallel groups map to the descriptor, read, and write AXI monitors:

Table 3.13.1: Monitor Register-to-Config Mapping

Register group	cfg_* target
<code>MON.DAXMON_*</code>	<code>cfg_desc_mon_*</code> (descriptor monitor)
<code>MON.RDMON_*</code>	<code>cfg_rdeng_mon_*</code> (read monitor)
<code>MON.WRMON_*</code>	<code>cfg_wreng_mon_*</code> (write monitor)

Within each group the enable/timeout/latency/mask fields map 1:1, e.g. `cfg_desc_mon_enable = MON.DAXMON_ENABLE.MON_EN & GLOBAL_CTRL.GLOBAL_EN`, `cfg_desc_mon_timeout_cycles = MON.DAXMON_TIMEOUT.TIMEOUT_CYCLES`, and the category masks (timeout/compl/thresh/perf/addr/debug) pass through directly. Key enables are gated by `GLOBAL_CTRL.GLOBAL_EN`; masks pass through ungated.

25.2.3 Performance and Observation

`PERF_CONFIG`, `PERF_CH_SEL`, and `OBS_CTRL` map to the profiler and channel-observation-mux `cfg_*` signals.

Last Updated: 2026-07-02

26 RAPIDS Beats Top Specification


Module: `rapids_beats_top.sv` **Location:** `projects/components/rapids/rtl/top_beats/`
Status: Implemented

26.1 Overview

`rapids_beats_top` is the synthesizable top-level integration of the RAPIDS Beats accelerator. It wraps the register block, config-block adapter, and core with a single APB slave for all software access, and adds optional AXI transaction monitors whose events are merged with the core's descriptor-monitor packet and delivered through a MonBus AXI-Lite group (error-drain slave, capture master, and interrupt).

26.2 Integration Datapath

26.2.1 Figure 3.14.1: RAPIDS Beats Top Integration

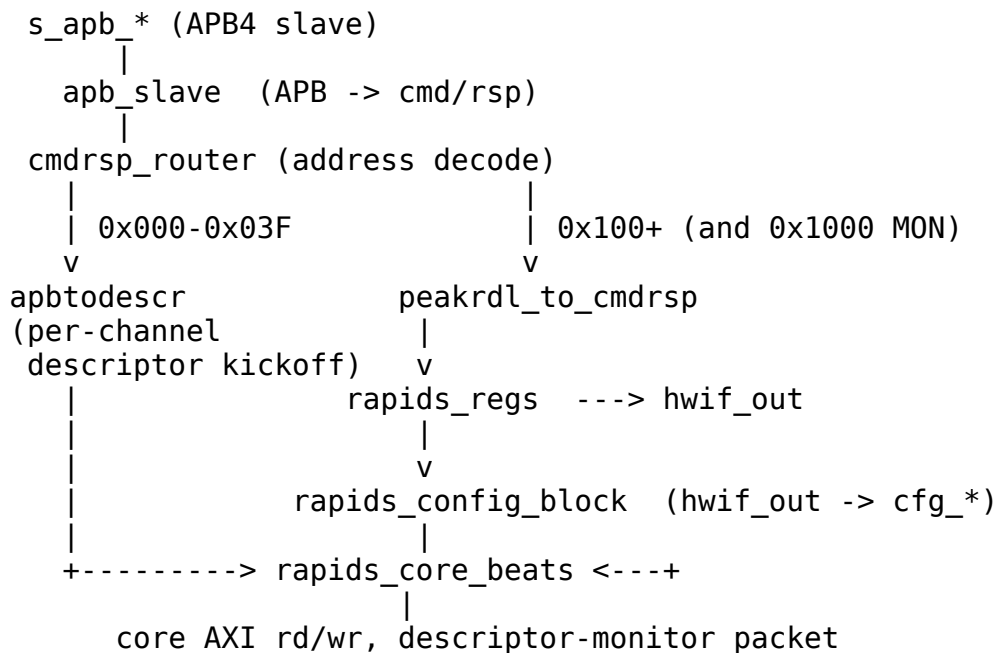

When `USE_AXI_MONITORS = 0` the monitor taps are bypassed (core AXI passes straight through to `m_axi_rd/m_axi_wr`), the core MonBus is dropped (always-ready), and the AXI-Lite group outputs are tied off (`s_axil_err` read-inactive, `m_axil_mon` write-inactive, `mon_irq = 0`).

26.4 Parameters

```
parameter int NUM_CHANNELS          = 8;
parameter int DATA_WIDTH           = 512;
parameter int ADDR_WIDTH            = 64;
parameter int AXI_ID_WIDTH          = 8;
parameter int SRAM_DEPTH            = 4096;
parameter int APB_ADDR_WIDTH        = 12;    // must be >= 13 to reach
MON regfile @ 0x1000
parameter int APB_DATA_WIDTH        = 32;
parameter bit USE_AXI_MONITORS      = 0;    // 1 = insert rd/wr monitors
+ MonBus group
parameter int MON_MAX_TRANSACTIONS = 16;
parameter int AR_MAX_OUTSTANDING    = 8;
parameter int AW_MAX_OUTSTANDING    = 8;
```

: Table 3.14.2: RAPIDS Beats Top Parameters

26.5 Top-Level Interfaces

Table 3.14.3: Top-Level Interfaces

Interface	Signals	Notes
Clock / reset	<code>aclk</code> , <code>aresetn</code> , <code>cam_clear</code>	Single clock domain; <code>cam_clear</code> for monitor CAMs
APB slave	<code>s_apb_paddr</code> (APB_ADDR_WIDTH), <code>s_apb_psel</code> / <code>penable</code> / <code>pwrite</code> / <code>pdata</code> / <code>pstrb</code> , <code>s_apb_prdata</code> / <code>pready</code> / <code>pslverr</code>	32-bit data
Descriptor AXI (master)	<code>m_axi_desc_ar*</code> , <code>m_axi_desc_r*</code>	256-bit read data
Data read AXI (master)	<code>m_axi_rd_ar*</code> , <code>m_axi_rd_r*</code>	DATA_WIDTH; monitored when enabled

Interface	Signals	Notes
Data write AXI (master)	m_axi_wr_aw*, m_axi_wr_w*, m_axi_wr_b*	DATA_WIDTH; monitored when enabled
Sink fill	snk_fill_alloc*, snk_fill_valid/ready/ id/data, snk_fill_space_free	Network ingress
Source drain	src_drain_data_avail/ req/size, src_drain_valid/read/ id/data	Network egress
MonBus error-drain slave	s_axil_err_ar*, s_axil_err_r*	AXI-Lite, 32-bit read
MonBus capture master	m_axil_mon_aw*, m_axil_mon_w* (64-bit wdata), m_axil_mon_b*	AXI-Lite write
MonBus interrupt	mon_irq	Error/threshold interrupt
MonBus config	cfg_mon_base_addr, cfg_mon_limit_addr, cfg_mon_flush_waterma rk	Capture region + flush watermark
Status	system_idle, sched_error[NC-1:0]	Aggregate status

Last Updated: 2026-07-02

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

27 Interface Overview

Last Updated: 2025-01-10

27.1 External Interfaces

The RAPIDS Beats architecture exposes the following external interfaces:

27.1.1 AXI4 Master Interfaces

Table 4.0.1: AXI4 Master Interfaces

Interface	Purpose	Data Width
Descriptor AXI	Fetch descriptors from memory	256-bit
Sink AXI Write	Write sink data to memory	512-bit (param)
Source AXI Read	Read source data from memory	512-bit (param)

27.1.2 Streaming Interfaces

Table 4.0.2: Streaming Interfaces

Interface	Type	Purpose
Fill Interface	Custom	Network data ingress (to SRAM)
Drain Interface	Custom	Network data egress (from SRAM)
AXIS Sink	AXI-Stream Slave	Optional AXIS wrapper for fill
AXIS Source	AXI-Stream Master	Optional AXIS wrapper for drain

27.1.3 Control/Monitor Interfaces

Table 4.0.3: Control and Monitor Interfaces

Interface	Type	Purpose
APB	APB slave	Per-channel kick-off
Configuration	Custom	Global/per-channel config
Status	Custom	Idle, state, error flags
MonBus	Custom 64-bit	Monitor packet output

27.2 Interface Documentation

- [AXI4 Interface Specification](#) - Descriptor, sink write, source read
 - [AXIS Interface Specification](#) - Optional streaming wrappers
 - [MonBus Interface Specification](#) - Monitor packet format
-

27.3 Interface Signal Naming Conventions

Table 4.0.4: Signal Naming Conventions

Prefix	Meaning	Example
m_axi_	AXI master port	m_axi_arvalid
s_axi_	AXI slave port	s_axi_awready
m_axis_	AXIS master port	m_axis_tvalid
s_axis_	AXIS slave port	s_axis_tready
cfg_	Configuration input	cfg_enable
snk_	Sink data path	snk_fill_valid
src_	Source data path	src_drain_ready
sched_	Scheduler interface	sched_rd_valid
monbus_	Monitor bus	monbus_pkt_data

Last Updated: 2025-01-10

RTL Design Sherpa · Learning Hardware Design Through Practice · [GitHub](#) · [Documentation Index](#) · [MIT License](#)

28 AXI4 Interface Specification

Last Updated: 2025-01-10

28.1 Overview

The RAPIDS Beats architecture uses three AXI4 master interfaces: 1. **Descriptor AXI**: Fetches descriptors from memory (256-bit data) 2. **Sink AXI Write**: Writes sink data to memory (512-bit data, configurable) 3. **Source AXI Read**: Reads source data from memory (512-bit data, configurable)

28.2 Descriptor AXI Master Interface

28.2.1 Purpose

Fetches descriptor packets from system memory. Shared across all 8 channels with round-robin arbitration.

28.2.2 Signal Table

Table 4.1.1: Descriptor AXI Master Interface Signals

Signal	Direction	Width	Description
m_axi_arvalid	output	1	AR channel valid
m_axi_arready	input	1	AR channel ready
m_axi_araddr	output	AW	Read address
m_axi_arid	output	ID_W	Transaction ID
m_axi_arlen	output	8	Burst length (fixed: 0 = 1 beat)
m_axi_arsize	output	3	Burst size (fixed: 5 = 32 bytes)
m_axi_arburst	output	2	Burst type (fixed: INCR)
m_axi_rvalid	input	1	R channel valid
m_axi_rready	output	1	R channel ready
m_axi_rdata	input	256	Read data

28.3 Sink AXI Write Master Interface

28.3.1 Purpose

Writes sink data from SRAM to system memory. Supports burst transactions for efficient memory bandwidth.

28.3.2 Signal Table

Table 4.1.3: Sink AXI Write Master Interface Signals

Signal	Direction	Width	Description
m_axi_awvalid	output	1	AW channel valid
m_axi_awready	input	1	AW channel ready
m_axi_awaddr	output	AW	Write address
m_axi_awid	output	ID_W	Transaction ID
m_axi_awlen	output	8	Burst length (0-255)
m_axi_awsz	output	3	Burst size
m_axi_awburst	output	2	Burst type
m_axi_wvalid	output	1	W channel valid
m_axi_wready	input	1	W channel ready
m_axi_wdata	output	DW	Write data
m_axi_wstrb	output	DW/8	Write strobes
m_axi_wlast	output	1	Last beat
m_axi_bvalid	input	1	B channel valid
m_axi_bready	output	1	B channel ready
m_axi_bid	input	ID_W	Response ID
m_axi_bresp	input	2	Write response


28.3.3 Transaction Characteristics

Table 4.1.4: Sink AXI Write Transaction Characteristics

Parameter	Value	Description
Data Width	512 bits	Configurable
Burst Length	1-256 beats	Based on transfer size
Burst Type	INCR	Incrementing burst
Max Outstanding AW	8	Configurable
W FIFO Depth	64	Configurable
B FIFO Depth	16	Configurable

28.3.4 Timing Diagram

28.3.5 Figure 4.1.2: Sink AXI Write Burst Timing

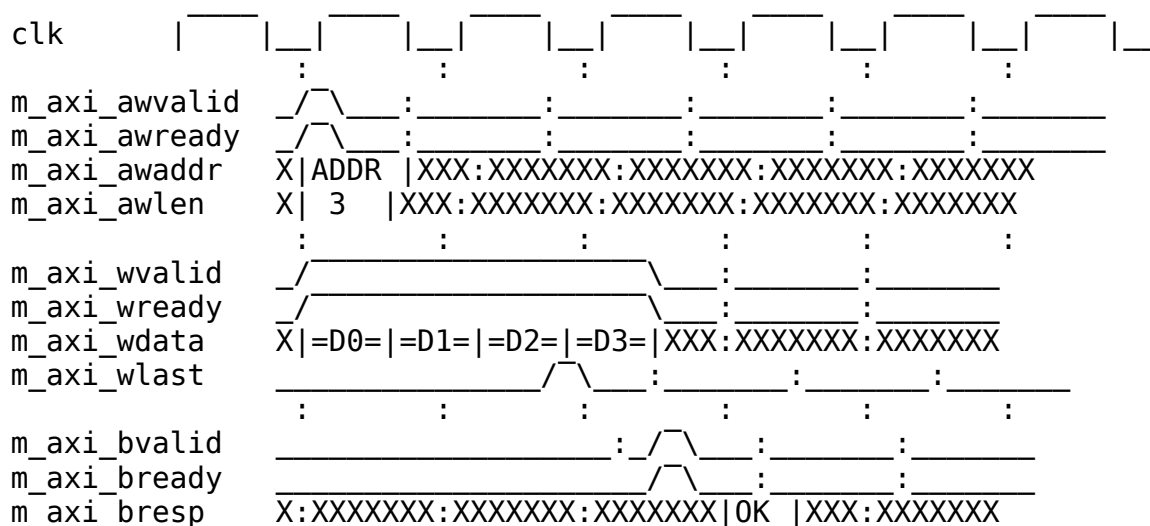

TODO: Replace with simulation-generated waveform

28.4 Source AXI Read Master Interface

28.4.1 Purpose

Reads source data from system memory into SRAM. Supports burst transactions for efficient memory bandwidth.

28.4.2 Signal Table

Table 4.1.5: Source AXI Read Master Interface Signals

Signal	Direction	Width	Description
m_axi_arvalid	output	1	AR channel valid
m_axi_arready	input	1	AR channel ready
m_axi_araddr	output	AW	Read address
m_axi_arid	output	ID_W	Transaction ID
m_axi_arlen	output	8	Burst length (0-255)
m_axi_arsize	output	3	Burst size
m_axi_arburst	output	2	Burst type
m_axi_rvalid	input	1	R channel valid
m_axi_rready	output	1	R channel ready
m_axi_rdata	input	DW	Read data
m_axi_rid	input	ID_W	Response ID
m_axi_rresp	input	2	Read response
m_axi_rlast	input	1	Last beat


28.4.3 Transaction Characteristics

Table 4.1.6: Source AXI Read Transaction Characteristics

Parameter	Value	Description
Data Width	512 bits	Configurable
Burst Length	1-256 beats	Based on transfer size
Burst Type	INCR	Incrementing burst
Max Outstanding AR	8	Configurable
R FIFO Depth	64	Configurable

28.4.4 Timing Diagram

28.4.5 Figure 4.1.3: Source AXI Read Burst Timing

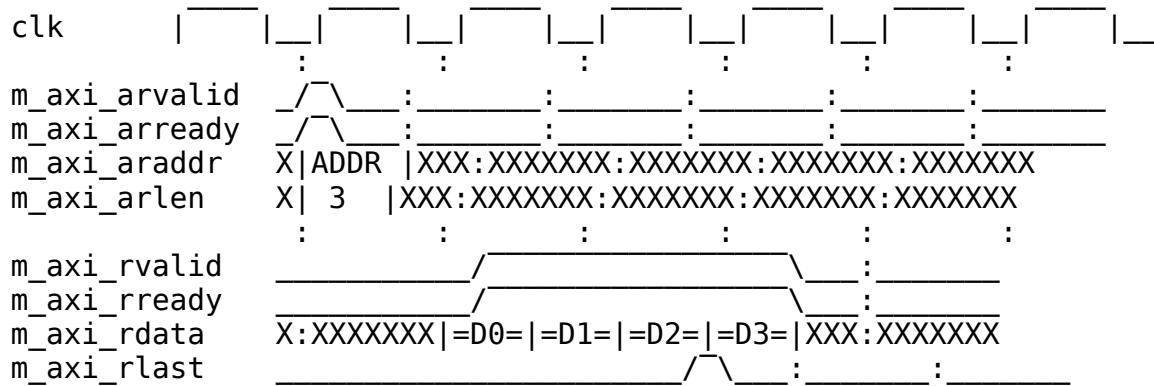

TODO: Replace with simulation-generated waveform

28.5 AXI Protocol Compliance

28.5.1 Supported Features

Table 4.1.7: AXI Feature Support

Feature	Descriptor	Sink Write	Source Read
Burst Type INCR	Yes	Yes	Yes
Burst Type FIXED	No	No	No
Burst Type WRAP	No	No	No
Exclusive Access	No	No	No
Locked Access	No	No	No
Unaligned Access	No	Yes	Yes
Narrow Transfers	No	Yes	Yes

28.5.2 Error Handling

- **SLVERR:** Transaction aborted, error reported to scheduler
 - **DECERR:** Transaction aborted, error reported to scheduler
 - **Timeout:** Configurable watchdog, error reported to scheduler
-

Last Updated: 2025-01-10

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

29 AXI-Stream Interface Specification

Last Updated: 2025-01-10

29.1 Overview

The RAPIDS Beats architecture provides optional AXI-Stream (AXIS) wrappers for network interfaces: 1. **AXIS Sink Slave:** Receives network data for memory writes 2. **AXIS Source Master:** Transmits network data from memory reads

These wrappers are available when `ENABLE_AXIS_WRAPPERS = 1`.

29.2 AXIS Sink Slave Interface

29.2.1 Purpose

Receives streaming network data and routes to per-channel SRAM buffers based on TID.

29.2.2 Signal Table

Table 4.2.1: AXIS Sink Slave Interface Signals

Signal	Direction	Width	Description
s_axis_tvalid	input	1	Data valid
s_axis_tready	output	1	Ready to

Signal	Direction	Width	Description
			accept data
s_axis_tdata	input	DATA_WIDTH	Data payload
s_axis_tkeep	input	DATA_WIDTH/ 8	Byte enables
s_axis_tlast	input	1	Last beat of packet
s_axis_tid	input	TID_WIDTH	Stream ID (channel select)
s_axis_tdest	input	TDEST_WIDTH	Destination routing
s_axis_tuser	input	TUSER_WIDTH	User sideband

29.2.3 Signal Details

29.2.3.1 TID (Transaction ID)

TID is used for per-channel routing:

Table 4.2.2: TID Channel Mapping

TID Value	Destination
0	Channel 0 SRAM
1	Channel 1 SRAM
2	Channel 2 SRAM
3	Channel 3 SRAM
4	Channel 4 SRAM
5	Channel 5 SRAM
6	Channel 6 SRAM
7	Channel 7 SRAM

29.2.3.2 TKEEP (Byte Enables)

TKEEP indicates valid bytes within TDATA:

Table 4.2.3: TKEEP Configuration


DATA_WIDTH	TKEEP Width	Usage
512 bits	64 bits	Per-byte valid
256 bits	32 bits	Per-byte valid

29.2.3.3 TLAST (Packet Boundary)

TLAST marks the end of an AXIS packet. This is mapped to the internal `fill_last` signal for packet boundary tracking.

29.2.4 Timing Diagram

29.2.5 Figure 4.2.1: AXIS Sink Slave Timing

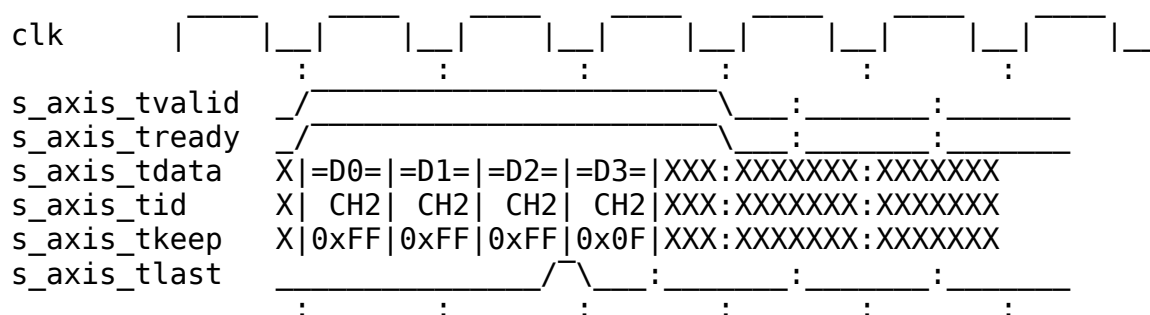

TODO: Replace with simulation-generated waveform

29.2.6 Backpressure

The sink interface asserts backpressure (`s_axis_tready = 0`) when: - Target channel SRAM is full - No space allocated for incoming data - Internal pipeline stalls

29.3 AXIS Source Master Interface

29.3.1 Purpose

Transmits streaming network data from per-channel SRAM buffers with TID indicating source channel.

29.3.2 Signal Table


Table 4.2.4: AXIS Source Master Interface Signals

Signal	Direction	Width	Description
<code>m_axis_tvalid</code>	output	1	Data valid

Signal	Direction	Width	Description
m_axis_tready	input	1	Ready to accept data
m_axis_tdata	output	DATA_WIDTH	Data payload
m_axis_tkeep	output	DATA_WIDTH/8	Byte enables
m_axis_tlast	output	1	Last beat of packet
m_axis_tid	output	TID_WIDTH	Stream ID (source channel)
m_axis_tdest	output	TDEST_WIDTH	Destination routing
m_axis_tuser	output	TUSER_WIDTH	User sideband

29.3.3 Timing Diagram

29.3.4 Figure 4.2.2: AXIS Source Master Timing

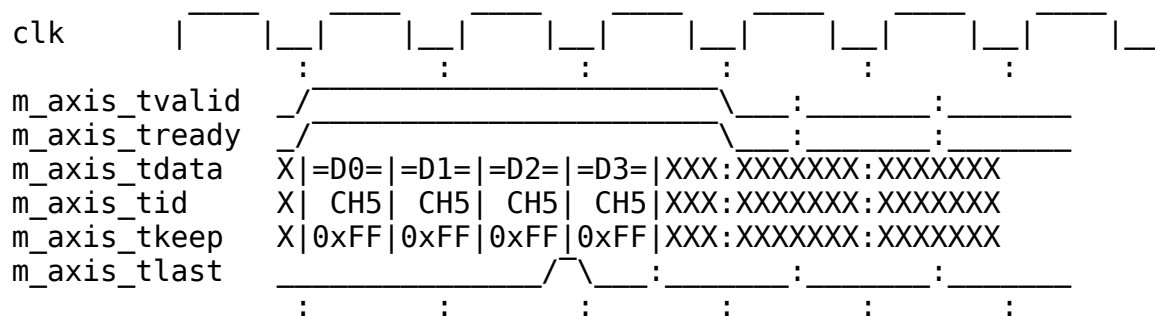

TODO: Replace with simulation-generated waveform

29.3.5 Flow Control

The source interface respects network backpressure: - Data held when m_axis_tready = 0 - No data loss on backpressure - SRAM drain pauses until ready

29.4 AXIS vs Custom Fill/Drain Interfaces

29.4.1 Comparison

Table 4.2.5: Interface Comparison

Aspect	Custom Fill/Drain	AXIS
Standard	Proprietary	AXI-Stream
Channel ID	fill_id / drain_id	TID
Packet Boundary	fill_last / drain_last	TLAST
Byte Enables	fill_strb / drain_strb	TKEEP
Interoperability	RAPIDS only	Industry standard

29.4.2 Selection Guide

Table 4.2.6: Interface Selection Guide

Use Case	Recommended Interface
Internal RAPIDS testing	Custom Fill/Drain
Network IP integration	AXIS
FPGA board-level design	AXIS
Maximum performance	Custom Fill/Drain

29.5 Configuration Parameters

```
// AXIS Interface Parameters
parameter int DATA_WIDTH = 512;           // Data payload width
parameter int TID_WIDTH = 3;              // Stream ID width (log2
channels)
parameter int TDEST_WIDTH = 1;            // Destination width
parameter int TUSER_WIDTH = 1;            // User sideband width
```

Last Updated: 2025-01-10

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

30 MonBus Interface Specification

Last Updated: 2025-01-10

30.1 Overview

The MonBus (Monitor Bus) is a 64-bit packet-based interface for reporting internal events, status, and performance data. All RAPIDS subsystems generate MonBus packets that are aggregated and output through a unified interface.

30.2 MonBus Signal Interface

30.2.1 Signal Table

Table 4.3.1: MonBus Interface Signals


Signal	Direction	Width	Description
monbus_pkt_valid	output	1	Packet valid
monbus_pkt_ready	input	1	Consumer ready
monbus_pkt_data	output	64	Packet data

30.2.2 Handshaking Protocol

Standard valid/ready handshaking: - Data transfers when valid & ready both high - Producer holds valid until ready seen - Consumer asserts ready when able to accept

30.2.3 Timing Diagram

30.2.4 Figure 4.3.1: MonBus Packet Transfer Timing

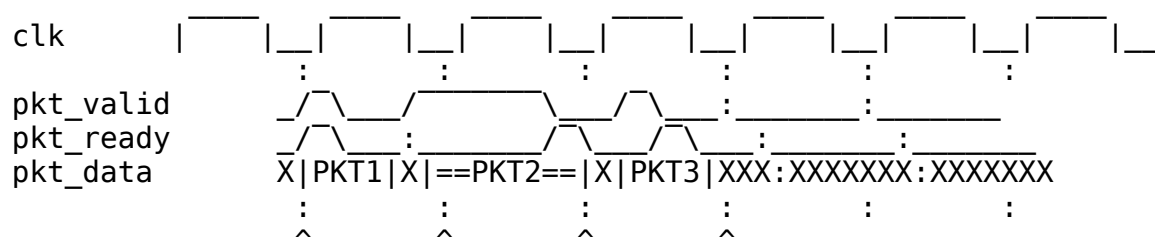




TODO: Replace with simulation-generated waveform

30.3 MonBus Packet Format

30.3.1 64-bit Packet Structure

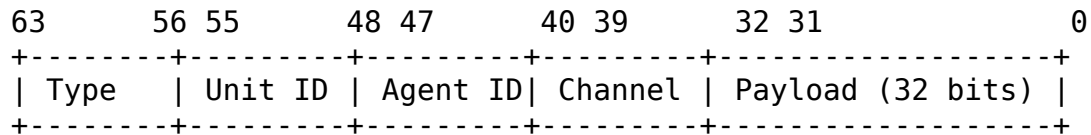

30.3.2 Figure 4.3.2: MonBus Packet Format

Table 4.3.2: MonBus Packet Fields

Field	Bits	Description
Type	[63:56]	Packet type code
Unit ID	[55:48]	Reporting unit identifier
Agent ID	[47:40]	Source agent within unit
Channel	[39:32]	Channel number (0-7)
Payload	[31:0]	Type-specific payload

30.4 Packet Types

30.4.1 Type Code Definitions

Table 4.3.3: MonBus Packet Types

Type Code	Name	Description
0x01	DESC_FETCH	Descriptor fetch started
0x02	DESC_COMPLETE	Descriptor fetch completed

Type Code	Name	Description
0x03	SCHED_START	Scheduler started transfer
0x04	SCHED_DONE	Scheduler transfer complete
0x10	AXI_RD_START	AXI read burst started
0x11	AXI_RD_DONE	AXI read burst completed
0x12	AXI_WR_START	AXI write burst started
0x13	AXI_WR_DONE	AXI write burst completed
0x20	SRAM_FILL	SRAM fill event
0x21	SRAM_DRAIN	SRAM drain event
0x30	ERROR	Error event
0x31	TIMEOUT	Timeout event
0xFF	HEARTBEAT	Periodic heartbeat

30.4.2 Payload Formats by Type

30.4.2.1 DESC_FETCH / DESC_COMPLETE (0x01, 0x02)

Table 4.3.4: Descriptor Packet Payload

Bits	Description
[31:16]	Descriptor address [47:32]
[15:0]	Descriptor address [31:16]

30.4.2.2 SCHED_START / SCHED_DONE (0x03, 0x04)

Table 4.3.5: Scheduler Packet Payload

Bits	Description
[31:16]	Transfer ID
[15:0]	Beat count

30.4.2.3 AXI_RD/WR_START/DONE (0x10-0x13)

Table 4.3.6: AXI Event Packet Payload

Bits	Description
[31:24]	AXI ID
[23:16]	Burst length
[15:0]	Reserved

30.4.2.4 ERROR (0x30)

Table 4.3.7: Error Packet Payload

Bits	Description
[31:24]	Error code
[23:16]	Error source
[15:0]	Error details

30.5 MonBus Source Aggregation


30.5.1 RAPIDS Core MonBus Sources

Table 4.3.8: MonBus Source Assignment

Source ID	Agent	Description
0-7	Scheduler[0:7]	Per-channel scheduler events
8-15	DescEngine[0:7]	Per-channel descriptor events
16-23	SnkSRAM[0:7]	Sink SRAM controller events
24-31	SrcSRAM[0:7]	Source SRAM controller events
32	AXI Write Engine	Write transaction events
33	AXI Read Engine	Read transaction events
34	Error Handler	Error events

30.5.2 Aggregation Hierarchy

30.5.3 Figure 4.3.3: MonBus Aggregation Tree

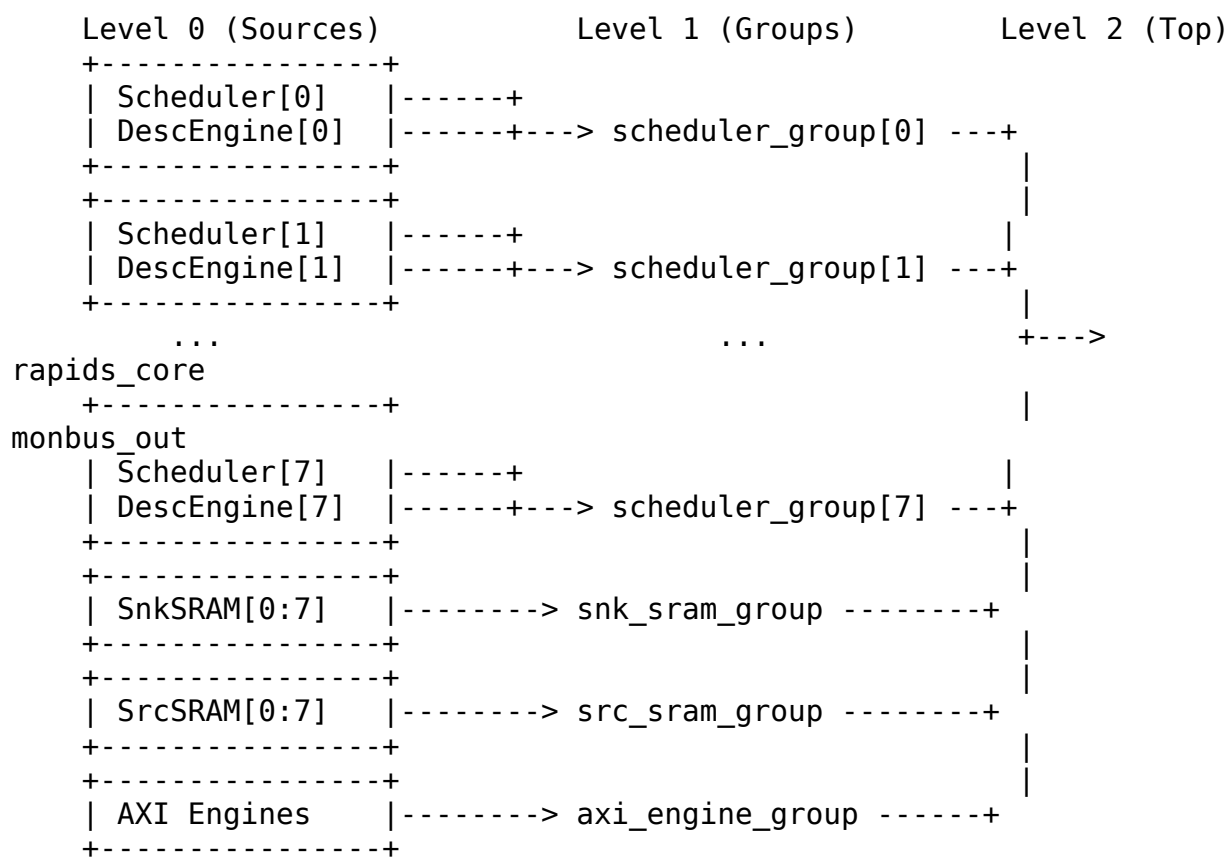

30.6 Integration Guidelines

30.6.1 Consumer Requirements

MonBus consumers must: 1. Provide sufficient ready cycles to prevent packet loss 2. Handle bursty traffic (multiple sources may have packets simultaneously) 3. Process or buffer packets at wire rate

30.6.2 Recommended Consumer Patterns

// Pattern 1: Direct FIFO buffering

```
gaxi_fifo_sync #(
    .DATA_WIDTH(64),
    .DEPTH(256)
) u_monbus_fifo (
    .i_clk      (clk),
    .i_rst_n    (rst_n),
```

```

        .i_valid      (monbus_pkt_valid),
        .i_data       (monbus_pkt_data),
        .o_ready      (monbus_pkt_ready),
        .o_valid      (fifo_valid),
        .o_data       (fifo_data),
        .i_ready      (consumer_ready)
    );

    // Pattern 2: Software register interface
    always_ff @(posedge clk) begin
        if (monbus_pkt_valid && monbus_pkt_ready) begin
            sw_monbus_data <= monbus_pkt_data;
            sw_monbus_valid <= 1'b1;
        end
    end
    assign monbus_pkt_ready = !sw_monbus_valid || sw_read;

```

30.7 Timing Requirements

Table 4.3.9: MonBus Timing Parameters

Parameter	Value	Description
Min Ready	1 cycle	Must assert ready within N cycles
Max Latency	Configurable	Before packet dropped
Packet Rate	Variable	Depends on activity

Last Updated: 2025-01-10

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

31 Product Requirements Document (PRD)

31.1 RAPIDS - Rapid AXI Programmable In-band Descriptor System

Version: 1.0 **Date:** 2025-09-30 **Status:** Active Development - Validation in Progress **Owner:** RTL Design Sherpa Project **Parent Document:** /PRD.md

31.2 1. Executive Summary

The Rapid AXI Programmable In-band Descriptor System (RAPIDS) is a custom hardware accelerator designed for efficient memory-to-memory data movement with network interface integration. It demonstrates complex FSM coordination, descriptor-based DMA operations, and comprehensive monitoring capabilities.

31.2.1 1.1 Quick Stats

- **Modules:** 17 SystemVerilog files
- **Architecture:** 3 major blocks (Scheduler, Sink, Source)
- **Interfaces:** AXI4 (memory), Network (network), AXIL4 (control), MonBus (monitoring)
- **Test Coverage:** ~80% functional (basic scenarios validated)
- **Status:** Active validation, known issues documented

31.2.2 1.2 Subsystem Goals

- **Primary:** Demonstrate complex accelerator design patterns
 - **Secondary:** Provide DMA-style memory transfer capability
 - **Tertiary:** Educational reference for descriptor-based engines
-

31.3 2. Documentation Structure

This PRD provides a high-level overview. **Detailed specifications are maintained separately:**

31.3.1 Complete RAPIDS Specification

Location: projects/components/rapids/docs/rapids_spec/

- **Index** - Complete specification structure

31.3.1.1 *Chapter 1: Overview*

- [Overview](#)
- [Architecture Requirements](#)
- [Clocking and Reset](#)
- [Acronyms](#)
- [References](#)

31.3.1.2 *Chapter 2: Block Specifications*

- [Blocks Overview](#)

Scheduler Group: - [Scheduler Group](#) - [Scheduler](#) - Task management FSM - [Descriptor Engine](#) - Descriptor parsing - [Program Engine](#) - Program sequencing

Sink Data Path (Network → Memory): - [Sink Data Path](#) - [Network Slave](#) - Network ingress - [Sink SRAM Control](#) - Buffer management - [Sink AXI Write Engine](#) - Memory writes

Source Data Path (Memory → Network): - [Source Data Path](#) - [Network Master](#) - Network egress - [Source SRAM Control](#) - Buffer management - [Source AXI Read Engine](#) - Memory reads

Monitoring: - [MonBus AXIL Group](#) - Control/status - [FSM Summary](#) - State machine overview

31.3.1.3 *Chapter 3: Interfaces*

- [Top-Level Ports](#)
- [AXIL4 Interface](#)
- [AXI4 Interface](#)
- [Network Interface](#)
- [MonBus Interface](#)

31.3.1.4 *Chapter 4 & 5: Programming*

- [Programming Model](#)
- [Register Definitions](#)

31.3.2 🐛 Known Issues

Location: `projects/components/rapids/known_issues/`

- [Scheduler](#) - Credit counter initialization bug
- [Sink Data Path](#) - Minor issues
- [Sink SRAM Control](#) - Edge cases

31.3.3 Other Documentation

- [README](#) - Quick start and integration guide
 - [CLAUDE](#) - AI assistance guide for this subsystem
 - [TASKS](#) - Current work items (to be created)
 - [Validation Report](#) - Test results
-

31.4 2.4 Organizational Standards - RAPIDS Code Location

 **MANDATORY:** All RAPIDS-specific code must be in the project area 


31.4.1 Code Organization Principle

“All RAPIDS-specific verification code MUST reside in projects/components/rapids/dv/ for easy discovery.”

This subsystem follows the repository-wide organizational standard (see /PRD.md Section 2.3) requiring all project-specific code to be located in the project area, NOT the framework area.

31.4.2 RAPIDS Directory Structure

```
projects/components/rapids/
├── rtl/                                # RTL source code
│   ├── includes/                      # RAPIDS packages (rapids_pkg.sv)
│   ├── rapids_fub/                   # Functional unit blocks
│   └── rapids_macro/                 # Top-level integration
├── dv/                                # Design verification (all RAPIDS-
specific)                               specific)
│   ├── tbclasses/                   # ★ RAPIDS TB classes HERE (not
framework!)                           framework!)
│   │   ├── scheduler_tb.py          # Scheduler testbench class
│   │   ├── descriptor_engine_tb.py
│   │   ├── program_engine_tb.py
│   │   └── rapids_integration_tb.py
│   ├── components/                 # ★ RAPIDS-specific BFM
│   │   └── (project-specific components if needed)
│   ├── scoreboards/                # ★ RAPIDS-specific scoreboards
│   │   └── (verification scoreboards)
│   └── tests/                      # Test runners (import TB classes)
│       ├── fub_tests/              # Functional unit block tests
│       │   └── scheduler/
│       │       └── test_scheduler.py
```

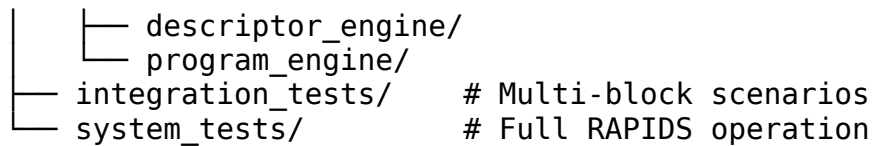

31.4.3 What Goes Where?

Code Type	✓ CORRECT Location	✗ WRONG Location
RAPIDS TB Classes	projects/components/ rapids/dv/tbclasses/	bin/TBClasses/rapids/
RAPIDS-Specific BFM s	projects/components/ rapids/dv/components/	bin/TBClasses/ components/rapids/
RAPIDS Scoreboards	projects/components/ rapids/dv/scoreboards/	bin/TBClasses/ scoreboards/rapids/
Test Runners	projects/components/ rapids/dv/tests/	Anywhere else
Shared AXI4/APB BFM s	bin/TBClasses/components/ {protocol}/	Project area

31.4.4 Import Pattern for RAPIDS Tests

✓ CORRECT - Import from Project Area:

```

# Import framework utilities (PYTHONPATH includes bin/)
import os, sys
from TBClasses.shared.utilities import get_repo_root
from TBClasses.shared.tbbase import TBBase

# Add repo root to Python path using robust git-based method
repo_root = get_repo_root()
sys.path.insert(0, repo_root)

# Import RAPIDS TB classes from PROJECT AREA
from projects.components.rapids.dv.tbclasses.scheduler_tb import SchedulerTB
from projects.components.rapids.dv.tbclasses.descriptor_engine_tb import DescriptorEngineTB

# Shared framework components
from CocoTBFramework.components.axi4.axi4_master import AXI4Master

```

✗ WRONG - Don't Import from Framework:

DON'T DO THIS!

```
from TBClasses.rapids.scheduler_tb import SchedulerTB # x WRONG!
```

31.4.5 Benefits of This Organization

1. **Easy Discovery** - All RAPIDS code in ONE place:
projects/components/rapids/
2. **Clear Ownership** - RAPIDS team owns their dv/ area completely
3. **No Confusion** - Never wonder “where does this TB class live?”
4. **Maintainability** - Changes isolated to RAPIDS area don’t affect other projects
5. **Framework Stays Clean** - Only truly shared cross-project code in framework

31.4.6 Compliance Status

✓ **RAPIDS is now compliant** - All TB classes moved to project area as of 2025-10-18


Migration History: - **Before:** TB classes incorrectly in bin/TBClasses/rapids/ - **After:** TB classes correctly in projects/components/rapids/dv/tbclasses/ - **Test Imports:** Updated to import from project area


📖 **Complete Documentation:** See /PRD.md Section 2.3 for repository-wide organizational standards.

31.5 3. Architecture Overview

31.5.13.1 Top-Level Block Diagram

RAPIDS (Rapid AXI Programmable In-band Descriptor System)

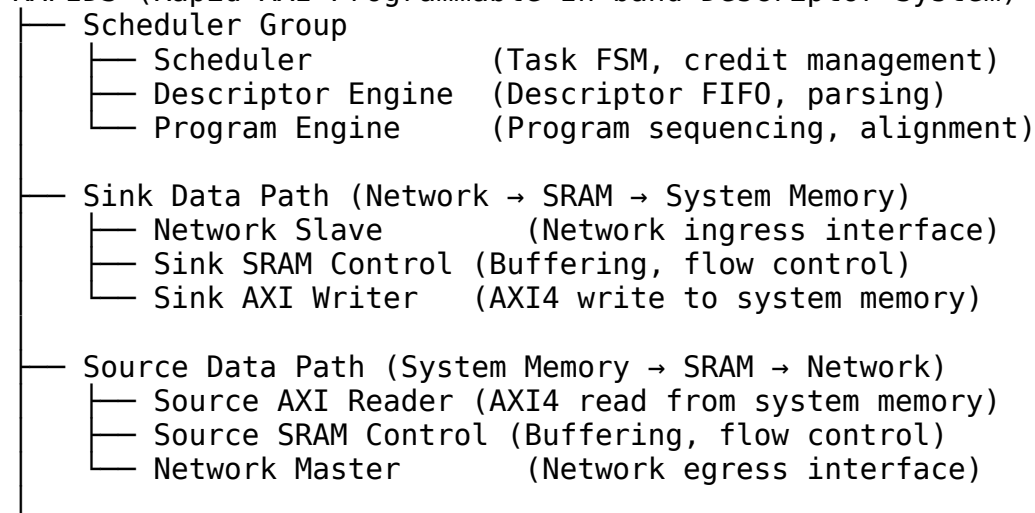



📖 See: [rapids_spec/ch02_blocks/00_overview.md](#) for detailed architecture

31.5.23.2 Data Flow

Sink Path (Receive): 1. Network packets arrive via Network Slave 2. Buffered in Sink SRAM 3. DMA'd to system memory via AXI4 Write Engine 4. Completion reported via MonBus

Source Path (Transmit): 1. Descriptor specifies data location in system memory 2. Source AXI Reader fetches data to Source SRAM 3. Network Master transmits to network 4. Completion reported via MonBus

Scheduler Coordination: - Parses descriptors from Descriptor Engine - Manages credit-based flow control - Sequences program engine operations - Coordinates sink/source data paths

31.6 4. Key Features

31.6.14.1 Descriptor-Based Operation

Feature	Status	Description
Descriptor FIFO	✓	Queued descriptor processing
Multi-field parsing	✓	Address, length, control fields
Chained descriptors	⌚	Future enhancement
Completion reporting	✓	Via MonBus packets

31.6.24.2 Data Path Features

Feature	Status	Description
SRAM buffering	✓	Decouple network from memory
AXI4 burst support	✓	Efficient memory transfers
Backpressure handling	✓	Flow control on all interfaces
Data alignment	✓	Handle unaligned

Feature	Status	Description
		transfers

31.6.34.3 Scheduler Features

Feature	Status	Description
Task FSM	✓	Multi-state coordination
Credit management	✓	Exponential encoding (0→1, 1→2, 2→4, ..., 15→∞)
Program sequencing	✓	Coordinated operations
Error detection	✓	Timeout, overflow detection

Credit Management Details: - Uses **exponential credit encoding** for compact configuration - 4-bit `cfg_initial_credit` decodes to actual credit counts: - 0 → 1 credit (2^0), 4 → 16 credits (2^4), 8 → 256 credits (2^8) - 15 → ∞ (unlimited credits, 0xFFFFFFFF) - Encoding applied at initialization; runtime operations are linear (increment/decrement by 1) - Provides wide range (1 to 16384) with minimal configuration overhead

📖 See: `rapids_spec/ch02_blocks/01_01_scheduler.md` for complete encoding table

31.6.44.4 Monitoring Integration

Feature	Status	Description
MonBus packets	✓	StandardAMBA 64-bit format
Descriptor events	✓	Start/complete reporting
Error events	✓	Timeout, overflow, underflow
Performance metrics	🕒	Future enhancement

31.7 5. Interfaces

31.7.15.1 External Interfaces

Interface	Type	Width	Purpose
AXIL4	Slave	32-bit	Control/status registers
AXI4 (Sink)	Master	Configurable	Write to

Interface	Type	Width	Purpose
			system memory
AXI4 (Source)	Master	Configurable	Read from system memory
Network (Sink)	Slave	Configurable	Network ingress
Network (Source)	Master	Configurable	Network egress
MonBus	Master	64-bit	Monitor packet output

 **See:** `rapids_spec/ch03_interfaces/` for complete interface specs

31.7.25.2 Configuration Parameters

// Example RAPIDS instantiation parameters

```
rapids_top #(
    .AXI_ADDR_WIDTH(32),
    .AXI_DATA_WIDTH(64),
    .Network_DATA_WIDTH(64),
    .SRAM_DEPTH(1024),
    .MAX_DESCRIPTOR(16)
) u_rapids (
    .aclk          (clk),
    .aresetn       (rst_n),
    // AXIL4 control interface
    .s_axil_*       (...),
    // AXI4 memory interfaces
    .m_axi_sink_*   (...),
    .m_axi_source_* (...),
    // Network network interfaces
    .s_network_*    (...),
    .m_network_*    (...),
    // MonBus output
    .monbus_pkt_*   (...);
);
```

31.8 6. Use Cases

31.8.16.1 DMA-Style Transfers

Scenario: Move data from network to system memory

Flow: 1. Software writes descriptor to Descriptor Engine 2. Scheduler parses descriptor, activates Sink path 3. Network packets arrive via Network Slave 4. Data buffered in Sink SRAM 5. AXI4 Write Engine DMAs to system memory 6. Completion packet on MonBus

31.8.26.2 Network Packet Processing

Scenario: Read data from memory, transmit to network

Flow: 1. Descriptor specifies source address, length 2. Source AXI Reader fetches data to SRAM 3. Network Master transmits to network 4. Completion/error reporting via MonBus

31.8.36.3 Custom Data Path Acceleration

Educational value: Shows how to build custom accelerators - Descriptor-based control - Multi-block FSM coordination - Buffering strategies - Error handling - Performance monitoring

31.9 7. Test Coverage

31.9.17.1 Current Status

Overall: ~85% functional coverage (basic scenarios validated, descriptor engine complete)

Component	Test Coverage	Status
Scheduler	~95%	Credit encoding fixed and verified (43/43 tests passing)
Descriptor Engine	✓ 100%	All tests passing (14/14 tests, 100% success rate)
Program Engine	~85%	Alignment tested
Sink Data Path	~75%	Basic flows working
Source Data Path	~70%	Basic flows working

Component	Test Coverage	Status
SRAM Controllers	~80%	Buffer management tested
Integration	~60%	More stress testing needed

Test Location: projects/components/rapids/dv/tests/fub_tests/ and projects/components/rapids/dv/tests/integration_tests/

Recent Achievements: - ✓ **Descriptor Engine (2025-10-13):** Achieved 100% test pass rate using continuous background monitoring pattern - 14/14 tests passing across all test levels (basic, medium, full) - All test classes passing (APB_ONLY, MIXED) - All delay profiles passing (fast_producer, fast_consumer, fixed_delay, minimal_delay) - Applied continuous monitoring methodology for asynchronous output capture

📖 **See:** docs/RAPIDS_Validation_Status_Report.md for detailed results

31.9.27.2 Test Strategy

FUB (Functional Unit Block) Tests: - Individual block testing - Located in projects/components/rapids/dv/tests/fub_tests/ - Focus on module-level functionality

Integration Tests: - Multi-block scenarios - Located in projects/components/rapids/dv/tests/integration_tests/ - End-to-end data flow validation

System Tests: - Full RAPIDS operation - Located in projects/components/rapids/dv/tests/system_tests/ - Realistic traffic patterns

31.10 8. Known Issues Summary

31.10.1 8.1 Critical Issues

✓ **Scheduler Credit Counter Initialization - FIXED (2025-10-11) - File:** projects/components/rapids/rtl/rapids_fub/scheduler.sv:567-570 - **Issue:** Credit counter was initializing to 0 instead of using exponential encoding - **Fix Applied:** Implemented exponential credit encoding - **Status:** Fixed, awaiting test verification - **Documentation:** known_issues/scheduler.md

Fix Details:

```
// Previous (wrong):
r_descriptor_credit_counter <= 32'h0;
```

```
// Fixed - Exponential encoding:
// 0→1, 1→2, 2→4, 3→8, ..., 14→16384, 15→∞
r_descriptor_credit_counter <= (cfg_initial_credit == 4'hF) ?
32'hFFFFFFFF :
                                (cfg_initial_credit == 4'h0) ?
32'h00000001 :
                                (32'h1 << cfg_initial_credit);
```

Encoding Rationale: - Compact 4-bit configuration covers 1 to 16384 credits - Fine-grained control for low traffic (1, 2, 4, 8) - High-throughput support (256, 1024, 16384) - Special unlimited mode (15 → ∞) - Exponential encoding applied at initialization only; runtime operations are linear

31.10.2 8.2 Medium Priority Issues

Descriptor Engine Edge Cases: - Some stress test failures under high load - Edge case handling needs improvement - **Priority:** P2

SRAM Control Timing: - Rare timing issues in back-to-back operations - **Priority:** P2

 **See:** `known_issues/` directory for complete issue tracking

31.11 9. Integration Guidelines

31.11.1 9.1 Quick Start

```
rapids_top #(
    .AXI_ADDR_WIDTH(32),
    .AXI_DATA_WIDTH(64),
    .Network_DATA_WIDTH(64)
) u_rapids (
    // Clocking & Reset
    .aclk          (system_clk),
    .aresetn       (system_rst_n),

    // AXIL4 Control (connect to control fabric)
    .s_axil_awaddr  (ctrl_awaddr),
    .s_axil_awvalid (ctrl_awvalid),
    .s_axil_awready (ctrl_awready),
    // ... other AXIL signals

    // AXI4 Memory (connect to memory controller)
    .m_axi_sink_awaddr (mem_awaddr),
    .m_axi_sink_awvalid (mem_awvalid),
    // ... AXI write channel for sink
    // ... AXI read channel for source
```

```

// Network Network (connect to network fabric)
.s_network_tdata      (net_rx_data),
.s_network_tvalid     (net_rx_valid),
// ... Network slave (receive)
// ... Network master (transmit)

// MonBus Output (connect to monitor aggregator)
.monbus_pkt_valid     (rapids_mon_valid),
.monbus_pkt_ready     (rapids_mon_ready),
.monbus_pkt_data      (rapids_mon_data)
);

```

31.11.2 9.2 Configuration Steps

1. Initialize via AXIL4:

- Configure SRAM depths
- Set timeout thresholds
- Enable credit management (or disable if using workaround)

2. Load Descriptors:

- Write descriptors to Descriptor Engine FIFO
- Each descriptor specifies: address, length, control bits

3. Enable Operation:

- Set enable bits via AXIL4 registers
- Monitor MonBus for completion/error packets

 **See:** [rapids_spec/ch04_programming_models/01_programming.md](#) for register details

31.12 10. Development Status

31.12.1 10.1 Current Phase

Phase: Validation and Bug Fixing (In Progress)

- ✓ Core architecture implemented
- ✓ Basic functionality verified
- ✓ Scheduler credit counter bug fixed (exponential encoding implemented)
- ⌚ Credit management tests need verification (remove workarounds)
- ⌚ Stress testing ongoing
- ⌚ Edge case refinement

 **See:** [TASKS.md](#) for detailed work items

31.12.2 10.2 Roadmap

Near-Term (Q4 2025): - ✓ Fix scheduler credit counter bug (completed 2025-10-11) - ⌚ Verify credit management tests (remove workarounds) - ⌚ Complete descriptor engine stress testing - ⌚ Integration test suite expansion - ⌚ Performance benchmarking

Long-Term (2026+): - Chained descriptor support - Advanced error recovery - Performance optimizations - Multi-channel support

31.13 11. Performance Characteristics

31.13.1 11.1 Throughput

Target: Match network/memory interface bandwidth

Bottlenecks: - SRAM buffer size - AXI4 burst efficiency - Scheduler overhead

Optimization: - Increase SRAM depth for larger packets - Tune AXI4 burst parameters - Pipeline scheduler operations

31.13.2 11.2 Latency

Components: - Descriptor parsing: ~10 cycles - SRAM buffering: Configurable depth - AXI4 memory access: System dependent - End-to-end: Typically <100 cycles for small packets

31.13.3 11.3 Resource Utilization

Area: - Scheduler: ~2K LUTs - Each data path: ~3K LUTs - SRAM buffers: Configurable (dominant area) - Total: ~10K LUTs + SRAM

Power: - Clock gating opportunities in idle blocks - SRAM power depends on depth/width

31.14 12. Verification Infrastructure

31.14.1 12.1 Test Organization

Location: projects/components/rapids/dv/tests/

Structure:

```
projects/components/rapids/dv/tests/
├── fub_tests/                # Functional Unit Block tests
│   ├── scheduler/
│   ├── descriptor_engine/
│   └── program_engine/
```



```

├── network_interfaces/
│   └── simple_sram/
├── integration_tests/      # Multi-block scenarios
└── system_tests/          # Full RAPIDS operation

```

31.14.2 12.2 CocoTB Framework

Location: bin/TBClasses/rapids/

Components: - RAPIDS-specific drivers - Descriptor generators - Traffic patterns - Monitor checkers

 **See:** docs/markdown/TBClasses/ (once created)

31.14.3 12.2.1 MANDATORY: BFM Usage for FUB Tests

CRITICAL DESIGN REQUIREMENT

All RAPIDS FUB (Functional Unit Block) level tests MUST use CocoTB Framework BFMs. Manual handshake driving is NOT allowed.

Required BFM Components:

Interface Type	Framework Location	BFM Component
Custom valid/ready	bin/TBClasses/components/gaxi/	GAXI Master/Slave
AXI4	bin/TBClasses/components/axi4/	AXI4 Master/Slave
AXI4-Lite (AXIL)	bin/TBClasses/components/axil4/	AXIL Master/Slave
APB	bin/TBClasses/components/apb/	APB Master/Slave
AXI-Stream (AXIS)	bin/TBClasses/components/axis4/	AXIS Master/Slave
Network	bin/TBClasses/components/network/	Network Master/Slave
MonBus	bin/TBClasses/components/monbus/	MonBus drivers

Rationale: 1. **Consistency:** All tests use standardized handshake protocols 2. **Correctness:** BFMs handle complex timing scenarios (backpressure, randomization) 3. **Reusability:** Same BFM across all RAPIDS tests 4. **Maintainability:** Fix once in BFM, all tests benefit 5. **Coverage:** BFMs include comprehensive timing profiles

Example - Program Engine:

```

# ✗ WRONG: Manual handshake (violates design requirement)
async def send_request(self, addr, data):

```

```

        self.dut.program_valid.value = 1
        self.dut.program_pkt_addr.value = addr
        # ... manual handshaking logic ...

# ✓ CORRECT: Use GAXI Master BFM
from CocoTBFramework.components.gaxi.gaxi_master import GAXIMaster

class ProgramEngineTB(TBBase):
    def __init__(self, dut):
        super().__init__(dut)
        self.program_master = GAXIMaster(
            dut=dut,
            clock=dut.clk,
            valid_signal='program_valid',
            ready_signal='program_ready',
            data_signals=['program_pkt_addr', 'program_pkt_data'],
            data_widths=[64, 32]
        )

    async def send_request(self, addr, data):
        await self.program_master.write({'program_pkt_addr': addr,
            'program_pkt_data': data})

```

📖 **See:** - projects/components/rapids/CLAUDE.md - Rule #1 for complete BFM usage guidelines - bin/TBClasses/components/gaxi/README.md - GAXI BFM documentation - bin/TBClasses/components/axi4/README.md - AXI4 BFM documentation

31.14.4 12.3 Test File Structure (Standard Pattern)

⚠ **MANDATORY: All RAPIDS tests must follow this structure** ⚠

RAPIDS tests follow the same pattern as AMBA tests for consistency across the repository:

Example:
projects/components/rapids/dv/tests/fub_tests/scheduler/test_scheduler.py

```

import os
import pytest
import cocotb
from cocotb_test.simulator import run

# Import REUSABLE testbench class (NOT defined in this file!)
from TBClasses.rapids.scheduler_tb import SchedulerTB
from TBClasses.shared.utilities import get_paths, create_view_cmd
from TBClasses.shared.tbbase import TBBase

```

```

#
=====
=====
# COCOTB TEST FUNCTIONS - prefix with "cocotb_" to prevent pytest
collection
#
=====
=====

@cocotb.test(timeout_time=100, timeout_unit="ms")
async def cocotb_test_basic_flow(dut):
    """Test basic descriptor flow."""
    tb = SchedulerTB(dut)
    await tb.setup_clocks_and_reset() # Mandatory init method
    await tb.initialize_test()
    result = await tb.test_basic_descriptor_flow()
    assert result, "Basic descriptor flow test failed"

@cocotb.test(timeout_time=100, timeout_unit="ms")
async def cocotb_test_credit_encoding(dut):
    """Test exponential credit encoding."""
    tb = SchedulerTB(dut)
    await tb.setup_clocks_and_reset() # Mandatory init method
    await tb.initialize_test()
    result = await tb.test_exponential_encoding_all_values()
    assert result, "Credit encoding test failed"

#
=====
=====
# PARAMETER GENERATION - at bottom of file
#
=====
=====

def generate_scheduler_test_params():
    """Generate test parameters for scheduler tests."""
    return [
        # (channel_id, num_channels, data_width, credit_width)
        (0, 8, 512, 8), # Standard configuration
        # Add more parameter sets as needed
    ]

scheduler_params = generate_scheduler_test_params()

#
=====
=====

```

```

=====
# PYTEST WRAPPER FUNCTIONS - at bottom of file
#
=====

@pytest.mark.parametrize("channel_id, num_channels, data_width,
credit_width", scheduler_params)
def test_basic_flow(request, channel_id, num_channels, data_width,
credit_width):
    """
    Scheduler basic flow test.

    Run with: pytest
    projects/components/rapids/dv/tests/fub_tests/scheduler/test_scheduler
    .py::test_basic_flow -v
    """
    module, repo_root, tests_dir, log_dir, rtl_dict = get_paths({
        'rtl_rapids_fub': '../rtl/rapids_fub'
    })

    dut_name = "scheduler"
    toplevel = dut_name

    verilog_sources = [
        os.path.join(repo_root, 'rtl', 'amba', 'includes',
'monitor_pkg.sv'),
        os.path.join(repo_root, 'rtl', 'rapids', 'includes',
'rapids_pkg.sv'),
        os.path.join(rtl_dict['rtl_rapids_fub'], f'{dut_name}.sv'),
    ]

    # Format parameters for unique test name
    cid_str = TBBase.format_dec(channel_id, 2)
    nc_str = TBBase.format_dec(num_channels, 2)
    dw_str = TBBase.format_dec(data_width, 4)
    cw_str = TBBase.format_dec(credit_width, 2)
    test_name_plus_params =
f"test_{dut_name}_cid{cid_str}_nc{nc_str}_dw{dw_str}_cw{cw_str}"

    # Add worker ID for pytest-xdist parallel execution
    worker_id = os.environ.get('PYTEST_XDIST_WORKER', '')
    if worker_id:
        test_name_plus_params = f"{test_name_plus_params}_{worker_id}"

    log_path = os.path.join(log_dir, f'{test_name_plus_params}.log')

```

```

    sim_build = os.path.join(tests_dir, 'local_sim_build',
test_name_plus_params)
    os.makedirs(sim_build, exist_ok=True)
    os.makedirs(log_dir, exist_ok=True)

    rtl_parameters = {
        'CHANNEL_ID': channel_id,
        'NUM_CHANNELS': num_channels,
        'DATA_WIDTH': data_width,
        'CREDIT_WIDTH': credit_width,
        # Add other RTL parameters as needed
    }

    extra_env = {
        'LOG_PATH': log_path,
        'TEST_CHANNEL_ID': str(channel_id),
        'TEST_NUM_CHANNELS': str(num_channels),
        'TEST_DATA_WIDTH': str(data_width),
    }

    compile_args = ["-Wno-TIMESCALEMOD"]
    sim_args = []
    plusargs = []

    cmd_filename = create_view_cmd(log_dir, log_path, sim_build,
module, test_name_plus_params)

    try:
        run(
            python_search=[tests_dir],
            verilog_sources=verilog_sources,
            includes=[
                os.path.join(repo_root, 'rtl', 'rapids', 'includes'),
                os.path.join(repo_root, 'rtl', 'amba', 'includes'),
            ],
            toplevel=toplevel,
            module=module,
            testcase="cocotb_test_basic_flow", # ← cocotb test
function name
            parameters=rtl_parameters,
            sim_build=sim_build,
            extra_env=extra_env,
            waves=False,
            keep_files=True,
            compile_args=compile_args,
            sim_args=sim_args,
            plusargs=plusargs,

```

```

    )

    print(f"✓ Scheduler basic flow test completed!")
    print(f"Logs: {log_path}")

except Exception as e:
    print(f"✗ Scheduler basic flow test failed: {str(e)}")
    print(f"Logs preserved at: {log_path}")
    raise

```

Key Structure Requirements:

1. Testbench Class Location:

- ALWAYS in bin/TBClasses/rapids/
- NEVER inline in test file
- Reusable across multiple test files

2. CocoTB Test Functions:

- Prefix with cocotb_ to prevent pytest collection
- Located at top of test file
- Use @cocotb.test() decorator
- Call testbench methods

3. Parameter Generation:

- Function returns list of parameter tuples
- Located near bottom of file (before pytest wrappers)
- Stored in variable (e.g., scheduler_params)

4. Pytest Wrapper Functions:

- Located at bottom of file
- Use @pytest.mark.parametrize() with parameter variable
- Build unique test names with TBBase.format_dec()
- Call run() with testcase="cocotb_test_function_name"
- Handle parallel execution (PYTEST_XDIST_WORKER)

5. Mandatory TB Methods:

- async def setup_clocks_and_reset(self) - Complete initialization
- async def assert_reset(self) - Assert reset signal(s)
- async def deassert_reset(self) - Deassert reset signal(s)

 **See:** - val/amba/test_apb_slave.py - Reference example -
 projects/components/rapids/CLAUDE.md - Detailed TB requirements

31.15 13. Quick Reference

31.15.1 13.1 Key Files

File	Purpose
projects/components/rapids/PRD.md	This document (overview)
projects/components/rapids/README.md	Quick start guide
projects/components/rapids/CLAUDE.md	AI assistance guide
projects/components/rapids/TASKS.md	Work items (to be created)
projects/components/rapids/docs/rapids_spec/	Complete specification
projects/components/rapids/known_issues/	Bug tracking
docs/RAPIDS_Validation_Status_Report.md	Test results

31.15.2 13.2 Commands

```
# Run RAPIDS tests
pytest projects/components/rapids/dv/tests/fub_tests/ -v #
Individual blocks
pytest projects/components/rapids/dv/tests/integration_tests/ -v #
Multi-block
pytest projects/components/rapids/dv/tests/system_tests/ -v #
Full system

# Run specific FUB test
pytest projects/components/rapids/dv/tests/fub_tests/scheduler/ -v

# Lint RAPIDS RTL
verilator --lint-only
projects/components/rapids/rtl/rapids_fub/scheduler.sv

# View specifications
cat projects/components/rapids/docs/rapids_spec/rapids_index.md
cat
projects/components/rapids/docs/rapids_spec/ch02_blocks/01_01_schedule
r.md
```

31.16 14. Success Criteria

31.16.1 14.1 Functional

- ✓ All major blocks implemented
- ✓ Basic data flows working
- ✓ Scheduler credit bug fixed (exponential encoding implemented)
- ⌚ Credit management tests verified (remove workarounds, run full suite)
- ⌚ 100% descriptor test pass rate (currently ~80%)
- ⌚ Stress tests passing

31.16.2 14.2 Quality

- ⌚ >90% functional coverage (currently ~80%)
- ⌚ >85% code coverage
- ✓ All FSMs documented
- ⌚ Integration guide complete

31.16.3 14.3 Documentation

- ✓ Complete specification in rapids_spec/
 - ✓ Known issues documented
 - ⌚ Integration examples
 - ⌚ Performance characterization
-

31.17 15. Educational Value

RAPIDS demonstrates: - ✓ Complex FSM coordination (scheduler ↔ data paths) - ✓ Descriptor-based DMA design patterns - ✓ Buffer management strategies - ✓ Credit-based flow control with exponential encoding - ✓ Multi-interface integration - ✓ Comprehensive monitoring - ✓ Error detection and reporting - ✓ Compact configuration encoding strategies

Target Audience: - Advanced RTL designers - Accelerator architects - DMA engine developers - System integration engineers

31.18 15. Attribution and Contribution Guidelines

31.18.1 15.1 Git Commit Attribution

When creating git commits for RAPIDS documentation or implementation:

Use:

Documentation and implementation support by Claude.

Do NOT use:

Co-Authored-By: Claude <noreply@anthropic.com>

Rationale: RAPIDS documentation and organization receives AI assistance for structure and clarity, while design concepts and architectural decisions remain human-authored.

31.19 16. Documentation Generation

31.19.1 16.1 Generating PDF/DOCX from Specification

Tool: /mnt/data/github/rtldesignsherpa/bin/md_to_docx.py

Use this tool to convert the linked specification index into a single all-inclusive PDF or DOCX file.

Basic Usage:

Generate DOCX from rapids_spec index

```
python bin/md_to_docx.py \
    projects/components/rapids/docs/rapids_spec/rapids_index.md \
    -o projects/components/rapids/docs/RAPIDS_Specification_v0.25.docx \
    --toc \
    --title-page
```

Generate both DOCX and PDF

```
python bin/md_to_docx.py \
    projects/components/rapids/docs/rapids_spec/rapids_index.md \
    -o projects/components/rapids/docs/RAPIDS_Specification_v0.25.docx \
    --toc \
    --title-page \
    --pdf
```

With custom template (optional)

```
python bin/md_to_docx.py \
    projects/components/rapids/docs/rapids_spec/rapids_index.md \
```

```

    -o projects/components/rapids/docs/RAPIDS_Specification_v0.25.docx
\
    -t path/to/template.dotx \
    --toc \
    --title-page \
    --pdf

```

Key Features:

- **Recursive Collection:** Follows all markdown links in the index file
- **Heading Demotion:** Automatically adjusts heading levels for included files
- **Table of Contents:** - -toc flag generates automatic ToC
- **Title Page:** - -title-page flag creates title page from first heading
- **PDF Export:** - -pdf flag generates both DOCX and PDF
- **Image Support:** Resolves images relative to source directory
- **Template Support:** Optional custom DOCX/DOTX template via -t flag

Common Workflow:

```

# 1. Update version number in index file (rapids_index.md)
# 2. Generate documentation
cd /mnt/data/github/rtldesignsherpa
python bin/md_to_docx.py \
    projects/components/rapids/docs/rapids_spec/rapids_index.md \
    -o projects/components/rapids/docs/RAPIDS_Specification_v0.25.docx
\
    --toc --title-page --pdf

# 3. Output files created:
#     - RAPIDS_Specification_v0.25.docx
#     - RAPIDS_Specification_v0.25.pdf (if --pdf used)

```

Debug Mode:

```

# Generate debug markdown to see combined output
python bin/md_to_docx.py \
    projects/components/rapids/docs/rapids_spec/rapids_index.md \
    -o output.docx \
    --debug-md

```

This creates debug.md showing the complete merged content

Tool Requirements: - Python 3.6+ - Pandoc installed and in PATH - For PDF generation: LaTeX (e.g., texlive) or use Pandoc's built-in PDF writer

 **See:** /mnt/data/github/rtldesignsherpa/bin/md_to_docx.py for complete implementation details

31.20 16.2 PDF Generation Location

IMPORTANT: PDF files should be generated in the docs directory:

/mnt/data/github/rtldesignsherpa/projects/components/rapids/docs/

Quick Command: Use the provided shell script:

```
cd /mnt/data/github/rtldesignsherpa/projects/components/rapids/docs
./generate_pdf.sh
```

The shell script will automatically: 1. Use the md_to_docx.py tool from bin/ 2. Process the rapids_spec index file 3. Generate both DOCX and PDF files in the docs/ directory 4. Create table of contents and title page

 **See:** bin/md_to_docx.py for complete implementation details

31.21 17. References

31.21.1 16.1 Internal Documentation

- **Complete Spec:** rapids_spec/ ← **Primary technical reference**
- **Validation:** docs/RAPIDS_Validation_Status_Report.md
- **Master PRD:** /PRD.md
- **Repository Guide:** /CLAUDE.md

31.21.2 16.2 Related Subsystems

- **AMBA:** rtl/amba/ - Monitor infrastructure used in RAPIDS
- **Common:** rtl/common/ - Building blocks (counters, FIFOs, etc.)
- **CocoTB Framework:** bin/TBClasses/rapids/

31.21.3 16.3 External References

- AXI4 Specification: ARM IHI0022E
 - AXIL4 Specification: ARM IHI0022E (subset)
 - Network interface specs (custom Network protocol)
-

Document Version: 1.0 **Last Updated:** 2025-09-30 **Review Cycle:** Monthly during active development **Next Review:** 2025-10-30 **Owner:** RTL Design Sherpa Project

31.22 Navigation

- ← **Back to Root:** /PRD.md
- **Complete Specification:** rapids_spec/rapids_index.md

- **Quick Start:** README.md
- **AI Guidance:** CLAUDE.md
- **Tasks:** TASKS.md (to be created)
- **Issues:** known_issues/

RTL Design Sherpa · Learning Hardware Design Through Practice GitHub · Documentation Index · MIT License

32 Claude Code Guide: RAPIDS Subsystem

Version: 1.0 **Last Updated:** 2025-10-11 **Purpose:** AI-specific guidance for working with RAPIDS subsystem

32.1 Quick Context

What: Rapid AXI Programmable In-band Descriptor System - Custom DMA-style accelerator with network interfaces **Status:** 🟡 Active development - ~80% test coverage, validation in progress **Your Role:** Help users understand architecture, fix bugs, extend functionality

📖 **Complete Specification:** projects/components/rapids/docs/rapids_spec/ ← **Always reference this for technical details**

32.2 📖 Global Requirements Reference

IMPORTANT: Check /GLOBAL_REQUIREMENTS.md before starting RAPIDS work

All mandatory requirements are consolidated in the global requirements document: - **See:** /GLOBAL_REQUIREMENTS.md - Repository-wide mandatory requirements - **RAPIDS-Specific:** Attribution format, BFM usage requirements - **Universal:** TB location, three methods, TBBase inheritance, 100% success

This CLAUDE.md provides RAPIDS-specific guidance. Also review: - Root /CLAUDE.md - Repository-wide patterns - projects/components/CLAUDE.md - Project area standards (reset macros, FPGA attributes) - bin/TBClasses/CLAUDE.md - Framework usage patterns

32.3 Critical Rules for This Subsystem

32.3.1 Rule #0: Attribution Format for Git Commits

IMPORTANT: When creating git commit messages for RAPIDS documentation or code:

Use:

Documentation and implementation support by Claude.

Do NOT use:

Co-Authored-By: Claude <noreply@anthropic.com>

Rationale: RAPIDS receives AI assistance for structure and clarity, while design concepts and architectural decisions remain human-authored.

32.3.2 Rule #0.1: Testbench Location and Test Structure (MANDATORY)

 **See:** /GLOBAL_REQUIREMENTS.md Section 2.1 for complete requirement

RAPIDS-Specific Directory Structure:

```
projects/components/rapids/dv/
├── tbclasses/                    # ★ RAPIDS TB classes (project
area!)
│   ├── scheduler_tb.py          # Scheduler testbench
│   ├── descriptor_engine_tb.py  # Descriptor engine testbench
│   └── rapids_integration_tb.py  # Integration testbench
├── tests/                       # Test runners
│   ├── fub_tests/scheduler/test_scheduler.py
│   ├── fub_tests/descriptor_engine/test_desc_engine.py
│   └── integration_tests/test_rapids_integration.py
```

RAPIDS Import Pattern:

```
# Import framework utilities (PYTHONPATH includes bin/)
import os, sys
from TBClasses.shared.utilities import get_repo_root
from TBClasses.shared.tbbase import TBBase

# Add repo root to Python path using robust git-based method
repo_root = get_repo_root()
sys.path.insert(0, repo_root)

# Import RAPIDS TB from project area
from projects.components.rapids.dv.tbclasses.scheduler_tb import
SchedulerTB
```

RAPIDS Test File Organization:

```

# 1. CocoTB functions at top (prefix "cocotb_test_*")
@cocotb.test(timeout_time=100, timeout_unit="ms")
async def cocotb_test_basic_flow(dut):
    tb = SchedulerTB(dut)
    await tb.setup_clocks_and_reset()
    # ... test logic

# 2. Parameter generation near bottom
def generate_scheduler_test_params():
    return [(0, 8, 512, 8)] # (channel_id, num_channels, data_width,
                           credit_width)

scheduler_params = generate_scheduler_test_params()

# 3. Pytest wrappers at bottom
@pytest.mark.parametrize("channel_id, ...", scheduler_params)
def test_basic_flow(request, channel_id, ...):
    run(..., testcase="cocotb_test_basic_flow", ...)

```

Why RAPIDS Tests Use Project Area: 1. **Reusability:** Same TB in FUB tests, integration tests, system tests 2. **Composition:** Scheduler TB + Descriptor TB → Integration TB 3. **Discovery:** All RAPIDS code under projects/components/rapids/

 **Complete Pattern:** val/amba/test_apb_slave.py lines 1251-1346 (reference example)

 **Queue-Based Verification Pattern:** See /GLOBAL_REQUIREMENTS.md Section 2.4

RAPIDS-Specific Usage:

RAPIDS uses queue-based verification for in-order verification of program engine, descriptor engine, and AXI transactions.

Example - Program Engine Verification:

```

# Direct queue access for in-order RAPIDS operations
class ProgramEngineTB(TBBase):
    async def verify_write_operation(self, expected_addr,
    expected_data):
        """RAPIDS program engine: In-order writes, simple queue
        verification"""
        # Wait for AXI transaction
        await self.wait_for_transaction(self.aw_monitor)

        # Get from queue - program engine writes are always in-order
        aw_pkt = self.aw_monitor._recvQ.popleft()
        w_pkt = self.w_monitor._recvQ.popleft()

        # Verify

```

```

assert aw_pkt.addr == expected_addr
assert w_pkt.data == expected_data

```

When RAPIDS Uses Memory Models: - ✗ Descriptor engine (in-order) - Use queue access - ✗ Program engine (in-order) - Use queue access - ✓ Integration tests with multiple masters - Memory model tracks state

📖 **Complete Patterns:** docs/VERIFICATION_ARCHITECTURE_GUIDE.md

32.3.3 Rule #0.5: Three Mandatory TB Methods (MANDATORY)

📖 **See:** /GLOBAL_REQUIREMENTS.md Section 2.2 for complete requirement

RAPIDS-Specific Context:

Many RAPIDS modules (especially scheduler and credit management) require configuration signals set BEFORE reset is released. This is because some counters/state are initialized during reset based on these config values.

Critical Example - Exponential Credit Encoding:

```

async def setup_clocks_and_reset(self):
    """RAPIDS-specific: Config signals MUST be set before reset"""
    # Start clock
    await self.start_clock('clk', freq=10, units='ns')

    # ⚠️ CRITICAL: Set exponential credit config BEFORE reset
    # Scheduler's credit counter initializes during reset based on
    this value
    self.dut.cfg_initial_credit.value = 4 # 4 = 16 credits (2^4)
    self.dut.cfg_use_credit.value = 1

    # Now perform reset sequence
    await self.assert_reset()
    await self.wait_clocks('clk', 10)
    await self.deassert_reset()
    await self.wait_clocks('clk', 5)

async def assert_reset(self):
    """Assert active-low reset"""
    self.dut.rst_n.value = 0

async def deassert_reset(self):
    """Release active-low reset"""
    self.dut.rst_n.value = 1

```

Why Config-Before-Reset Matters for RAPIDS: - Scheduler credit counter: Initialized to $(1 \ll \text{cfg_initial_credit})$ during reset - Descriptor engine depth: Configuration read during reset sequence - SRAM parameters: Must be stable before memory controllers come out of reset

Common RAPIDS Configs to Set Before Reset: - `cfg_initial_credit` - Exponential credit encoding (0→1, 1→2, 2→4, etc.) - `cfg_use_credit` - Enable/disable credit-based flow control - `cfg_timeout_threshold` - Watchdog timer configuration - `cfg_sram_depth` - SRAM buffer size parameters

32.3.4 Rule #0.75: Audit Signal Naming BEFORE Writing Testbenches

⚠ **CRITICAL: Check for Signal Naming Conflicts BEFORE Factory Usage** ⚠

Before writing testbench code that uses AXI factory functions, audit your RTL for signal naming conflicts.

The Problem: AXI factory pattern matching searches for signals using prefix + channel patterns (e.g., {prefix}ar_valid, {prefix}r_ready). If you have: - Internal signals: `desc_valid`, `desc_ready` (simple handshake) - External AXI ports: `desc_ar_valid`, `desc_ar_ready` (AXI AR channel)

Both match `desc_*valid` → Factory finds BOTH signals → Initialization FAILS!

Solution - Signal Naming Audit Tool:

```
# Audit single file before writing testbench
../../bin/audit_signal_naming_conflicts.py
projects/components/rapids/rtl/rapids_macro/scheduler_group.sv
```

```
# Audit entire RAPIDS subsystem
../../bin/audit_signal_naming_conflicts.py
projects/components/rapids/rtl/
```

```
# Generate markdown report
../../bin/audit_signal_naming_conflicts.py
projects/components/rapids/rtl/ --markdown signal_conflicts.md
```

Known RAPIDS Conflicts: See

`projects/components/rapids/known_issues/scheduler_group_signal_naming_conflicts.md` for documented conflicts in `scheduler_group.sv`: - desc prefix: 4 internal + 4 external (AR/R channels) - prog prefix: 4 internal + 6 external (AW/W/B channels)

Recommended Workflow: 1. ✓ Write RTL module with signals 2. ✓ **Run audit script to detect conflicts** 3. ✓ Fix naming conflicts (rename internal signals with `_to_sched` suffix) 4. ✓ Write testbench using factory pattern matching

Three Solutions When Conflicts Found: 1. **Rename internal signals** (recommended): desc_valid → desc_to_sched_valid 2. **Use explicit signal_map**: Bypass pattern matching with manual signal mapping 3. **Test at higher level**: Where internal signals aren't visible (e.g., rapids_top)

 **Complete Guide:** bin/SIGNAL_NAMING_AUDIT.md

32.3.5 Rule #1: MANDATORY BFM Usage for FUB-Level Tests

 **CRITICAL DESIGN INTENTION - USE FRAMEWORK BFMs** 

For all RAPIDS FUB (Functional Unit Block) level tests, you **MUST** use appropriate BFMs from the CocoTB Framework:

Interface Type → Required BFM Component:

Interface Type	Framework Component Location	Usage
Custom valid/ready	bin/TBClasses/components/gaxi/	GAXI Master/Slave BFMs
AXI4	bin/TBClasses/components/axi4/	AXI4 Master/Slave drivers
AXI4-Lite (AXIL)	bin/TBClasses/components/axil4/	AXIL Master/Slave drivers
APB	bin/TBClasses/components/apb/	APB Master/Slave drivers
AXI-Stream (AXIS)	bin/TBClasses/components/axis4/	AXIS Master/Slave drivers
Network	bin/TBClasses/components/network/	Network Master/Slave

Interface Type	Framework Component Location	Usage
		ave drivers
MonBus	bin/TBClasses/components/monbus/	MonBus drivers

Critical Rules:

1. **NEVER manually drive valid/ready handshakes** - Use GAXI BFM components
2. **NEVER create custom protocol drivers** - Framework components already exist
3. **NEVER embed simple handshake logic** - Extract to GAXI Master/Slave

Example - Program Engine Interface:

```
# ✗ WRONG: Manual handshake driving
async def send_program_request(self, addr, data):
    # Manually driving program_valid/program_ready - DON'T DO THIS!
    self.dut.program_valid.value = 1
    self.dut.program_pkt_addr.value = addr
    self.dut.program_pkt_data.value = data
    while int(self.dut.program_ready.value) == 0:
        await self.wait_clocks(self.clk_name, 1)
    await self.wait_clocks(self.clk_name, 1)
    self.dut.program_valid.value = 0
```

```
# ✓ CORRECT: Use GAXI Master BFM
from CocotbFramework.components.gaxi.gaxi_master import GAXIMaster
```

```
class ProgramEngineTB(TBBase):
    def __init__(self, dut):
        super().__init__(dut)
        # Create GAXI master for program interface
        self.program_master = GAXIMaster(
            dut=dut,
            clock=dut.clk,
            valid_signal='program_valid',
            ready_signal='program_ready',
            data_signals=['program_pkt_addr', 'program_pkt_data'],
            data_widths=[64, 32],
            name='program_interface'
        )

    async def send_program_request(self, addr, data):
```

```

    # Use GAXI master for proper handshaking
    await self.program_master.write({'program_pkt_addr': addr,
'program_pkt_data': data})

```

Why This Rule Exists:

1. **Consistency:** All tests use same handshake protocol
2. **Correctness:** GAXI BFM's handle complex timing scenarios correctly
3. **Reusability:** Same BFM used across all RAPIDS tests
4. **Maintainability:** Fix once in BFM, all tests benefit
5. **Coverage:** GAXI BFM's include timing randomization and backpressure

When Manual Driving is Acceptable:

- ✓ **Quick debug/prototype** - Temporary, will be replaced with BFM
- ✓ **Clock/reset initialization** - Not part of protocol handshaking
- ✗ **Production testbenches** - MUST use BFM's

Search Before Creating:

```

# Find existing GAXI components
find bin/TBClasses/components/gaxi/ -name "*.py"

```

```

# Find example usage
grep -r "GAXIMaster\|GAXISlave"
projects/components/rapids/dv/tests/fub_tests/
grep -r "from.*gaxi" bin/TBClasses/

```

BFM Selection Guide:

Need to drive interface with valid/ready?

- └ Standard protocol (AXI4, APB, AXIS, Network)?
 - └ Use protocol-specific BFM (axi4/, apb/, axis4/, network/)
- └ Custom RAPIDS interface with valid/ready signals?
 - └ Use GAXI Master/Slave BFM (gaxi/)
- └ MonBus monitor packet interface?
 - └ Use MonBus BFM (monbus/)

📖 **See:** - bin/TBClasses/components/gaxi/README.md - GAXI BFM documentation -
 bin/TBClasses/components/axi4/README.md - AXI4 BFM documentation -
 val/amba/test_*.py - Reference examples using framework BFM's

32.3.6 Rule #2: Always Reference Detailed Specification

This subsystem has extensive documentation in
projects/components/rapids/docs/rapids_spec/

Before answering technical questions:

```
# Check complete specification
ls projects/components/rapids/docs/rapids_spec/
cat projects/components/rapids/docs/rapids_spec/rapids_index.md
cat
projects/components/rapids/docs/rapids_spec/ch02_blocks/01_01_schedule
r.md
```

Your answer should: 1. Provide direct answer/code 2. **Then link to detailed spec:** “See projects/components/rapids/docs/rapids_spec/{file}.md for complete specification”

32.3.7 Rule #3: Know the Known Issues

Fixed Critical Issue: - ✓ **Scheduler Credit Counter - FIXED**

(projects/components/rapids/rtl/rapids_fub/scheduler.sv:567-570) - Was: Credit counter hardcoded to 0 - Now: Implements exponential encoding (0→1, 1→2, 2→4, ..., 15→∞) - Impact: Credit-based flow control now functional with proper encoding - Tests: Verify exponential decoding works correctly - Priority: P0 (Critical - COMPLETED)

Always check: projects/components/rapids/known_issues/ before diagnosing bugs

```
ls projects/components/rapids/known_issues/
cat projects/components/rapids/known_issues/scheduler.md
```

32.3.8 Rule #4: RAPIDS is Complex - Understand Block Interactions

Key Interaction Patterns:

1. Descriptor Flow:

Software → AXIL4 → Descriptor Engine → Scheduler → Data Paths

2. Sink Data Path (Network → Memory):

Network Slave → Sink SRAM Control → Sink AXI Write Engine →
System Memory

3. Source Data Path (Memory → Network):

System Memory → Source AXI Read Engine → Source SRAM Control →
Network Master

4. Monitoring:

All Blocks → MonBus Reporter → MonBus Output

Never work on one block in isolation without understanding its upstream/downstream dependencies!

32.3.9 Rule #5: Test Strategy is Multi-Layered

RAPIDS testing follows this hierarchy:


1. **FUB (Functional Unit Block) Tests:**
projects/components/rapids/dv/tests/fub_tests/
 - Individual block testing
 - Focus: Module-level functionality
 - Example: Scheduler FSM, Descriptor Engine FIFO
2. **Integration Tests:**
projects/components/rapids/dv/tests/integration_tests/
 - Multi-block scenarios
 - Focus: Block-to-block interfaces
 - Example: Scheduler + Descriptor Engine, Sink data path end-to-end
3. **System Tests:** projects/components/rapids/dv/tests/system_tests/
 - Full RAPIDS operation
 - Focus: Realistic traffic patterns
 - Example: Complete DMA transfer with monitoring

When creating/modifying tests, ensure appropriate test layer is used!

32.4 Architecture Quick Reference

32.4.1 Block Organization

RAPIDS Architecture (17 SystemVerilog modules)

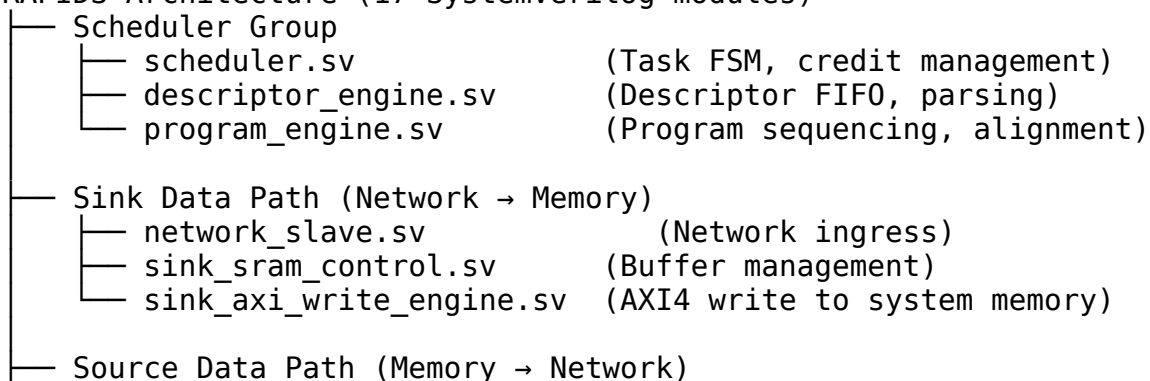

—	source_axi_read_engine.sv	(AXI4 read from system memory)
—	source_sram_control.sv	(Buffer management)
—	network_master.sv	(Network egress)
—	MonBus AXIL Group	
—	axil4_slave.sv	(Control/status registers)
—	monbus_reporter.sv	(Monitor packet generation)

📖 See: [projects/components/rapids/docs/rapids_spec/ch02_blocks/00_overview.md](#) for detailed block descriptions

32.4.2 Module Quick Reference

Module	Location	Purpose	Documentation
scheduler.sv	rapids_fub/	Task FSM, credit management	rapids_spec/ch02_blocks/01_01_scheduler.md
descriptor_engine.sv	rapids_fub/	Descriptor FIFO, parsing	rapids_spec/ch02_blocks/01_02_descriptor_engine.md
program_engine.sv	rapids_fub/	Program sequencing	rapids_spec/ch02_blocks/01_03_program_engine.md
network_slave.sv	rapids_fub/	Network ingress	rapids_spec/ch02_blocks/02_01_network_slave.md
sink_sram_control.sv	rapids_fub/	Sink buffer management	rapids_spec/ch02_blocks/02_02_sink_sram_control.md
sink_axi_write_engine.sv	rapids_fub/	Memory writes	rapids_spec/ch02_blocks/02_03_sink_axi_write_engine.md
source_axi_read_engine.sv	rapids_fub/	Memory reads	rapids_spec/ch02_blocks/03_03_source_axi_read_engine.md
source_sram_control.sv	rapids_fub/	Source buffer management	rapids_spec/ch02_blocks/03_02_source_sram_control.md
network_master.sv	rapids_fub/	Network egress	rapids_spec/ch02_blocks/

Module	Location	Purpose	Documentation
rapids_top.sv	rapids_macro/	Top-level integration	03_01_network_master.md rapids_spec/ ch03_interfaces/ 01_top_level.md

32.4.3 Interface Summary

Interface	Type	Width	Purpose	Specification
AXIL4	Slave	32-bit	Control/status registers	rapids_spec/ ch03_interfaces/ 02_axil_interface_spec.md
AXI4 (Sink)	Master	Configurable	Write to system memory	rapids_spec/ ch03_interfaces/ 03_axi4_interface_spec.md
AXI4 (Source)	Master	Configurable	Read from system memory	rapids_spec/ ch03_interfaces/ 03_axi4_interface_spec.md
Network (Sink)	Slave	Configurable	Network ingress	rapids_spec/ ch03_interfaces/ 04_network_interface_spec.md
Network (Source)	Master	Configurable	Network egress	rapids_spec/ ch03_interfaces/ 04_network_interface_spec.md
MonBus	Master	64-bit	Monitor packet output	rapids_spec/ ch03_interfaces/ 05_monbus_interface_spec.md

32.5 Common User Questions and Responses

32.5.1 Q: "How does the scheduler work?"

A: Direct answer:

The scheduler is a complex FSM that coordinates RAPIDS operations:

1. **Idle State:** Waits for descriptors from Descriptor Engine
2. **Parse State:** Extracts descriptor fields (address, length, control)

3. **Credit Check:** Verifies credit availability (if credit mode enabled)
4. **Execute State:** Activates appropriate data path (sink or source)
5. **Monitor State:** Tracks operation progress
6. **Complete State:** Generates completion packets, updates credits

Key FSM States: - IDLE → PARSE → CREDIT_CHECK → EXECUTE → MONITOR → COMPLETE → IDLE

Credit Management: - ✓ **FIXED:** Exponential credit encoding now implemented (lines 567-570) -
Encoding: 0→1, 1→2, 2→4, 3→8, ..., 14→16384, 15→∞ (unlimited) - **See Q&A below** for complete encoding table and details

 **See:** -

projects/components/rapids/docs/rapids_spec/ch02_blocks/01_01_scheduler.md -
 Complete FSM specification - projects/components/rapids/known_issues/scheduler.md -
 Known bugs and workarounds

32.5.2 Q: “How do I configure RAPIDS?”

A: Configuration via AXIL4 interface:

```
// 1. Initialize RAPIDS via AXIL4 writes
// Configure SRAM depths
write_axil(ADDR_SINK_SRAM_DEPTH, 1024);
write_axil(ADDR_SOURCE_SRAM_DEPTH, 1024);

// Set timeout thresholds
write_axil(ADDR_TIMEOUT_THRESHOLD, 1000);

// Configure initial credits (exponential encoding)
// 0→1, 1→2, 2→4, 3→8, 4→16, etc.
write_axil(ADDR_INITIAL_CREDIT, 4); // 4 = 16 credits (2^4)
write_axil(ADDR_CREDIT_ENABLE, 1); // ✓ Enable credit mode (now fixed!)

// 2. Load descriptors
write_descriptor(addr, length, control_bits);

// 3. Enable operation
write_axil(ADDR_ENABLE, 1);
```

 **See:** - projects/components/rapids/docs/rapids_spec/ch04_programming_models/01_programming.md - Programming model -
 projects/components/rapids/docs/rapids_spec/ch05_registers/01_registers.md -
 Register definitions

32.5.3 Q: “What’s the data flow for network to memory transfer?”

A: Sink path data flow:

1. Network Packet Arrives
↓
2. Network Slave receives packet
 - Validates packet format
 - Handshakes with Network interface↓
3. Sink SRAM Control buffers data
 - Writes to SRAM
 - Manages write pointers
 - Handles backpressure↓
4. Sink AXI Write Engine
 - Reads from SRAM
 - Generates AXI4 write transactions
 - Bursts data to system memory↓
5. Completion Reporting
 - Generates MonBus completion packet
 - Updates scheduler state

Key Considerations: - SRAM acts as buffer to decouple network from memory timing - AXI4 bursts used for efficient memory access - Backpressure propagates from memory to network

📖 See:

projects/components/rapids/docs/rapids_spec/ch02_blocks/02_00_sink_data_path.md

32.5.4 Q: “What’s the credit counter bug and how does exponential encoding work?”

A: Scheduler credit counter exponential encoding:

The scheduler uses **exponential credit encoding** to provide a wide range of credit values (1 to 16384) with a compact 4-bit configuration:

Encoding Table:

cfg_initial_credit	Actual Credits	Use Case
0	1	Minimum (2^0)
1	2	Very low traffic (2^1)
2	4	Low traffic (2^2)
3	8	(2^3)
4	16	Typical (2^4)
5	32	(2^5)
6	64	Medium traffic (2^6)
7	128	(2^7)
8	256	High traffic (2^8)
10	1024	Very high traffic (2^{10})
14	16384	Maximum finite (2^{14})
15	∞ (0xFFFFFFFF)	Unlimited credits

✓ FIXED Implementation:

```
// projects/components/rapids/rtl/rapids_fub/scheduler.sv:567-570
// Exponential credit encoding: 0→1, 1→2, 2→4, ..., 14→16384, 15→∞
r_descriptor_credit_counter <= (cfg_initial_credit == 4'hF) ?
```

```

32'hFFFFFFFF :
                                     (cfg_initial_credit == 4'h0) ?
32'h00000001 :
                                     (32'h1 << cfg_initial_credit);

```

Was Broken (Before Fix):

```
r_descriptor_credit_counter <= 32'h0; // x WRONG: Hardcoded to 0
```

Impact (Before Fix): - Credit-based flow control didn't work - All operations blocked if credit mode enabled - Descriptors never processed

Encoding Rationale: - Compact 4-bit config covers wide range: 1 to 16384 credits - Fine-grained control for low traffic (1, 2, 4, 8) - High-throughput support (256, 1024, 16384) - Special unlimited mode (15 → ∞)

Important: Exponential encoding applies **only at initialization**. Once running, the counter operates linearly (increment/decrement by 1).

 **See:** -

projects/components/rapids/docs/rapids_spec/ch02_blocks/01_01_scheduler.md - Complete encoding table - projects/components/rapids/known_issues/scheduler.md - Bug details and fix verification

32.5.5 Q: "How do I run RAPIDS tests?"

A: Multi-layered test approach:

```

# 1. FUB (Functional Unit Block) Tests - Individual blocks
pytest projects/components/rapids/dv/tests/fub_tests/scheduler/ -v
pytest
projects/components/rapids/dv/tests/fub_tests/descriptor_engine/ -v
pytest projects/components/rapids/dv/tests/fub_tests/ -v # All FUB
tests

```

```

# 2. Integration Tests - Multi-block scenarios
pytest projects/components/rapids/dv/tests/integration_tests/ -v

```

```

# 3. System Tests - Full RAPIDS operation
pytest projects/components/rapids/dv/tests/system_tests/ -v

```

```

# Run with waveforms for debugging
pytest projects/components/rapids/dv/tests/fub_tests/scheduler/ --
vcd=debug.vcd
gtkwave debug.vcd

```

Test Organization: - **FUB tests:** Focus on individual block functionality - **Integration tests:** Verify block-to-block interfaces - **System tests:** Validate complete data flows

Current Status: ~80% functional coverage, basic scenarios validated

 **See:** docs/RAPIDS_Validation_Status_Report.md for detailed test results

32.6 Integration Patterns

32.6.1 Pattern 1: Basic RAPIDS Instantiation

```
rapids_top #(
    .AXI_ADDR_WIDTH(32),
    .AXI_DATA_WIDTH(64),
    .Network_DATA_WIDTH(64),
    .SRAM_DEPTH(1024),
    .MAX_DESCRIPTOR(16)
) u_rapids (
    // Clock and Reset
    .aclk          (system_clk),
    .aresetn       (system_rst_n),

    // AXI4 Control Interface
    .s_axil_awaddr  (ctrl_awaddr),
    .s_axil_awvalid (ctrl_awvalid),
    .s_axil_awready (ctrl_awready),
    .s_axil_wdata   (ctrl_wdata),
    .s_axil_wstrb   (ctrl_wstrb),
    .s_axil_wvalid  (ctrl_wvalid),
    .s_axil_wready  (ctrl_wready),
    .s_axil_bresp   (ctrl_bresp),
    .s_axil_bvalid  (ctrl_bvalid),
    .s_axil_bready  (ctrl_bready),
    .s_axil_araddr  (ctrl_araddr),
    .s_axil_arvalid (ctrl_arvalid),
    .s_axil_arready (ctrl_arready),
    .s_axil_rdata   (ctrl_rdata),
    .s_axil_rresp   (ctrl_rresp),
    .s_axil_rvalid  (ctrl_rvalid),
    .s_axil_rready  (ctrl_rready),

    // AXI4 Memory Interface (Sink - Write)
    .m_axi_sink_awaddr (mem_sink_awaddr),
    .m_axi_sink_awlen  (mem_sink_awlen),
    .m_axi_sink_awsz   (mem_sink_awsz),
    .m_axi_sink_awburst (mem_sink_awburst),
    .m_axi_sink_awvalid (mem_sink_awvalid),
    .m_axi_sink_awready (mem_sink_awready),
    // ... additional AXI4 sink write channel signals
```

```

// AXI4 Memory Interface (Source - Read)
.m_axi_source_araddr (mem_source_araddr),
.m_axi_source_arlen  (mem_source_arlen),
.m_axi_source_arsize (mem_source_arsize),
.m_axi_source_arburst (mem_source_arburst),
.m_axi_source_arvalid (mem_source_arvalid),
.m_axi_source_arready (mem_source_arready),
// ... additional AXI4 source read channel signals

// Network Network Interface (Sink - Receive)
.s_network_tdata      (net_rx_data),
.s_network_tvalid     (net_rx_valid),
.s_network_tready     (net_rx_ready),
.s_network_tlast      (net_rx_last),
// ... additional Network sink signals

// Network Network Interface (Source - Transmit)
.m_network_tdata      (net_tx_data),
.m_network_tvalid     (net_tx_valid),
.m_network_tready     (net_tx_ready),
.m_network_tlast      (net_tx_last),
// ... additional Network source signals

// MonBus Output
.monbus_pkt_valid     (rapids_mon_valid),
.monbus_pkt_ready     (rapids_mon_ready),
.monbus_pkt_data      (rapids_mon_data)
);

```

32.6.2 Pattern 2: Configuration Sequence

```

// Recommended initialization sequence
initial begin
    // 1. Assert reset
    aresetn = 0;
    repeat(10) @(posedge aclk);
    aresetn = 1;

    // 2. Configure RAPIDS via AXIL4
    axil_write(ADDR_SINK_SRAM_DEPTH, 1024);
    axil_write(ADDR_SOURCE_SRAM_DEPTH, 1024);
    axil_write(ADDR_TIMEOUT_THRESHOLD, 1000);
    axil_write(ADDR_INITIAL_CREDIT, 4); // 4 = 16 credits (2^4,
    exponential encoding)
    axil_write(ADDR_CREDIT_ENABLE, 1); // ✓ Enable credit mode (now
    fixed!)

```

```

// 3. Load descriptors
for (int i = 0; i < num_descriptors; i++) begin
    axil_write(ADDR_DESC_ADDR, descriptor[i].addr);
    axil_write(ADDR_DESC_LEN, descriptor[i].length);
    axil_write(ADDR_DESC_CTRL, descriptor[i].control);
    axil_write(ADDR_DESC_COMMIT, 1);
end

// 4. Enable RAPIDS operation
axil_write(ADDR_ENABLE, 1);
end

```

32.6.3 Pattern 3: MonBus Integration

```

// Always add downstream FIFO for MonBus
gaxi_fifo_sync #(
    .DATA_WIDTH(64),
    .DEPTH(256)
) u_rapids_mon_fifo (
    .i_clk      (aclk),
    .i_rst_n    (aresetn),
    .i_data     (monbus_pkt_data),
    .i_valid    (monbus_pkt_valid),
    .o_ready    (monbus_pkt_ready),
    .o_data     (fifo_mon_data),
    .o_valid    (fifo_mon_valid),
    .i_ready    (consumer_ready)
);

```

32.7 Anti-Patterns to Catch

32.7.1 X Anti-Pattern 1: Not Understanding Exponential Credit Encoding

x WRONG:

```
.cfg_initial_credit(4'd16), // Thinks this gives 16 credits - it
doesn't!
```

✓ CORRECTED:

"Credits use exponential encoding:

- cfg_initial_credit = 4 → 16 credits (2^4)
- cfg_initial_credit = 8 → 256 credits (2^8)
- cfg_initial_credit = 15 → ∞ credits (unlimited)

See

projects/components/rapids/docs/rapids_spec/ch02_blocks/01_01_schedule
r.md for encoding table."

32.7.2 X Anti-Pattern 2: Insufficient SRAM Depth

x WRONG:

```
.SRAM_DEPTH(16) // Too small for realistic packets
```

✓ CORRECTED:

"SRAM depth should match typical packet sizes.

Recommended: 1024-4096 entries depending on data width and packet sizes."

32.7.3 X Anti-Pattern 3: No MonBus Downstream Handling

x WRONG:

```
assign monbus_pkt_ready = 1'b1; // Always ready = potential packet loss
```

✓ CORRECTED:

"Connect to FIFO or proper consumer:

```
gaxi_fifo_sync #(.DATA_WIDTH(64), .DEPTH(256)) u_mon_fifo (
    .i_valid(monbus_pkt_valid),
    .i_data(monbus_pkt_data),
    .o_ready(monbus_pkt_ready),
    ...
);"
```

32.7.4 X Anti-Pattern 4: Testing Individual Blocks in Isolation

x WRONG:

"Only test scheduler without descriptor engine"

✓ CORRECTED:

"RAPIDS blocks are tightly coupled. Always test:

1. FUB tests for basic block functionality
2. Integration tests for block interactions
3. System tests for complete flows"

32.8 Debugging Workflow

32.8.1 Issue: Scheduler Not Processing Descriptors

Check in order: 1. ✓ Credit configuration correct? (Remember exponential encoding!) 2. ✓ Descriptors loaded via AXIL4? 3. ✓ RAPIDS enabled? (ADDR_ENABLE = 1) 4. ✓ Reset properly deasserted? 5. ✓ Descriptor engine FIFO not empty?

Debug commands:

```

pytest projects/components/rapids/dv/tests/fub_tests/scheduler/ -v -s
# Verbose test
pytest projects/components/rapids/dv/tests/fub_tests/scheduler/ --
vcd=debug.vcd
gtkwave debug.vcd # Inspect FSM state transitions

```

32.8.2 Issue: Data Path Stalls

Check in order: 1. ✓ SRAM depth sufficient? 2. ✓ Downstream interfaces ready? 3. ✓ AXI4 backpressure handling? 4. ✓ Network flow control? 5. ✓ Buffer overflow/underflow detection?

Waveform Analysis: - Check SRAM read/write pointers - Verify AXI4 handshakes - Inspect Network TREADY signals

32.8.3 Issue: MonBus Packets Not Generated

Check in order: 1. ✓ Operations completing successfully? 2. ✓ MonBus ready signal asserted? 3. ✓ MonBus reporter enabled? 4. ✓ Downstream FIFO not full?

32.9 Testing Guidance

32.9.1 Test Organization

```

projects/components/rapids/dv/tests/
├── fub_tests/                                # Individual block tests
│   ├── scheduler/
│   │   ├── test_scheduler.py                # FSM, credit management
│   │   └── conftest.py
│   ├── descriptor_engine/
│   │   ├── test_desc_engine.py             # FIFO, parsing
│   │   └── conftest.py
│   ├── program_engine/
│   ├── network_interfaces/
│   └── simple_sram/
├── integration_tests/                       # Multi-block scenarios
│   ├── test_scheduler_desc.py              # Scheduler + Descriptor Engine
│   ├── test_sink_path.py                   # Complete sink data path
│   └── test_source_path.py                 # Complete source data path
├── system_tests/                           # Full RAPIDS operation
│   ├── test_full_dma.py                    # Complete DMA transfer
│   └── test_bidirectional.py               # Simultaneous sink/source

```

32.9.2 Running Tests

Single block test

```
pytest projects/components/rapids/dv/tests/fub_tests/scheduler/ -v
```

All FUB tests

```
pytest projects/components/rapids/dv/tests/fub_tests/ -v
```

Integration tests

```
pytest projects/components/rapids/dv/tests/integration_tests/ -v
```

System tests

```
pytest projects/components/rapids/dv/tests/system_tests/ -v
```

All RAPIDS tests

```
pytest projects/components/rapids/dv/tests/ -v
```

With waveforms

```
pytest projects/components/rapids/dv/tests/fub_tests/scheduler/ --  
vcd=waves.vcd
```

32.9.3 Test Coverage Status

Current Status: ~80% functional coverage

Component	Coverage	Status
Scheduler	~90%	Exponential credit encoding implemented
Descriptor Engine	~80%	Basic tests passing
Program Engine	~85%	Alignment tested
Sink Data Path	~75%	Basic flows working
Source Data Path	~70%	Basic flows working
Integration	~60%	More stress testing needed

32.10 Key Documentation Links

32.10.1 Always Reference These

Primary Technical Specification: -

projects/components/rapids/docs/rapids_spec/rapids_index.md - Complete specification index - projects/components/rapids/docs/rapids_spec/ch01_overview/ - Architecture overview - projects/components/rapids/docs/rapids_spec/ch02_blocks/ - Block specifications - projects/components/rapids/docs/rapids_spec/ch03_interfaces/ - Interface specifications - projects/components/rapids/docs/rapids_spec/ch04_programming_models/ - Programming model - projects/components/rapids/docs/rapids_spec/ch05_registers/ - Register definitions

This Subsystem: - projects/components/rapids/PRD.md - Requirements overview - projects/components/rapids/README.md - Quick start guide (if exists) - projects/components/rapids/TASKS.md - Current work items - projects/components/rapids/known_issues/ - Bug tracking

Validation: - docs/RAPIDS_Validation_Status_Report.md - Test results and status

Root: - /PRD.md - Master requirements - /CLAUDE.md - Repository guide

32.11 Quick Commands

View complete specification

```
cat projects/components/rapids/docs/rapids_spec/rapids_index.md
cat
projects/components/rapids/docs/rapids_spec/ch02_blocks/01_01_schedule
r.md
```

Check known issues

```
ls projects/components/rapids/known_issues/
cat projects/components/rapids/known_issues/scheduler.md
```

Run tests

```
pytest projects/components/rapids/dv/tests/fub_tests/ -v
pytest projects/components/rapids/dv/tests/integration_tests/ -v
```

Lint

```
verilator --lint-only
projects/components/rapids/rtl/rapids_fub/scheduler.sv
```

Search for modules

```
find projects/components/rapids/rtl/rapids_fub/ -name "*.sv" -exec  
grep -H "^module" {} \;
```

32.12 Verification Patterns and Best Practices

32.12.1 Pattern: Continuous Background Monitoring

Problem: When testing components that output data asynchronously (descriptors, packets, etc.), tests that only check outputs at specific points will miss data that arrives during other operations.

Solution: Use continuous background monitoring coroutines that run throughout the test.

Example - Descriptor Engine Testing:

```
class DescriptorEngineTB(TBBase):  
    async def run_apb_only_test(self, num_packets: int, profile:  
DelayProfile):  
        """Test with continuous descriptor monitoring"""  
        descriptors_collected = [] # Shared list  
        monitor_active = True # Control flag  
  
        # Background coroutine monitors continuously  
        async def descriptor_monitor():  
            """Continuously monitor for descriptors throughout the  
test"""  
            while monitor_active:  
                await self.wait_clocks(self.clk_name, 1)  
                if int(self.dut.descriptor_valid.value) == 1:  
                    desc_data = int(self.dut.descriptor_packet.value)  
                    descriptors_collected.append(desc_data)  
                    if len(descriptors_collected) % 5 == 1:  
                        self.log.info(f"📦 Descriptor  
{len(descriptors_collected)}: 0x{desc_data:X}")  
  
        # Start background monitor  
        monitor_task = cocotb.start_soon(descriptor_monitor())  
  
        # Send all requests (monitor captures outputs during this  
phase)  
        for i in range(num_packets):  
            # Send APB request  
            self.dut.apb_valid.value = 1  
            self.dut.apb_addr.value = test_addr  
            await self.wait_clocks(self.clk_name, 1)  
            # ... wait for ready ...  
            self.dut.apb_valid.value = 0
```

```

# Wait for final descriptors (monitor still running)
for cycle in range(final_window):
    await self.wait_clocks(self.clk_name, 1)
    if len(descriptors_collected) >= num_packets:
        break

# Stop background monitor
monitor_active = False
await self.wait_clocks(self.clk_name, 2) # Let monitor finish

# Verify results
return len(descriptors_collected) == num_packets

```

Key Points: 1. **Shared State:** Use list/dict accessible from both main test and monitor coroutine 2.

Control Flag: monitor_active allows clean shutdown 3. **Background Task:**

cocotb.start_soon() runs monitor concurrently 4. **Continuous Capture:** Monitor checks every clock cycle, never missing data 5. **Clean Shutdown:** Set flag to False, wait for monitor to finish

When to Use: - ✓ Asynchronous output interfaces (descriptors, packets, responses) - ✓ Tests with rapid-fire input operations - ✓ Multi-stage pipelines where outputs don't align with inputs - ✗ Simple synchronous request-response patterns

Benefits: - 100% capture rate (no missed transactions) - Decouples input stimulus from output monitoring - Realistic timing coverage (captures outputs at any point)

Results: Descriptor engine tests improved from 42% success (5/12 descriptors) to 100% success (14/14 tests passing) by applying this pattern.

32.12.2 Pattern: Using Existing CocoTBFramework Components

Critical Rule: Always search for existing components before creating new ones.

Framework Structure:

```

bin/TBClasses/
├── components/           # Protocol-specific BFM and drivers
│   ├── axi4/             # Complete AXI4 infrastructure
│   ├── axil4/           # AXI4-Lite components
│   ├── apb/             # APB drivers and monitors
│   ├── axis4/           # AXI-Stream components
│   └── rapids/          # RAPIDS-specific BFM
├── tbclasses/           # Reusable testbench classes
│   ├── amba/            # AMBA testbenches
│   ├── rapids/          # RAPIDS testbenches
│   └── shared/          # Common utilities (TBBBase, etc.)
└── scoreboards/         # Transaction checkers

```

Decision Tree: Create New BFM vs Use Existing?

Need to model protocol behavior?

- └ Is it a standard protocol (AXI4, APB, AXIS)?
 - └ YES → Use components/axi4/, components/apb/, etc.
 - ✓ DO NOT create new implementation
- └ Is it RAPIDS-specific custom behavior?
 - └ Is it >100 lines?
 - └ YES → Extract to components/rapids/
 - └ Is it <50 lines and test-specific?
 - └ YES → Keep embedded in testbench
- └ Is it generic helper (not protocol-specific)?
 - └ Add to tbclasses/shared/utilities.py

Example - Descriptor Engine AXI Responder:

```
# ✗ WRONG: Creating new AXI4 read responder BFM
# File: components/rapids/axi_read_responder_bfm.py
class AXIReadResponderBFM:
    """New AXI4 read responder - DON'T DO THIS!"""
    # ... 200 lines of AXI4 protocol implementation ...

# ✓ CORRECT: Use existing AXI4 components
# File: tbclasses/rapids/descriptor_engine_tb.py
async def axi_read_responder(self):
    """Simple test-specific responder - 50 lines, embedded"""
    while True:
        await self.wait_clocks(self.clk_name, 1)
        if int(self.dut.ar_valid.value) == 1 and
int(self.dut.ar_ready.value) == 1:
            # Generate response data
            self.dut.r_valid.value = 1
            self.dut.r_data.value = response_data
            # ... wait for r_ready ...
            self.dut.r_valid.value = 0
```

Why This Matters: - **Existing AXI4 components:** Comprehensive, tested, feature-complete - **Simple embedded responder:** Test-specific, minimal protocol simulation - **No duplication:** Framework already has robust AXI4 infrastructure

BFM Extraction Criteria:

Factor	Extract to BFM	Keep Embedded
Lines of code	>100 lines	<50 lines
Complexity	Complex protocol logic	Simple stimulus/response

Factor	Extract to BFM	Keep Embedded
Reusability	Used across multiple tests	Test-specific
Protocol	Custom RAPIDS-specific	Standard protocol (use framework)
Dependencies	Standalone	Tightly coupled to one test

Examples:

✓ **Extracted to BFM:** DataMoverBFM (components/rapids/data_mover_bfm.py) - 150+ lines - Complex RAPIDS data mover protocol - Used across scheduler tests - Reusable for integration tests

✓ **Kept Embedded:** AXI read responder in descriptor engine - 50 lines - Simple test-specific behavior - Framework already has full AXI4 support - No need for extraction

32.12.3 Test Scalability Patterns

Principle: Tests should scale from basic validation to comprehensive stress testing.

Pattern: Delay Profiles for Timing Coverage

```
class DelayProfile(Enum):
    """Delay profiles for comprehensive timing coverage"""
    FAST_PRODUCER = "fast_producer"      # Producer faster than
    consumer
    FAST_CONSUMER = "fast_consumer"      # Consumer faster than
    producer
    FIXED_DELAY = "fixed_delay"          # Predictable timing
    MINIMAL_DELAY = "minimal_delay"      # Stress test - minimal
    delays
    BACKPRESSURE = "backpressure"        # Heavy backpressure
    scenarios

# Test method scales with profile
async def run_apb_only_test(self, num_packets: int, profile:
DelayProfile):
    """Scalable test with configurable timing"""
    params = self.delay_params[profile]

    for i in range(num_packets):
        # Apply profile-specific delays
        producer_delay =
self.get_delay_value(params['producer_delay'])
        await self.wait_clocks(self.clk_name, producer_delay)

        # Send request...
```

```

# Profile-specific backpressure
if random.random() < params.get('backpressure_freq', 0.1):
    backpressure_cycles = random.randint(5, 25)
    await self.wait_clocks(self.clk_name, backpressure_cycles)

```

Pattern: Hierarchical Test Levels

```

# Test runner with multiple levels
@pytest.mark.parametrize("test_level", ["basic", "medium", "full"])
def test_descriptor_engine(test_level, ...):
    """Hierarchical test levels for different coverage needs"""

    if test_level == "basic":
        # Quick validation: 10 packets, simple timing
        num_packets = 10
        test_class = TestClass.APB_ONLY

    elif test_level == "medium":
        # Moderate coverage: 3 packets × 4 profiles
        num_packets = 3
        test_classes = [TestClass.APB_ONLY, TestClass.MIXED]

    elif test_level == "full":
        # Comprehensive: 5 packets × all profiles × all test classes
        num_packets = 5
        test_classes = [TestClass.APB_ONLY, TestClass.MIXED]

```

Benefits: - **Basic:** Quick smoke tests (CI/CD) - **Medium:** Developer validation - **Full:** Comprehensive regression

Pattern: Parametrized Test Generation

```

def generate_test_params():
    """Generate comprehensive parameter combinations"""
    params = []

    # Basic configurations
    for num_channels in [8, 32, 64]:
        for data_width in [64, 512]:
            for addr_width in [32, 64]:
                params.append((num_channels, data_width, addr_width))

    return params

# Pytest automatically runs all combinations
@pytest.mark.parametrize("num_channels, data_width, addr_width",
generate_test_params())
def test_scheduler(num_channels, data_width, addr_width):

```

```
"""Test scales across all parameter combinations"""  
# ...
```

Test Success Criteria:

⚠ **CRITICAL:** All tests must achieve 100% success rate.

```
# ✗ WRONG: Accepting partial success  
success_rate = (descriptors_received / total_sent) * 100  
return success_rate >= 70 # "Mostly good" - NOT ACCEPTABLE  
  
# ✓ CORRECT: Require 100% success  
success_rate = (descriptors_received / total_sent) * 100  
return success_rate >= 100 # Must receive ALL expected outputs
```

Why 100% Required: - Partial success indicates bugs, not acceptable tolerance - RTL should be deterministic - 100% success is achievable - Lower thresholds mask real issues

32.13 Documentation Generation

32.13.1 Generating PDF/DOCX from Specification

Tool: /mnt/data/github/rtldesignsherpa/bin/md_to_docx.py

Use this tool to convert the linked specification index into a single all-inclusive PDF or DOCX file.

Basic Usage:

```
# Generate DOCX from rapids_spec index  
python bin/md_to_docx.py \  
    projects/components/rapids/docs/rapids_spec/rapids_index.md \  
    -o projects/components/rapids/docs/RAPIDS_Specification_v0.25.docx \  
    \  
    --toc \  
    --title-page  
  
# Generate both DOCX and PDF  
python bin/md_to_docx.py \  
    projects/components/rapids/docs/rapids_spec/rapids_index.md \  
    -o projects/components/rapids/docs/RAPIDS_Specification_v0.25.docx \  
    \  
    --toc \  
    --title-page \  
    --pdf  
  
# With custom template (optional)  
python bin/md_to_docx.py \  
    projects/components/rapids/docs/rapids_spec/rapids_index.md \  
    -o projects/components/rapids/docs/RAPIDS_Specification_v0.25.docx \  
    --template projects/components/rapids/docs/rapids_spec/rapids_index.md
```

```

    projects/components/rapids/docs/rapids_spec/rapids_index.md \
    -o projects/components/rapids/docs/RAPIDS_Specification_v0.25.docx
\
    -t path/to/template.dotx \
    --toc \
    --title-page \
    --pdf

```

Key Features: - **Recursive Collection:** Follows all markdown links in the index file - **Heading Demotion:** Automatically adjusts heading levels for included files - **Table of Contents:** --toc flag generates automatic ToC - **Title Page:** --title-page flag creates title page from first heading - **PDF Export:** --pdf flag generates both DOCX and PDF - **Image Support:** Resolves images relative to source directory - **Template Support:** Optional custom DOCX/DOTX template via -t flag

Common Workflow:

```

# 1. Update version number in index file (rapids_index.md)
# 2. Generate documentation
cd /mnt/data/github/rtldesignsherpa
python bin/md_to_docx.py \
    projects/components/rapids/docs/rapids_spec/rapids_index.md \
    -o projects/components/rapids/docs/RAPIDS_Specification_v0.25.docx
\
    --toc --title-page --pdf

# 3. Output files created:
#     - RAPIDS_Specification_v0.25.docx
#     - RAPIDS_Specification_v0.25.pdf (if --pdf used)

```

Debug Mode:

```

# Generate debug markdown to see combined output
python bin/md_to_docx.py \
    projects/components/rapids/docs/rapids_spec/rapids_index.md \
    -o output.docx \
    --debug-md

```

This creates debug.md showing the complete merged content

Tool Requirements: - Python 3.6+ - Pandoc installed and in PATH - For PDF generation: LaTeX (e.g., texlive) or use Pandoc's built-in PDF writer

 **See:** /mnt/data/github/rtldesignsherpa/bin/md_to_docx.py for complete implementation details

32.14 PDF Generation Location

IMPORTANT: PDF files should be generated in the docs directory:

```
/mnt/data/github/rtldesignsherpa/projects/components/rapids/docs/
```

Quick Command: Use the provided shell script:

```
cd /mnt/data/github/rtldesignsherpa/projects/components/rapids/docs
./generate_pdf.sh
```

The shell script will automatically: 1. Use the md_to_docx.py tool from bin/ 2. Process the rapids_spec index file 3. Generate both DOCX and PDF files in the docs/ directory 4. Create table of contents and title page

 **See:** bin/md_to_docx.py for complete implementation details

32.15 Remember

1.  **MANDATORY: Use BFM**s - GAXI Master/Slave for custom valid/ready, protocol-specific BFM's for AXI4/APB/AXIS/Network
 2.  **Link to detailed spec** - projects/components/rapids/docs/rapids_spec/ has complete architecture docs
 3.  **Exponential credit encoding** - Remember: 0→1, 1→2, 2→4, not linear!
 4.  **Check known issues** - Before diagnosing bugs
 5.  **Block interactions** - RAPIDS blocks are tightly coupled
 6.  **Multi-layered testing** - FUB → Integration → System tests
 7.  **Testbench reuse** - Always create TB classes in bin/TBClasses/rapids/
 8.  **Continuous monitoring** - Use background coroutines for asynchronous output capture
 9.  **Search first** - Use existing CocoTBFramework components before creating new ones
 10.  **100% success** - All tests must achieve 100% success rate, no exceptions
 11.  **Three-layer architecture** - TB (infrastructure) + Test (intelligence) + Scoreboard (verification)
 12.  **Queue-based verification** - Use `monitor._recvQ.popleft()` for simple tests, not memory models
-

Version: 1.2 Last Updated: 2025-10-14 Maintained By: RTL Design Sherpa Project