



RTL Design Sherpa

Bridge Hardware Architecture Specification 1.0

January 3, 2026

Table of Contents

1 Bridge Has Index.....	24
2 Document Information.....	24
2.1 Bridge Hardware Architecture Specification.....	24
2.2 Revision History.....	24
2.3 Document Purpose.....	25
2.4 Intended Audience.....	26
2.5 Related Documents.....	26
3 Purpose and Scope.....	26
3.1 What is Bridge?.....	26
3.2 The Problem Bridge Solves.....	26
3.3 Scope.....	27
3.4 Out of Scope.....	27
4 Document Conventions.....	27
4.1 Terminology.....	27
4.2 Signal Naming.....	28
4.3 Diagrams.....	28
4.3.1 Figure 1.1: Block Diagram Legend.....	28
4.4 Code Examples.....	29
4.5 Parameter Notation.....	29
5 Definitions and Acronyms.....	29
5.1 Acronyms.....	29
5.2 Definitions.....	31

6 Use Cases.....	31
6.1 Primary Applications.....	31
6.1.1 SoC Interconnects.....	31
6.1.2 Memory Systems.....	32
6.1.3 Accelerator Systems.....	32
6.2 Example: RAPIDS Accelerator.....	33
6.2.1 Figure 2.1: RAPIDS System Topology.....	33
6.2.2 Configuration.....	33
6.2.3 Benefits.....	33
6.3 Rapid Prototyping.....	34
7 Key Features.....	34
7.1 Configuration-Driven Generation.....	34
7.1.1 CSV/TOML Configuration.....	34
7.1.2 Example Configuration.....	34
7.2 Multi-Protocol Support.....	35
7.2.1 Protocol Features.....	35
7.3 Channel-Specific Masters.....	35
7.3.1 Write-Only Masters (wr).....	35
7.3.2 Read-Only Masters (rd).....	36
7.3.3 Full Masters (rw).....	36
7.3.4 Resource Savings.....	36
7.4 Automatic Converters.....	36
7.4.1 Width Conversion.....	36
7.4.2 Protocol Conversion.....	36

7.5 Flexible Topology.....	36
7.5.1 Scalability.....	36
7.5.2 Mixed Configurations.....	37
8 System Context.....	38
8.1 Bridge in SoC Architecture.....	38
8.1.1 Figure 2.2: Bridge System Context.....	38
8.2 Interface Boundaries.....	38
8.2.1 Master-Side (Upstream).....	38
8.2.2 Slave-Side (Downstream).....	39
8.3 Address Space.....	39
8.3.1 Address Map Organization.....	39
8.3.2 Address Decode.....	39
8.4 Clock and Reset.....	39
8.4.1 Clock Domain.....	39
8.4.2 Reset.....	39
8.5 Dependencies.....	40
8.5.1 Required Infrastructure.....	40
8.5.2 Optional Features.....	40
9 Block Diagram.....	40
9.1 Bridge Architecture Overview.....	40
9.1.1 Figure 3.1: Bridge Block Diagram.....	40
9.2 Functional Blocks.....	41
9.2.1 Master Adapter.....	41
9.2.2 Crossbar Core.....	41

9.2.3 Slave Router.....	41
9.3 Data Flow.....	42
9.3.1 Figure 3.2: Write Path.....	42
9.3.2 Figure 3.3: Read Path.....	42
9.4 Scalability.....	42
9.4.1 Topology Parameters.....	42
9.4.2 Resource Scaling.....	43
10 Data Flow.....	43
10.1 Transaction Flow Overview.....	43
10.1.1 Write Transaction Flow.....	43
10.1.2 Read Transaction Flow.....	43
10.2 Channel Independence.....	44
10.2.1 AXI4 Channel Separation.....	44
10.2.2 Parallel Operation.....	44
10.3 ID Extension.....	44
10.3.1 Bridge ID (BID) Concept.....	44
10.3.2 Example: 4 Masters, 4-bit ID.....	44
10.3.3 ID Flow.....	45
10.4 Response Routing.....	45
10.4.1 B Channel (Write Response).....	45
10.4.2 R Channel (Read Data).....	45
10.5 Out-of-Order Support.....	45
10.5.1 Transaction Interleaving.....	45
10.5.2 Example Sequence.....	45

11 Protocol Support.....	46
11.1 Supported Protocols.....	46
11.1.1 AXI4 Full.....	46
11.1.2 AXI4-Lite.....	46
11.1.3 APB (Advanced Peripheral Bus).....	46
11.2 Protocol Conversion Matrix.....	47
11.3 Automatic Conversion Shims at Slave Boundary.....	47
11.4 AXI4 to APB Conversion.....	48
11.4.1 Conversion Process.....	48
11.4.2 Figure 3.1: AXI4 to APB Conversion Sequence.....	48
11.4.3 Burst Handling.....	48
11.4.4 Timing Considerations.....	48
11.5 Width Conversion.....	49
11.5.1 Upsize (Narrow to Wide).....	49
11.5.2 Figure 3.2: Width Upsize Conversion.....	49
11.5.3 Downsize (Wide to Narrow).....	50
11.5.4 Figure 3.3: Width Downsize Conversion.....	50
11.6 Channel-Specific Protocol.....	51
11.6.1 Write-Only Masters.....	51
11.6.2 Read-Only Masters.....	51
12 AXI4 Interface Overview.....	51
12.1 Interface Organization.....	51
12.1.1 Master-Side Interfaces.....	51
12.1.2 Slave-Side Interfaces.....	52

12.2 Signal Naming Convention.....	53
12.2.1 Custom Prefixes.....	53
12.2.2 ID Width Extension.....	53
12.3 Channel-Specific Interfaces.....	53
12.3.1 Write-Only Master (wr).....	53
12.3.2 Read-Only Master (rd).....	54
12.4 Monitor Bus Output (when variants includes mon).....	54
12.5 Handshake Protocol.....	55
12.5.1 Valid/Ready Handshake.....	55
12.5.2 Backpressure.....	55
12.6 Burst Support.....	55
12.6.1 Supported Burst Types.....	55
12.6.2 Burst Length.....	56
13 APB Interface Overview.....	56
13.1 APB Protocol Summary.....	56
13.1.1 Signal Definition.....	56
13.2 APB Slave Interface.....	56
13.2.1 Signal Naming.....	56
13.3 APB Transaction Timing.....	57
13.3.1 Write Transaction.....	57
13.3.2 Read Transaction.....	57
13.4 AXI4 to APB Conversion.....	58
13.4.1 Conversion Requirements.....	58
13.4.2 Burst Handling.....	58

13.4.3 Error Mapping.....	58
13.5 Performance Implications.....	58
13.5.1 APB Limitations.....	58
13.5.2 Design Recommendations.....	58
14 Clock and Reset.....	59
14.1 Clock Requirements.....	59
14.1.1 Single Clock Domain.....	59
14.1.2 Figure 4.1: Clock Distribution.....	59
14.1.3 No Clock Domain Crossing.....	59
14.2 Reset Requirements.....	60
14.2.1 Asynchronous Active-Low Reset.....	60
14.2.2 Reset Behavior.....	60
14.2.3 Figure 4.3: Reset Timing.....	60
14.2.4 Reset Effects.....	60
14.2.5 Outstanding Transactions.....	60
14.2.6 Reset Release.....	61
14.3 Timing Constraints.....	61
14.3.1 Setup and Hold.....	61
14.3.2 Clock-to-Output.....	61
14.3.3 Recommended Constraints.....	61
14.4 Multi-Clock Systems.....	62
14.4.1 External CDC Required.....	62
14.4.2 Figure 4.2: Multi-Clock CDC.....	62
14.4.3 CDC Recommendations.....	62

15 AXI5 and APB5 Interfaces (AMBA5 Support).....	62
15.1 Declaring AMBA5 Ports.....	62
15.2 AXI5 Port Surface.....	63
15.3 APB5 Slave Surface.....	63
15.4 Interop Matrix.....	64
16 Throughput Characteristics.....	64
16.1 Peak Throughput.....	64
16.1.1 Single Master to Single Slave.....	64
16.1.2 Formula.....	65
16.2 Sustained Throughput.....	65
16.2.1 Factors Affecting Throughput.....	65
16.2.2 Multi-Master Scaling.....	65
16.2.3 Example: 4 Masters, 2 Slaves.....	65
16.3 Burst Efficiency.....	65
16.3.1 Burst vs Single-Beat.....	65
16.3.2 Recommendation.....	66
16.4 Width Conversion Impact.....	66
16.4.1 Upsize (Narrow to Wide).....	66
16.4.2 Downsize (Wide to Narrow).....	66
16.5 Protocol Conversion Impact.....	66
16.5.1 AXI4 to APB.....	66
16.5.2 Recommendation.....	67
17 Latency Analysis.....	67
17.1 Latency Components.....	67

17.1.1 Address Path Latency.....	67
17.1.2 Data Path Latency.....	67
17.1.3 Response Path Latency.....	68
17.2 End-to-End Latency.....	68
17.2.1 Write Transaction (Best Case).....	68
17.2.2 Read Transaction (Best Case).....	68
17.2.3 Contention Latency.....	68
17.3 Width Conversion Latency.....	69
17.3.1 Upsize Latency.....	69
17.3.2 Downsize Latency.....	69
17.4 Protocol Conversion Latency.....	69
17.4.1 AXI4 to APB.....	69
17.4.2 APB Wait States.....	70
17.5 Latency Optimization.....	70
17.5.1 Design Recommendations.....	70
18 Resource Estimates.....	70
18.1 FPGA Resource Summary.....	70
18.1.1 Baseline Configuration (2x2, 64-bit).....	70
18.1.2 Scaling Factors.....	71
18.2 Component Breakdown.....	71
18.2.1 Per-Master Resources.....	71
18.2.2 Per-Slave Resources.....	71
18.2.3 Crossbar Core.....	71
18.3 Width Converter Resources.....	72

18.4 Protocol Converter Resources.....	72
18.4.1 AXI4 to APB.....	72
18.5 Example Configurations.....	72
18.5.1 Notes.....	73
18.6 Optimization Strategies.....	73
18.6.1 Resource Reduction.....	73
18.6.2 Performance/Resource Trade-off.....	73
19 System Requirements.....	74
19.1 Hardware Requirements.....	74
19.1.1 Clock Infrastructure.....	74
19.1.2 Reset Infrastructure.....	74
19.1.3 Power.....	74
19.2 Interface Requirements.....	74
19.2.1 Master Requirements.....	74
19.2.2 Slave Requirements.....	75
19.3 Configuration Requirements.....	75
19.3.1 Address Map.....	75
19.3.2 Connectivity.....	75
19.4 Timing Requirements.....	75
19.4.1 Setup/Hold.....	75
19.4.2 Recommended Margins.....	76
19.5 Verification Requirements.....	76
19.5.1 Pre-Integration Checks.....	76
19.5.2 Integration Checks.....	76

19.5.3 Post-Integration Checks.....	76
20 Parameter Configuration.....	77
20.1 Core Parameters.....	77
20.2 Derived Parameters.....	77
20.2.1 Calculated by Generator.....	77
20.3 Per-Port Configuration.....	78
20.3.1 Master Port Configuration.....	78
20.3.2 Slave Port Configuration.....	78
20.4 Top-Level Monitor Configuration.....	79
20.4.1 Monitor Identifiers.....	79
20.4.2 AXIL→Wider-Slave Master-Side Alignment.....	79
20.5 Configuration File Format.....	80
20.5.1 TOML Configuration.....	80
20.5.2 CSV Connectivity.....	80
20.6 Parameter Validation.....	80
20.6.1 Generator Checks.....	80
20.6.2 Runtime Validation.....	81
20.7 Example Configurations.....	81
20.7.1 Simple 2x2.....	81
20.7.2 Mixed Protocol.....	81
21 Verification Strategy.....	82
21.1 Verification Levels.....	82
21.1.1 Unit Level.....	82
21.1.2 Integration Level.....	82

21.1.3 System Level.....	83
21.2 Test Infrastructure.....	83
21.2.1 CocoTB Framework with Protocol-BFM-Only Driving.....	83
21.2.2 Test Categories.....	84
21.3 Test Execution Model.....	84
21.3.1 Serial Execution.....	84
21.3.2 Boundary Probe Testing.....	84
21.4 Coverage Goals.....	85
21.4.1 Functional Coverage.....	85
21.4.2 Code Coverage.....	85
21.5 Debug Features.....	85
21.5.1 Waveform Capture.....	85
21.5.2 Debug Signals.....	85
21.6 Regression Testing.....	86
21.6.1 Continuous Integration.....	86
21.6.2 Test Matrix.....	86
21.7 Known Limitations.....	86
21.7.1 Test Gaps.....	86
21.7.2 Simulator Support.....	87
22 Bridge Micro-Architecture Specification Index.....	87
22.1 Document Organization.....	87
22.1.1 Front Matter.....	87
22.1.2 Chapter 1: Introduction.....	87
22.1.3 Chapter 2: Block Descriptions.....	87

22.1.4 Chapter 3: FSM Design.....	88
22.1.5 Chapter 4: ID Management.....	88
22.1.6 Chapter 5: Converters.....	88
22.1.7 Chapter 6: Generated RTL.....	88
22.1.8 Chapter 7: Verification.....	88
22.2 Quick Navigation.....	88
22.2.1 For New Users.....	88
22.2.2 For Integration.....	89
22.3 Visual Assets.....	89
22.3.1 Architecture Diagrams.....	89
22.3.2 FSM Diagrams.....	89
22.4 Component Overview.....	89
22.4.1 Key Features.....	89
22.4.2 Protocol Conversion Matrix.....	90
22.4.3 Design Philosophy.....	90
22.5 Related Documentation.....	90
22.5.1 Companion Specifications.....	90
22.5.2 Project-Level.....	90
22.5.3 Generator.....	90
22.6 Version History.....	91
23 Bridge: AXI4 Full Crossbar Generator - Product Requirements Document.....	91
23.1 Executive Summary.....	91
23.2 Design Philosophy.....	92
23.2.1 Core Principles.....	92

23.2.2 Architecture Philosophy.....	93
23.3 ⚠ CRITICAL: RTL Regeneration Requirements.....	94
23.4 1. Product Overview.....	94
23.4.1 1.1 Purpose.....	94
23.4.2 1.2 Target Audience.....	95
23.4.3 1.3 Success Criteria.....	95
23.4.4 1.4 Implementation Status and Phases.....	95
23.5 2. Architecture Overview.....	96
23.5.1 2.1 AXI4 vs AXIS vs APB.....	96
23.5.2 2.2 Block Diagram.....	97
23.5.3 2.3 Key Components.....	98
23.6 3. Functional Requirements.....	99
23.6.1 3.1 AXI4 Protocol Compliance.....	99
23.6.2 3.2 Address Decoding.....	99
23.6.3 3.3 Arbitration Strategy.....	99
23.6.4 3.4 Burst Handling.....	100
23.7 4. Non-Functional Requirements.....	100
23.7.1 4.1 Performance.....	100
23.7.2 4.2 Resource Usage (Estimated).....	100
23.7.3 4.3 Quality Requirements.....	101
23.8 5. Interface Specifications.....	101
23.8.1 5.1 AXI4 Master Interfaces (M × 5 channels).....	101
23.8.2 5.2 AXI4 Slave Interfaces (S × 5 channels).....	102
23.8.3 5.3 Configuration Parameters.....	102

23.9 6. Performance Modeling.....	103
23.9.1 6.1 Analytical Model.....	103
23.9.2 6.2 Resource Scaling.....	103
23.9.3 6.3 Comparison with Other Crossbars.....	104
23.10 7. Generator Architecture.....	104
23.10.1 7.1 Python Generator Structure.....	104
23.10.2 7.2 Address Map Configuration.....	105
23.11 8. Comparison with APB and Delta.....	106
23.11.1 8.1 Code Reuse from APB Generator.....	106
23.11.2 8.2 Code Reuse from Delta Generator.....	106
23.11.3 8.3 Complexity Comparison.....	107
23.12 9. Use Cases.....	107
23.12.1 9.1 Multi-Core Processor Interconnect.....	107
23.12.2 9.2 DMA + Accelerator System.....	108
23.12.3 9.3 FPGA System Integration.....	108
23.13 10. Testing Strategy.....	108
23.13.1 10.1 FUB (Functional Unit Block) Tests.....	108
23.13.2 10.2 Integration Tests.....	109
23.13.3 10.3 Performance Validation.....	109
23.14 11. Documentation Plan.....	109
23.14.1 11.1 Specifications (Before Code).....	109
23.14.2 11.2 Performance Analysis (Before Implementation).....	109
23.14.3 11.3 Code Generation.....	110
23.14.4 11.4 Verification.....	110

23.15	12. Success Metrics.....	110
23.15.1	12.1 Functional Completeness.....	110
23.15.2	12.2 Performance Targets.....	110
23.15.3	12.3 Educational Value.....	110
23.15.4	12.4 Reusability.....	111
23.16	12. Attribution and Contribution Guidelines.....	111
23.16.1	12.1 Git Commit Attribution.....	111
23.17	12.2 PDF Generation Location.....	111
23.18	13. Future Enhancements.....	112
23.18.1	13.1 Short-Term (Post-Initial Release).....	112
23.18.2	13.2 Long-Term.....	112
23.19	14. Risk Assessment.....	112
23.20	15. Project Timeline (Estimated).....	113
23.21	16. References.....	113
23.22	17. Glossary.....	113
24	Claude Code Guide: Bridge Subsystem.....	114
24.1	 CRITICAL: Read Architecture Documents First.....	114
24.2	Quick Context.....	114
24.3	Target Architecture: Intelligent Width-Aware Routing.....	115
24.3.1	Efficient Multi-Width Design.....	115
24.3.2	Why This Architecture.....	115
24.3.3	Per-Master Output Paths.....	115
24.3.4	Benefits.....	116
24.3.5	Implementation Status.....	116

24.4	🔴 CRITICAL RULE #0: RTL Regeneration Requirements.....	116
24.4.1	The Golden Rule.....	116
24.4.2	Why This Is Non-Negotiable.....	116
24.4.3	Real Example (Historical Session).....	117
24.4.4	Generator Files That Trigger Full Regeneration.....	117
24.4.5	The Regeneration Workflow.....	117
24.4.6	Symptoms of Version Mismatch.....	117
24.4.7	Think Like a Compiler Developer.....	118
24.4.8	Exception: Hand-Written RTL.....	118
24.5	Critical Pitfalls: slave_select_* Reversion After Handshake.....	118
24.5.1	The Problem: Combinational Address Decode.....	118
24.5.2	Visible Symptoms.....	119
24.5.3	The Solution (MANDATORY in All Generators).....	119
24.5.4	When This Bug Appears.....	120
24.6	⚠️ MANDATORY: Project Organization Pattern.....	120
24.6.1	Required Directory Structure.....	120
24.6.2	Testbench Class Location (MANDATORY).....	121
24.6.3	Test File Pattern (MANDATORY).....	121
24.7	Critical Rules for This Subsystem.....	123
24.7.1	Rule #0: Attribution Format for Git Commits.....	123
24.7.2	Rule #0.1: Testbench Architecture - MANDATORY SEPARATION.....	123
24.7.3	Rule #1: All Testbenches Inherit from TBBase.....	124
24.7.4	Rule #2: Mandatory Testbench Methods.....	124
24.7.5	Rule #3: Use GAXI Components for Protocol Handling.....	125

24.7.6 Rule #4: Queue-Based Verification.....	125
24.8 TOML/CSV-Based Bridge Generator (Phase 2 Complete).....	126
24.8.1 Overview.....	126
24.8.2 Quick Start.....	126
24.8.3 Configuration Format Details.....	127
24.8.4 Channel-Specific Masters (Phase 2 Feature).....	128
24.8.5 Example: RAPIDS-Style Configuration.....	128
24.8.6 Common User Questions.....	130
24.8.7 Generator Output Structure.....	132
24.8.8 Testing Generated Bridges.....	132
24.9 Bridge Architecture Quick Reference.....	132
24.9.1 Generated Bridge Crossbar Structure.....	132
24.9.2 Key Features.....	133
24.9.3 Address Map.....	133
24.10 Test Organization.....	133
24.10.1 Test Hierarchy.....	133
24.10.2 Test Levels.....	134
24.11 Common User Questions and Responses.....	134
24.11.1 Q: “How does the Bridge work?”.....	134
24.11.2 Q: “How do I generate a Bridge?”.....	134
24.11.3 Q: “How do I test a Bridge?”.....	134
24.12 Anti-Patterns to Avoid.....	135
24.12.1 ✗ Anti-Pattern 1: Embedded Testbench Classes.....	135
24.12.2 ✗ Anti-Pattern 2: Manual AXI4 Handshaking.....	135

24.12.3 ✕ Anti-Pattern 3: Memory Models for Simple Tests.....	136
24.13 Quick Reference.....	136
24.13.1 Finding Existing Components.....	136
24.13.2 Common Commands.....	136
24.14 Remember.....	137
24.15 PDF Generation Location.....	137

List of Figures

Figure 1.1: Block Diagram Legend.....	28
Figure 2.1: RAPIDS System Topology.....	33
Figure 2.2: Bridge System Context.....	38
Figure 3.1: Bridge Block Diagram.....	40
Figure 3.2: Write Path.....	42
Figure 3.3: Read Path.....	42
Figure 3.1: AXI4 to APB Conversion Sequence.....	48
Figure 3.2: Width Upsize Conversion.....	49
Figure 3.3: Width Downsize Conversion.....	50
Figure 4.1: Clock Distribution.....	59
Figure 4.3: Reset Timing.....	60
Figure 4.2: Multi-Clock CDC.....	62

List of Tables

Table 1: Table 1.1: Common Terminology.....	27
Table 2: Table 1.2: Signal Naming Prefixes.....	28
Table 3: Table 1.3: Block Diagram Symbols.....	28
Table 4: Table 1.4: Parameter Format Example.....	29
Table 5: Table 1.5: Acronyms and Abbreviations.....	29
Table 6: Table 2.1: Supported Protocols.....	35
Table 7: Table 2.2: Channel-Specific Resource Savings.....	36
Table 8: Table 2.3: Address Map Organization.....	39
Table 9: Table 3.1: Topology Parameter Scaling.....	42
Table 10: Table 3.2: AXI4 Channel Summary.....	44
Table 11: Table 3.3: Protocol Conversion Matrix.....	47
Table 12: Table 4.9: Master-Side Interface Channels.....	51
Table 13: Table 4.10: Slave-Side Interface Channels.....	52
Table 14: Table 4.11: Supported Burst Types.....	55
Table 15: Table 4.1: APB Signal Definitions.....	56
Table 16: Table 4.2: AXI4 to APB Burst Conversion.....	58
Table 17: Table 4.3: APB to AXI4 Error Mapping.....	58
Table 18: Table 4.4: Clock Requirements.....	59
Table 19: Table 4.5: Reset Signal.....	60
Table 20: Table 4.6: Reset Effects.....	60
Table 21: Table 4.7: Timing Constraints.....	61
Table 22: Table 4.8: Clock-to-Output Delays.....	61
Table 23: Table 5.1: Peak Throughput by Data Width.....	64
Table 24: Table 5.2: Factors Affecting Throughput.....	65
Table 25: Table 5.3: Burst Efficiency Comparison.....	65
Table 26: Table 5.4: AXI4 vs APB Protocol Impact.....	66
Table 27: Table 5.5: Address Path Latency.....	67
Table 28: Table 5.6: Data Path Latency.....	67
Table 29: Table 5.7: Response Path Latency.....	68
Table 30: Table 5.8: Upsize Latency by Ratio.....	69
Table 31: Table 5.9: Downsize Latency by Ratio.....	69
Table 32: Table 5.10: AXI4 to APB Conversion Latency.....	69
Table 33: Table 5.11: Baseline Resource Requirements.....	70
Table 34: Table 5.12: Resource Scaling Factors.....	71
Table 35: Table 5.13: Per-Master Resource Breakdown.....	71
Table 36: Table 5.14: Per-Slave Resource Breakdown.....	71

Table 37: Table 5.15: Crossbar Core Resources.....	71
Table 38: Table 5.16: Width Converter Resources.....	72
Table 39: Table 5.17: AXI4 to APB Converter Resources.....	72
Table 40: Table 5.18: Complete Bridge Resource Estimates.....	72
Table 41: Table 5.19: Performance/Resource Trade-offs.....	73
Table 42: Table 6.1: Clock Requirements.....	74
Table 43: Table 6.2: Reset Requirements.....	74
Table 44: Table 6.3: Power Requirements.....	74
Table 45: Table 6.4: Address Map Requirements.....	75
Table 46: Table 6.5: Connectivity Requirements.....	75
Table 47: Table 6.6: Timing Requirements.....	75
Table 48: Table 6.7: Recommended Timing Margins.....	76
Table 49: Table 6.8: Bridge Core Parameters.....	77
Table 50: Table 6.9: Derived Parameters.....	77
Table 51: Table 6.10: Master Port Configuration.....	78
Table 52: Table 6.11: Slave Port Configuration.....	78
Table 53: Table 6.12: Generator Validation Checks.....	80
Table 54: Table 6.13: Unit Level Test Focus.....	82
Table 55: Table 6.14: Integration Test Coverage.....	82
Table 56: Table 6.15: System Level Tests.....	83
Table 57: Table 6.16: Test Categories.....	84
Table 58: Table 6.17: Functional Coverage Goals.....	85
Table 59: Table 6.18: Code Coverage Goals.....	85
Table 60: Table 6.19: Debug Signals.....	86
Table 61: Table 6.20: CI Test Schedule.....	86
Table 62: Table 6.21: Configuration Test Matrix.....	86
Table 63: Table 6.22: Known Test Gaps.....	86
Table 64: Table 6.23: Simulator Support Status.....	87

1

Bridge Has Index

Generated: 2026-08-10

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

2

Document Information

2.1

Bridge Hardware Architecture Specification

Property	Value
Document Title	Bridge Hardware Architecture Specification
Version	1.1
Date	June 4, 2026
Status	Released
Classification	Open Source - Apache 2.0 License

2.2

Revision History

Version	Date	Author	Description
1.0	2026-01-03	RTL Design Sherpa	Initial release - restructured from single spec
1.1	2026-06-04	RTL Design Sherpa	Content sync to RTL state at 2026-06-04. Documents (1) the 64→128-bit monbus packet migration with new 64-bit side-band timestamp wire — referenced via docs/markdown/rtl-amba/includes/monitor_package_spec.md; (2) per-

Version	Date	Author	Description
			port + global SV-parameter monitor methodology with mandatory use_monitor TOML field and variants = ["no", "mon"] generator selector; (3) generator-emitted AXI4 ↔ AXIL conversion at the slave boundary (was external); (4) new AXIL → wider-slave master-side alignment converters (axil_to_axi4_wide_align_{rd,wr}); (5) verification-strategy rewrite to protocol-BFM-only TBs with memory-backed slaves, serial-only execution, per-module cocotb function names, boundary_probe (renamed from address_decode) tests; (6) note of the independent W-tracker FIFO + split AW/W-ready MUX fix (commit d24bd617) that closed an interleaved-master deadlock.

2.3 Document Purpose

This Hardware Architecture Specification (HAS) provides a high-level view of the Bridge component, covering:

- System-level architecture and data flow
- Protocol support (AXI4, AXI4-Lite, APB)
- Interface definitions and requirements

- Performance characteristics
- Integration guidelines

For detailed micro-architecture, FSM designs, and signal-level specifications, refer to the companion **Bridge Micro-Architecture Specification (MAS)**.

2.4 Intended Audience

- System architects defining interconnect topology
- Hardware engineers integrating Bridge into SoC designs
- Verification engineers planning test strategies
- Technical managers evaluating Bridge capabilities

2.5 Related Documents

- **Bridge MAS** - Micro-Architecture Specification (detailed block-level)
- **PRD.md** - Product requirements and overview
- **CLAUDE.md** - AI development guide

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

3 Purpose and Scope

3.1 What is Bridge?

Bridge is a Python-based multi-protocol crossbar generator that creates parameterized SystemVerilog RTL from human-readable configuration files. It generates AXI4 crossbars with automatic support for:

- **Protocol conversion** - AXI4, AXI4-Lite, and APB slave interfaces
- **Width conversion** - Automatic upsize/downsize for data width mismatches
- **Channel-specific masters** - Write-only, read-only, or full AXI4 masters

3.2 The Problem Bridge Solves

Manual AXI4 Crossbar Development is Error-Prone:

Creating an AXI4 crossbar manually requires: 1. Writing 5 separate channel multiplexers (AW, W, B, AR, R) 2. Implementing per-slave arbitration for each channel 3. Managing ID-based response routing for out-of-order support 4. Handling burst locking and interleaving constraints 5. Inserting width converters for data width mismatches 6. Inserting protocol converters for APB/AXI4-Lite mixed systems 7. Wiring hundreds of signals with consistent naming

Bridge Automates All of This: - Define ports and connectivity in configuration files - Run generator script - Get production-ready SystemVerilog RTL

3.3 Scope

This specification covers:

- High-level architecture and block organization
- Supported protocols and conversion capabilities
- Interface requirements and signal conventions
- Performance characteristics and resource estimates
- Integration guidelines and verification strategy

3.4 Out of Scope

The following are covered in the companion MAS:

- Detailed FSM state diagrams and transitions
- Signal-level timing diagrams
- Internal pipeline structures
- RTL implementation details

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

4 Document Conventions

4.1 Terminology

Table 1.1: Common Terminology

Term	Definition
Master	AXI4 initiator that issues

Term	Definition
	transactions
Slave	AXI4 target that responds to transactions
Crossbar	NxM interconnect connecting masters to slaves
Channel	AXI4 communication path (AW, W, B, AR, R)
Converter	Logic that transforms width or protocol

4.2 Signal Naming

Bridge uses consistent signal prefixes:

Table 1.2: Signal Naming Prefixes

Prefix	Meaning
s_*	Slave-side interface (master port on bridge)
m_*	Master-side interface (slave port on bridge)
axi4_*	AXI4 protocol signals
apb_*	APB protocol signals
cfg_*	Configuration signals
dbg_*	Debug signals

4.3 Diagrams

4.3.1 Figure 1.1: Block Diagram Legend

Block diagrams in this specification use the following conventions:

Table 1.3: Block Diagram Symbols

Symbol	Meaning
Rectangle	Functional block
Arrow	Data/signal flow

Symbol	Meaning
Dashed box	Optional/configurable block
Double line	Multi-signal bus

4.4 Code Examples

SystemVerilog code examples are formatted as:

```
// Module instantiation example
bridge_4x4 u_bridge (
    .aclk      (sys_clk),
    .aresetn   (sys_rst_n),
    // ... port connections
);
```

4.5 Parameter Notation

Parameters use the following format:

Table 1.4: Parameter Format Example

Parameter	Type	Range	Default	Description
NUM_MASTERS	int	1-32	2	Number of master ports
NUM_SLAVES	int	1-256	2	Number of slave ports

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

5 Definitions and Acronyms

5.1 Acronyms

Table 1.5: Acronyms and Abbreviations

Acronym	Definition
AMBA	Advanced Microcontroller Bus

Acronym	Definition
	Architecture
APB	Advanced Peripheral Bus
AR	AXI4 Read Address channel
AW	AXI4 Write Address channel
AXI	Advanced eXtensible Interface
AXI4	AXI Protocol Version 4
B	AXI4 Write Response channel
BID	Bridge ID (internal master identifier)
CAM	Content-Addressable Memory
CDC	Clock Domain Crossing
CSV	Comma-Separated Values
DECERR	Decode Error (AXI response)
DMA	Direct Memory Access
FIFO	First-In First-Out buffer
FSM	Finite State Machine
HAS	Hardware Architecture Specification
ID	Transaction Identifier
MAS	Micro-Architecture Specification
MUX	Multiplexer
NxM	N masters by M slaves (topology notation)
OOO	Out-of-Order
OOR	Out-of-Range
QoS	Quality of Service
R	AXI4 Read Data channel
RTL	Register-Transfer Level
SLVERR	Slave Error (AXI response)
SoC	System-on-Chip
TOML	Tom's Obvious Minimal

Acronym	Definition
W	Language AXI4 Write Data channel

5.2 Definitions

Address Decode: The process of determining which slave should receive a transaction based on the address.

Arbitration: The process of selecting which master gains access to a slave when multiple masters contend.

Bridge ID (BID): Internal identifier prepended to master IDs for response routing. Width = $\text{clog}_2(\text{NUM_MASTERS})$.

Channel-Specific Master: A master that only uses subset of AXI4 channels (write-only or read-only).

Crossbar: An NxM interconnect allowing any master to communicate with any connected slave.

Grant Locking: Mechanism that holds arbitration grant until transaction completes.

Out-of-Order Response: Responses returned in different order than requests were issued.

Protocol Conversion: Transformation between different bus protocols (e.g., AXI4 to APB).

Response Routing: Directing B/R channel responses back to the originating master.

Round-Robin Arbitration: Fair arbitration where priority rotates among requesters.

Width Conversion: Transformation between different data bus widths (upscale or downsize).

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

6 Use Cases

6.1 Primary Applications

6.1.1 SoC Interconnects

Bridge serves as the primary interconnect fabric for System-on-Chip designs:

- **Multi-core processor memory subsystems** - Connect multiple CPU cores to shared memory
- **Accelerator integration** - Route GPU, DSP, or custom accelerator traffic
- **DMA engine routing** - Connect DMA controllers to memory and peripherals
- **Peripheral bus bridges** - Convert AXI4 to APB for low-speed peripherals

6.1.2 Memory Systems

Bridge provides flexible memory access:

- **Multi-port DDR controllers** - Multiple masters accessing shared DDR
- **SRAM buffer sharing** - Shared packet buffers for networking
- **Cache coherency interconnects** - Connect cache controllers
- **Memory-mapped I/O** - Unified address space for peripherals


6.1.3 Accelerator Systems

Bridge supports custom accelerator architectures like RAPIDS:

- **Descriptor write masters** - Write control descriptors (write-only)
- **Sink write masters** - Write incoming data packets (write-only)
- **Source read masters** - Read outgoing data packets (read-only)
- **CPU configuration** - Full access for register configuration

6.2 Example: RAPIDS Accelerator

6.2.1 Figure 2.1: RAPIDS System Topology

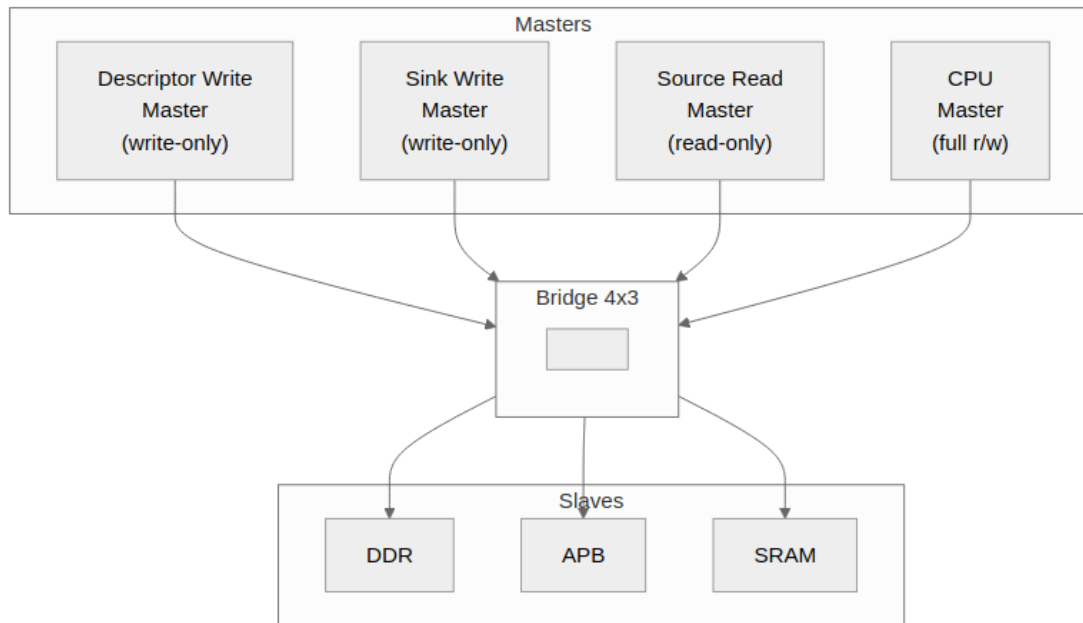

RAPIDS System Topology

Bridge topology for RAPIDS accelerator with channel-specific masters.

6.2.2 Configuration

[bridge]

```
name = "bridge_rapids"
masters = [
    {name = "rapids_descr_wr", channels = "wr", data_width = 512},
    {name = "rapids_sink_wr", channels = "wr", data_width = 512},
    {name = "rapids_src_rd", channels = "rd", data_width = 512},
    {name = "cpu", channels = "rw", data_width = 64}
]
slaves = [
    {name = "ddr", protocol = "axi4", data_width = 512},
    {name = "apb_periph", protocol = "apb", data_width = 32},
    {name = "sram", protocol = "axi4", data_width = 256}
]
```

6.2.3 Benefits

- **39% port reduction** for write-only masters (3 channels vs 5)
- **61% port reduction** for read-only masters (2 channels vs 5)
- **Automatic width conversion** for 64b CPU to 512b DDR

- **Protocol conversion** for APB peripheral access

6.3 Rapid Prototyping

Bridge accelerates design exploration:

- **Quick topology exploration** - Try different master/slave configurations
- **Performance analysis** - Evaluate arbitration and bandwidth
- **Design space exploration** - Compare resource usage
- **Educational projects** - Learn AXI4 protocol and interconnects

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

7 Key Features

7.1 Configuration-Driven Generation

7.1.1 CSV/TOML Configuration

Bridge uses human-readable configuration files:

- **ports configuration** - Define each master and slave port
- **connectivity matrix** - Specify which masters connect to which slaves
- **Version-control friendly** - Text-based, easy to diff and review

7.1.2 Example Configuration

Port Definition (TOML):

```
masters = [  
  {name = "cpu", prefix = "cpu_m_axi", data_width = 64, channels =  
    "rw"},  
  {name = "dma", prefix = "dma_m_axi", data_width = 256, channels =  
    "rw"}  
]  
slaves = [  
  {name = "ddr", prefix = "ddr_s_axi", data_width = 512, protocol =  
    "axi4"},  
  {name = "uart", prefix = "uart_apb", data_width = 32, protocol =
```

```
"apb"}
]
```

Connectivity Matrix (CSV):

```
master\slave,ddr,uart
cpu,1,1
dma,1,0
```

7.2 Multi-Protocol Support

Table 2.1: Supported Protocols

Master Protocol	Slave Protocol	Conversion Type
AXI4	AXI4	Direct or width convert
AXI4	AXI4-Lite	Protocol downgrade
AXI4	APB	Full protocol conversion
AXI5	AXI4 / AXI4-Lite / APB	Base-subset interop; sideband terminates at the boundary (warning)
AXI5	AXI5 (width-matched)	Native sideband pass- through; store-class atomics; poison
AXI4 / AXI5	APB5	APB4 conversion core + APB5 sideband surface

AMBA5 ports are declared per port (protocol = "axi5" / "apb5" with an optional axi5_features list); the fabric stays AXI4 internally. See [AXI5 and APB5 Interfaces](#).

7.2.1 Protocol Features

- **AXI4 Full** - Complete 5-channel implementation with bursts
- **AXI4-Lite** - Simplified single-beat transactions
- **APB** - Low-power peripheral access

7.3 Channel-Specific Masters

7.3.1 Write-Only Masters (wr)

Generate only write channels: - AW (Write Address) - W (Write Data) - B (Write Response)

Use case: DMA write engines, descriptor writers

7.3.2 Read-Only Masters (rd)

Generate only read channels: - AR (Read Address) - R (Read Data)

Use case: DMA read engines, source data fetchers

7.3.3 Full Masters (rw)

Generate all five channels for complete read/write capability.

Use case: CPU interfaces, configuration masters

7.3.4 Resource Savings

Table 2.2: Channel-Specific Resource Savings

Master Type	Channels	Signal Reduction
Write-only (wr)	3 of 5	~39% fewer signals
Read-only (rd)	2 of 5	~61% fewer signals
Full (rw)	5 of 5	Baseline

7.4 Automatic Converters

7.4.1 Width Conversion

Bridge automatically inserts width converters:

- **Upsize** - Narrow master to wide slave (e.g., 64b to 512b)
- **Downsize** - Wide master to narrow slave (e.g., 512b to 32b)
- **Per-path** - Only where needed, not global conversion

7.4.2 Protocol Conversion

Bridge inserts protocol converters for mixed systems:

- **AXI4 to APB** - Full conversion with burst handling
- **AXI4 to AXI4-Lite** - Simplified conversion

7.5 Flexible Topology

7.5.1 Scalability

- **Masters:** 1-32 master ports
- **Slaves:** 1-256 slave ports
- **Partial connectivity** - Not all masters need access to all slaves

7.5.2 Mixed Configurations


- **Mixed protocols** - AXI4, AXI4-Lite, and APB slaves in same crossbar
- **Mixed data widths** - 32b, 64b, 128b, 256b, 512b
- **Mixed channels** - Write-only, read-only, and full masters

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

8 System Context

8.1 Bridge in SoC Architecture

8.1.1 Figure 2.2: Bridge System Context

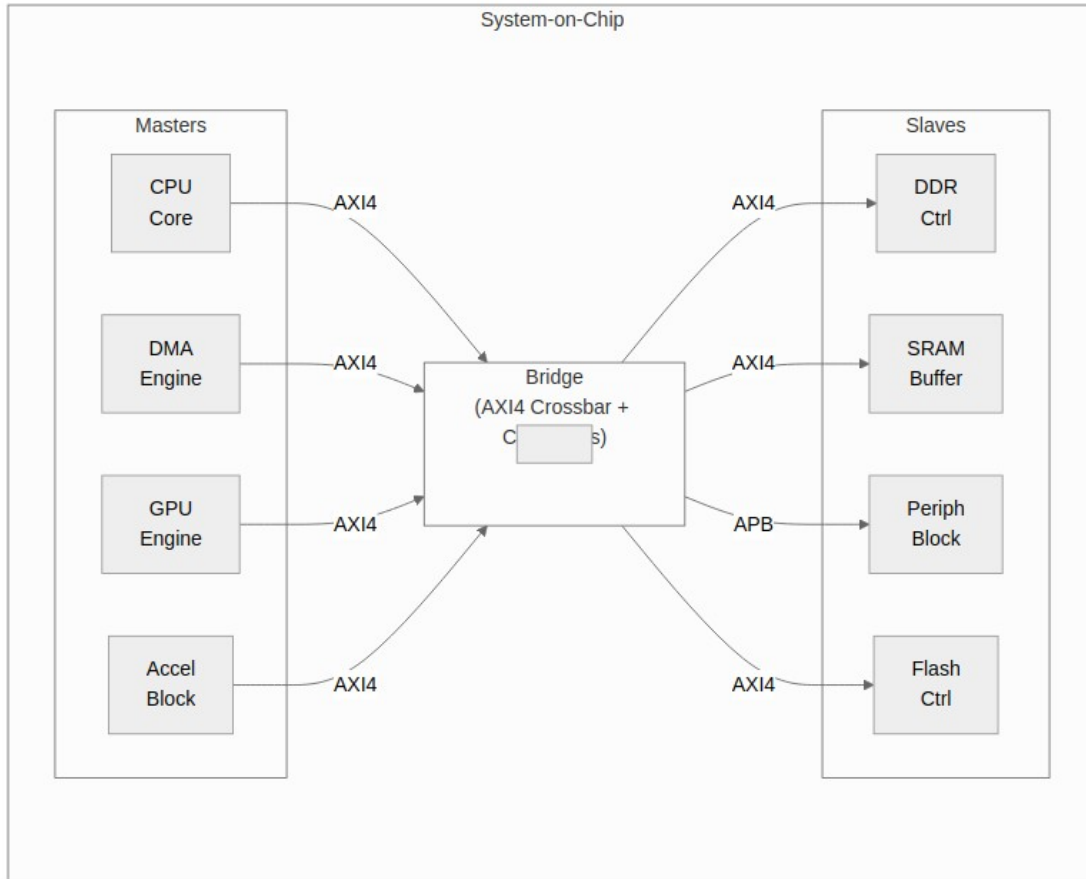

Bridge System Context

Bridge as central interconnect connecting masters to slaves with protocol conversion.

8.2 Interface Boundaries

8.2.1 Master-Side (Upstream)

Bridge presents slave interfaces to upstream masters:

- Accepts AXI4 transactions from masters
- Provides flow control via ready signals
- Returns responses (B/R channels) to correct master

8.2.2 Slave-Side (Downstream)

Bridge presents master interfaces to downstream slaves:

- Issues AXI4/APB transactions to slaves
- Accepts responses from slaves
- Routes responses back through ID tracking

8.3 Address Space

8.3.1 Address Map Organization

Each slave occupies a configurable address region:

Table 2.3: Address Map Organization

Slave	Base Address	Address Range	Size
Slave 0	BASE + 0x0000_0000	Configurable	Variable
Slave 1	BASE + addr_range_0	Configurable	Variable
Slave N	Sum of previous ranges	Configurable	Variable

8.3.2 Address Decode

- **Parallel decode** - All slaves checked simultaneously
- **One-hot result** - Exactly one slave selected per transaction
- **Out-of-range detection** - DECERR for unmapped addresses

8.4 Clock and Reset

8.4.1 Clock Domain

- **Single clock domain** - All Bridge logic synchronous to aclk
- **No CDC** - Masters and slaves must be in same clock domain

8.4.2 Reset

- **Active-low asynchronous** - Standard aresetn convention
- **Full reset** - All internal state cleared on reset
- **Transaction safety** - Outstanding transactions aborted on reset

8.5 Dependencies

8.5.1 Required Infrastructure

- AXI4-compliant masters and slaves
- Proper clock and reset distribution
- Address map configuration matching slave address ranges

8.5.2 Optional Features


- Width converters (only if widths mismatch)
- Protocol converters (only if protocols differ)
- ID tracking CAM (only if OOO support needed)

RTL Design Sherpa · Learning Hardware Design Through Practice GitHub · Documentation Index · MIT License

9 Block Diagram

9.1 Bridge Architecture Overview

9.1.1 Figure 3.1: Bridge Block Diagram

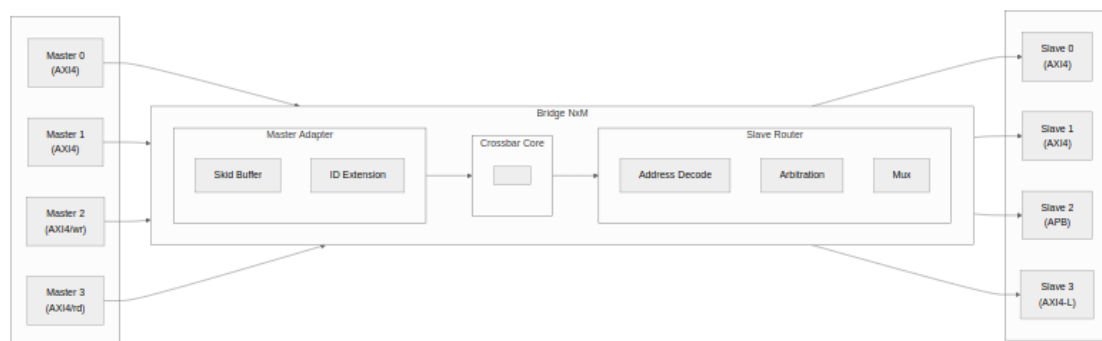

Bridge Block Diagram

Bridge high-level block diagram showing master adapters, crossbar core, and slave routers.

9.2 Functional Blocks

9.2.1 Master Adapter

Receives transactions from upstream masters:

- **Skid buffer** - Pipeline registration for timing
- **ID extension** - Prepend Bridge ID for response routing
- **Channel separation** - Route AW/W/AR independently

9.2.2 Crossbar Core

Central switching fabric:

- **5-channel routing** - Independent AW, W, B, AR, R paths
- **Address decode** - Determine target slave
- **Arbitration** - Per-slave round-robin selection


9.2.3 Slave Router

Delivers transactions to downstream slaves:

- **Protocol conversion** - AXI4 to APB/AXI4-Lite if needed
- **Width conversion** - Upsize/downsize data paths
- **Response collection** - Route B/R back to masters


9.3 Data Flow

9.3.1 Figure 3.2: Write Path

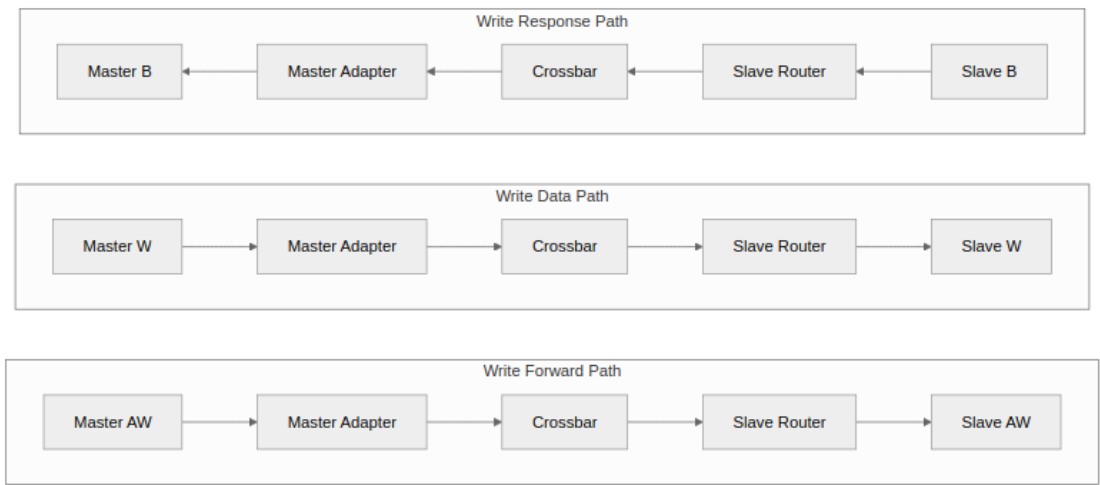

Write Path Flow

9.3.2 Figure 3.3: Read Path

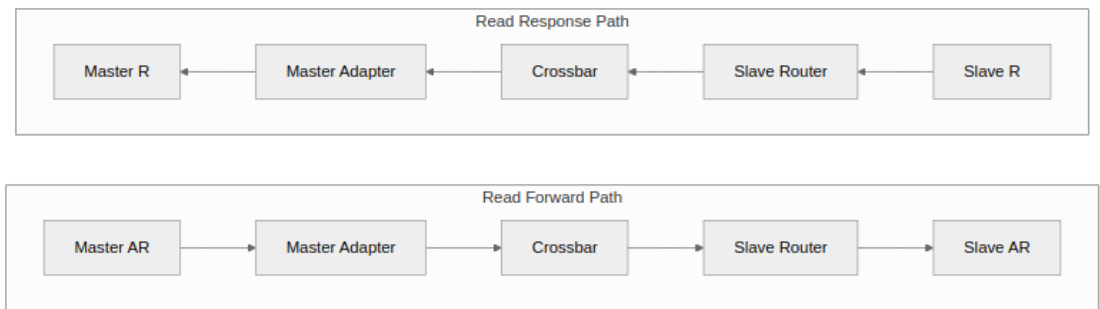

Read Path Flow

9.4 Scalability

9.4.1 Topology Parameters

Table 3.1: Topology Parameter Scaling

Parameter	Range	Impact
NUM_MASTERS	1-32	Linear MUX growth
NUM_SLAVES	1-256	Linear decoder growth
DATA_WIDTH	32-512	Linear data path

Parameter	Range	Impact
ID_WIDTH	1-16	growth Logarithmic CAM growth

9.4.2 Resource Scaling

- **Logic:** $O(M \times N)$ for crossbar core
- **Routing:** $O(M + N)$ for address/response paths
- **Memory:** $O(M \times \text{outstanding})$ for ID tracking

RTL Design Sherpa · Learning Hardware Design Through Practice GitHub · Documentation Index · MIT License

10 Data Flow

10.1 Transaction Flow Overview

10.1.1 Write Transaction Flow

1. **Master issues AW** - Address and control information
2. **Bridge decodes address** - Determines target slave
3. **Arbitration** - Grants access if multiple masters contend
4. **AW forwarded to slave** - With extended ID (Bridge ID prepended)
5. **Master sends W data** - Following the granted AW
6. **W forwarded to slave** - Using same grant
7. **Slave returns B response** - With extended ID
8. **Bridge routes B to master** - Using ID to find originator

10.1.2 Read Transaction Flow

1. **Master issues AR** - Address and control information
2. **Bridge decodes address** - Determines target slave
3. **Arbitration** - Grants access if multiple masters contend
4. **AR forwarded to slave** - With extended ID
5. **Slave returns R data** - Potentially multiple beats

6. Bridge routes R to master - Using ID to find originator

10.2 Channel Independence

10.2.1 AXI4 Channel Separation

Each AXI4 channel operates independently:

Table 3.2: AXI4 Channel Summary

Channel	Direction	Contents	Arbitration
AW	Master to Slave	Write address	Per-slave
W	Master to Slave	Write data	Follows AW grant
B	Slave to Master	Write response	ID-based routing
AR	Master to Slave	Read address	Per-slave
R	Slave to Master	Read data	ID-based routing

10.2.2 Parallel Operation

- Read and write transactions can proceed simultaneously
- Different masters can access different slaves in parallel
- Same slave serializes access via arbitration

10.3 ID Extension

10.3.1 Bridge ID (BID) Concept

Original Master ID: [ID_WIDTH-1:0]

Extended ID: [BID | Original ID]

BID Width: $\text{clog2}(\text{NUM_MASTERS})$

10.3.2 Example: 4 Masters, 4-bit ID

Master 0 ID = 4'b0101

Extended ID = 6'b00_0101 (BID=00, prepended)

Master 3 ID = 4'b1100

Extended ID = 6'b11_1100 (BID=11, prepended)

10.3.3 ID Flow

```
Master 0: ID=5 --[Extend]--> Slave: ID=0x05 --[Response]--> B.ID=0x05
--[Extract]--> Master 0
Master 1: ID=5 --[Extend]--> Slave: ID=0x15 --[Response]--> B.ID=0x15
--[Extract]--> Master 1
```

10.4 Response Routing

10.4.1 B Channel (Write Response)

1. Slave issues B with extended ID
2. Bridge extracts BID from upper bits
3. BID determines destination master
4. Original ID (lower bits) returned to master

10.4.2 R Channel (Read Data)

1. Slave issues R with extended ID
2. Bridge extracts BID from upper bits
3. BID determines destination master
4. Original ID (lower bits) returned to master
5. RLAST indicates final beat

10.5 Out-of-Order Support

10.5.1 Transaction Interleaving

Bridge supports out-of-order completion:

- Different IDs can complete in any order
- Same ID must complete in order (AXI4 rule)
- ID tracking tables manage outstanding transactions

10.5.2 Example Sequence

```
Time 0: Master 0 issues AR (ID=1) to Slave 0
Time 1: Master 0 issues AR (ID=2) to Slave 1
Time 2: Slave 1 returns R (ID=2) - fast slave
Time 3: Slave 0 returns R (ID=1) - slow slave
```

Result: ID=2 response arrives before ID=1 - valid 000

11 Protocol Support

11.1 Supported Protocols

11.1.1 AXI4 Full

Complete AMBA AXI4 protocol support:

- **5 channels:** AW, W, B, AR, R
- **Burst transactions:** FIXED, INCR, WRAP
- **Transaction IDs:** Configurable width
- **Out-of-order:** Response reordering supported
- **Data widths:** 32, 64, 128, 256, 512 bits

11.1.2 AXI4-Lite

Simplified AXI4 for register access:

- **5 channels:** Same as AXI4
- **Single-beat only:** AWLEN/ARLEN = 0
- **No IDs:** Transaction ordering by channel
- **Fixed width:** Typically 32 or 64 bits

11.1.3 APB (Advanced Peripheral Bus)

Low-power peripheral protocol:

- **Single channel:** Combined address and data
- **Simple handshake:** PSEL, PENABLE, PREADY
- **No bursts:** Single transfer per transaction
- **Low overhead:** Minimal logic for slow peripherals

11.2 Protocol Conversion Matrix

Table 3.3: Protocol Conversion Matrix

Master	Slave	Conversion Type	Notes
AXI4	AXI4	Direct	Width conversion if needed
AXI4	AXI4-Lite	Downgrade	Burst split to single beats
AXI4	APB	Full convert	Channel and timing conversion
AXI4-Lite	AXI4	Upgrade	Single-beat pass-through
AXI4-Lite	AXI4-Lite	Direct	Width conversion if needed
AXI4-Lite	APB	Convert	Simplified conversion

11.3 Automatic Conversion Shims at Slave Boundary

When a slave port's TOML configuration specifies a protocol other than native AXI4 (e.g., `protocol = "axi4lite"` or `protocol = "apb"`), the bridge generator automatically emits protocol conversion shims between the crossbar core and the slave port. These shims are generated once during design time and inserted transparently.


Supported Slave Protocols: - **axi4:** Native AXI4 (no shim required) - **axi4lite:** AXI4-Lite protocol (emits `axi4_to_axil4_{rd,wr}` shims) - **apb:** APB3/APB4 protocol (emits `axi4_to_axil4` shim followed by internal AXIL-to-APB bridge)

The shim modules are located in `projects/components/converters/rtl/` and are instantiated by the bridge generator in each generated top-level module. External to the bridge, slave ports still present the configured protocol (AXIL or APB); internally, the crossbar core is uniformly AXI4.

11.4 AXI4 to APB Conversion

11.4.1 Conversion Process

11.4.2 Figure 3.1: AXI4 to APB Conversion Sequence

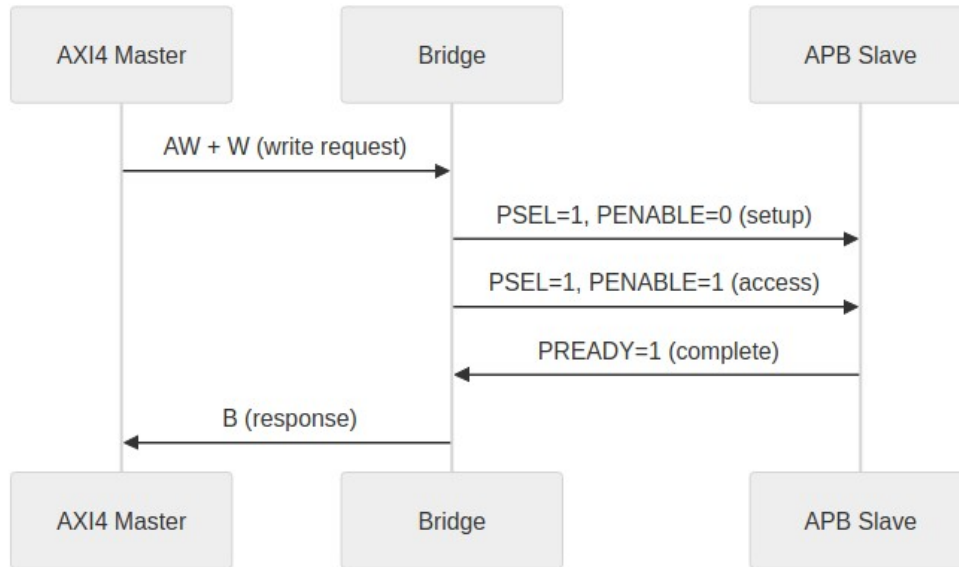

AXI4 to APB Conversion

11.4.3 Burst Handling

- AXI4 bursts split into individual APB transfers
- WSTRB converted to per-byte enables
- B response generated after all beats complete


11.4.4 Timing Considerations

- APB is inherently slower (minimum 2 cycles per transfer)
- Pipeline stalls during APB access
- Consider separate APB crossbar for multiple slow peripherals

11.5 Width Conversion

11.5.1 Upsize (Narrow to Wide)


11.5.2 Figure 3.2: Width Upsize Conversion

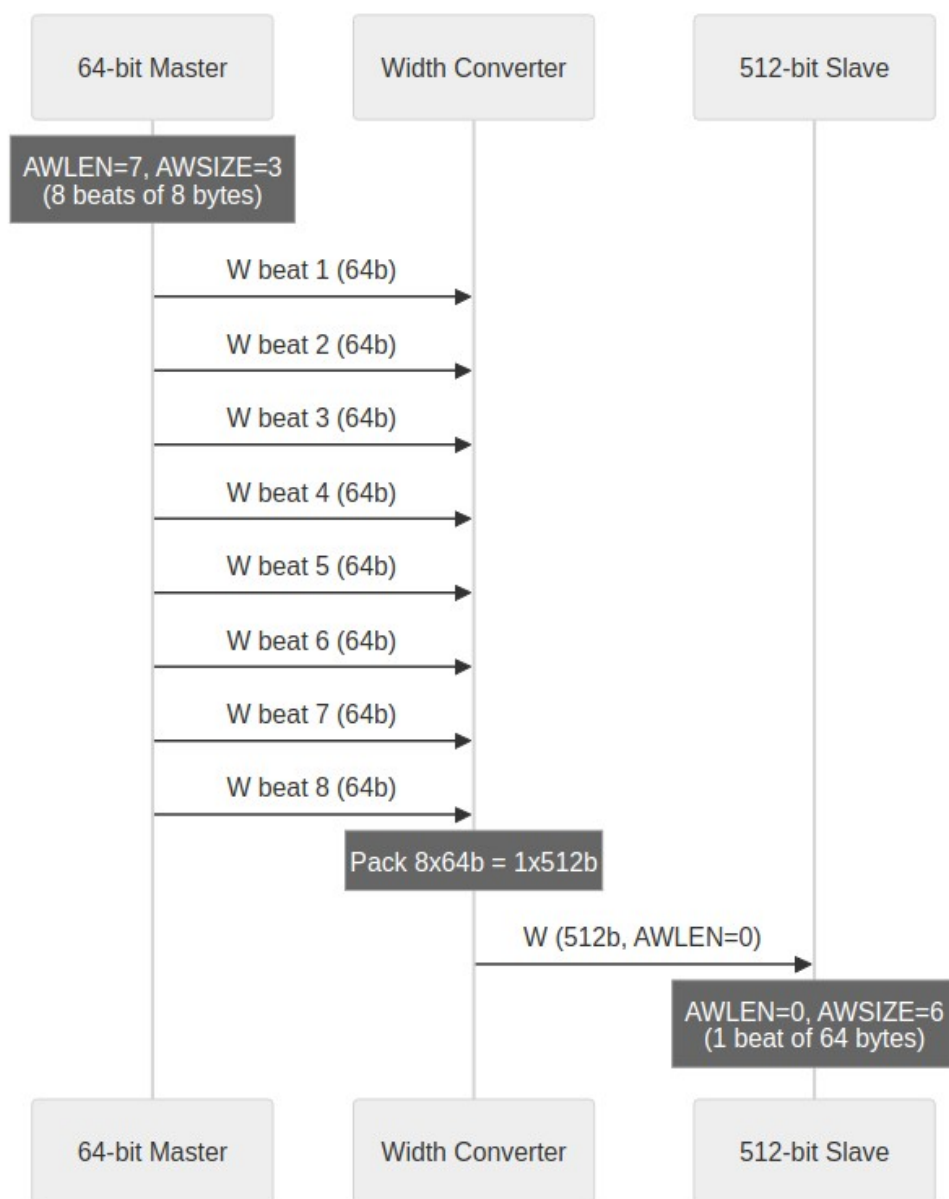

Width Upsize

11.5.3 Downsize (Wide to Narrow)

11.5.4 Figure 3.3: Width Downsize Conversion

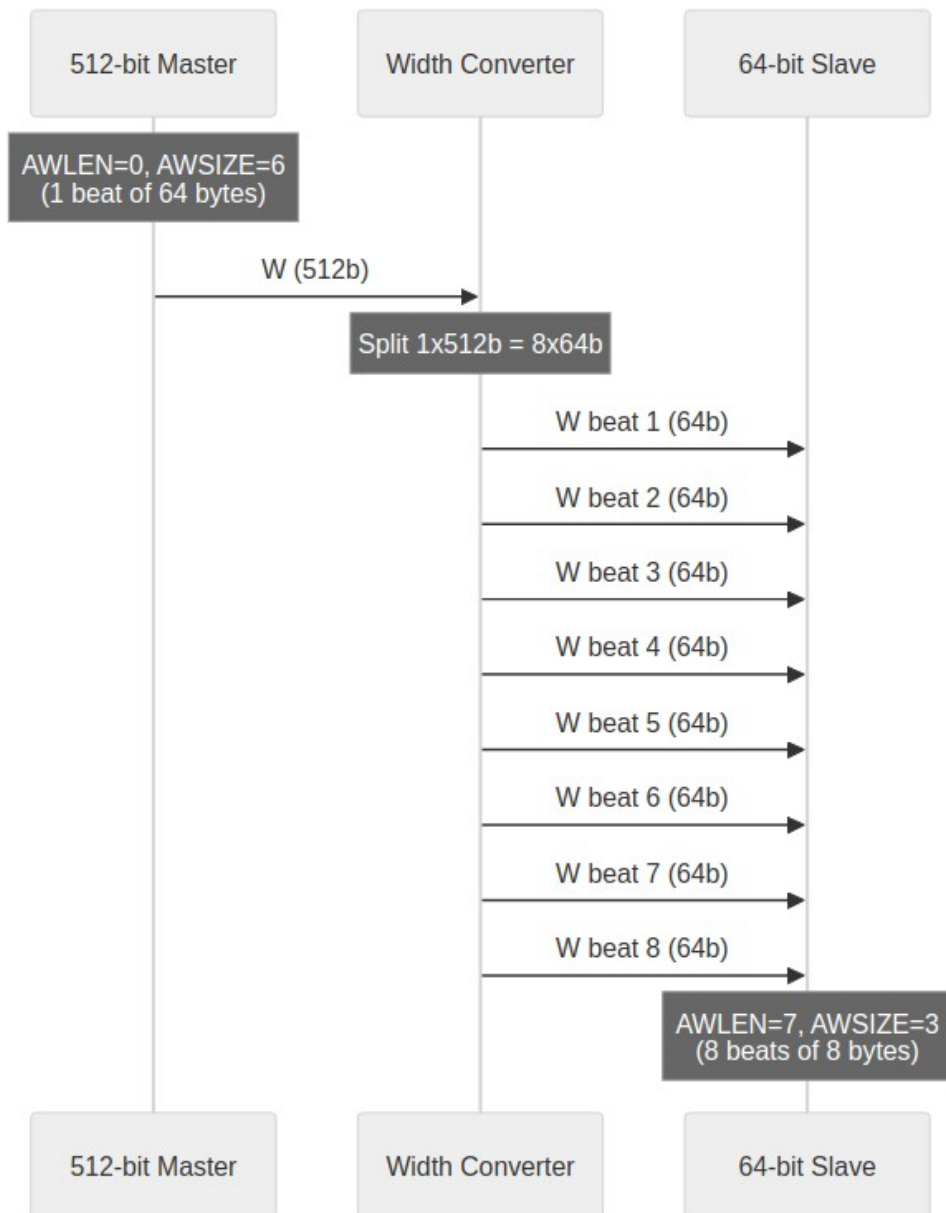

Width Downsize

11.6 Channel-Specific Protocol

11.6.1 Write-Only Masters

Only AW, W, B channels active:

- AR permanently deasserted
- R channel ignored (no routing logic)
- Reduced signal count and logic

11.6.2 Read-Only Masters

Only AR, R channels active:

- AW, W, B channels ignored
- No write arbitration for this master
- Reduced signal count and logic

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

12 AXI4 Interface Overview

12.1 Interface Organization

12.1.1 Master-Side Interfaces

Bridge presents **slave interfaces** to upstream masters. Each master port includes:

Table 4.9: Master-Side Interface Channels

Channel	Signals	Direction (to Bridge)
AW	AWVALID, AWREADY, AWADDR, AWID, AWLEN, AWSIZE, AWBURST, ...	Input
W	WVALID,	Input

Channel	Signals	Direction (to Bridge)
B	WREADY, WDATA, WSTRB, WLAST	Output
	BVALID, BREADY, BID, BRESP	
AR	ARVALID, ARREADY, ARADDR, ARID, ARLEN, ARSIZE, ARBURST, ...	Input
R	RVALID, RREADY, RDATA, RID, RRESP, RLAST	Output

12.1.2 Slave-Side Interfaces

Bridge presents **master interfaces** to downstream slaves. Each slave port includes:

Table 4.10: Slave-Side Interface Channels

Channel	Signals	Direction (from Bridge)
AW	AWVALID, AWREADY, AWADDR, AWID, AWLEN, AWSIZE, AWBURST, ...	Output
W	WVALID, WREADY, WDATA, WSTRB, WLAST	Output
B	BVALID, BREADY, BID, BRESP	Input

Channel	Signals	Direction (from Bridge)
AR	ARVALID, ARREADY, ARADDR, ARID, ARLEN, ARSIZE, ARBURST, ...	Output
R	RVALID, RREADY, RDATA, RID, RRESP, RLAST	Input

12.2 Signal Naming Convention

12.2.1 Custom Prefixes

Each port uses a custom prefix for signal naming:

```
// Example: Master 0 with prefix "cpu_m_axi_"
input logic [31:0] cpu_m_axi_awaddr,
input logic [3:0]  cpu_m_axi_awid,
input logic       cpu_m_axi_awvalid,
output logic      cpu_m_axi_awready,
// ... remaining AW signals
```

```
// Example: Slave 0 with prefix "ddr_s_axi_"
output logic [31:0] ddr_s_axi_awaddr,
output logic [7:0]  ddr_s_axi_awid, // Extended ID
output logic       ddr_s_axi_awvalid,
input logic        ddr_s_axi_awready,
```

12.2.2 ID Width Extension

Slave-side IDs are wider than master-side:

Master ID Width: ID_WIDTH (configuration parameter)
Bridge ID Width: $\text{clog2}(\text{NUM_MASTERS})$
Slave ID Width: $\text{ID_WIDTH} + \text{clog2}(\text{NUM_MASTERS})$

12.3 Channel-Specific Interfaces

12.3.1 Write-Only Master (wr)

Only AW, W, B channels generated:

```

// Write Address Channel
input logic [ADDR_WIDTH-1:0] descr_m_axi_awaddr,
input logic [ID_WIDTH-1:0]   descr_m_axi_awid,
// ... full AW channel

// Write Data Channel
input logic [DATA_WIDTH-1:0] descr_m_axi_wdata,
input logic [STRB_WIDTH-1:0] descr_m_axi_wstrb,
// ... full W channel

// Write Response Channel
output logic [ID_WIDTH-1:0]   descr_m_axi_bid,
output logic [1:0]           descr_m_axi_bresp,
// ... full B channel

// NO AR or R channels

```

12.3.2 Read-Only Master (rd)

Only AR, R channels generated:

```

// Read Address Channel
input logic [ADDR_WIDTH-1:0] src_m_axi_araddr,
input logic [ID_WIDTH-1:0]   src_m_axi_arid,
// ... full AR channel

// Read Data Channel
output logic [DATA_WIDTH-1:0] src_m_axi_rdata,
output logic [ID_WIDTH-1:0]   src_m_axi_rid,
// ... full R channel

// NO AW, W, or B channels

```

12.4 Monitor Bus Output (when variants includes mon)

When monitor collection is enabled (via the bridge TOML variants list including "mon"), each bridge instance exposes a unified monitor interface at the bridge top level:

Signal	Type	Width	Direction	Description
s_mon_axil —*	AXIL Slave	32-bit addr, 64- bit data	Input	Monitor packet read interface for CPU consumption
m_axil_mon —*	AXIL Master	32-bit addr, 64- bit data	Output	Monitor packet write interface for bulk trace capture

Signal	Type	Width	Direction	Description
stream_irq	logic	1-bit	Output	Interrupt signal (asserted when error FIFO has records)

The monitor system combines per-port collection from `axi4_master_{rd,wr}_mon` and `axi4_slave_{rd,wr}_mon` wrappers through a tree of `monbus_arbiter` instances and terminates in a single `monbus_axil_group` at the bridge top. The group provides a 64-bit free-running timestamp counter sampled at each packet arrival and exposes both a slave interface (for CPU read access) and a master interface (for bulk DMA writes to system memory).

Packet Format: The canonical 128-bit packet layout and field definitions are documented in `docs/markdown/rtl-amba/includes/monitor_package_spec.md`. See that reference for complete bit-field descriptions, protocol-type enumerations, and packet-type codes.

12.5 Handshake Protocol

12.5.1 Valid/Ready Handshake

All channels use AXI4 valid/ready handshake:

Transfer occurs when: `VALID && READY`

12.5.2 Backpressure

- Bridge asserts `READY` when able to accept
- Masters must hold `VALID` until `READY`
- Bridge does not drop transactions

12.6 Burst Support

12.6.1 Supported Burst Types

Table 4.11: Supported Burst Types

AWBURST/ARBURST	Type	Description
2'b00	FIXED	Same address each beat
2'b01	INCR	Incrementing address
2'b10	WRAP	Wrapping at boundary
2'b11	Reserved	Not used

12.6.2 Burst Length

- AWLEN/ARLEN: 8-bit field
- Length = AXLEN + 1 (1 to 256 beats)
- Burst does not cross 4KB boundary (AXI4 rule)

13 APB Interface Overview

13.1 APB Protocol Summary

13.1.1 Signal Definition

Table 4.1: APB Signal Definitions

Signal	Width	Direction	Description
PSEL	1	Output	Slave select
PENABLE	1	Output	Transaction phase
PADDR	ADDR_WIDTH	Output	Address
PWRITE	1	Output	Write enable
PWDATA	DATA_WIDTH	Output	Write data
PSTRB	DATA_WIDTH/ 8	Output	Byte strobes
PPROT	3	Output	Protection
PRDATA	DATA_WIDTH	Input	Read data
PSLVERR	1	Input	Slave error
PREADY	1	Input	Slave ready

13.2 APB Slave Interface


13.2.1 Signal Naming

APB slave ports use custom prefixes:



```
// Example: APB slave with prefix "uart_apb_"
output logic      uart_apb_psel,
output logic      uart_apb_penable,
output logic [31:0] uart_apb_paddr,
output logic      uart_apb_pwrite,
output logic [31:0] uart_apb_pwdata,
output logic [3:0]  uart_apb_pstrb,
output logic [2:0]  uart_apb_pprot,
input logic  [31:0]  uart_apb_prdata,
input logic      uart_apb_pslverr,
input logic      uart_apb_pready
```

13.3 APB Transaction Timing

13.3.1 Write Transaction

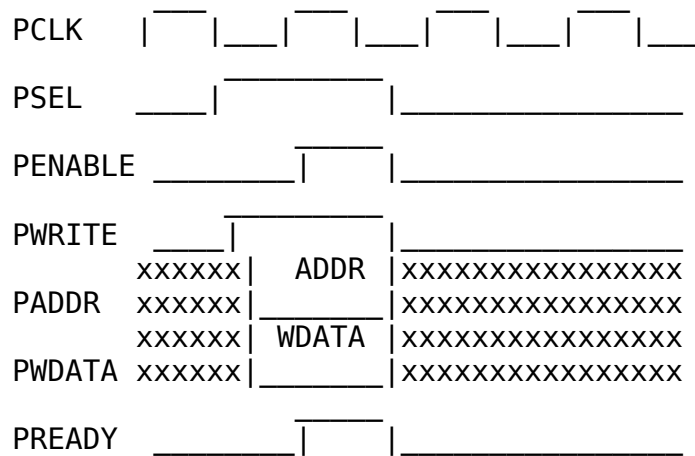

13.3.2 Read Transaction

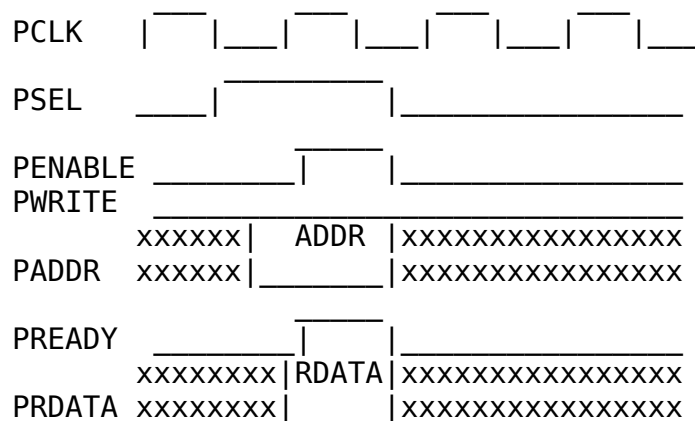

13.4 AXI4 to APB Conversion

13.4.1 Conversion Requirements

When an AXI4 master accesses an APB slave, Bridge performs:

1. **Burst splitting** - AXI4 bursts become multiple APB transfers
2. **Channel mapping** - AW+W combined into PADDR+PWDATA
3. **Response generation** - APB PSLVERR maps to AXI4 BRESP/RRESP
4. **Timing adaptation** - Insert wait states as needed

13.4.2 Burst Handling

Table 4.2: AXI4 to APB Burst Conversion

AXI4 AWLEN	APB Transfers
0 (1 beat)	1 transfer
1 (2 beats)	2 transfers
N (N+1 beats)	N+1 transfers

13.4.3 Error Mapping

Table 4.3: APB to AXI4 Error Mapping

APB PSLVERR	AXI4 BRESP/RRESP
0 (OK)	2'b00 (OKAY)
1 (Error)	2'b10 (SLVERR)

13.5 Performance Implications

13.5.1 APB Limitations

- **Minimum 2 cycles per transfer** (setup + access phase)
- **No pipelining** (sequential transfers only)
- **No bursts** (each beat requires full handshake)

13.5.2 Design Recommendations

- Use APB only for slow peripherals (UART, GPIO, config registers)
- Group APB slaves behind dedicated sub-crossbar
- Use AXI4/AXI4-Lite for higher-bandwidth slaves

14 Clock and Reset

14.1 Clock Requirements


14.1.1 Single Clock Domain

Bridge operates in a single synchronous clock domain:

Table 4.4: Clock Requirements

Signal	Description	Requirements
ack	System clock	All interfaces synchronous
Frequency	Operating frequency	Design-dependent
Duty cycle	Clock duty cycle	40-60% typical

14.1.2 Figure 4.1: Clock Distribution

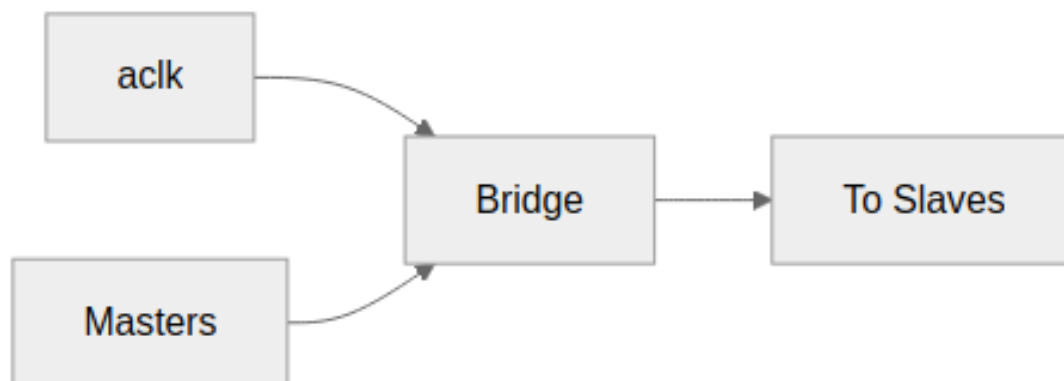

Clock Distribution

All masters and slaves must be in the same clock domain as Bridge.

14.1.3 No Clock Domain Crossing

Bridge does not include CDC logic:

- All inputs sampled on ack rising edge

- All outputs generated on aclk rising edge
- External CDC required if masters/slaves use different clocks

14.2 Reset Requirements


14.2.1 Asynchronous Active-Low Reset

Table 4.5: Reset Signal

Signal	Description	Polarity
aresetn	Async reset	Active-low

14.2.2 Reset Behavior

14.2.3 Figure 4.3: Reset Timing

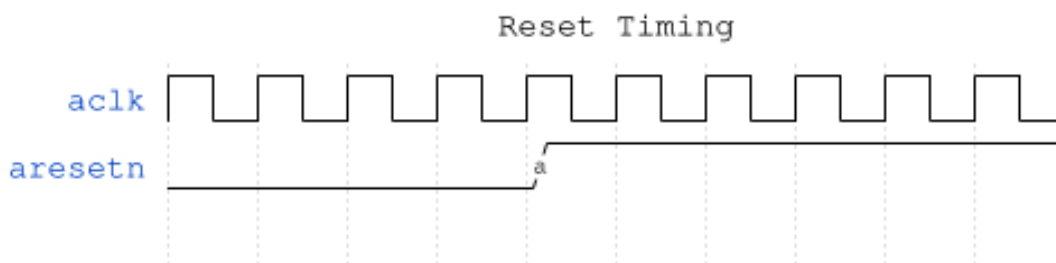

Reset Timing

The diagram shows the relationship between clock and reset signals. Reset is active-low, meaning the system is in reset when $\text{aresetn} = 0$.

14.2.4 Reset Effects

During reset ($\text{aresetn} = 0$):

Table 4.6: Reset Effects

Component	State
Arbiters	Cleared (no grants)
ID tables	Cleared (no outstanding)
FIFOs	Emptied
Outputs	Deasserted ($\text{VALID} = 0$)

14.2.5 Outstanding Transactions

Warning: Transactions in flight during reset are lost:

- Master may see timeout (no response)
- Slave may receive partial transaction
- System must ensure quiescence before reset

14.2.6 Reset Release

After reset release (aresetn = 1):

1. Bridge accepts new transactions after 1 cycle
2. All state machines start in IDLE
3. No residual grants or locks

14.3 Timing Constraints

14.3.1 Setup and Hold

All inputs must meet setup/hold relative to aclk:

Table 4.7: Timing Constraints

Constraint	Typical Value
Setup time	Process-dependent
Hold time	Process-dependent

14.3.2 Clock-to-Output

All outputs appear after aclk rising edge:

Table 4.8: Clock-to-Output Delays

Path	Typical Delay
aclk to VALID	1 cycle (registered)
aclk to READY	Combinational
aclk to DATA	1 cycle (registered)

14.3.3 Recommended Constraints

Example SDC constraints

```
create_clock -period 10 [get_ports aclk] ;# 100 MHz
```

Reset is async - synchronize externally


```
set_false_path -from [get_ports aresetn]
```

14.4 Multi-Clock Systems

14.4.1 External CDC Required

For systems with multiple clock domains:

14.4.2 Figure 4.2: Multi-Clock CDC

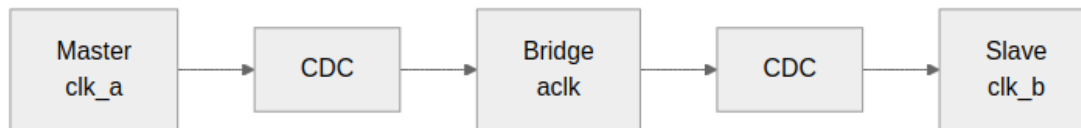

Multi-Clock CDC

14.4.3 CDC Recommendations

- Use AXI4 async FIFO bridges
- Consider AXI4 clock converter IP
- Ensure proper gray-coding for pointers

15 AXI5 and APB5 Interfaces (AMBA5 Support)

The bridge remains AMBA4-shaped internally — the crossbar fabric is always AXI4 — but any master or slave port can be declared AMBA5. This chapter covers the external surfaces; the mechanism lives in the MAS ([AMBA5 Boundary and Native Sideband](#)).

15.1 Declaring AMBA5 Ports

```
[[bridge.masters]]
name = "cpu_wr"
protocol = "axi5"
axi5_features = ["trace", "atomic"] # optional; empty = base AXI5
# ... standard fields unchanged

[[bridge.slaves]]
name = "periph5"
protocol = "apb5" # APB5 peripheral via the apb5
shim # APB rules unchanged (rw-only,
channels = "rw" 32-bit)
```

15.2 AXI5 Port Surface

An axi5 port exposes the AXI4 signal set **minus** AW/ARREGION (AXI5 removed REGION) **plus** the enabled features' sideband signals. Disabled features' signals are not exposed at all — the boundary wrapper ties them off internally.

Feature	Signals added	Class
nsaid	aw/ar _{nsaid} [3:0]	Droppable sideband
trace	aw/ar _{trace} , b _{trace} , r _{trace}	Droppable sideband
mpam	aw/ar _{mpam} [10:0]	Droppable sideband
mecid	aw/ar _{mecid} [15:0]	Droppable sideband
unique	aw/ar _{unique}	Droppable sideband
poison	w _{poison} , r _{poison}	Connectivity-gated
atomic	aw _{atop} [5:0]	Connectivity-gated (store-class only)
mte, chunking	—	Rejected at config time (deferred)

Droppable sideband passes natively end-to-end when both ends of a path are AXI5, feature-enabled, and width-matched; on any other path it terminates at the fabric boundary with a generation-time warning.

Connectivity-gated features are a config **error** unless *every* connected path is native (AXI5 both ends, feature enabled both ends, data widths matched — dwidth converters cannot carry per-beat sideband). Dropping POISON silently would launder corrupted data; dropping ATOP would turn an atomic into a plain write.

Atomics are store-class only. AWATOP = 01xxxx (AtomicStore) and plain writes forward natively. Read-return classes (AtomicLoad 10xxxx, AtomicSwap/Compare 11000x) return their data on the R channel of a path the split-wr/rd fabric cannot route, so the master boundary's axi5_atomic_filter answers them locally with **DECERR** — no slave-side AW handshake, no memory side effect.

15.3 APB5 Slave Surface

An apb5 slave exposes the APB4 requester surface plus the APB5 sideband, mirroring rtl/amba/apb5/apb5_slave.sv pin-for-pin:

Direction	Signals
Requester → completer	APB4 set + PAUSER, PWUSER (driven '0

Direction	Signals
Completer → requester	— nothing upstream sources them) APB4 set + PWAKEUP, PRUSER, PBUSER (accepted and terminated)

The transfer protocol is unchanged from APB4, so the `axi4_to_apb5_shim` is a sideband wrapper over the APB4 conversion core; APB constraints (rw-only, 32-bit data) apply unchanged.

15.4 Interop Matrix

Master	Slave	axi4	axi5	apb / apb5 / axil
axi4		native	base subset	via shim
axi5		sideband drops (warning)	native sideband when width- matched	sideband drops (warning)

Connectivity-gated features tighten the axi5→axi5 cell: they *require* it.

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

16 Throughput Characteristics

16.1 Peak Throughput

16.1.1 Single Master to Single Slave

Table 5.1: Peak Throughput by Data Width

Data Width	Frequency	Peak Throughput
32-bit	100 MHz	400 MB/s
64-bit	100 MHz	800 MB/s
128-bit	100 MHz	1.6 GB/s
256-bit	100 MHz	3.2 GB/s
512-bit	100 MHz	6.4 GB/s

16.1.2 Formula

Peak Throughput = DATA_WIDTH (bits) × Frequency (Hz) / 8 bytes/bit

16.2 Sustained Throughput

16.2.1 Factors Affecting Throughput

Table 5.2: Factors Affecting Throughput

Factor	Impact	Mitigation
Arbitration contention	Reduces per-master throughput	Increase slave ports
Width conversion	1-cycle penalty per direction	Match widths where possible
Protocol conversion	2+ cycles for APB	Use AXI4 for high-bandwidth
Response routing	Minimal (pipelined)	N/A

16.2.2 Multi-Master Scaling

With fair round-robin arbitration:

Per-Master Throughput = Peak Throughput / Active Masters (to same slave)

16.2.3 Example: 4 Masters, 2 Slaves

All 4 masters accessing Slave 0:

Per-master = Peak / 4

2 masters to Slave 0, 2 masters to Slave 1:

Per-master = Peak / 2 (full parallelism)

16.3 Burst Efficiency

16.3.1 Burst vs Single-Beat

Table 5.3: Burst Efficiency Comparison

Transaction Type	Overhead	Efficiency
Single beat	1 cycle address + 1 cycle data	50%
4-beat burst	1 cycle address + 4 cycle data	80%

Transaction Type	Overhead	Efficiency
16-beat burst	1 cycle address + 16 cycle data	94%
256-beat burst	1 cycle address + 256 cycle data	99.6%

16.3.2 Recommendation

- Use bursts whenever possible
- AXI4 supports up to 256 beats per burst
- APB does not support bursts (split internally)

16.4 Width Conversion Impact

16.4.1 Upsize (Narrow to Wide)

64-bit to 512-bit (8:1 ratio):

Input: 8 beats × 64 bits = 512 bits

Output: 1 beat × 512 bits = 512 bits

Throughput: Preserved (same data, fewer beats)

Latency: +1 cycle (packing delay)

16.4.2 Downsize (Wide to Narrow)

512-bit to 64-bit (8:1 ratio):

Input: 1 beat × 512 bits = 512 bits

Output: 8 beats × 64 bits = 512 bits

Throughput: Preserved (same data, more beats)

Latency: +7 cycles (sequential output)

16.5 Protocol Conversion Impact

16.5.1 AXI4 to APB

Table 5.4: AXI4 vs APB Protocol Impact

Metric	AXI4 Direct	AXI4 to APB
Min cycles/transfer	1	2
Burst support	Yes	No (split)
Pipeline depth	1+	1
Peak throughput	DATA_WIDTH/cycle	DATA_WIDTH/2

Metric	AXI4 Direct	AXI4 to APB
		cycles

16.5.2 Recommendation

- Keep high-bandwidth traffic on AXI4 paths
- Use APB only for low-bandwidth peripherals
- Group APB slaves to avoid impacting AXI4 traffic

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

17 Latency Analysis

17.1 Latency Components

17.1.1 Address Path Latency

Table 5.5: Address Path Latency

Stage	Cycles	Notes
Master Adapter (skid)	1	Pipeline registration
Address Decode	0	Combinational
Arbitration	0-1	0 if no contention, 1 if arbitrate
Slave Router	1	Pipeline registration
Total Address	2-3	Best/worst case

17.1.2 Data Path Latency

Table 5.6: Data Path Latency

Stage	Cycles	Notes
W follows AW	0	Same grant
Width conversion	0-1	0 if match, 1 if convert

Stage	Cycles	Notes
Protocol conversion	0-2+	0 for AXI4, 2+ for APB
Total Data	0-3+	Best/worst case

17.1.3 Response Path Latency

Table 5.7: Response Path Latency

Stage	Cycles	Notes
Slave response	Variable	Slave-dependent
ID extraction	0	Combinational
Response routing	1	Pipeline registration
Master delivery	0	Direct connection
Total Response	1 + slave	Plus slave latency

17.2 End-to-End Latency

17.2.1 Write Transaction (Best Case)

Cycle 0: AW arrives at Bridge
 Cycle 1: AW exits to Slave (skid buffer)
 Cycle 2: Slave receives AW
 Cycle 1: W arrives (same cycle as AW skid)
 Cycle 2: W exits to Slave
 Cycle 3: Slave receives W, generates B
 Cycle 4: B routed back to Master

Total: 4 cycles (minimum)

17.2.2 Read Transaction (Best Case)

Cycle 0: AR arrives at Bridge
 Cycle 1: AR exits to Slave (skid buffer)
 Cycle 2: Slave receives AR, generates R
 Cycle 3: R routed back to Master

Total: 3 cycles (minimum)

17.2.3 Contention Latency

When multiple masters contend for same slave:

Arbitration adds 1 cycle per contending master

Example: 4 masters requesting same slave

Worst case: Wait for 3 other masters = 3 extra cycles

Average case: Wait for 1.5 masters = 1-2 extra cycles

17.3 Width Conversion Latency

17.3.1 Upsize Latency

Table 5.8: Upsize Latency by Ratio

Ratio	Extra Cycles	Notes
1:1	0	No conversion
2:1	0	Pack on fly
4:1	0	Pack on fly
8:1	0-1	May need accumulation

17.3.2 Downsize Latency

Table 5.9: Downsize Latency by Ratio

Ratio	Extra Cycles	Notes
1:1	0	No conversion
1:2	+1	2 output beats
1:4	+3	4 output beats
1:8	+7	8 output beats

17.4 Protocol Conversion Latency

17.4.1 AXI4 to APB

Table 5.10: AXI4 to APB Conversion Latency

Phase	Cycles
AXI4 AW decode	1
APB setup	1
APB access	1+ (PREADY)
B generation	1
Total	4+ cycles

17.4.2 APB Wait States

APB slaves may insert wait states:

PREADY deasserted: +1 cycle per wait
Typical UART/GPIO: 0-2 wait states
Slow peripherals: May have many wait states

17.5 Latency Optimization

17.5.1 Design Recommendations

1. **Match data widths** - Avoid conversion latency
2. **Use AXI4 for fast paths** - Avoid APB latency
3. **Minimize contention** - Spread traffic across slaves
4. **Use bursts** - Amortize address latency
5. **Pipeline responses** - Don't block on slow slaves

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

18 Resource Estimates

18.1 FPGA Resource Summary

18.1.1 Baseline Configuration (2x2, 64-bit)

Table 5.11: Baseline Resource Requirements

Resource	Count	Notes
LUTs	~2,000-3,000	Logic and routing
Registers	~1,500-2,000	Pipeline stages
Block RAM	0-1	Optional ID CAM
DSP	0	No arithmetic

18.1.2 Scaling Factors

Table 5.12: Resource Scaling Factors

Component	Scaling
Crossbar core	$O(M \times N)$
Master adapters	$O(M)$
Slave routers	$O(N)$
ID tracking	$O(M \times \text{Outstanding})$
Width converters	$O(\text{per-path ratio})$

18.2 Component Breakdown

18.2.1 Per-Master Resources

Table 5.13: Per-Master Resource Breakdown

Component	LUTs	Registers
Skid buffer	~50-100	~DATA_WIDTH
ID extension	~20	~ID_WIDTH
Channel mux	~100	~50
Per Master Total	~200-300	~DATA_WIDTH + 100

18.2.2 Per-Slave Resources

Table 5.14: Per-Slave Resource Breakdown

Component	LUTs	Registers
Address decode	~50	0
Arbiter	~100-200	~50
Response mux	~100	~50
Per Slave Total	~250-350	~100

18.2.3 Crossbar Core

Table 5.15: Crossbar Core Resources

Component	LUTs	Registers
AW mux (N-way)	~100 x N	~50 x N
W mux (N-way)	~100 x N	~50 x N
B demux (M-way)	~50 x M	~50 x M

Component	LUTs	Registers
AR mux (N-way)	~100 x N	~50 x N
R demux (M-way)	~50 x M	~50 x M

18.3 Width Converter Resources

Table 5.16: Width Converter Resources

Ratio	LUTs	Registers	Notes
1:2 upsize	~200	~DATA_IN	Pack logic
1:4 upsize	~300	~DATA_IN	Pack logic
1:8 upsize	~400	~DATA_IN	Pack logic
2:1 downsize	~200	~DATA_OUT	Split logic
4:1 downsize	~300	~DATA_OUT	Split logic
8:1 downsize	~400	~DATA_OUT	Split logic

18.4 Protocol Converter Resources

18.4.1 AXI4 to APB

Table 5.17: AXI4 to APB Converter Resources

Component	LUTs	Registers
FSM	~100	~20
Burst counter	~50	~8
Data buffer	~100	~DATA_WIDTH
Response logic	~50	~10
Total	~300	~DATA_WIDTH + 50

18.5 Example Configurations

Table 5.18: Complete Bridge Resource Estimates

Config	Masters	Slaves	Data	LUTs	Registers
2x2 Basic	2	2	64	~2,500	~1,500
4x4 Standard	4	4	64	~5,000	~3,000

Config	Masters	Slaves	Data	LUTs	Registers
4x4 Wide	4	4	256	~8,000	~5,000
8x8	8	8	128	~12,000	~8,000
Large					
RAPIDS (4x3)	4	3	512	~10,000	~6,000

18.5.1 Notes

- Estimates include all converters and adapters
- Actual results vary by synthesis tool and FPGA family
- Block RAM usage depends on ID table implementation
- DSP usage is zero (no multiplication/division)

18.6 Optimization Strategies

18.6.1 Resource Reduction

1. **Use channel-specific masters** - 40-60% port reduction
2. **Match data widths** - Avoid converter logic
3. **Use APB sparingly** - Reduces AXI4 overhead
4. **Limit outstanding transactions** - Smaller ID tables

18.6.2 Performance/Resource Trade-off

Table 5.19: Performance/Resource Trade-offs

Feature	Resource Impact	Performance Impact
Deeper skid buffers	+registers	+timing margin
Larger ID tables	+BRAM	+OOO depth
Pipeline stages	+registers	+frequency
Wider data paths	+routing	+throughput

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

19 System Requirements

19.1 Hardware Requirements

19.1.1 Clock Infrastructure

Table 6.1: Clock Requirements

Requirement	Specification
Clock source	Single clock domain (aclk)
Clock quality	Low jitter, stable frequency
Clock distribution	Must reach all Bridge ports

19.1.2 Reset Infrastructure

Table 6.2: Reset Requirements

Requirement	Specification
Reset type	Asynchronous, active-low (aresetn)
Reset synchronization	External synchronizer recommended
Reset distribution	Must reach all Bridge ports

19.1.3 Power

Table 6.3: Power Requirements

Requirement	Specification
Power domains	Single domain (no power gating)
Voltage	FPGA/ASIC process-dependent

19.2 Interface Requirements

19.2.1 Master Requirements

Masters connecting to Bridge must:

1. **Comply with AXI4 protocol** - Valid/ready handshake
2. **Use correct ID width** - Match configured ID_WIDTH
3. **Use correct data width** - Match configured DATA_WIDTH
4. **Use correct address width** - Match configured ADDR_WIDTH

5. **Stay within address range** - Target valid slave addresses

19.2.2 Slave Requirements

Slaves connecting to Bridge must:

1. **Comply with AXI4/APB protocol** - Based on configuration
2. **Accept extended IDs** - ID_WIDTH + BID_WIDTH
3. **Match configured data width** - Or use width conversion
4. **Respond to all transactions** - No hanging

19.3 Configuration Requirements

19.3.1 Address Map

Table 6.4: Address Map Requirements

Requirement	Specification
Slave ranges	Must not overlap
Range alignment	Power-of-2 recommended
Coverage	All master addresses must map to slaves or OOR

19.3.2 Connectivity

Table 6.5: Connectivity Requirements

Requirement	Specification
Matrix completeness	All masters must access at least one slave
Reachability	Consider traffic patterns for performance

19.4 Timing Requirements

19.4.1 Setup/Hold

Table 6.6: Timing Requirements

Constraint	Requirement
Input setup	Meet FPGA/ASIC requirements
Input hold	Meet FPGA/ASIC requirements

Constraint	Requirement
Clock-to-output	Per process characterization

19.4.2 Recommended Margins

Table 6.7: Recommended Timing Margins

Margin	Value	Purpose
Setup margin	10-20%	Variation tolerance
Hold margin	Positive	No hold violations
Clock uncertainty	Include in constraints	PLL/MMCM jitter

19.5 Verification Requirements

19.5.1 Pre-Integration Checks

1. **RTL lint clean** - No Verilator warnings
2. **Parameter validation** - All parameters in valid range
3. **Address map review** - No overlaps, complete coverage
4. **ID width calculation** - Sufficient for NUM_MASTERS

19.5.2 Integration Checks

1. **Signal connectivity** - All ports connected
2. **Width matching** - DATA_WIDTH, ADDR_WIDTH, ID_WIDTH
3. **Protocol matching** - AXI4 vs APB correctly configured
4. **Clock/reset connectivity** - All ports share same domain

19.5.3 Post-Integration Checks

1. **Basic transaction test** - Read/write to each slave
2. **Arbitration test** - Multi-master contention
3. **Error handling test** - OOR address response
4. **Performance validation** - Meet throughput targets

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

20 Parameter Configuration

20.1 Core Parameters

Table 6.8: Bridge Core Parameters

Parameter	Type	Range	Default	Description
NUM_MASTERS	int	1-32	2	Number of master ports
NUM_SLAVES	int	1-256	2	Number of slave ports
ADDR_WIDTH	int	12-64	32	Address bus width
DATA_WIDTH	int	32-512	64	Data bus width
ID_WIDTH	int	1-16	4	Master ID width
USER_WIDTH	int	1-16	1	User signal width

20.2 Derived Parameters

20.2.1 Calculated by Generator

Table 6.9: Derived Parameters

Parameter	Formula	Example
BID_WIDTH	$\text{clog2}(\text{NUM_MASTERS})$	4 masters = 2 bits
TOTAL_ID_WIDTH	$\text{ID_WIDTH} + \text{BID_WIDTH}$	4 + 2 = 6 bits
STRB_WIDTH	$\text{DATA_WIDTH} / 8$	64b = 8 strobes

20.3 Per-Port Configuration

20.3.1 Master Port Configuration

Table 6.10: Master Port Configuration

Field	Type	Description
name	string	Unique identifier
prefix	string	Signal prefix
channels	enum	“rw”, “wr”, or “rd”
data_width	int	Port data width
id_width	int	Port ID width
use_monitor	bool	Mandatory. Enable per-port monitor wrappers (true/false)

20.3.2 Slave Port Configuration

Table 6.11: Slave Port Configuration

Field	Type	Description
name	string	Unique identifier
prefix	string	Signal prefix
protocol	enum	“axi4”, “axi4lite”, “apb”
data_width	int	Port data width
base_addr	hex	Base address (must be 4K-aligned)
addr_range	hex	Address range size (must be multiple of 4K)
use_monitor	bool	Mandatory. Enable per-port monitor wrappers (true/false)

20.3.2.1 Slave Address Window Rules (MANDATORY)

Every slave must occupy a 4K-aligned address window that is a multiple of 4 KB:

Rule 1: Base Address Alignment

$\text{base_addr} \& 0\text{xFFF} == 0\text{x000}$

Valid: 0x00000000, 0x00001000, 0x80000000, 0xFFFF0000

Invalid: 0x00000001, 0x80000800, 0xC0000100

Rule 2: Range Alignment

```
addr_range % 0x1000 == 0
```

```
Valid: 0x1000 (4 KB), 0x2000 (8 KB), 0x10000 (64 KB)
```

```
Invalid: 0x800 (2 KB), 0x1001, 0x7FFF
```

Rule 3: Non-Overlapping Windows

All slaves must have non-overlapping address ranges

```
Valid: Slave0: 0x00000000-0xFFFFFFFF, Slave1: 0x10000000-0x1FFFFFFF
```

```
Invalid: Slave0: 0x00000000-0x10000000, Slave1: 0x0FFFFFFF-0x1FFFFFFF
```

20.4 Top-Level Monitor Configuration

When monitor collection is desired, the bridge TOML configuration includes:

Field	Type	Description
variants	list	List of bridge variants to generate. Supported: ["no"] (no monitor), ["mon"] (monitor only), ["no", "mon"] (both). Default: ["no"]

20.4.1 Monitor Identifiers

Each monitored port gets a unique (UNIT_ID, AGENT_ID) pair for identification in monitor packets:

UNIT_ID Assignment:

- UNIT_ID = 1: Master-side monitor wrappers (axi4_master_{rd,wr}_mon)
- UNIT_ID = 2: Slave-side monitor wrappers (axi4_slave_{rd,wr}_mon)

AGENT_ID Assignment (per port):

- AGENT_ID = (port_index << 4) | channel_bit
- channel_bit: 0 = read channel (AR/R), 1 = write channel (AW/W/B)
- Example: Master port 2, write direction → AGENT_ID = (2 << 4) | 1 = 0x21

20.4.2 AXIL→Wider-Slave Master-Side Alignment

When an AXI4-Lite master connects to a wider AXI4 slave through the bridge (e.g., 32-bit AXIL master to 64-bit AXI4 slave), the generator automatically emits a master-side alignment converter (axil_to_axi4_wide_align_{rd,wr} modules) between the master adapter and the crossbar core. This converter handles partial-word alignment on the narrow side while preserving AXIL's

single-beat semantics, without changing the protocol from AXIL to AXI4 (protocol shims are applied separately at the slave boundary).

Why This Rule Exists: - Real memory systems use 4K page boundaries (virtual memory, MMU) - Linker scripts and memory maps assume 4K granularity - Address decoders simplify to bit masks with 4K alignment - Prevents ambiguity in address decode logic

20.5 Configuration File Format

20.5.1 TOML Configuration

[bridge]

```
name = "my_bridge"
description = "Example bridge configuration"
```

```
defaults.skid_depths = {ar = 2, r = 4, aw = 2, w = 4, b = 2}
```

```
masters = [
  {name = "cpu", prefix = "cpu_m_axi", channels = "rw",
   id_width = 4, addr_width = 32, data_width = 64, user_width = 1},
  {name = "dma", prefix = "dma_m_axi", channels = "rw",
   id_width = 4, addr_width = 32, data_width = 256, user_width = 1}
]
```

```
slaves = [
  {name = "ddr", prefix = "ddr_s_axi", protocol = "axi4",
   id_width = 6, addr_width = 32, data_width = 512, user_width = 1,
   base_addr = 0x80000000, addr_range = 0x40000000},
  {name = "uart", prefix = "uart_apb", protocol = "apb",
   addr_width = 12, data_width = 32,
   base_addr = 0x00000000, addr_range = 0x00001000}
]
```

20.5.2 CSV Connectivity

```
master\slave,ddr,uart
cpu,1,1
dma,1,0
```

20.6 Parameter Validation

20.6.1 Generator Checks

Table 6.12: Generator Validation Checks

Check	Error Condition
NUM_MASTERS	< 1 or > 32

Check	Error Condition
NUM_SLAVES	< 1 or > 256
DATA_WIDTH	Not power of 2
Address overlap	Slave ranges intersect
Connectivity	Master with no slaves
ID width	Insufficient for masters

20.6.2 Runtime Validation

Bridge includes optional assertions for:

- Address alignment
- Burst boundary crossing
- Protocol violations
- ID mismatch

20.7 Example Configurations

20.7.1 Simple 2x2

```
[bridge]
  name = "bridge_simple"
  masters = [
    {name = "m0", prefix = "m0_axi", data_width = 64},
    {name = "m1", prefix = "m1_axi", data_width = 64}
  ]
  slaves = [
    {name = "s0", prefix = "s0_axi", base_addr = 0x0, addr_range =
0x100000000},
    {name = "s1", prefix = "s1_axi", base_addr = 0x100000000,
addr_range = 0x100000000}
  ]
```

20.7.2 Mixed Protocol

```
[bridge]
  name = "bridge_mixed"
  masters = [
    {name = "cpu", prefix = "cpu_axi", data_width = 64, channels =
"rw"}
  ]
  slaves = [
    {name = "mem", prefix = "mem_axi", protocol = "axi4", data_width =
512},
    {name = "gpio", prefix = "gpio_apb", protocol = "apb", data_width
```

```

= 32},
  {name = "uart", prefix = "uart_apb", protocol = "apb", data_width
= 32}
]

```

21 Verification Strategy

21.1 Verification Levels

21.1.1 Unit Level

Test individual Bridge components:

Table 6.13: Unit Level Test Focus

Component	Test Focus
Master Adapter	Skid buffer, ID extension
Slave Router	Address decode, arbitration
Width Converter	Upsize/downsize correctness
Protocol Converter	AXI4 to APB timing
Response Router	ID extraction, routing

21.1.2 Integration Level

Test complete Bridge functionality:

Table 6.14: Integration Test Coverage

Test Category	Coverage
Address routing	All master-slave paths
Arbitration	Contention, fairness
ID tracking	Response routing
Error handling	OOR, timeouts
Performance	Throughput, latency

21.1.3 System Level

Test Bridge in target system:

Table 6.15: System Level Tests

Test Category	Focus
End-to-end	CPU to memory
Multi-master	DMA + CPU
Mixed protocol	AXI4 + APB
Stress	Maximum traffic

21.2 Test Infrastructure

21.2.1 CocoTB Framework with Protocol-BFM-Only Driving

Bridge uses CocoTB for verification with a protocol-BFM-only approach: **all test stimulus is driven through protocol BFM (AXI4Master, AXI4Slave, etc.) with no direct DUT signal manipulation**. Each slave port is backed by an in-memory model (MemoryModel), and verification is assertion-based (readback matches write) rather than routing-based.

```
from CocoTBFramework.components.axi4 import AXI4Master, AXI4Slave
from TBClasses.shared.tbbase import TBBase

class BridgeTB(TBBase):
    def __init__(self, dut):
        super().__init__(dut)
        self.masters = [AXI4Master(dut, dut.clk, f"m{i}_axi") for i in
range(NUM_MASTERS)]
        self.slaves = [MemoryModel(dut, dut.clk, f"s{i}_axi") for i in
range(NUM_SLAVES)]

@cocotb.test()
async def cocotb_test_basic_write(dut):
    tb = BridgeTB(dut)
    await tb.setup_clocks_and_reset()

    # Write transaction via BFM only
    await tb.masters[0].write(addr=0x1000, data=0xDEADBEEF)

    # Verify: readback matches write (memory-model assertion)
    readback = await tb.masters[0].read(addr=0x1000)
    assert readback == 0xDEADBEEF
```

21.2.2 Test Categories

Table 6.16: Test Categories

Category	Description	Example
Basic	Single transactions	Read/write
Burst	Multi-beat transactions	16-beat burst
Concurrent	Multiple masters active	M0 + M1
Boundary Probe	Address window edges	Top/mid/bottom of each slave page
Stress	Maximum utilization	Back-to-back
Error	Error conditions	SLVERR injection, timeout
Monitor	Monitor packet collection	Packet capture, IRQ assertion

21.3 Test Execution Model

21.3.1 Serial Execution

Bridge tests run **serially only** (no parallel execution via pytest-xdist). Each test function is named per-module to avoid cross-test cocotb function name pollution:

```
# Naming convention: test_bridge_{N}x{M}_{variant}_{scenario}
def test_bridge_1x2_rd_basic(request):          # Test name indicates 1
master, 2 slaves, read-only
def test_bridge_1x2_rd_monitor_smoke(request): # Monitor test on 1x2
def test_bridge_4x4_rw_concurrent(request):    # Concurrent test on
4x4
```

Cocotb test functions inside each file follow the same naming pattern but with `cocotb_test_*` prefix to avoid pytest collection conflicts.

21.3.2 Boundary Probe Testing

Address-window boundary testing probes the **top, middle, and bottom** of each slave's address window to catch address-decode logic errors at window edges:

```
for slave_idx, (base, window_size) in enumerate(slave_windows):
    # Probe bottom (base address)
    await master.write(base + 0x000, data)

    # Probe middle (arbitrary address within window)
    await master.write(base + window_size // 2, data)
```

```
# Probe top (base + window_size - 1)
await master.write(base + window_size - 1, data)
```

21.4 Coverage Goals

21.4.1 Functional Coverage

Table 6.17: Functional Coverage Goals

Category	Target
Address paths	100% master-slave combinations via boundary probes
Transaction types	Read, write, burst, error (SLVERR)
Monitor modes	Enabled and disabled
ID values	Full ID range (representative)

21.4.2 Code Coverage

Table 6.18: Code Coverage Goals

Metric	Target
Line coverage	>95%
Branch coverage	>90%
FSM coverage	100% state transitions
Toggle coverage	>80% signals

21.5 Debug Features

21.5.1 Waveform Capture

Bridge tests support VCD/FST waveform dumps:

```
pytest test_bridge.py --vcd=waves.vcd
gtkwave waves.vcd
```

21.5.2 Debug Signals

Bridge includes optional debug signals:

Table 6.19: Debug Signals

Signal	Description
dbg_aw_grant	Current AW grant
dbg_ar_grant	Current AR grant
dbg_outstanding	Outstanding transaction count
dbg_state	FSM states

21.6 Regression Testing

21.6.1 Continuous Integration

Table 6.20: CI Test Schedule

Stage	Tests	Frequency
Pre-commit	Basic sanity	Each commit
Nightly	Full regression	Daily
Weekly	Performance	Weekly

21.6.2 Test Matrix

Table 6.21: Configuration Test Matrix

Config	Data Width	Protocol	Tested
2x2	64	AXI4	Yes
4x4	64	AXI4	Yes
4x4	256	AXI4	Yes
2x2	64	AXI4+APB	Yes
RAPIDS	512	AXI4+APB	Yes

21.7 Known Limitations

21.7.1 Test Gaps

Table 6.22: Known Test Gaps

Gap	Status	Plan
APB burst stress	Partial	Phase 3
Width downsize stress	Partial	Planned

Gap	Status	Plan
32-master config	Not tested	Low priority

21.7.2 Simulator Support

Table 6.23: Simulator Support Status

Simulator	Status
Verilator	Fully supported
Icarus Verilog	Supported
Commercial (VCS, Questa)	Not tested

22

Bridge Micro-Architecture Specification Index

Component: Bridge (Multi-Protocol Crossbar Generator) **Version:** 1.1 **Date:** 2026-06-04 **Purpose:** Detailed micro-architecture specification for Bridge component

22.1 Document Organization

This specification covers the Bridge component - a CSV-driven generator that creates AXI4 crossbars with automatic width conversion, protocol conversion (AXI4, AXI4-Lite, APB), and channel-specific master support (read-only, write-only, or full).

22.1.1 Front Matter

- [Document Information](#)

22.1.2 Chapter 1: Introduction

- [Overview](#)

22.1.3 Chapter 2: Block Descriptions

- [Master Adapter](#)
- [Slave Router](#)
- [Crossbar Core](#)

- [Arbitration](#)
- [ID Management](#)
- [Width Conversion](#)
- [Protocol Conversion](#)
- [Response Routing](#)
- [Error Handling](#)
- [AMBA5 Boundary and Native Sideband](#)

22.1.4 Chapter 3: FSM Design

- [Arbiter FSMs](#)
- [Transaction Tracking](#)

22.1.5 Chapter 4: ID Management

- [CAM Architecture](#)
- [ID Tracking Tables](#)

22.1.6 Chapter 5: Converters

- [Width Converters](#)
- [APB Converters](#)

22.1.7 Chapter 6: Generated RTL

- [Module Structure](#)
- [Signal Naming](#)

22.1.8 Chapter 7: Verification

- [Test Strategy](#)
 - [Debug Guide](#)
-

22.2 Quick Navigation

22.2.1 For New Users

1. Start with [Overview](#) for understanding Bridge capabilities
2. Read [Block Diagram](#) to understand the architecture
3. Study [Arbitration](#) for operational details
4. Reference [Module Structure](#) for generated RTL

22.2.2 For Integration

- **Protocol support:** See [Protocol Conversion](#) for AXI4/APB/AXI-Lite
 - **Width handling:** See [Width Conversion](#) for data width mismatches
 - **ID management:** See [ID Management](#) for transaction tracking
 - **Error handling:** See [Error Handling](#) for OOR and timeout
-

22.3 Visual Assets

All diagrams referenced in the documentation are available in:

- **Source Files:**
 - `assets/graphviz/*.gv` - Graphviz source diagrams
 - `assets/puml/*.puml` - PlantUML FSM diagrams
- **Rendered Files:**
 - `assets/graphviz/*.png` - Rendered block diagrams
 - `assets/puml/*.png` - Rendered FSM diagrams

22.3.1 Architecture Diagrams

1. **Master Adapter** - [assets/graphviz/master_adapter.png](#)
2. **Slave Router** - [assets/graphviz/slave_router.png](#)
3. **Crossbar Core** - [assets/graphviz/crossbar_core.png](#)
4. **ID Management** - [assets/graphviz/id_management.png](#)
5. **Width Conversion** - [assets/graphviz/width_conversion.png](#)
6. **Protocol Conversion** - [assets/graphviz/protocol_conversion_apb.png](#)
7. **Response Routing** - [assets/graphviz/response_routing.png](#)
8. **Error Handling** - [assets/graphviz/error_handling.png](#)

22.3.2 FSM Diagrams

1. **AW Arbiter FSM** - [assets/puml/aw_arbiter_fsm.png](#)
 2. **AR Arbiter FSM** - [assets/puml/ar_arbiter_fsm.png](#)
-

22.4 Component Overview

22.4.1 Key Features

- **Multi-Protocol Support:** AXI4, AXI4-Lite, and APB slave conversion

- **CSV-Driven Configuration:** Human-readable port and connectivity definitions
- **Channel-Specific Masters:** Write-only (wr), read-only (rd), or full (rw) support
- **Automatic Width Conversion:** Upsize/downsize for data width mismatches
- **Out-of-Order Support:** ID-based response routing with CAM tracking
- **Custom Signal Prefixes:** Unique prefixes per port for clean integration

22.4.2 Protocol Conversion Matrix

Master Protocol	Slave Protocol	Conversion
AXI4	AXI4	Direct or width convert
AXI4	AXI4-Lite	Protocol downgrade
AXI4	APB	Full protocol conversion

22.4.3 Design Philosophy

Efficient Multi-Width Routing: - Direct connections where widths match (zero conversion overhead) - Width converters only where needed - No fixed internal crossbar width

Resource Optimization: - Channel-specific masters reduce port count by 40-60% - Per-path width converters instead of global conversion - Minimal logic for matching-width connections

22.5 Related Documentation

22.5.1 Companion Specifications

- **Bridge HAS** - Hardware Architecture Specification (high-level)

22.5.2 Project-Level

- **PRD.md:** [../PRD.md](#) - Complete product requirements document
- **CLAUDE.md:** [../CLAUDE.md](#) - AI assistant integration guide

22.5.3 Generator

- **Generator:** `../bin/bridge_generator.py` - CSV/TOML-based generator script (with `../bin/bridge_pkg/`)

- **Test Configs:** ../../bin/test_configs/ - Example TOML/CSV configurations
-

22.6 Version History

Version 1.0 (2026-01-03): - Initial specification release - Restructured from single spec to HAS/MAS format - Complete block-level documentation - FSM and ID management details

Last Updated: 2026-01-03 **Maintained By:** RTL Design Sherpa Project

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

23 Bridge: AXI4 Full Crossbar Generator - Product Requirements Document

Project: Bridge **Version:** 2.1 **Status:**  Phase 2 Complete - Simplified Architecture with Hard Limits **Created:** 2025-10-18 **Last Updated:** 2025-11-02

23.1 Executive Summary

Bridge is a Python-based AXI4 crossbar generator that produces simple, performant SystemVerilog RTL for connecting multiple AXI4 masters to multiple AXI4 slaves. The name follows the infrastructure theme - bridges connect different regions, enabling communication across divides, just like crossbars connect masters and slaves.

Design Philosophy: A simple AMBA fabric that is performant, but makes no attempt to support all features. We enforce hard limits (8-bit ID width, 64-bit address width) to eliminate unnecessary complexity, focusing only on what real hardware needs.

Key Differentiator from Delta: - **Delta:** AXI-Stream crossbar (streaming data, single channel, simple routing) - **Bridge:** AXI4 full crossbar (memory-mapped, 5 channels, burst support, ID-based routing)

Key Differentiator from Commercial IP: - Commercial AXI4 Crossbars: Feature-complete, support every AXI4 edge case, complex configurability - **Bridge:** Simple and performant, supports common use cases, hard limits for simplicity

Target Use Case: High-performance memory-mapped interconnects for multi-core processors, accelerators, and memory controllers where simplicity and performance matter more than spec compliance.

23.2 Design Philosophy

Vision: A simple AMBA fabric that is performant, but makes no attempt to support all features.

23.2.1 Core Principles

1. Simplicity Over Completeness - Focus on common use cases, not edge cases - Implement what's needed for real hardware, not AXI4 spec compliance theater - Prefer straightforward implementations over complex feature sets

2. Performance First - Direct connections where possible (matching widths = zero overhead) - Minimal conversion logic in critical paths - Optimize for throughput and latency, not feature count

3. Hard Limits for Simplicity

We enforce uniform widths on certain parameters to eliminate complexity:

Parameter	Hard Limit	Rationale
ID Width	8 bits (fixed)	Eliminates ID width conversion logic. 256 unique IDs is sufficient for all realistic use cases.
Address Width	64 bits (fixed)	Eliminates address width conversion. 64-bit addressing covers all memory-mapped systems.
Data Width	Variable (32b-512b)	Width converters ONLY for data. Commonly needed for bandwidth optimization.

Why This Works: - ID width conversion adds complexity with minimal benefit (nobody needs >256 outstanding transactions per master) - Address width conversion is rarely needed (peripheral addresses fit in 32-bit, but using 64-bit everywhere is simpler) - Data width conversion is the ONLY width conversion that provides real value (bandwidth matching)

4. What We DON'T Support (By Design)

Features intentionally excluded for simplicity: - ✗ Variable ID width per port - ✗ Variable address width per port - ✗ AXI4-Lite protocol variant (use standard AXI4 with len=0) - ✗ ACE protocol extensions (cache coherency) - ✗ AXI5 features - ✗ Complete AXI4 sideband signal support (QoS, Region, User signals declared but not routed)

5. What We DO Support

Core AXI4 features that matter: - ✓ Full 5-channel AXI4 protocol (AW, W, B, AR, R) - ✓ Burst transactions (INCR, WRAP, FIXED) - ✓ Out-of-order completion via transaction IDs - ✓ Multiple outstanding transactions per master - ✓ Channel-specific masters (write-only, read-only, read-write) - ✓ Data width conversion (32b ↔ 64b ↔ 128b ↔ 256b ↔ 512b) - ✓ Configurable M×N topology (1-32 masters, 1-256 slaves) - ✓ Fair round-robin arbitration per slave

23.2.2 Architecture Philosophy

Target: Intelligent width-aware routing, not fixed-width crossbar

OLD Approach (What We're Moving Away From):

Master (64b) → Upsize(64→256) → Fixed 256b Crossbar → Downsize(256→64) → Slave (64b)

- Two conversions for same-width connections (wasteful!)
- Artificial bandwidth bottleneck
- Unnecessary logic and latency

NEW Approach (Target Architecture):

Master (64b) → Direct Connection → Slave (64b) [0 conversions!]
Master (512b) → Conv(512→64) → Slave (64b) [1 conversion]

- Per-master paths to each unique slave width it connects to
- Direct paths where widths match (zero overhead)
- Converters only where actually needed
- Router selects appropriate path based on address decode

Result: Minimal conversion logic, maximum performance, pragmatic simplicity.

23.3 CRITICAL: RTL Regeneration Requirements

ALL generated RTL files MUST be deleted and regenerated together whenever ANY generator code changes.

Why This Matters: - Generated RTL files may have interdependencies (bridges, wrappers, integrators) - Generator code changes can create version mismatches between files - Partial regeneration creates subtle incompatibilities that cause test failures - Even “small innocuous” generator changes can have cascading effects

The Rule:

```
# ✗ WRONG - Partial regeneration
./bridge_generator.py --masters 5 --slaves 3 --output ../rtl/
# Only regenerates bridge_axi4_flat_5x3.sv
# Other files (wrappers, integrators) now mismatched!

# ✓ CORRECT - Full regeneration
cd bin
make clean                    # Delete ALL generated
bridges (rtl/generated/)
make all                      # Regenerate everything from
bridge_batch.csv
```

Generator Files That Trigger Full Regeneration: - bin/bridge_generator.py - Main bridge generator (CSV/TOML driven) - Any Python file in bin/bridge_pkg/ (components/, generators/, config, csv_parser, ...) - Any Jinja template in bin/bridge_pkg/jinja_templates/ - bridge_wrapper_generator.py - Wrapper generation - **Any** Python file in projects/components/bridge/bin/

Symptoms of Version Mismatch: - Tests that previously passed now fail - Simulation errors about missing signals - Mismatched port widths or counts - Address decode routing to wrong slaves

Think of Generated RTL Like Compiled Code: When you update a compiler, you don’t selectively recompile - you rebuild everything. When you update a generator, you don’t selectively regenerate - you regenerate everything.

23.4 1. Product Overview

23.4.1 1.1 Purpose

Bridge provides automated generation of AXI4 crossbar infrastructure with: - **Python code generation** - Parameterized RTL generation (similar to APB/Delta) - **Performance modeling** - Analytical + simulation validation - **Flat topology** - Full M×N interconnect matrix - **ID-based routing** - Out-of-order transaction support - **Burst optimization** - Pipelined burst transfers

23.4.2 1.2 Target Audience

Primary Users: - RTL designers building SoC interconnect - System architects evaluating interconnect topologies - Verification engineers needing crossbar testbenches - Students learning AXI4 protocol and interconnects

Educational Focus: - Demonstrates AXI4 protocol complexity - Shows arbitration strategies for memory-mapped busses - Teaches ID-based transaction tracking - Illustrates burst optimization techniques

23.4.3 1.3 Success Criteria

Functional: - [x] Generates working AXI4 crossbar RTL (`bridge_generator.py`) - [x] Generates CSV/TOML-configured bridges (`bridge_generator.py` + `bridge_pkg/`; the earlier separate `bridge_csv_generator.py` was merged in) - [x] Passes Verilator lint - [x] Supports 1-32 masters, 1-256 slaves - [x] Handles out-of-order completion via IDs (`bridge_cam.sv`) - [x] Supports burst lengths 1-256 beats - [x] Channel-specific masters (wr/rd/rw) for resource optimization (Phase 2) - [] APB converter integration (Phase 3 pending)

Performance: - [x] Latency ≤ 3 cycles for single-beat transactions - [x] Throughput: All M×N paths can transfer concurrently - [x] Performance models implemented (`bridge_model.py` - V1 Flat) - [] Fmax ≥ 300 MHz on UltraScale+ FPGAs (pending synthesis validation)

Quality: - [x] Complete specifications (PRD) before code - [x] Performance models validate requirements (`bridge_model.py`) - [x] All generated RTL Verilator verified - [x] Integration examples provided (CSV examples) - [x] Comprehensive documentation (`GENERATOR_ARCHITECTURE.md`, `docs/bridge_has/`, `docs/bridge_mas/`)

23.4.4 1.4 Implementation Status and Phases

Unified Generator (`bridge_generator.py`):

The bridge generator now supports both TOML/CSV configuration and legacy array-indexed modes:

Configuration Modes: 1. **TOML/CSV Mode (Preferred)** - TOML port configuration (`bridge_name.toml`) - CSV connectivity matrix (`bridge_name_connectivity.csv`) - Custom port prefixes (`rapids_m_axi_`, `cpu_m_axi_`, etc.) - Interface wrapper integration (timing isolation) - Mixed protocols (AXI4 + APB + AXI4-Lite slaves) - Channel-specific masters (wr/rd/rw) - Status: ✓ Phase 2 complete, Phase 3 pending

2. **Legacy CSV Mode (Backwards Compatible)**

- Separate `ports.csv` and `connectivity.csv` files
- Migration path to TOML format
- See `bin/test_configs/README.md` for conversion guide

Phase Status:

Phase 1: CSV Configuration ✓ **COMPLETE** - CSV parser (ports.csv, connectivity.csv) - Port generation with custom prefixes - Converter identification logic - Basic crossbar instantiation

Phase 2: Channel-Specific Masters ✓ **COMPLETE (2025-10-26)** - Added channels field to PortSpec (rw/wr/rd) - Conditional port generation based on channels - **Resource Optimization:** - wr (write-only): AW, W, B channels only → 39% port reduction - rd (read-only): AR, R channels only → 61% port reduction - rw (full): All 5 channels - Width converter awareness (only generate needed converters) - Example: 4-master bridge saves 35% signals with optimized channels

Phase 3: APB Converter Integration ⌚ **PENDING** - AXI2APB converter module (create or integrate existing) - APB signal packing/unpacking - APB converter instantiation in generated bridges - Width converter + APB converter chaining - End-to-end testing with APB slaves - Status: Placeholders in generated code with detailed TODO comments

Additional Resources: - models/bridge_model/bridge_model.py - Performance modeling (V1 Flat implemented) - rtl/bridge_cam.sv - Transaction ID tracking for OOO support - See GENERATOR_ARCHITECTURE.md for the generator/build architecture - See docs/bridge_has/ and docs/bridge_mas/ for architecture diagrams and specs (the older BRIDGE_CURRENT_STATE.md / BRIDGE_ARCHITECTURE_DIAGRAMS.md were superseded)

23.5 2. Architecture Overview


23.5.1 2.1 AXI4 vs AXIS vs APB


Feature	APB	AXI-Stream (Delta)	AXI4 (Bridge)
Protocol Type	Simpl e regist er bus	Streaming data	Memory-mapped burst
Channels	1 (addre ss + data)	1 (data stream)	5 (AW, W, B, AR, R)
Request Generation	Addre ss range decod e	TDEST decode	Address range decode
Arbitration	Per- slave,	Per-slave, packet-locked	Per-slave, per-address- phase

Feature	APB	AXI-Stream (Delta)	AXI4 (Bridge)
	per-cycle		
Out-of-Order	No (sequential)	No (streaming order)	Yes (ID-based)
Burst Support	No	Packet (via TLAST)	Yes (AWLEN/ARLEN)
Complexity	Low	Medium	High
Latency	1-2 cycles	2 cycles	2-3 cycles
Use Case	Control registers	Data streaming	Memory-mapped I/O

Bridge Complexity Sources: 1. **5 independent channels** requiring separate arbitration 2. **ID-based routing** for out-of-order completion 3. **Burst handling** with interleaving constraints 4. **Write response tracking** (match AW with B channel) 5. **Address decode + ID muxing** for response routing

23.5.22.2 Block Diagram

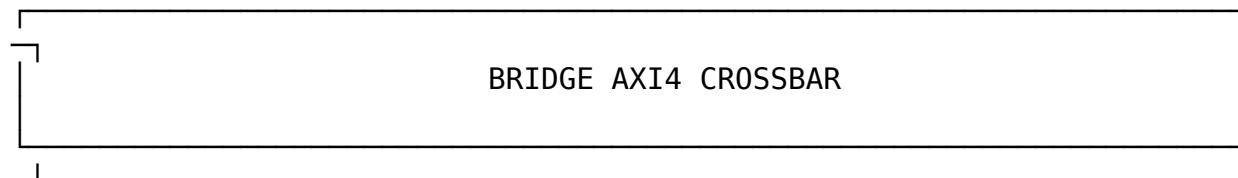

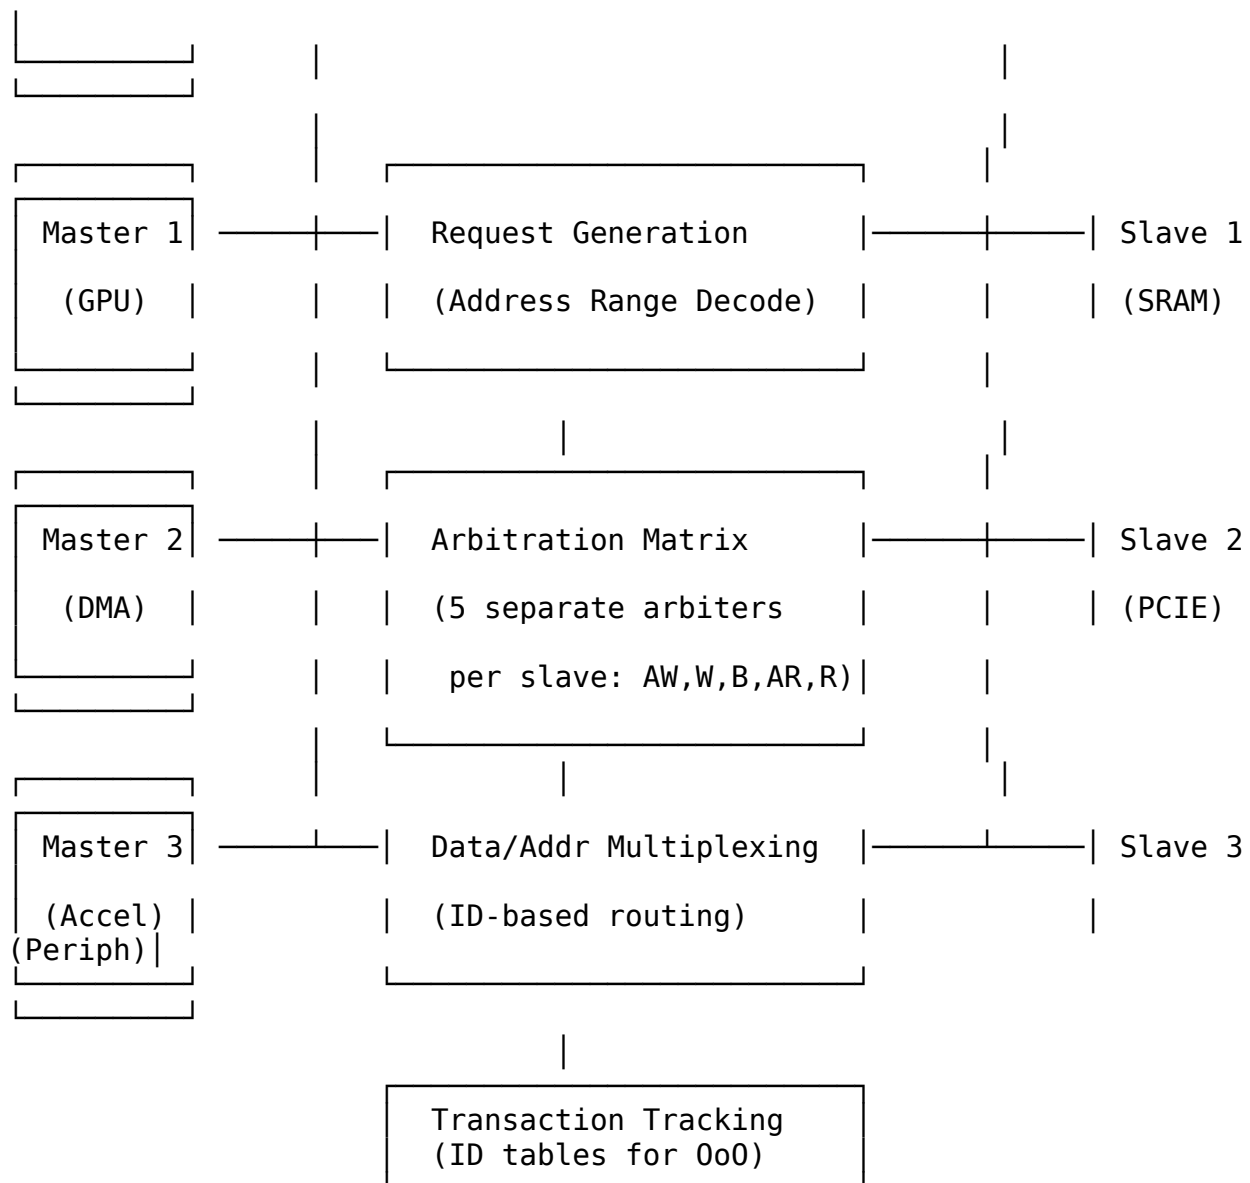

23.5.32.3 Key Components

1. Request Generation - Address range decode for each slave - Generates $M \times S$ request matrix per channel (AW, AR) - Similar to APB but more complex (2 address channels)

2. Per-Slave Arbitration - **5 separate arbiters per slave:** - AW channel arbiter (write address) - W channel arbiter (write data - locked to AW grant) - B channel arbiter (write response - routed by ID) - AR channel arbiter (read address) - R channel arbiter (read data - routed by ID) - Round-robin with burst locking - Separate read/write paths (no head-of-line blocking)

3. Data Multiplexing - Mux master signals to selected slave - ID-based response routing (B, R channels) - Burst tracking (hold grant until xlast)

4. Transaction Tracking - ID tables per slave for out-of-order support - Track {Master ID, Transaction ID} → Master mapping - Required for routing B/R channels back to correct master

5. Optional Performance Counters - Transaction counts per master/slave - Arbitration conflict counts - Latency histograms

23.6 3. Functional Requirements

23.6.1 3.1 AXI4 Protocol Compliance

FR-1: Full AXI4 Protocol Support - Support all 5 AXI4 channels: AW, W, B, AR, R - Comply with AMBA AXI4 specification (ARM IHI 0022) - Support burst lengths: 1-256 beats (AWLEN/ARLEN = 0-255) - Support burst types: INCR, WRAP, FIXED - Support burst sizes: 1-128 bytes (AWSIZE/ARSIZE = 0-7)

FR-2: Out-of-Order Transaction Support - Route responses via ID matching - Maintain transaction ID integrity (AWID → BID, ARID → RID) - Support configurable ID width (1-16 bits) - Track up to $2^{\text{ID_WIDTH}}$ outstanding transactions per slave

FR-3: Atomic Operations - Support exclusive access (AWLOCK/ARLOCK) - Track exclusive monitor per slave - Generate BRESP/RRESP errors for failed exclusives

23.6.2 3.2 Address Decoding

FR-4: Configurable Address Map - Support M masters × S slaves - Each slave has base address and size - Non-overlapping address ranges (verified at generation) - Default slave for unmapped addresses (optional)

FR-5: Address Range Configuration

```
# Example address map
address_map = {
    0: {'base': 0x00000000, 'size': 0x40000000, 'name': 'DDR'},      #
1GB
    1: {'base': 0x40000000, 'size': 0x00100000, 'name': 'SRAM'},    #
1MB
    2: {'base': 0x50000000, 'size': 0x01000000, 'name': 'PCIE'},    #
16MB
    3: {'base': 0x60000000, 'size': 0x00010000, 'name': 'Peripherals'}
# 64KB
}
```

23.6.3 3.3 Arbitration Strategy

FR-6: Round-Robin Arbitration - Fair bandwidth allocation (no starvation) - Separate arbiters for AW and AR channels - Burst locking: Grant held until xlast (WLAST/RLAST) - Configurable arbitration policy (round-robin default)

FR-7: Read/Write Independence - Separate read and write paths - No head-of-line blocking between read/write - Concurrent read and write to same slave (if slave supports)

23.6.43.4 Burst Handling

FR-8: Burst Optimization - Pipelined burst transfers (overlap address and data) - No artificial burst splitting - Full AXI4 burst protocol support

FR-9: Interleaving Constraints - W channel locked to AW grant master - R channel routed by transaction ID - Support ID-based interleaving (slave-dependent)

23.7 4. Non-Functional Requirements

23.7.14.1 Performance

NFR-1: Latency - Single-beat read: ≤ 3 cycles (address decode + arbitration + mux) - **Single-beat write:** ≤ 3 cycles (address decode + arbitration + mux) - **Burst transfer:** No additional latency per beat (pipelined)

NFR-2: Throughput - Concurrent transfers: All M×S paths can transfer simultaneously - **Burst efficiency:** Line-rate data transfer after address phase - **No artificial stalls:** Crossbar adds no wait states beyond arbitration

NFR-3: Fmax - Target: 300-400 MHz on Xilinx UltraScale+ - **Registered outputs:** All slave outputs registered for timing closure - **Pipelineable:** Optional pipeline stages for >400 MHz

23.7.24.2 Resource Usage (Estimated)

M = 4 masters, S = 4 slaves, DATA_WIDTH = 512, ADDR_WIDTH = 64, ID_WIDTH = 4:

Resource	Flat Crossbar	Notes
LUTs	~2,500	Address decode + arbiters + mux
FFs	~3,000	Registered outputs + ID tables
BRAM	0	Distributed RAM for small ID tables
DSP	0	No arithmetic operations

Scaling: ~150 LUTs per M×S connection

23.7.34.3 Quality Requirements

NFR-4: Code Generation Quality - Lint-clean SystemVerilog (Verilator) - Synthesizable (Vivado, Yosys, Design Compiler) - No vendor-specific primitives (technology-agnostic) - Clear structure (commented, readable)

NFR-5: Verification - CocoTB testbench framework - Transaction-level verification - Out-of-order test scenarios - Burst interleaving tests - >95% functional coverage

23.8 5. Interface Specifications

23.8.1 5.1 AXI4 Master Interfaces (M × 5 channels)

Write Address Channel (AW):

```
input logic [ADDR_WIDTH-1:0] s_axi_awaddr [NUM_MASTERS];
input logic [ID_WIDTH-1:0] s_axi_awid [NUM_MASTERS];
input logic [7:0] s_axi_awlen [NUM_MASTERS]; // Burst
length-1
input logic [2:0] s_axi_awsz [NUM_MASTERS]; // Burst
size
input logic [1:0] s_axi_awburst [NUM_MASTERS]; //
INCR/WRAP/FIXED
input logic s_axi_awlock [NUM_MASTERS]; //
Exclusive access
input logic [3:0] s_axi_awcache [NUM_MASTERS]; // Cache
attributes
input logic [2:0] s_axi_awprot [NUM_MASTERS]; //
Protection type
input logic s_axi_awvalid [NUM_MASTERS];
output logic s_axi_awready [NUM_MASTERS];
```

Write Data Channel (W):

```
input logic [DATA_WIDTH-1:0] s_axi_wdata [NUM_MASTERS];
input logic [DATA_WIDTH/8-1:0] s_axi_wstrb [NUM_MASTERS]; // Byte
strokes
input logic s_axi_wlast [NUM_MASTERS]; // Last
beat
input logic s_axi_wvalid [NUM_MASTERS];
output logic s_axi_wready [NUM_MASTERS];
```

Write Response Channel (B):

```
output logic [ID_WIDTH-1:0] s_axi_bid [NUM_MASTERS];
output logic [1:0] s_axi_bresp [NUM_MASTERS]; //
OKAY/EXOKAY/SLVERR/DECERR
```

```

output logic          s_axi_bvalid [NUM_MASTERS];
input logic           s_axi_bready [NUM_MASTERS];

```

Read Address Channel (AR):

```

input logic [ADDR_WIDTH-1:0] s_axi_araddr [NUM_MASTERS];
input logic [ID_WIDTH-1:0]   s_axi_arid   [NUM_MASTERS];
input logic [7:0]            s_axi_arlen   [NUM_MASTERS];
input logic [2:0]            s_axi_arsize  [NUM_MASTERS];
input logic [1:0]            s_axi_arburst [NUM_MASTERS];
input logic                  s_axi_arlock  [NUM_MASTERS];
input logic [3:0]            s_axi_arcache [NUM_MASTERS];
input logic [2:0]            s_axi_arprot  [NUM_MASTERS];
input logic                  s_axi_arvalid [NUM_MASTERS];
output logic                 s_axi_arready [NUM_MASTERS];

```

Read Data Channel (R):

```

output logic [DATA_WIDTH-1:0] s_axi_rdata [NUM_MASTERS];
output logic [ID_WIDTH-1:0]   s_axi_rid   [NUM_MASTERS];
output logic [1:0]            s_axi_rresp [NUM_MASTERS];
output logic                  s_axi_rlast  [NUM_MASTERS];
output logic                  s_axi_rvalid [NUM_MASTERS];
input logic                   s_axi_rready [NUM_MASTERS];

```

23.8.25.2 AXI4 Slave Interfaces (S × 5 channels)

Mirror of master interfaces, with M → S direction reversed.

23.8.35.3 Configuration Parameters

```

parameter int NUM_MASTERS    = 4;           // Number of master
interfaces
parameter int NUM_SLAVES    = 4;           // Number of slave
interfaces
parameter int DATA_WIDTH   = 512;         // Data bus width (bits)
parameter int ADDR_WIDTH    = 64;         // Address bus width (bits)
parameter int ID_WIDTH      = 4;          // Transaction ID width
(bits)
parameter int MAX_BURST_LEN = 256;         // Maximum burst length
(beats)
parameter bit PIPELINE_OUTPUTS = 1;       // Register slave outputs
parameter bit ENABLE_COUNTERS  = 1;       // Performance counters

```

23.9 6. Performance Modeling

23.9.16.1 Analytical Model

Latency Components (Flat Crossbar):

Single-Beat Read Latency:

1. Address Decode: 0 cycles (combinatorial)
2. Arbitration: 1 cycle (AR arbiter decision)
3. Address Mux: 0 cycles (combinatorial)
4. Slave Access: (slave-dependent, not crossbar)
5. Response Mux: 1 cycle (R channel ID lookup + mux)
6. Output Register: 1 cycle (optional, for timing closure)

Total (no pipeline): 2 cycles
Total (pipelined): 3 cycles

Burst Transfer Throughput:

After address phase completes, data transfer is line-rate:

- W channel: 1 beat/cycle (locked to AW grant)
- R channel: 1 beat/cycle (ID-routed from slave)

Example: 256-beat burst

Address phase: 2-3 cycles (one-time)
Data phase: 256 cycles (line-rate)
Total: 258-259 cycles
Efficiency: 98.8%

Concurrent Throughput:

Maximum concurrent transfers (4×4 crossbar):

- Read: 4 concurrent (one per master-slave pair)
- Write: 4 concurrent (one per master-slave pair)
- Total: 8 concurrent read+write (separate paths)

Throughput @ 100 MHz, 512-bit data:

Per path: 100 MHz × 512 bits = 51.2 Gbps
Total: 8 paths × 51.2 Gbps = 409.6 Gbps theoretical

23.9.26.2 Resource Scaling

LUT Usage Formula (empirical):

$LUTs \approx 500 \text{ (base)} + 150 \times M \times S + 20 \times ID_TABLE_DEPTH$

Example (4×4 crossbar, ID_WIDTH=4, ID_TABLE_DEPTH=16 per slave):

$$\begin{aligned}\text{LUTs} &\approx 500 + 150 \times 16 + 20 \times 16 \times 4 \\ &\approx 500 + 2,400 + 1,280 \\ &\approx 4,180 \text{ LUTs}\end{aligned}$$

23.9.36.3 Comparison with Other Crossbars

Crossbar Type	Latency	Throughput	Complexity	Use Case
APB	1-2 cycles	Low (serialized)	Low	Control registers
AXI-Stream (Delta)	2 cycles	High (streaming)	Medium	Data streaming
AXI4 (Bridge)	2-3 cycles	High (burst)	High	Memory-mapped I/O
AXI4 + Slices	4-6 cycles	High (burst)	Very High	>400 MHz designs

Bridge Sweet Spot: High-performance memory-mapped interconnects where out-of-order and burst efficiency are critical.

23.10 7. Generator Architecture

23.10.1 7.1 Python Generator Structure

```
class BridgeGenerator:
    """AXI4 crossbar RTL generator"""

    def __init__(self, config):
        self.num_masters = config.num_masters
        self.num_slaves = config.num_slaves
        self.data_width = config.data_width
        self.addr_width = config.addr_width
        self.id_width = config.id_width
        self.address_map = config.address_map

    def generate_address_decode(self) -> str:
        """Generate address range decode logic"""
        # For each master x slave, check if address in range
        # More complex than AXIS (uses address), simpler than full
decode

    def generate_aw_arbiter(self, slave_idx) -> str:
        """Generate write address channel arbiter for one slave"""
        # Round-robin arbiter
```



```

        # Grants locked until corresponding B response completes

def generate_ar_arbiter(self, slave_idx) -> str:
    """Generate read address channel arbiter for one slave"""
    # Round-robin arbiter
    # Grants locked until corresponding R response completes
(RLAST)

def generate_w_channel_mux(self, slave_idx) -> str:
    """Generate write data channel multiplexer"""
    # W channel follows AW grant (locked until WLAST)

def generate_b_channel_demux(self, slave_idx) -> str:
    """Generate write response channel demultiplexer"""
    # Route by ID: lookup master from {slave_idx, BID}

def generate_r_channel_demux(self, slave_idx) -> str:
    """Generate read data channel demultiplexer"""
    # Route by ID: lookup master from {slave_idx, RID}

def generate_id_table(self, slave_idx) -> str:
    """Generate transaction ID tracking table"""
    # Maps {slave, transaction_id} → master_id
    # Indexed on AW/AR grant, looked up on B/R response

def generate_crossbar(self) -> str:
    """Generate complete crossbar module"""
    # Instantiate all arbiters, muxes, demuxes, ID tables

```

23.10.2 7.2 Address Map Configuration

Python Configuration:

```

bridge_config = {
    'num_masters': 4,
    'num_slaves': 4,
    'data_width': 512,
    'addr_width': 64,
    'id_width': 4,
    'address_map': {
        0: {'base': 0x00000000, 'size': 0x40000000, 'name': 'DDR'},
        1: {'base': 0x40000000, 'size': 0x00100000, 'name': 'SRAM'},
        2: {'base': 0x50000000, 'size': 0x01000000, 'name': 'PCIE'},
        3: {'base': 0x60000000, 'size': 0x00010000, 'name':
'Peripherals'}
    },
    'pipeline_outputs': True,

```

```

        'enable_counters': True
    }

```

Generated Address Decode:

```

// Address decode for each master
always_comb begin
    for (int s = 0; s < NUM_SLAVES; s++)
        aw_request_matrix[s] = '0;

    for (int m = 0; m < NUM_MASTERS; m++) begin
        if (s_axi_awvalid[m]) begin
            // Slave 0: DDR (0x00000000 - 0x3FFFFFFF)
            if (s_axi_awaddr[m] >= 64'h00000000 &&
                s_axi_awaddr[m] < 64'h40000000)
                aw_request_matrix[0][m] = 1'b1;

            // Slave 1: SRAM (0x40000000 - 0x400FFFFF)
            if (s_axi_awaddr[m] >= 64'h40000000 &&
                s_axi_awaddr[m] < 64'h40100000)
                aw_request_matrix[1][m] = 1'b1;

            // ... slaves 2-3 ...
        end
    end
end

```

23.11 8. Comparison with APB and Delta

23.11.1 8.1 Code Reuse from APB Generator

Similar Components (~70% reuse): - Address range decode logic (same pattern, different signals)
 - Round-robin arbiter (same algorithm) - Data multiplexing pattern (same approach) -
 Backpressure handling (similar to PREADY)

New Components for Bridge: - 5× **the arbiters** (AW, W, B, AR, R instead of single channel) - **ID-based routing** (B and R channel demuxing) - **Transaction tracking** (ID tables for out-of-order) - **Burst handling** (grant locking until xlast)

Migration Effort from APB: - ~120 minutes (vs ~75 min for AXIS, due to higher complexity) - Most time: ID table logic and response demuxing

23.11.2 8.2 Code Reuse from Delta Generator

Similar Components (~60% reuse): - Python generation framework - Command-line interface -
 Performance modeling structure - Arbitration pattern (round-robin with locking)

Key Differences: - 5 channels vs 1 channel (Delta only has TDATA/TVALID/TREADY/TLAST) - **ID-based routing** vs TDEST-based routing - **Address decode** vs TDEST decode (Bridge more complex) - **Transaction tracking** vs packet atomicity (different mechanisms)

23.11.3 8.3 Complexity Comparison

Metric	APB Crossbar	Delta (AXIS)	Bridge (AXI4)
Channels to arbitrate	1	1	5 ★
Request generation	Address ranges	TDEST decode	Address ranges
Response routing	Grant-based	Grant-based	ID-based ★
Burst support	No	Packet (TLAST)	Yes (AWLEN/ARLEN) ★
Out-of-order	No	No	Yes (ID tables) ★
Transaction tracking	No	No	Yes ★
Lines of Python	~500	~697	~900 (est.)
Lines of generated SV	~200 (4×4)	~250 (4×4)	~400 (4×4) (est.)

★ = Additional complexity in Bridge

23.12 9. Use Cases

23.12.1 9.1 Multi-Core Processor Interconnect

Scenario: 4 CPU cores + GPU accessing DDR + SRAM + Peripherals

Configuration:

Masters: 5 (4 CPUs, 1 GPU)
Slaves: 3 (DDR, SRAM, Peripherals)

Data: 512-bit (cache line width)
Address: 64-bit (large memory space)
ID: 4-bit (up to 16 outstanding per master)

Benefits: - Concurrent access to all slaves - Out-of-order completion for high-performance CPUs - Burst transfers for cache line fills - Separate read/write paths (no head-of-line blocking)

23.12.2 9.2 DMA + Accelerator System

Scenario: DMA engine + 4 accelerators accessing shared memory

Configuration:

Masters: 5 (1 DMA, 4 accelerators)
Slaves: 2 (DDR, Control registers)
Data: 512-bit (high-bandwidth DMA)
Address: 32-bit (limited address space)
ID: 2-bit (simple ID space)

Benefits: - High-bandwidth memory access for DMA - Fair arbitration prevents accelerator starvation - Control register access doesn't block data transfers

23.12.3 9.3 FPGA System Integration

Scenario: MicroBlaze CPU + custom accelerators + memory controllers

Configuration:

Masters: 8 (1 CPU, 7 accelerators)
Slaves: 4 (DDR, BRAM, AXI GPIO, AXI DMA)
Data: 128-bit (AXI4 standard width)
Address: 32-bit (standard FPGA address space)
ID: 4-bit (moderate outstanding transactions)

Benefits: - Standard AXI4 interfaces (Xilinx IP compatibility) - Scalable to many masters/slaves - Performance counters for profiling

23.13 10. Testing Strategy

23.13.1 10.1 FUB (Functional Unit Block) Tests

Address Decode Tests: - Verify all address ranges correctly decoded - Test boundary conditions (base, base+size-1) - Test unmapped addresses (error response)

Arbiter Tests: - Round-robin fairness (all masters get turns) - Burst locking (grant held until xlast) - Starvation prevention

ID Table Tests: - Correct ID → master mapping - Out-of-order transaction handling - Table full condition

Mux/Demux Tests: - Data integrity through crossbar - Response routing to correct master - Concurrent transfers don't interfere

23.13.2 10.2 Integration Tests

Single-Master, Single-Slave: - Basic read/write transactions - Burst transfers (various lengths) - Out-of-order completions

Multi-Master, Single-Slave: - Arbitration correctness - Fairness verification - Burst interleaving (if supported)

Multi-Master, Multi-Slave: - Concurrent transfers - No crosstalk between paths - Full M×S matrix coverage

Stress Tests: - All masters active simultaneously - Maximum burst lengths - Full ID space utilization - Back-to-back bursts

23.13.3 10.3 Performance Validation

Latency Measurement: - Single-beat read: measure actual vs analytical - Single-beat write: measure actual vs analytical - Compare with specification (≤ 3 cycles)

Throughput Measurement: - Burst transfer efficiency (should be ~98%) - Concurrent path throughput (should be line-rate $\times$ M×S) - Compare with theoretical maximum

Resource Validation: - Synthesize for Xilinx UltraScale+ - Compare LUT/FF usage with estimates - Verify $F_{max} \geq 300$ MHz

23.14 11. Documentation Plan

23.14.1 11.1 Specifications (Before Code)

- ☒ **PRD.md** - This document (complete requirements)
- ☐ **README.md** - User guide with quick start
- ☐ **BRIDGE_VS_APB_GENERATOR.md** - Migration guide from APB
- ☐ **BRIDGE_VS_DELTA_GENERATOR.md** - Comparison with Delta
- ☐ **AXI4_PROTOCOL_GUIDE.md** - AXI4 primer for students

23.14.2 11.2 Performance Analysis (Before Implementation)

- ☒ **models/bridge_model/bridge_model.py** - Analytical model (V1 Flat implemented)
 - Latency calculations (single-beat, burst)
 - Throughput estimates (concurrent paths)

- Resource estimates (LUT/FF scaling)
- ☐ **bridge simulator** - Discrete event simulation (optional, not implemented)
 - Cycle-accurate modeling
 - Traffic pattern support
 - Validation against RTL

23.14.3 11.3 Code Generation

- ☐ **bin/bridge_generator.py** - Main RTL generator
 - Command-line interface
 - Address map configuration
 - Generated RTL output

23.14.4 11.4 Verification

- ☐ **dv/tests/** - CocoTB testbenches
 - FUB tests (individual blocks)
 - Integration tests (multi-block)
 - Stress tests (corner cases)
-

23.15 12. Success Metrics

23.15.1 12.1 Functional Completeness

- ☐ Generates working AXI4 crossbar RTL
- ☐ Passes all CocoTB tests
- ☐ Verilator lint clean
- ☐ Xilinx Vivado synthesis clean

23.15.2 12.2 Performance Targets

- ☐ Latency ≤ 3 cycles (measured in simulation)
- ☐ Throughput = line-rate $\times$ M $\times$ S paths (measured)
- ☐ Fmax ≥ 300 MHz (post-synthesis)

23.15.3 12.3 Educational Value

- ☐ Complete specifications demonstrating rigor
- ☐ Performance models validate requirements

- ☐ Clear code structure (readable generated RTL)
- ☐ Integration examples provided

23.15.4 12.4 Reusability

- ☐ ~70% code reuse from APB generator (measured by LOC)
 - ☐ Similar patterns to Delta generator
 - ☐ Can be extended (weighted arbitration, QoS, etc.)
-

23.16 12. Attribution and Contribution Guidelines

23.16.1 12.1 Git Commit Attribution

When creating git commits for Bridge documentation or implementation:

Use:

Documentation and implementation support by Claude.

Do NOT use:

Co-Authored-By: Claude <noreply@anthropic.com>

Rationale: Bridge documentation and organization receives AI assistance for structure and clarity, while design concepts and architectural decisions remain human-authored.

23.17 12.2 PDF Generation Location

IMPORTANT: PDF files should be generated in the docs directory:

projects/components/bridge/docs/

Quick Commands: Use the provided shell scripts:

```
cd projects/components/bridge/docs
./generate_has_pdf.sh    # Bridge_HAS_v<rev>.docx/.pdf
./generate_mas_pdf.sh    # Bridge_MAS_v<rev>.docx/.pdf
```

The shell scripts will automatically: 1. Use the md_to_docx.py tool from bin/ 2. Process the bridge_has/bridge_mas index files 3. Generate both DOCX and PDF files in the docs/ directory 4. Create table of contents and title page

 **See:** bin/md_to_docx.py for complete implementation details

23.18 13. Future Enhancements

23.18.1 13.1 Short-Term (Post-Initial Release)

- ☐ **Optional pipeline stages** - For Fmax >400 MHz
- ☐ **Weighted arbitration** - QoS support
- ☐ **Default slave** - Unmapped address handling
- ☐ **Exclusive monitor** - Full atomic operation support

23.18.2 13.2 Long-Term

- ☐ **Tree topology** - Hierarchical crossbar (like Delta)
- ☐ **AXI4-Lite variant** - Simplified for control registers
- ☐ **ACE support** - Coherent cache interconnect
- ☐ **GUI configurator** - Visual address map setup

23.19 14. Risk Assessment

Risk	Probability	Impact	Mitigation
ID table complexity	Medium	High	Start with small ID_WIDTH (2-4), test thoroughly
Out-of-order corner cases	High	High	Extensive CocoTB tests with random delays
Fmax below target	Low	Medium	Optional pipeline stages for timing closure
Resource usage exceeds	Low	Low	Empirical formulas guide expectations
Burst interleaving bugs	Medium	High	Separate test suite for burst scenarios

23.20 15. Project Timeline (Estimated)

Week 1: Specifications and Models - [x] Day 1-2: PRD.md (complete) - [] Day 3-4: Performance modeling (analytical) - [] Day 5-7: README.md, migration guides

Week 2-3: Core Implementation - [] Day 1-3: Address decode + arbiter generation - [] Day 4-5: Data mux/demux generation - [] Day 6-8: ID table generation - [] Day 9-10: Integration and testing

Week 4: Verification and Examples - [] Day 1-5: CocoTB testbenches - [] Day 6-7: Integration examples

23.21 16. References

AXI4 Specifications: - ARM IHI 0022 - AMBA AXI and ACE Protocol Specification - Xilinx UG1037 - Vivado AXI Reference Guide

Related Projects: - **APB Crossbar** - Simple register bus crossbar (existing) - **Delta (AXIS Crossbar)** - Streaming data crossbar (projects/components/delta/) - **RAPIDS** - DMA engine with AXI4 masters (projects/components/dmas/rapids/)

Tools: - Verilator - RTL linting and simulation - CocoTB - Python-based verification - Xilinx Vivado - FPGA synthesis

23.22 17. Glossary

- **AXI4:** Advanced eXtensible Interface version 4 (AMBA standard)
 - **Burst:** Multi-beat transaction (AWLEN/ARLEN > 0)
 - **Crossbar:** Full M×N interconnect matrix
 - **ID:** Transaction identifier for out-of-order support
 - **Out-of-order:** Responses can return in different order than requests
 - **xlast:** WLAST (write) or RLAST (read) - last beat indicator
-

Version: 1.0 **Status:** ✓ Specification Complete - Ready for Implementation **Next Steps:** Create performance models, then implement generator

Project Bridge - Connecting masters and slaves across the divide 

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

24 Claude Code Guide: Bridge Subsystem

Version: 2.1 **Last Updated:** 2025-11-03 **Purpose:** AI-specific guidance for working with Bridge subsystem

24.1 CRITICAL: Read Architecture Documents First

Before making ANY changes to bridge generator or understanding signal flow:

 **READ:** projects/components/bridge/GENERATOR_ARCHITECTURE.md (generator structure) and projects/components/bridge/docs/bridge_mas/ (micro-architecture spec; rendered as docs/Bridge_MAS_v1.1.pdf)

These documents contain the **definitive bridge architecture** including: - Correct signal flow (wrappers → decoder → converters → crossbar → slaves) - Component purposes and placement - Common misconceptions that previous agents made - Why there's NO fixed crossbar width

If you skip these documents, you WILL make incorrect assumptions.

24.2 Quick Context

What: Bridge - Two complementary AXI4 Crossbar Generators (framework-based and CSV-based)

Status:  Phase 2 Complete - CSV generator with channel-specific masters (wr/rd/rw) **Your Role:** Help users configure CSV files, generate bridges, understand architecture, and create tests

 **Complete Documentation (Read in This Order):** 1.

projects/components/bridge/GENERATOR_ARCHITECTURE.md ← **START HERE** (generator architecture reference) 2. projects/components/bridge/PRD.md ← Product requirements 3. projects/components/bridge/TASKS.md ← Task history and current status 4. projects/components/bridge/docs/bridge_has/bridge_has_index.md ← Hardware Architecture Spec (rendered: docs/Bridge_HAS_v1.1.pdf) 5. projects/components/bridge/docs/bridge_mas/bridge_mas_index.md ← Micro-Architecture Spec (rendered: docs/Bridge_MAS_v1.1.pdf)

(The older BRIDGE_ARCHITECTURE.md, BRIDGE_CURRENT_STATE.md, BRIDGE_ARCHITECTURE_DIAGRAMS.md, CSV_BRIDGE_STATUS.md, and docs/bridge_spec/ documents were superseded by the HAS/MAS above.)

24.3 Target Architecture: Intelligent Width-Aware Routing

Core Principle: Direct connections where possible, converters only where needed, no fixed crossbar width.

24.3.1 Efficient Multi-Width Design

Master_A (64b)

└ Direct → Slave_0 (64b)	[0 conversions, minimal latency]
└ Conv(64→128) → Slave_1 (128b)	[1 conversion]
└ Conv(64→512) → Slave_2 (512b)	[1 conversion]

Master_B (512b)

└ Conv(512→64) → Slave_0 (64b)	[1 conversion]
└ Conv(512→128) → Slave_1 (128b)	[1 conversion]
└ Direct → Slave_2 (512b)	[0 conversions, full bandwidth]

Router Logic: Address decoder determines target slave, selects correctly-sized path for that master-slave pair.

24.3.2 Why This Architecture

✗ Naive Fixed-Width Approach (Don't Do This):

Master (64b) → Upsize(64→256) → Fixed 256b Crossbar → Downsize(256→64) → Slave (64b)

- TWO conversions for same-width connections (wasteful!)
- Reduced bandwidth on narrow paths
- Unnecessary logic and area
- Higher latency

✓ Intelligent Routing (Target):

Master (64b) → Router → Direct Connection → Slave (64b)

- ZERO conversions for matching widths
- Full native bandwidth
- Minimal logic
- Lowest latency

24.3.3 Per-Master Output Paths

Each master has N output paths (one per unique slave width it connects to):

*// Master_A connects to slaves at 64b, 128b, 512b
// Generate 3 output paths:*

```

logic [63:0] master_a_64b_wdata;    // For 64b slaves (direct)
logic [127:0] master_a_128b_wdata; // For 128b slaves (via converter)
logic [511:0] master_a_512b_wdata; // For 512b slaves (via converter)

// Router selects based on address decode:
always_comb begin
    case (decoded_slave_id)
        SLAVE_0: select master_a_64b_wdata;    // Slave_0 is 64b
        SLAVE_1: select master_a_128b_wdata;    // Slave_1 is 128b
        SLAVE_2: select master_a_512b_wdata;    // Slave_2 is 512b
    endcase
end

```

24.3.4 Benefits

1. **Resource Efficient** - Only instantiate converters actually needed
2. **Maximum Performance** - Direct paths have zero conversion overhead
3. **Optimal Bandwidth** - No artificial width bottlenecks
4. **Lower Latency** - Minimal logic in critical path for matching widths
5. **Scalable** - Works for any combination of master/slave widths

24.3.5 Implementation Status

Current State: Fixed-width crossbar with master-side upsizing (Phase 1 architecture) **Target State:** Intelligent per-master multi-width routing (your vision) **Migration:** Requires generator architecture rework (see TASKS.md)

24.4 CRITICAL RULE #0: RTL Regeneration Requirements

 **READ THIS FIRST - FAILURE TO FOLLOW CAUSES TEST FAILURES** 

24.4.1 The Golden Rule

ALL generated RTL files MUST be deleted and regenerated together whenever ANY generator code changes.

24.4.2 Why This Is Non-Negotiable

Generated RTL files have interdependencies: - Each rtl/generated/<bridge_name>/ directory holds a matched set (top module, crossbar, adapters, package) - Generator changes affect signal names, port widths, interface structure - **Partial regeneration creates version mismatches that cause silent failures**

24.4.3 Real Example (Historical Session)

✗ WHAT WENT WRONG:

1. Updated the address decode logic in the generator
2. Regenerated ONLY one bridge configuration
3. Did NOT regenerate the wrapper that instantiated it
4. Result: All tests that were passing now FAIL
5. Cause: Version mismatch between wrapper and core bridge

✓ WHAT SHOULD HAVE BEEN DONE:

1. Update the generator
2. Delete ALL generated bridge directories (`rtl/generated/bridge_*/`)
3. Regenerate ALL bridges from scratch (`make all in bin/`)
4. Run ALL tests to verify

24.4.4 Generator Files That Trigger Full Regeneration

Any change to these files requires regenerating ALL bridges:

- ✓ `bin/bridge_generator.py` - Core bridge generator (CSV/TOML driven)
- ✓ ANY Python file in `bin/bridge_pkg/` (components/, generators/, config, csv_parser, signal_naming, ...)
- ✓ Any Jinja template in `bin/bridge_pkg/jinja_templates/`

24.4.5 The Regeneration Workflow

Step 1: Make generator code changes

```
vim bin/bridge_pkg/generators/crossbar_generator.py
```

Step 2: Delete ALL generated RTL (be aggressive!)

```
cd projects/components/bridge/bin
```

```
make clean # Removes rtl/generated/ output
```

Step 3: Regenerate everything from bridge_batch.csv

```
make all # Runs bridge_generator.py --bulk bridge_batch.csv
```

Step 4: Run ALL tests

```
cd ../dv/tests
```

```
pytest -v # ALL tests, not just the one you think changed
```

Step 5: Verify git diff makes sense

```
git diff ../rtl/ # Review all changes
```

24.4.6 Symptoms of Version Mismatch

If you see these symptoms, you probably did partial regeneration:

- ✗ Tests that previously passed now fail
- ✗ “Signal not found” errors in simulation
- ✗ Port width mismatches in instantiation
- ✗ Address decode routing to wrong slaves
- ✗ Missing debug signals (dbg_*)
- ✗ Unexpected compile errors in working code

24.4.7 Think Like a Compiler Developer

Generated RTL = Compiled Object Files

When you update a compiler, you don’t selectively recompile - you make `clean` && `make all`.

When you update a generator, you don’t selectively regenerate - you **delete all and regenerate all**.

24.4.8 Exception: Hand-Written RTL

These files are **never** regenerated: - `bridge_cam.sv` - CAM module (hand-written) - Any file in `rtl/` that is NOT generated

Check file headers - generated files say “Generated by: `bridge_generator.py`”

24.5 Critical Pitfalls: `slave_select_*` Reversion After Handshake

24.5.1 The Problem: Combinational Address Decode

The master adapter’s R/B response MUX and the crossbar’s AR/AW gating both relied on `<master>_slave_select_{ar,aw}` — a combinational decode of `fub_axi_{ar,aw}addr`. This signal reverts immediately when the address port is freed:

1. AR/AW handshake completes (`arvalid` && `arready`, `awvalid` && `awready`)
2. Wrapper pops skid buffer and releases the address port
3. `fub_axi_araddr` / `fub_axi_awaddr` reverts to next transaction or zero
4. Decode flips to different slave
5. Response MUX is now gated on WRONG slave
6. Response path closes, transaction hangs

This happens BEFORE the converter even finishes pushing to the crossbar, and ALWAYS before response arrives.

24.5.2 Visible Symptoms

- ✗ Multi-slave multi-master bridges hang (timeout)
- ✗ Multi-width masters fail basic connectivity
- ✗ APB/AXIL slaves consistently timeout (longer converter latency = more decode changes)
- ✓ Single-slave or single-master systems work fine (no decode change)

24.5.3 The Solution (MANDATORY in All Generators)

For Crossbar AR/AW Gating: - Replace <master>_slave_select_ar/aw gates with **inline address re-decode** on stable m_axi buses - Address on m_axi is held stable across the entire AXI handshake

For Master Adapter Response MUX: - Add **per-channel response-tracking FIFOs** that capture slave index at request time - Use FIFO head for response MUX instead of live combinational decode

Crossbar Code Pattern:

```
// WRONG (old implementation):
assign gate_ar_s0 = m0_slave_select_ar && m0_arvalid;
//                               ^^^^^^^^^^^^^^^^^^ Reverts after handshake!

// CORRECT (new implementation):
assign gate_ar_s0 = ((m0_m_axi_araddr >= S0_BASE) &&
                    (m0_m_axi_araddr < S0_END) &&
                    m0_arvalid); // Re-decode on stable m_axi
address
```

Master Adapter Code Pattern:

```
// WRONG (old implementation):
assign r_slave_select = comb_slave_select_ar; // Stale after pop!

// CORRECT (new implementation):
// Capture at request time
always_ff @(posedge aclk) begin
    if (fub_axi_arvalid && fub_axi_arready) begin
        ar_trk_fifo <= comb_slave_select_ar;
    end
end

// Use stable value for response MUX
assign r_slave_select = ar_trk_fifo_out;
```

24.5.4 When This Bug Appears

- Works: Single-master, single-slave systems (no address re-evaluation)
 - Fails: Multi-master to same slave (multiple addresses decode differently)
 - Fails: Multi-slave same master (address decode changes per transaction)
 - Fails: Multi-width paths (W beats re-evaluate AW decode mid-burst)
-

24.6 MANDATORY: Project Organization Pattern

THIS SUBSYSTEM MUST FOLLOW THE RAPIDS/AMBA ORGANIZATIONAL PATTERN - NO EXCEPTIONS

24.6.1 Required Directory Structure

```
projects/components/bridge/
├── bin/                                # Bridge-specific tools
├── (generators, scripts)
│   ├── bridge_generator.py            # AXI4 crossbar generator (CSV/TOML
│   └── driven)
│       ├── bridge_pkg/                # Generator implementation package
│       └── test_configs/              # TOML port configs + CSV
├── connectivity
│   └── Makefile                       # make all / make single / make
├── clean
├── docs/                             # Design documentation
├── (bridge_has/, bridge_mas/, PDFs)
├── dv/                               # Design Verification (MANDATORY
├── structure)
│   ├── tbclasses/                    # Testbench classes (MANDATORY - TB
├── classes here!)
│   ├── └── __init__.py
│   │   └── bridge2x2_rw_tb.py        # Per-config generated TB classes
│   ├── components/                  # Bridge-specific BFMs (if needed)
│   └── scoreboards/                 # Bridge-specific scoreboards (if
├── needed)
│   ├── testplans/                   # Test plans
│   └── tests/                       # All test files (test runners
├── only, flat)
│   ├── conftest.py                  # Pytest configuration (MANDATORY)
│   └── test_bridge_*.py              # Per-config tests
├── (test_bridge_2x2_rw.py, ...)
├── rtl/                             # RTL source files
│   ├── bridge_cam.sv                # Hand-written CAM
│   ├── filelists/                   # Generated filelists
│   └── generated/                   # Generated bridges (one subdir per
├── config)
```


└─ CLAUDE.md	# This file
└─ PRD.md	# Product requirements
└─ TASKS.md	# Task history and status

24.6.2 Testbench Class Location (MANDATORY)

✗ **WRONG:** Testbench class in test file

```
# projects/components/bridge/dv/tests/test_bridge_2x2_rw.py
class Bridge2x2RwTB: # ✗ WRONG LOCATION!
    """Embedded TB - NOT REUSABLE"""
```

✓ **CORRECT:** Testbench class in PROJECT AREA dv/tbclasses/

```
# projects/components/bridge/dv/tbclasses/bridge2x2_rw_tb.py
class Bridge2x2RwTB(TBBase): # ✓ CORRECT LOCATION!
    """Reusable TB class - imported by the matching test runner"""
```

CRITICAL: TB classes are PROJECT-SPECIFIC and MUST be in the project area (projects/components/{name}/dv/tbclasses/), NOT in the framework (bin/TBClasses/).

24.6.3 Test File Pattern (MANDATORY)

Test files MUST follow this structure:

```
# projects/components/bridge/dv/tests/test_bridge_2x2_rw.py

import os
import pytest
import cocotb
from cocotb_test.simulator import run

# ✓ IMPORT testbench class from PROJECT AREA
import sys
from TBClasses.shared.utilities import get_repo_root
sys.path.insert(0, get_repo_root())
from projects.components.bridge.dv.tbclasses.bridge2x2_rw_tb import
Bridge2x2RwTB
from TBClasses.shared.utilities import get_paths, get_wave_config
from TBClasses.shared.filelist_utils import get_sources_from_filelist

#
=====
=====
# COCOTB TEST FUNCTIONS - Prefix with "cocotb_" to prevent pytest
collection
#
=====
=====
```

```

@cocotb.test(timeout_time=100, timeout_unit='us')
async def cocotb_test_basic_routing(dut):
    """Test basic address routing"""
    tb = Bridge2x2RwTB(dut) # ✓ Imported TB
    await tb.setup_clocks_and_reset()
    result = await tb.test_basic_routing()
    assert result, "Basic routing test failed"

# More cocotb test functions...

#
=====
=====
# PYTEST WRAPPER FUNCTIONS - At bottom of file
#
=====
=====

@pytest.mark.bridge
def test_bridge_2x2_rw(request):
    """Pytest wrapper for the generated 2x2 rw bridge"""
    module, repo_root, tests_dir, log_dir, rtl_dict = get_paths({
        'rtl_bridge': '../rtl'
    })

    # ... verilog_sources from the bridge's filelist, parameters,
    etc ...

    run(
        verilog_sources=verilog_sources,
        toplevel="bridge_2x2_rw",
        module=module,
        testcase="cocotb_test_basic_routing", # ← cocotb function
name
        parameters=rtl_parameters,
        sim_build=sim_build,
        # ...
    )

```

See dv/tests/test_bridge_2x2_rw.py for the real, complete pattern (tests and TB classes are generated per bridge configuration alongside the RTL).

24.7 Critical Rules for This Subsystem

24.7.1 Rule #0: Attribution Format for Git Commits

IMPORTANT: When creating git commit messages for Bridge documentation or code:

Use:

Documentation and implementation support by Claude.

Do NOT use:

Co-Authored-By: Claude <noreply@anthropic.com>

Rationale: Bridge receives AI assistance for structure and clarity, while design concepts and architectural decisions remain human-authored.

24.7.2 Rule #0.1: Testbench Architecture - MANDATORY SEPARATION

⚠️ **THIS IS A HARD REQUIREMENT - NO EXCEPTIONS** ⚠️

NEVER embed testbench classes inside test runner files!

The same testbench logic will be reused across multiple test scenarios. Having testbench code only in test files makes it COMPLETELY WORTHLESS for reuse.

MANDATORY Structure:

```
projects/components/bridge/
├── dv/
│   ├── tbclasses/                # TB classes HERE (not in
│   │   └── framework!)          # REUSABLE TB CLASS (per config)
│   │   ├── __init__.py
│   │   ├── bridge2x2_rw_tb.py
│   │   └── bridge5x3_channels_tb.py
│   └── components/              # Bridge-specific BFM (if
│       └── needed)              # Bridge-specific scoreboards
│       ├── __init__.py
│       ├── scoreboards/
│       │   └── __init__.py
│       └── tests/                # Test runners (flat, one per
│           └── config)
│           ├── conftest.py       ← MANDATORY pytest config
│           ├── test_bridge_2x2_rw.py ← TEST RUNNER ONLY (imports TB)
│           └── test_bridge_5x3_channels.py
```

Why This Matters:

1. **Reusability:** Same TB class used in:

- Per-config functional tests
 - Monitor stress tests (test_bridge*_mon_monitor.py)
 - User projects (external imports)
2. **Maintainability:** Fix bug once in TB class, all tests benefit
 3. **Composition:** TB classes can inherit/compose for complex scenarios
-

24.7.3 Rule #1: All Testbenches Inherit from TBBase

Every testbench class **MUST** inherit from TBBase:

```
from TBClasses.shared.tbbase import TBBase
```

```
class BridgeAXI4FlatTB(TBBase):  
    """Testbench for Bridge crossbar - inherits base functionality"""  
  
    def __init__(self, dut, num_masters=2, num_slaves=2, **kwargs):  
        super().__init__(dut)  
        # Bridge-specific initialization
```

TBBase Provides: - Clock management (start_clock, wait_clocks) - Reset utilities (assert_reset, deassert_reset) - Logging (self.log) - Progress tracking (mark_progress) - Safety monitoring (timeouts, memory limits)

24.7.4 Rule #2: Mandatory Testbench Methods

Every testbench class **MUST** implement these three methods:

```
async def setup_clocks_and_reset(self):  
    """Complete initialization - starts clocks and performs reset"""  
    await self.start_clock('aclk', freq=10, units='ns')  
  
    # Set config signals before reset (if needed)  
    # self.dut.cfg_param.value = initial_value  
  
    # Reset sequence  
    await self.assert_reset()  
    await self.wait_clocks('aclk', 10)  
    await self.deassert_reset()  
    await self.wait_clocks('aclk', 5)  
  
async def assert_reset(self):
```

```

"""Assert reset signal (active-low for AXI4)"""
self.dut.aresetn.value = 0

```

```

async def deassert_reset(self):
    """Deassert reset signal"""
    self.dut.aresetn.value = 1

```

Why Required: - Consistency across all testbenches - Reusability for mid-test resets - Clear test structure and intent

24.7.5 Rule #3: Use GAXI Components for Protocol Handling

For Bridge testing, use GAXI Master/Slave components for AXI4 channel handling:

```

from CocoTBFramework.components.gaxi.gaxi_master import GAXIMaster
from CocoTBFramework.components.gaxi.gaxi_slave import GAXISlave
from CocoTBFramework.components.axi4.axi4_field_configs import
AXI4FieldConfigHelper

```

```

# ✓ CORRECT: Use GAXI for AXI4 channels

```

```

self.aw_master = GAXIMaster(
    dut=dut,
    title="AW_M0",
    prefix="s0_axi4_",
    clock=clock,

    field_config=AXI4FieldConfigHelper.create_aw_field_config(id_width,
        addr_width, 1),
    pkt_prefix="aw",
    multi_sig=True,
    log=log
)

```

Never manually drive AXI4 valid/ready handshakes - Use GAXI components.

24.7.6 Rule #4: Queue-Based Verification

For simple in-order verification, use direct monitor queue access:

```

# ✓ CORRECT: Direct queue access
aw_pkt = self.aw_slave._recvQ.popleft()
w_pkt = self.w_slave._recvQ.popleft()

# Verify
assert aw_pkt.addr == expected_addr

```

```
assert w_pkt.data == expected_data
```

```
# ✗ WRONG: Memory model for simple test  
memory_model = MemoryModel() # Unnecessary complexity
```

When to Use Memory Models: - *✗* Simple in-order tests → Use queue access - *✗* Single-master systems → Use queue access - *✓* Complex out-of-order scenarios → Memory model may help - *✓* Multi-master with address overlap → Memory model tracks state

24.8 TOML/CSV-Based Bridge Generator (Phase 2 Complete)

24.8.1 Overview

The Bridge generator creates parameterized SystemVerilog crossbars from TOML configuration files with CSV connectivity matrices, eliminating manual RTL editing for complex interconnects.

Key Benefits: - **Human-readable configuration** - TOML for ports, CSV for connectivity - **Custom signal prefixes** - Each port has unique prefix (rapids_m_axi_, apb0_, etc.) - **Channel-specific masters** - Write-only (wr), read-only (rd), or full (rw) - **Interface modules** - Timing isolation via axi4_master/slave wrappers with configurable skid depths - **Automatic converters** - Width and protocol conversion inserted automatically - **Resource efficient** - Only generates needed channels and converters

24.8.2 Quick Start

1. Create bridge_mybridge.toml:

```
[bridge]  
  name = "bridge_mybridge"  
  description = "Custom bridge example"  
  
  # Default skid buffer depths (can be overridden per port)  
  defaults.skid_depths = {ar = 2, r = 4, aw = 2, w = 4, b = 2}  
  
  masters = [  
    {name = "cpu", prefix = "cpu_m_axi", id_width = 4, addr_width =  
32, data_width = 64, user_width = 1,  
      interface = {type = "axi4_master"}}},  
    {name = "dma", prefix = "dma_m_axi", id_width = 4, addr_width =  
32, data_width = 512, user_width = 1,  
      interface = {type = "axi4_master", skid_depths = {ar = 4, r = 8,  
aw = 4, w = 8, b = 4}}}  
  ]  
  
  slaves = [  
    {name = "cpu", prefix = "cpu_s_axi", id_width = 4, addr_width =  
32, data_width = 64, user_width = 1,  
      interface = {type = "axi4_slave", skid_depths = {ar = 4, r = 8,  
aw = 4, w = 8, b = 4}}}
```

```

    {name = "ddr", prefix = "ddr_s_axi", id_width = 4, addr_width =
32, data_width = 512, user_width = 1,
    base_addr = 0x00000000, addr_range = 0x80000000, interface =
{type = "axi4_slave"}}},
    {name = "sram", prefix = "sram_s_axi", id_width = 4, addr_width =
32, data_width = 256, user_width = 1,
    base_addr = 0x80000000, addr_range = 0x80000000, interface =
{type = "axi4_slave"}}}
]

```

2. Create `bridge_mybridge_connectivity.csv`:

```

master\slave,ddr,sram
cpu,1,1
dma,1,1

```

3. Generate bridge:

```

cd projects/components/bridge/bin
python3 bridge_generator.py --ports test_configs/bridge_mybridge.toml
# Auto-finds bridge_mybridge_connectivity.csv

```

Or use bulk generation

```
python3 bridge_generator.py --bulk bridge_batch.csv
```

Result: Complete SystemVerilog module with: - Custom port prefixes per port - Timing isolation via interface wrappers - Only needed AXI4 channels (wr/rd/rw optimized) - Width converters for data mismatches - Internal crossbar instantiation - APB/AXI4-Lite converter integration points

24.8.3 Configuration Format Details

TOML Port Configuration:

The primary format is now **TOML** (preferred over CSV for better structure and interface configuration):

Port Specifications: - name - Unique identifier (cpu, dma, ddr, etc.) - prefix - Signal prefix (cpu_m_axi, ddr_s_axi, etc.) - id_width - AXI4 ID width in bits - addr_width - Address width in bits - data_width - Data width in bits (32, 64, 128, 256, 512) - user_width - AXI4 user signal width - base_addr - Slave base address (slaves only) - addr_range - Slave address range (slaves only) - interface - Interface wrapper configuration (optional) - type - "axi4_master", "axi4_slave", "axi4_master_mon", "axi4_slave_mon", or omit for direct connection - skid_depths - Per-channel buffer depths: {ar, r, aw, w, b} (valid: 2, 4, 6, 8)

CSV Connectivity Matrix:

```

master\slave,slave0,slave1,slave2
master0,1,0,1
master1,0,1,1

```

- 1 = connected, 0 = not connected
- Partial connectivity supported (not all masters to all slaves)
- Auto-detected based on TOML filename: `bridge_name.toml` → `bridge_name_connectivity.csv`

Legacy CSV Format:

For backwards compatibility, the generator still supports CSV port files: - See `bin/test_configs/README.md` for migration guide from CSV to TOML - TOML is now preferred for new bridges (better structure, interface config support)

24.8.4 Channel-Specific Masters (Phase 2 Feature)

Why Channel-Specific? Real hardware often has dedicated read or write masters. Generating all 5 AXI4 channels wastes resources:

Traditional (wasteful):

```
// Write-only master gets unused read channels
input logic [63:0] rapids_descr_m_axi_awaddr, // ✓ USED
input logic [511:0] rapids_descr_m_axi_wdata, // ✓ USED
output logic [7:0] rapids_descr_m_axi_bid, // ✓ USED
input logic [63:0] rapids_descr_m_axi_araddr, // ✗ UNUSED (50%
waste!)
output logic [511:0] rapids_descr_m_axi_rdata, // ✗ UNUSED
```

Channel-Specific (optimized):

`rapids_descr_wr, master, axi4, wr, rapids_descr_m_axi_, 512, 64, 8, N/A, N/A`

Generated:

```
// Write-only master - only AW, W, B channels
input logic [63:0] rapids_descr_m_axi_awaddr,
input logic [511:0] rapids_descr_m_axi_wdata,
output logic [7:0] rapids_descr_m_axi_bid,
// ✓ NO READ CHANNELS (araddr, rdata, etc.)
```

Resource Savings: - 40-60% fewer ports for dedicated masters - Only necessary width converters instantiated - Channel-aware direct connection wiring - Faster synthesis, smaller netlists

24.8.5 Example: RAPIDS-Style Configuration

RAPIDS Architecture: - Descriptor write master (wr) - Writes descriptors to memory - Sink write master (wr) - Writes incoming packets to memory - Source read master (rd) - Reads outgoing packets from memory - CPU master (rw) - Full access for configuration

TOML Configuration (`bridge_rapids.toml`):

[bridge]

```
name = "bridge_rapids"
description = "RAPIDS accelerator bridge"
defaults.skid_depths = {ar = 2, r = 4, aw = 2, w = 4, b = 2}

masters = [
  {name = "rapids_descr_wr", prefix = "rapids_descr_m_axi", channels
= "wr",
  id_width = 8, addr_width = 64, data_width = 512, user_width = 1,
  interface = {type = "axi4_master"}}},
  {name = "rapids_sink_wr", prefix = "rapids_sink_m_axi", channels =
"wr",
  id_width = 8, addr_width = 64, data_width = 512, user_width = 1,
  interface = {type = "axi4_master"}}},
  {name = "rapids_src_rd", prefix = "rapids_src_m_axi", channels =
"rd",
  id_width = 8, addr_width = 64, data_width = 512, user_width = 1,
  interface = {type = "axi4_master"}}},
  {name = "cpu", prefix = "cpu_m_axi", channels = "rw",
  id_width = 4, addr_width = 32, data_width = 64, user_width = 1,
  interface = {type = "axi4_master"}}}
]

slaves = [
  {name = "ddr", prefix = "ddr_s_axi", protocol = "axi4",
  id_width = 8, addr_width = 64, data_width = 512, user_width = 1,
  base_addr = 0x80000000, addr_range = 0x80000000,
  interface = {type = "axi4_slave"}}},
  {name = "apb_periph", prefix = "apb0_", protocol = "apb",
  addr_width = 32, data_width = 32,
  base_addr = 0x00000000, addr_range = 0x00010000}
]
```

Connectivity CSV (bridge_rapids_connectivity.csv):

```
master\slave,ddr,apb_periph
rapids_descr_wr,1,0
rapids_sink_wr,1,0
rapids_src_rd,1,0
cpu,1,1
```

Generated RTL Features: - rapids_descr_wr: 37 signals (write channels only) vs 61 signals (full) = **39% reduction** - rapids_sink_wr: 37 signals (write channels only) vs 61 signals (full) = **39% reduction** - rapids_src_rd: 24 signals (read channels only) vs 61 signals (full) = **61% reduction** - cpu_master: Width converters for 64b→512b upsize (both wr and rd converters) - ddr_controller: Direct 512b connection (no conversion) - apb_periph0: APB converter placeholder (Phase 3)

24.8.6 Common User Questions

Q: “How do I generate a bridge?”

A: Three steps:

1. Create TOML port configuration file
2. Create CSV connectivity matrix
3. Run `bridge_generator.py`

```
# Create bridge_mybridge.toml (port configuration)
```

```
# Create bridge_mybridge_connectivity.csv (connectivity matrix)
```

```
cd projects/components/bridge/bin
```

```
python3 bridge_generator.py --ports test_configs/bridge_mybridge.toml
```

```
# Auto-finds bridge_mybridge_connectivity.csv
```

```
# Or use bulk generation for multiple bridges
```

```
python3 bridge_generator.py --bulk bridge_batch.csv
```

Q: “What’s the difference between wr/rd/rw channels?”

A: Number of AXI4 channels generated:

- **rw** (read/write) - All 5 channels: AW, W, B, AR, R
- **wr** (write-only) - 3 channels: AW, W, B (no read channels)
- **rd** (read-only) - 2 channels: AR, R (no write channels)

Benefits: 40-60% fewer ports for dedicated masters, less logic, faster synthesis

Q: “Can I add timing isolation to ports?”

A: Yes, use interface configuration:

```
masters = [  
    {name = "cpu", prefix = "cpu_m_axi", ...,  
      interface = {type = "axi4_master", skid_depths = {ar = 2, r = 4, aw  
= 2, w = 4, b = 2}}}  
]
```

Available interface types: - "axi4_master" - Timing isolation on master port - "axi4_slave" - Timing isolation on slave port - "axi4_master_mon" - Timing + monitoring - "axi4_slave_mon" - Timing + monitoring - Omit interface field for direct connection

Q: “Can I mix AXI4 and APB slaves?”

A: Yes, use protocol field in TOML:

```
slaves = [
    {name = "ddr", prefix = "ddr_s_axi", protocol = "axi4", ...},
    {name = "apb0", prefix = "apb0_", protocol = "apb", ...}
]
```

Generator inserts AXI2APB converters automatically (Phase 3 for full implementation).

Q: “Can ports be AMBA5 (AXI5 / APB5)?”

A: Yes — per port, while the fabric stays AXI4 (BRIDGE-002):

```
[[bridge.masters]]
protocol = "axi5"
axi5_features = ["trace", "atomic"] # nsaid/trace/mpam/mecid/unique
are
                                # droppable sideband;
poison/atomic are
                                # connectivity-gated (every
connected path
                                # must be AXI5 + feature + width-
matched);
                                # mte/chunking rejected
```

```
[[bridge.slaves]]
protocol = "apb5" # APB4 rules apply (rw-only, 32-bit); adds the
APB5 pins
```

Sideband passes natively on width-matched AXI5<->AXI5 paths and terminates with a generation-time warning elsewhere. Atomics are store-class only: read-return classes DECERR at the boundary (axi5_atomic_filter). Details:

docs/bridge_has/ch04_interfaces/04_axi5_apb5_interfaces.md and
docs/bridge_mas/ch02_blocks/10_amba5_boundary.md.

Q: “What if data widths don’t match?”

A: Generator inserts width converters automatically:

```
masters = [
    {name = "cpu", data_width = 64, ...}, # 64b master
]
slaves = [
    {name = "ddr", data_width = 512, ...} # 512b slave
]
# Generator creates width converter: 64b → 512b
```

Q: “Do all masters need to connect to all slaves?”

A: No, use partial connectivity in CSV:

```

master\slave,ddr,sram,apb
rapids_descr,1,1,0      # Connects to ddr and sram only
cpu,1,1,1              # Connects to all three

```

24.8.7 Generator Output Structure

Generated File Contains:

1. **Module Header** - Parameterized with NUM_MASTERS, NUM_SLAVES, widths
2. **Port Declarations** - Custom prefix per port, channel-specific signals
3. **Internal Signals** - Crossbar interface arrays (xbar_m_, xbar_s_)
4. **Width Converters** - Master-side upsize instances (channel-aware)
5. **Crossbar Instance** - Internal AXI4 full crossbar
6. **Direct Connections** - For matching-width interfaces
7. **APB Converters** - Placeholder TODO comments (Phase 3)

Example Output Size: - Simple 2x2 bridge: ~400 lines - Complex 5x3 with mixed protocols: ~900 lines - Includes comprehensive comments and structure

24.8.8 Testing Generated Bridges

For Pure AXI4 Bridges (Working Now):

```

# Generate bridge (outputs to rtl/generated/<bridge_name>/)
python3 bridge_generator.py --ports test_configs/bridge_2x2_rw.toml

# Run its test (per-config TB classes live in dv/tbclasses/, e.g.
bridge2x2_rw_tb.py)
cd ../dv/tests
pytest test_bridge_2x2_rw.py -v

```

For Mixed AXI4/APB (Requires Phase 3): APB converter placeholders need implementation before end-to-end testing.

24.9 Bridge Architecture Quick Reference

24.9.1 Generated Bridge Crossbar Structure

Illustrative shape (see rtl/generated/bridge_2x2_rw/bridge_2x2_rw.sv for a real example):

```

module bridge_2x2_rw #(
    parameter NUM_MASTERS = 2,
    parameter NUM_SLAVES = 2,

```

```

parameter DATA_WIDTH = 32,
parameter ADDR_WIDTH = 32,
parameter ID_WIDTH = 4
) (
    input logic aclk,
    input logic aresetn,

    // Master-side interfaces (slave ports on bridge)
    // AW, W, B, AR, R channels for each master

    // Slave-side interfaces (master ports on bridge)
    // AW, W, B, AR, R channels for each slave
);

```

24.9.2 Key Features

1. **5-Channel Implementation:** Complete AW, W, B, AR, R routing
2. **Round-Robin Arbitration:** Per-slave arbitration with grant locking
3. **Transaction ID Tracking:** Distributed RAM for B/R response routing
4. **ID-Based Routing:** Enables out-of-order responses
5. **Configurable Parameters:** NxM topology, data/addr/ID widths

24.9.3 Address Map

Default address map (configurable): - Slave 0: 0x00000000 - 0xFFFFFFFF (256MB) - Slave 1: 0x10000000 - 0x1FFFFFFF (256MB) - Slave N: N * 0x10000000

24.10 Test Organization

24.10.1 Test Hierarchy

```

projects/components/bridge/dv/tests/
├── conftest.py                    # Pytest configuration with
fixtures                          # Per-config functional tests
├── test_bridge_1x2_rd.py
├── test_bridge_2x2_rw.py
├── test_bridge_4x4_rw.py
├── test_bridge_5x3_channels.py
├── test_bridge_mix_a_mon_monitor.py # Monitor stress tests (mon
configs)
└── monitor_stress_common.py      # Shared monitor-stress helpers

```

24.10.2 Test Levels

Per-Config Functional Tests: - Individual bridge functionality - Address routing - ID tracking - Arbitration

Monitor Stress Tests (*_mon_monitor.py): - Bridges generated with monitor interfaces - Monitor packet generation under traffic

24.11 Common User Questions and Responses

24.11.1 Q: “How does the Bridge work?”

A: Direct answer:

The Bridge AXI4 crossbar connects multiple AXI4 masters to multiple slaves:

1. **Address Decode (AW/AR):** Routes master requests to appropriate slave based on address
2. **Write Path:** AW → arbitration → slave, W follows locked grant
3. **Read Path:** AR → arbitration → slave, R returns via ID table
4. **Arbitration:** Per-slave round-robin with grant locking until burst complete
5. **Response Routing:** B/R responses use ID lookup tables (not grant-based)

Key Features: - Out-of-order response support via ID tracking - Burst-aware arbitration (grant locked until WLAST/RLAST) - Configurable NxM topology - Single-clock domain

 **See:** - projects/components/bridge/PRD.md - Complete specification - projects/components/bridge/bin/bridge_generator.py - Generator implementation

24.11.2 Q: “How do I generate a Bridge?”

A: Use the bridge_generator.py tool:

```
cd projects/components/bridge/bin
python3 bridge_generator.py --ports test_configs/bridge_2x2_rw.toml
# Auto-finds test_configs/bridge_2x2_rw_connectivity.csv
# Or regenerate everything: make all (bulk from bridge_batch.csv)
```

Generated files: - RTL: projects/components/bridge/rtl/generated/<bridge_name>/ (top module, crossbar, adapters, package) - Contains complete 5-channel crossbar with ID tracking

24.11.3 Q: “How do I test a Bridge?”

A: Use the Bridge testbench class:

```

# Import from project area
import sys
from TBClasses.shared.utilities import get_repo_root
sys.path.insert(0, get_repo_root())
from projects.components.bridge.dv.tbclasses.bridge2x2_rw_tb import
Bridge2x2RwTB

@cocotb.test()
async def cocotb_test_basic(dut):
    tb = Bridge2x2RwTB(dut)
    await tb.setup_clocks_and_reset()

    # Send write to slave 0
    await tb.write_transaction(master_idx=0, address=0x00001000,
data=0xDEADBEEF)

    # Verify routing
    assert len(tb.aw_slaves[0]._recvQ) > 0, "Slave 0 should receive
AW"

```

Run tests:

```

cd projects/components/bridge/dv/tests
pytest test_bridge_2x2_rw.py -v

```

24.12 Anti-Patterns to Avoid

24.12.1 X Anti-Pattern 1: Embedded Testbench Classes

x WRONG: TB **class** in test file

```

class BridgeTB:
    """NOT REUSABLE - WRONG LOCATION"""

```

✓ CORRECT: Import **from** project area

```

import sys
from TBClasses.shared.utilities import get_repo_root
sys.path.insert(0, get_repo_root())
from projects.components.bridge.dv.tbclasses.bridge2x2_rw_tb import
Bridge2x2RwTB

```

24.12.2 X Anti-Pattern 2: Manual AXI4 Handshaking

x WRONG: Manual signal driving

```

self.dut.s0_axi4_awvalid.value = 1
while self.dut.s0_axi4_awready.value == 0:
    await RisingEdge(self.clock)

```

✓ CORRECT: Use GAXI components
`await self.aw_master.send(aw_pkt)`

24.12.3 ✗ Anti-Pattern 3: Memory Models for Simple Tests

✗ WRONG: Unnecessary complexity
`memory = MemoryModel()`
`memory.write(addr, data)`
`result = memory.read(addr)`

✓ CORRECT: Direct queue verification
`aw_pkt = self.aw_slave._recvQ.popleft()`
`assert aw_pkt.addr == expected_addr`

24.13 Quick Reference

24.13.1 Finding Existing Components

Bridge TB classes (in PROJECT AREA, not framework!)
`ls projects/components/bridge/dv/tbclasses/`

Bridge generator
`cat projects/components/bridge/bin/bridge_generator.py`

Test examples
`ls projects/components/bridge/dv/tests/`

24.13.2 Common Commands

Generate 2x2 bridge (from bin/, outputs to rtl/generated/bridge_2x2_rw/)
`cd projects/components/bridge/bin`
`python3 bridge_generator.py --ports test_configs/bridge_2x2_rw.toml`

Run tests
`pytest projects/components/bridge/dv/tests/test_bridge_2x2_rw.py -v`

Lint generated RTL
`verilator --lint-only`
`projects/components/bridge/rtl/generated/bridge_2x2_rw/bridge_2x2_rw.sv`

24.14 Remember

1.  **MANDATORY: Testbench architecture** - TB classes in framework, tests import them
 2.  **MANDATORY: Directory structure** - Follow RAPIDS/AMBA pattern exactly
 3.  **MANDATORY: conftest.py** - Must exist in dv/tests/
 4.  **Use GAXI components** - Never manually drive AXI4 handshakes
 5.  **Queue-based verification** - Simple tests use direct queue access
 6.  **Three-layer architecture** - TB (framework) + Test (runner) + Scoreboard (verification)
 7.  **Three mandatory methods** - setup_clocks_and_reset, assert_reset, deassert_reset
 8.  **Search first** - Use existing components before creating new ones
 9.  **Test scalability** - Support basic/medium/full test levels
 10.  **100% success** - All tests must achieve 100% success rate
-

24.15 PDF Generation Location

IMPORTANT: PDF files should be generated in the docs directory:

projects/components/bridge/docs/

Quick Commands: Use the provided shell scripts:

```
cd projects/components/bridge/docs
./generate_has_pdf.sh    # Builds Bridge_HAS_v<rev> from bridge_has/
./generate_mas_pdf.sh    # Builds Bridge_MAS_v<rev> from bridge_mas/
```

The shell scripts will automatically: 1. Use the md_to_docx.py tool from bin/ 2. Process the bridge_has/bridge_mas index files 3. Generate both DOCX and PDF files in the docs/ directory 4. Create table of contents and title page

 **See:** bin/md_to_docx.py for complete implementation details

Version: 1.0 **Last Updated:** 2025-10-18 **Maintained By:** RTL Design Sherpa Project