



RTL Design Sherpa

Bridge Hardware Architecture Specification 1.1

August 14, 2026

Table of Contents

1 Bridge Has Index.....	24
2 Document Information.....	25
2.1 Bridge Hardware Architecture Specification.....	26
2.2 Revision History.....	27
2.3 Document Purpose.....	29
2.4 Intended Audience.....	30
2.5 Related Documents.....	31
3 Purpose and Scope.....	32
3.1 What is Bridge?.....	33
3.2 The Problem Bridge Solves.....	34
3.3 Scope.....	35
3.4 Out of Scope.....	36
4 Document Conventions.....	37
4.1 Terminology.....	38
4.2 Signal Naming.....	39
4.3 Diagrams.....	40
4.3.1 Figure 1.1: Block Diagram Legend.....	40
4.4 Code Examples.....	41
4.5 Parameter Notation.....	42
5 Definitions and Acronyms.....	43
5.1 Acronyms.....	44
5.2 Definitions.....	46

6 Use Cases.....	47
6.1 Primary Applications.....	48
6.1.1 SoC Interconnects.....	48
6.1.2 Memory Systems.....	48
6.1.3 Accelerator Systems.....	48
6.2 Example: RAPIDS Accelerator.....	49
6.2.1 Figure 2.1: RAPIDS System Topology.....	49
6.2.2 Configuration.....	49
6.2.3 Benefits.....	49
6.3 Rapid Prototyping.....	51
7 Key Features.....	52
7.1 Configuration-Driven Generation.....	53
7.1.1 CSV/TOML Configuration.....	53
7.1.2 Example Configuration.....	53
7.2 Multi-Protocol Support.....	54
7.2.1 Protocol Features.....	54
7.3 Channel-Specific Masters.....	55
7.3.1 Write-Only Masters (wr).....	55
7.3.2 Read-Only Masters (rd).....	55
7.3.3 Full Masters (rw).....	55
7.3.4 Resource Savings.....	55
7.4 Automatic Converters.....	56
7.4.1 Width Conversion.....	56
7.4.2 Protocol Conversion.....	56

7.5 Flexible Topology.....	57
7.5.1 Scalability.....	57
7.5.2 Mixed Configurations.....	57
8 System Context.....	58
8.1 Bridge in SoC Architecture.....	59
8.1.1 Figure 2.2: Bridge System Context.....	59
8.2 Interface Boundaries.....	60
8.2.1 Master-Side (Upstream).....	60
8.2.2 Slave-Side (Downstream).....	60
8.3 Address Space.....	61
8.3.1 Address Map Organization.....	61
8.3.2 Address Decode.....	61
8.4 Clock and Reset.....	62
8.4.1 Clock Domain.....	62
8.4.2 Reset.....	62
8.5 Dependencies.....	63
8.5.1 Required Infrastructure.....	63
8.5.2 Optional Features.....	63
9 Block Diagram.....	64
9.1 Bridge Architecture Overview.....	65
9.1.1 Figure 3.1: Bridge Block Diagram.....	65
9.2 Functional Blocks.....	66
9.2.1 Master Adapter.....	66
9.2.2 Crossbar Core.....	66

9.2.3 Slave Router.....	66
9.3 Data Flow.....	67
9.3.1 Figure 3.2: Write Path.....	67
9.3.2 Figure 3.3: Read Path.....	67
9.4 Scalability.....	68
9.4.1 Topology Parameters.....	68
9.4.2 Resource Scaling.....	68
10 Data Flow.....	69
10.1 Transaction Flow Overview.....	70
10.1.1 Write Transaction Flow.....	70
10.1.2 Read Transaction Flow.....	70
10.2 Channel Independence.....	71
10.2.1 AXI4 Channel Separation.....	71
10.2.2 Parallel Operation.....	71
10.3 ID Extension.....	72
10.3.1 Bridge ID (BID) Concept.....	72
10.3.2 Example: 4 Masters, 4-bit ID.....	72
10.4 Response Routing.....	73
10.4.1 B Channel (Write Response).....	73
10.4.2 R Channel (Read Data).....	73
10.5 Out-of-Order Support.....	74
10.5.1 Transaction Interleaving.....	74
10.5.2 Example Sequence.....	74
11 Protocol Support.....	75

11.1 Supported Protocols.....	76
11.1.1 AXI4 Full.....	76
11.1.2 AXI4-Lite.....	76
11.1.3 APB (Advanced Peripheral Bus).....	76
11.2 Protocol Conversion Matrix.....	77
11.3 Automatic Conversion Shims at Slave Boundary.....	78
11.4 AXI4 to APB Conversion.....	79
11.4.1 Conversion Process.....	79
11.4.2 Figure 3.1: AXI4 to APB Conversion Sequence.....	79
11.4.3 Burst Handling.....	79
11.4.4 Timing Considerations.....	79
11.5 Width Conversion.....	80
11.5.1 Upsize (Narrow to Wide).....	80
11.5.2 Figure 3.2: Width Upsize Conversion.....	80
11.5.3 Downsize (Wide to Narrow).....	81
11.5.4 Figure 3.3: Width Downsize Conversion.....	81
11.6 Channel-Specific Protocol.....	82
11.6.1 Write-Only Masters.....	82
11.6.2 Read-Only Masters.....	82
12 AXI4 Interface Overview.....	83
12.1 Interface Organization.....	84
12.1.1 Master-Side Interfaces.....	84
12.1.2 Slave-Side Interfaces.....	84
12.2 Signal Naming Convention.....	86

12.2.1 Custom Prefixes.....	86
12.2.2 ID Width Extension.....	86
12.3 Channel-Specific Interfaces.....	87
12.3.1 Write-Only Master (wr).....	87
12.3.2 Read-Only Master (rd).....	87
12.4 Monitor Bus Output (when variants includes mon).....	88
12.5 Handshake Protocol.....	89
12.5.1 Valid/Ready Handshake.....	89
12.5.2 Backpressure.....	89
12.6 Burst Support.....	90
12.6.1 Supported Burst Types.....	90
12.6.2 Burst Length.....	90
13 APB Interface Overview.....	91
13.1 APB Protocol Summary.....	92
13.1.1 Signal Definition.....	92
13.2 APB Slave Interface.....	93
13.2.1 Signal Naming.....	93
13.3 APB Transaction Timing.....	94
13.3.1 Write Transaction.....	94
13.3.2 Read Transaction.....	94
13.4 AXI4 to APB Conversion.....	95
13.4.1 Conversion Requirements.....	95
13.4.2 Burst Handling.....	95
13.4.3 Error Mapping.....	95

13.5 Performance Implications.....	96
13.5.1 APB Limitations.....	96
13.5.2 Design Recommendations.....	96
14 Clock and Reset.....	97
14.1 Clock Requirements.....	98
14.1.1 Single Clock Domain.....	98
14.1.2 Figure 4.1: Clock Distribution.....	98
14.1.3 No Clock Domain Crossing.....	98
14.2 Reset Requirements.....	99
14.2.1 Asynchronous Active-Low Reset.....	99
14.2.2 Reset Behavior.....	99
14.2.3 Figure 4.3: Reset Timing.....	99
14.2.4 Reset Effects.....	99
14.2.5 Outstanding Transactions.....	99
14.2.6 Reset Release.....	100
14.3 Timing Constraints.....	101
14.3.1 Setup and Hold.....	101
14.3.2 Clock-to-Output.....	101
14.3.3 Recommended Constraints.....	101
14.4 Multi-Clock Systems.....	102
14.4.1 External CDC Required.....	102
14.4.2 Figure 4.2: Multi-Clock CDC.....	102
14.4.3 CDC Recommendations.....	102
15 AXI5 and APB5 Interfaces (AMBA5 Support).....	103

15.1 Declaring AMBA5 Ports.....	104
15.2 AXI5 Port Surface.....	105
15.3 APB5 Slave Surface.....	106
15.4 Interop Matrix.....	107
16 Throughput Characteristics.....	108
16.1 Peak Throughput.....	109
16.1.1 Single Master to Single Slave.....	109
16.1.2 Formula.....	109
16.2 Sustained Throughput.....	110
16.2.1 Factors Affecting Throughput.....	110
16.2.2 Multi-Master Scaling.....	110
16.2.3 Example: 4 Masters, 2 Slaves.....	110
16.3 Burst Efficiency.....	111
16.3.1 Burst vs Single-Beat.....	111
16.3.2 Recommendation.....	111
16.4 Width Conversion Impact.....	112
16.4.1 Upsize (Narrow to Wide).....	112
16.4.2 Downsize (Wide to Narrow).....	112
16.5 Protocol Conversion Impact.....	113
16.5.1 AXI4 to APB.....	113
16.5.2 Recommendation.....	113
17 Latency Analysis.....	114
17.1 Latency Components.....	115
17.1.1 Address Path Latency.....	115

17.1.2 Data Path Latency.....	115
17.1.3 Response Path Latency.....	115
17.2 End-to-End Latency.....	116
17.2.1 Write Transaction (Best Case).....	116
17.2.2 Read Transaction (Best Case).....	116
17.2.3 Contention Latency.....	116
17.3 Width Conversion Latency.....	117
17.3.1 Upsize Latency.....	117
17.3.2 Downsize Latency.....	117
17.4 Protocol Conversion Latency.....	118
17.4.1 AXI4 to APB.....	118
17.4.2 APB Wait States.....	118
17.5 Latency Optimization.....	119
17.5.1 Design Recommendations.....	119
18 Resource Estimates.....	120
18.1 FPGA Resource Summary.....	121
18.1.1 Baseline Configuration (2x2, 64-bit).....	121
18.1.2 Scaling Factors.....	121
18.2 Component Breakdown.....	122
18.2.1 Per-Master Resources.....	122
18.2.2 Per-Slave Resources.....	122
18.2.3 Crossbar Core.....	122
18.3 Width Converter Resources.....	123
18.4 Protocol Converter Resources.....	124

18.4.1 AXI4 to APB.....	124
18.5 Example Configurations.....	125
18.5.1 Notes.....	125
18.6 Optimization Strategies.....	126
18.6.1 Resource Reduction.....	126
18.6.2 Performance/Resource Trade-off.....	126
19 System Requirements.....	127
19.1 Hardware Requirements.....	128
19.1.1 Clock Infrastructure.....	128
19.1.2 Reset Infrastructure.....	128
19.1.3 Power.....	128
19.2 Interface Requirements.....	129
19.2.1 Master Requirements.....	129
19.2.2 Slave Requirements.....	129
19.3 Configuration Requirements.....	130
19.3.1 Address Map.....	130
19.3.2 Connectivity.....	130
19.4 Timing Requirements.....	131
19.4.1 Setup/Hold.....	131
19.4.2 Recommended Margins.....	131
19.5 Verification Requirements.....	132
19.5.1 Pre-Integration Checks.....	132
19.5.2 Integration Checks.....	132
19.5.3 Post-Integration Checks.....	132

20 Parameter Configuration.....	133
20.1 Core Parameters.....	134
20.2 Derived Parameters.....	135
20.2.1 Calculated by Generator.....	135
20.3 Per-Port Configuration.....	136
20.3.1 Master Port Configuration.....	136
20.3.2 Slave Port Configuration.....	136
20.4 Top-Level Monitor Configuration.....	138
20.4.1 Monitor Identifiers.....	138
20.4.2 AXIL→Wider-Slave Master-Side Alignment.....	138
20.5 Configuration File Format.....	139
20.5.1 TOML Configuration.....	139
20.5.2 CSV Connectivity.....	139
20.6 Parameter Validation.....	140
20.6.1 Generator Checks.....	140
20.6.2 Runtime Validation.....	140
20.7 Example Configurations.....	141
20.7.1 Simple 2x2.....	141
20.7.2 Mixed Protocol.....	141
21 Verification Strategy.....	142
21.1 Verification Levels.....	143
21.1.1 Unit Level.....	143
21.1.2 Integration Level.....	143
21.1.3 System Level.....	143

21.2 Test Infrastructure.....	144
21.2.1 CocoTB Framework with Protocol-BFM-Only Driving.....	144
21.2.2 Test Categories.....	144
21.3 Test Execution Model.....	146
21.3.1 Serial Execution.....	146
21.3.2 Boundary Probe Testing.....	146
21.4 Coverage Goals.....	147
21.4.1 Functional Coverage.....	147
21.4.2 Code Coverage.....	147
21.5 Debug Features.....	148
21.5.1 Waveform Capture.....	148
21.5.2 Debug Signals.....	148
21.6 Regression Testing.....	149
21.6.1 Continuous Integration.....	149
21.6.2 Test Matrix.....	149
21.7 Known Limitations.....	150
21.7.1 Test Gaps.....	150
21.7.2 Simulator Support.....	150
22 Bridge Micro-Architecture Specification Index.....	151
22.1 Document Organization.....	152
22.1.1 Front Matter.....	152
22.1.2 Chapter 1: Introduction.....	152
22.1.3 Chapter 2: Block Descriptions.....	152
22.1.4 Chapter 3: FSM Design.....	152

22.1.5 Chapter 4: ID Management.....	152
22.1.6 Chapter 5: Converters.....	152
22.1.7 Chapter 6: Generated RTL.....	153
22.1.8 Chapter 7: Verification.....	153
22.2 Quick Navigation.....	154
22.2.1 For New Users.....	154
22.2.2 For Integration.....	154
22.3 Visual Assets.....	155
22.3.1 Architecture Diagrams.....	155
22.3.2 FSM Diagrams.....	155
22.4 Component Overview.....	156
22.4.1 Key Features.....	156
22.4.2 Protocol Conversion Matrix.....	156
22.4.3 Design Philosophy.....	156
22.5 Related Documentation.....	157
22.5.1 Companion Specifications.....	157
22.5.2 Project-Level.....	157
22.5.3 Generator.....	157
22.6 Version History.....	158
23 Bridge: AXI4 Full Crossbar Generator - Product Requirements Document.....	159
23.1 Executive Summary.....	160
23.2 Design Philosophy.....	161
23.2.1 Core Principles.....	161
23.2.2 Architecture Philosophy.....	162

23.3 CRITICAL: RTL Regeneration Requirements.....	163
23.4 1. Product Overview.....	164
23.4.1 1.1 Purpose.....	164
23.4.2 1.2 Target Audience.....	164
23.4.3 1.3 Success Criteria.....	164
23.4.4 1.4 Implementation Status and Phases.....	164
23.5 2. Architecture Overview.....	166
23.5.1 2.1 AXI4 vs AXIS vs APB.....	166
23.5.2 2.2 Block Diagram.....	167
23.5.3 2.3 Key Components.....	168
23.6 3. Functional Requirements.....	169
23.6.1 3.1 AXI4 Protocol Compliance.....	169
23.6.2 3.2 Address Decoding.....	169
23.6.3 3.3 Arbitration Strategy.....	169
23.6.4 3.4 Burst Handling.....	170
23.7 4. Non-Functional Requirements.....	171
23.7.1 4.1 Performance.....	171
23.7.2 4.2 Resource Usage (Estimated).....	171
23.7.3 4.3 Quality Requirements.....	171
23.8 5. Interface Specifications.....	172
23.8.1 5.1 AXI4 Master Interfaces ($M \times 5$ channels).....	172
23.8.2 5.2 AXI4 Slave Interfaces ($S \times 5$ channels).....	173
23.8.3 5.3 Configuration Parameters.....	173
23.9 6. Performance Modeling.....	174

23.9.1 6.1 Analytical Model.....	174
23.9.2 6.2 Resource Scaling.....	174
23.9.3 6.3 Comparison with Other Crossbars.....	175
23.10 7. Generator Architecture.....	176
23.10.1 7.1 Python Generator Structure.....	176
23.10.2 7.2 Address Map Configuration.....	177
23.11 8. Comparison with APB and Delta.....	179
23.11.1 8.1 Code Reuse from APB Generator.....	179
23.11.2 8.2 Code Reuse from Delta Generator.....	179
23.11.3 8.3 Complexity Comparison.....	179
23.12 9. Use Cases.....	181
23.12.1 9.1 Multi-Core Processor Interconnect.....	181
23.12.2 9.2 DMA + Accelerator System.....	181
23.12.3 9.3 FPGA System Integration.....	181
23.13 10. Testing Strategy.....	182
23.13.1 10.1 FUB (Functional Unit Block) Tests.....	182
23.13.2 10.2 Integration Tests.....	182
23.13.3 10.3 Performance Validation.....	182
23.14 11. Documentation Plan.....	183
23.14.1 11.1 Specifications (Before Code).....	183
23.14.2 11.2 Performance Analysis (Before Implementation).....	183
23.14.3 11.3 Code Generation.....	183
23.14.4 11.4 Verification.....	183
23.15 12. Success Metrics.....	184

23.15.1 12.1 Functional Completeness.....	184
23.15.2 12.2 Performance Targets.....	184
23.15.3 12.3 Educational Value.....	184
23.15.4 12.4 Reusability.....	184
23.16 12. Attribution and Contribution Guidelines.....	185
23.16.1 12.1 Git Commit Attribution.....	185
23.17 12.2 PDF Generation Location.....	186
23.18 13. Future Enhancements.....	187
23.18.1 13.1 Short-Term (Post-Initial Release).....	187
23.18.2 13.2 Long-Term.....	187
23.19 14. Risk Assessment.....	188
23.20 15. Project Timeline (Estimated).....	189
23.21 16. References.....	190
23.22 17. Glossary.....	191
24 Claude Code Guide: Bridge Subsystem.....	192
24.1 CRITICAL: Read Architecture Documents First.....	193
24.2 Quick Context.....	194
24.3 Target Architecture: Intelligent Width-Aware Routing.....	195
24.3.1 Efficient Multi-Width Design.....	195
24.3.2 Why This Architecture.....	195
24.3.3 Per-Master Output Paths.....	195
24.3.4 Benefits.....	196
24.3.5 Implementation Status.....	196
24.4 CRITICAL RULE #0: RTL Regeneration Requirements.....	197

24.4.1 The Golden Rule.....	197
24.4.2 Why This Is Non-Negotiable.....	197
24.4.3 Real Example (Historical Session).....	197
24.4.4 Generator Files That Trigger Full Regeneration.....	197
24.4.5 The Regeneration Workflow.....	197
24.4.6 Symptoms of Version Mismatch.....	198
24.4.7 Think Like a Compiler Developer.....	198
24.4.8 Exception: Hand-Written RTL.....	198
24.5 Critical Pitfalls: slave_select_* Reversion After Handshake.....	199
24.5.1 The Problem: Combinational Address Decode.....	199
24.5.2 Visible Symptoms.....	199
24.5.3 The Solution (MANDATORY in All Generators).....	199
24.5.4 When This Bug Appears.....	200
24.6 MANDATORY: Project Organization Pattern.....	201
24.6.1 Required Directory Structure.....	201
24.6.2 Testbench Class Location (MANDATORY).....	201
24.6.3 Test File Pattern (MANDATORY).....	202
24.7 Critical Rules for This Subsystem.....	204
24.7.1 Rule #0: Attribution Format for Git Commits.....	204
24.7.2 Rule #0.1: Testbench Architecture - MANDATORY SEPARATION.....	204
24.7.3 Rule #1: All Testbenches Inherit from TBBase.....	205
24.7.4 Rule #2: Mandatory Testbench Methods.....	205
24.7.5 Rule #3: Use GAXI Components for Protocol Handling.....	206
24.7.6 Rule #4: Queue-Based Verification.....	206

24.8 TOML/CSV-Based Bridge Generator (Phase 2 Complete).....	208
24.8.1 Overview.....	208
24.8.2 Quick Start.....	208
24.8.3 Configuration Format Details.....	209
24.8.4 Channel-Specific Masters (Phase 2 Feature).....	210
24.8.5 Example: RAPIDS-Style Configuration.....	210
24.8.6 Common User Questions.....	211
24.8.7 Generator Output Structure.....	213
24.8.8 Testing Generated Bridges.....	214
24.9 Bridge Architecture Quick Reference.....	215
24.9.1 Generated Bridge Crossbar Structure.....	215
24.9.2 Key Features.....	215
24.9.3 Address Map.....	215
24.10 Test Organization.....	216
24.10.1 Test Hierarchy.....	216
24.10.2 Test Levels.....	216
24.11 Common User Questions and Responses.....	217
24.11.1 Q: “How does the Bridge work?”.....	217
24.11.2 Q: “How do I generate a Bridge?”.....	217
24.11.3 Q: “How do I test a Bridge?”.....	217
24.12 Anti-Patterns to Avoid.....	219
24.12.1 Anti-Pattern 1: Embedded Testbench Classes.....	219
24.12.2 Anti-Pattern 2: Manual AXI4 Handshaking.....	219
24.12.3 Anti-Pattern 3: Memory Models for Simple Tests.....	219

24.13 Quick Reference.....	220
24.13.1 Finding Existing Components.....	220
24.13.2 Common Commands.....	220
24.14 Remember.....	221
24.15 PDF Generation Location.....	222

List of Figures

Figure 1.1: Block Diagram Legend.....	40
Figure 2.1: RAPIDS System Topology.....	49
Figure 2.2: Bridge System Context.....	59
Figure 3.1: Bridge Block Diagram.....	65
Figure 3.2: Write Path.....	67
Figure 3.3: Read Path.....	67
Figure 3.1: AXI4 to APB Conversion Sequence.....	79
Figure 3.2: Width Upsize Conversion.....	80
Figure 3.3: Width Downsize Conversion.....	81
Figure 4.1: Clock Distribution.....	98
Figure 4.3: Reset Timing.....	99
Figure 4.2: Multi-Clock CDC.....	102

List of Tables

Table 1: Table 1.1: Common Terminology.....	38
Table 2: Table 1.2: Signal Naming Prefixes.....	39
Table 3: Table 1.3: Block Diagram Symbols.....	40
Table 4: Table 1.4: Parameter Format Example.....	42
Table 5: Table 1.5: Acronyms and Abbreviations.....	44
Table 6: Table 2.1: Supported Protocols.....	54
Table 7: Table 2.2: Channel-Specific Resource Savings.....	55
Table 8: Table 2.3: Address Map Organization.....	61
Table 9: Table 3.1: Topology Parameter Scaling.....	68
Table 10: Table 3.2: AXI4 Channel Summary.....	71
Table 11: Table 3.3: Protocol Conversion Matrix.....	77
Table 12: Table 4.9: Master-Side Interface Channels.....	84
Table 13: Table 4.10: Slave-Side Interface Channels.....	84
Table 14: Table 4.11: Supported Burst Types.....	90
Table 15: Table 4.1: APB Signal Definitions.....	92
Table 16: Table 4.2: AXI4 to APB Burst Conversion.....	95
Table 17: Table 4.3: APB to AXI4 Error Mapping.....	95
Table 18: Table 4.4: Clock Requirements.....	98
Table 19: Table 4.5: Reset Signal.....	99
Table 20: Table 4.6: Reset Effects.....	99
Table 21: Table 4.7: Timing Constraints.....	101
Table 22: Table 4.8: Clock-to-Output Delays.....	101
Table 23: Table 5.1: Peak Throughput by Data Width.....	109
Table 24: Table 5.2: Factors Affecting Throughput.....	110
Table 25: Table 5.3: Burst Efficiency Comparison.....	111
Table 26: Table 5.4: AXI4 vs APB Protocol Impact.....	113
Table 27: Table 5.5: Address Path Latency.....	115
Table 28: Table 5.6: Data Path Latency.....	115
Table 29: Table 5.7: Response Path Latency.....	115
Table 30: Table 5.8: Upsize Latency by Ratio.....	117
Table 31: Table 5.9: Downsize Latency by Ratio.....	117
Table 32: Table 5.10: AXI4 to APB Conversion Latency.....	118
Table 33: Table 5.11: Baseline Resource Requirements.....	121
Table 34: Table 5.12: Resource Scaling Factors.....	121
Table 35: Table 5.13: Per-Master Resource Breakdown.....	122
Table 36: Table 5.14: Per-Slave Resource Breakdown.....	122

Table 37: Table 5.15: Crossbar Core Resources.....	122
Table 38: Table 5.16: Width Converter Resources.....	123
Table 39: Table 5.17: AXI4 to APB Converter Resources.....	124
Table 40: Table 5.18: Complete Bridge Resource Estimates.....	125
Table 41: Table 5.19: Performance/Resource Trade-offs.....	126
Table 42: Table 6.1: Clock Requirements.....	128
Table 43: Table 6.2: Reset Requirements.....	128
Table 44: Table 6.3: Power Requirements.....	128
Table 45: Table 6.4: Address Map Requirements.....	130
Table 46: Table 6.5: Connectivity Requirements.....	130
Table 47: Table 6.6: Timing Requirements.....	131
Table 48: Table 6.7: Recommended Timing Margins.....	131
Table 49: Table 6.8: Bridge Core Parameters.....	134
Table 50: Table 6.9: Derived Parameters.....	135
Table 51: Table 6.10: Master Port Configuration.....	136
Table 52: Table 6.11: Slave Port Configuration.....	136
Table 53: Table 6.12: Generator Validation Checks.....	140
Table 54: Table 6.13: Unit Level Test Focus.....	143
Table 55: Table 6.14: Integration Test Coverage.....	143
Table 56: Table 6.15: System Level Tests.....	143
Table 57: Table 6.16: Test Categories.....	144
Table 58: Table 6.17: Functional Coverage Goals.....	147
Table 59: Table 6.18: Code Coverage Goals.....	147
Table 60: Table 6.19: Debug Signals.....	148
Table 61: Table 6.20: CI Test Schedule.....	149
Table 62: Table 6.21: Configuration Test Matrix.....	149
Table 63: Table 6.22: Known Test Gaps.....	150
Table 64: Table 6.23: Simulator Support Status.....	150

1 Bridge Has Index

Generated: 2026-08-14

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

2 Document Information

2.1 Bridge Hardware Architecture Specification

Property	Value
Document Title	Bridge Hardware Architecture Specification
Version	1.1
Date	June 4, 2026
Status	Released
Classification	Open Source - Apache 2.0 License

2.2 Revision History

Version	Date	Author	Description
1.0	2026-01-03	RTL Design Sherpa	Initial release - restructured from single spec
1.1	2026-06-04	RTL Design Sherpa	Content sync to RTL state at 2026-06-04. Documents (1) the 64→128-bit monbus packet migration with new 64-bit side-band timestamp wire — referenced via docs/markdown/rtl- amba/includes/monitor_p ackage_spec.md; (2) per- port + global SV-parameter monitor methodology with mandatory use_monitor TOML field and variants = ["no", "mon"] generator selector; (3) generator- emitted AXI4↔AXIL conversion at the slave boundary (was external); (4) new AXIL→wider-slave master-side alignment converters (axil_to_axi4_wide_align _{rd,wr}); (5) verification- strategy rewrite to protocol-BFM-only TBs with memory-backed slaves, serial-only execution, per-module cocotb function names, boundary_probe (renamed from address_decode) tests;

Version	Date	Author	Description
			(6) note of the independent W-tracker FIFO + split AW/W-ready MUX fix (commit d24bd617) that closed an interleaved-master deadlock.

2.3 Document Purpose

This Hardware Architecture Specification (HAS) is the high-level view of the Bridge component. It covers:

- System-level architecture and data flow
- Protocol support (AXI4, AXI4-Lite, APB)
- Interface definitions and requirements
- Performance characteristics
- Integration guidelines

For micro-architecture, FSM designs, and signal-level detail, see the companion **Bridge Micro-Architecture Specification (MAS)**.

2.4 Intended Audience

- System architects defining interconnect topology
- Hardware engineers integrating Bridge into SoC designs
- Verification engineers planning test strategies
- Technical managers evaluating Bridge capabilities

2.5 Related Documents

- **Bridge MAS** - Micro-Architecture Specification (detailed block-level)
- **PRD.md** - Product requirements and overview
- **CLAUDE.md** - AI development guide

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

3 Purpose and Scope

3.1 What is Bridge?

Bridge is a Python-based multi-protocol crossbar generator that turns human-readable configuration files into parameterized SystemVerilog RTL. The generated AXI4 crossbars come with automatic support for:

- **Protocol conversion** - AXI4, AXI4-Lite, and APB slave interfaces
- **Width conversion** - Automatic upsize/downsize for data width mismatches
- **Channel-specific masters** - Write-only, read-only, or full AXI4 masters

3.2 The Problem Bridge Solves

A **hand-written AXI4 crossbar is error-prone**. Building one means:

1. Writing 5 separate channel multiplexers (AW, W, B, AR, R)
2. Implementing per-slave arbitration for each channel
3. Managing ID-based response routing for out-of-order support
4. Handling burst locking and interleaving constraints
5. Inserting width converters for data width mismatches
6. Inserting protocol converters for APB/AXI4-Lite mixed systems
7. Wiring hundreds of signals with consistent naming

Bridge automates all of it:

- Define ports and connectivity in configuration files
- Run the generator script
- Get production-ready SystemVerilog RTL

3.3 Scope

This specification covers:

- High-level architecture and block organization
- Supported protocols and conversion capabilities
- Interface requirements and signal conventions
- Performance characteristics and resource estimates
- Integration guidelines and verification strategy

3.4 Out of Scope

These live in the companion MAS:

- Detailed FSM state diagrams and transitions
- Signal-level timing diagrams
- Internal pipeline structures
- RTL implementation details

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

4 Document Conventions

4.1 Terminology

Table 1.1: Common Terminology

Term	Definition
Master	AXI4 initiator that issues transactions
Slave	AXI4 target that responds to transactions
Crossbar	NxM interconnect connecting masters to slaves
Channel	AXI4 communication path (AW, W, B, AR, R)
Converter	Logic that transforms width or protocol

4.2 Signal Naming

Bridge uses consistent signal prefixes:

Table 1.2: Signal Naming Prefixes

Prefix	Meaning
s_*	Slave-side interface (master port on bridge)
m_*	Master-side interface (slave port on bridge)
axi4_*	AXI4 protocol signals
apb_*	APB protocol signals
cfg_*	Configuration signals
dbg_*	Debug signals

4.3 Diagrams

4.3.1 Figure 1.1: Block Diagram Legend

Block diagrams in this specification use these symbols:

Table 1.3: Block Diagram Symbols

Symbol	Meaning
Rectangle	Functional block
Arrow	Data/signal flow
Dashed box	Optional/configurable block
Double line	Multi-signal bus

4.4 Code Examples

SystemVerilog examples are formatted like this:

```
// Module instantiation example
bridge_4x4 u_bridge (
    .aclk      (sys_clk),
    .aresetn   (sys_rst_n),
    // ... port connections
);
```

4.5 Parameter Notation

Parameter tables throughout the spec use this format:

Table 1.4: Parameter Format Example

Parameter	Type	Range	Default	Description
NUM_MASTERS	int	1-32	2	Number of master ports
NUM_SLAVES	int	1-256	2	Number of slave ports

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

5 Definitions and Acronyms

5.1 Acronyms

Table 1.5: Acronyms and Abbreviations

Acronym	Definition
AMBA	Advanced Microcontroller Bus Architecture
APB	Advanced Peripheral Bus
AR	AXI4 Read Address channel
AW	AXI4 Write Address channel
AXI	Advanced eXtensible Interface
AXI4	AXI Protocol Version 4
B	AXI4 Write Response channel
BID	Bridge ID (internal master identifier)
CAM	Content-Addressable Memory
CDC	Clock Domain Crossing
CSV	Comma-Separated Values
DECERR	Decode Error (AXI response)
DMA	Direct Memory Access
FIFO	First-In First-Out buffer
FSM	Finite State Machine
HAS	Hardware Architecture Specification
ID	Transaction Identifier
MAS	Micro-Architecture Specification
MUX	Multiplexer
NxM	N masters by M slaves (topology notation)
OOO	Out-of-Order
OOR	Out-of-Range
QoS	Quality of Service
R	AXI4 Read Data channel

Acronym	Definition
RTL	Register-Transfer Level
SLVERR	Slave Error (AXI response)
SoC	System-on-Chip
TOML	Tom's Obvious Minimal Language
W	AXI4 Write Data channel

5.2 Definitions

Address Decode: Determining which slave receives a transaction, from its address.

Arbitration: Selecting which master gets a slave when several masters contend for it.

Bridge ID (BID): Internal identifier prepended to master IDs for response routing. Width = $\text{clog2}(\text{NUM_MASTERS})$.

Channel-Specific Master: A master that only uses subset of AXI4 channels (write-only or read-only).

Crossbar: An NxM interconnect allowing any master to communicate with any connected slave.

Grant Locking: Mechanism that holds arbitration grant until transaction completes.

Out-of-Order Response: Responses returned in different order than requests were issued.

Protocol Conversion: Transformation between different bus protocols (e.g., AXI4 to APB).

Response Routing: Directing B/R channel responses back to the originating master.

Round-Robin Arbitration: Fair arbitration where priority rotates among requesters.

Width Conversion: Transformation between different data bus widths (upsized or downsize).

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

6.1 Primary Applications

6.1.1 SoC Interconnects

Bridge acts as the main interconnect fabric in SoC designs:

- **Multi-core processor memory subsystems** - Connect multiple CPU cores to shared memory
- **Accelerator integration** - Route GPU, DSP, or custom accelerator traffic
- **DMA engine routing** - Connect DMA controllers to memory and peripherals
- **Peripheral bus bridges** - Convert AXI4 to APB for low-speed peripherals

6.1.2 Memory Systems

Typical memory-system uses:

- **Multi-port DDR controllers** - Multiple masters accessing shared DDR
- **SRAM buffer sharing** - Shared packet buffers for networking
- **Cache coherency interconnects** - Connect cache controllers
- **Memory-mapped I/O** - Unified address space for peripherals


6.1.3 Accelerator Systems

Bridge supports custom accelerator architectures like RAPIDS:

- **Descriptor write masters** - Write control descriptors (write-only)
- **Sink write masters** - Write incoming data packets (write-only)
- **Source read masters** - Read outgoing data packets (read-only)
- **CPU configuration** - Full access for register configuration

6.2 Example: RAPIDS Accelerator

6.2.1 Figure 2.1: RAPIDS System Topology

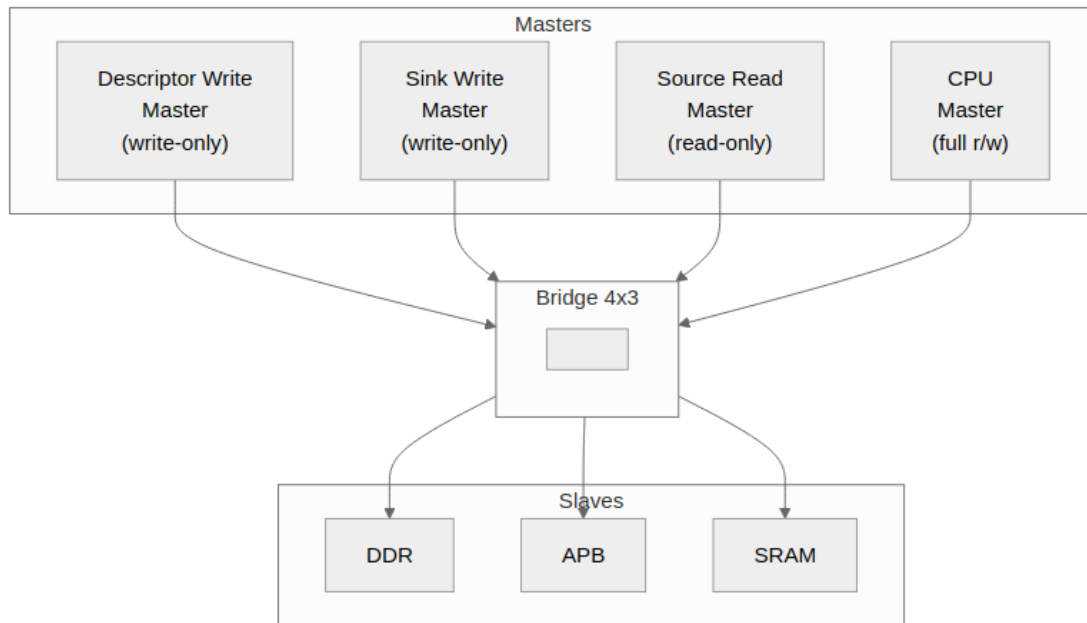

RAPIDS System Topology

Bridge topology for RAPIDS accelerator with channel-specific masters.

6.2.2 Configuration

[bridge]

```
name = "bridge_rapids"
masters = [
    {name = "rapids_descr_wr", channels = "wr", data_width = 512},
    {name = "rapids_sink_wr", channels = "wr", data_width = 512},
    {name = "rapids_src_rd", channels = "rd", data_width = 512},
    {name = "cpu", channels = "rw", data_width = 64}
]
slaves = [
    {name = "ddr", protocol = "axi4", data_width = 512},
    {name = "apb_periph", protocol = "apb", data_width = 32},
    {name = "sram", protocol = "axi4", data_width = 256}
]
```

6.2.3 Benefits

- **39% port reduction** for write-only masters (3 channels vs 5)
- **61% port reduction** for read-only masters (2 channels vs 5)
- **Automatic width conversion** for 64b CPU to 512b DDR

- **Protocol conversion** for APB peripheral access

6.3 Rapid Prototyping

Bridge accelerates design exploration:

- **Quick topology exploration** - Try different master/slave configurations
- **Performance analysis** - Evaluate arbitration and bandwidth
- **Design space exploration** - Compare resource usage
- **Educational projects** - Learn AXI4 protocol and interconnects

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

7 Key Features

7.1 Configuration-Driven Generation

7.1.1 CSV/TOML Configuration

Bridge is configured with human-readable text files:

- **ports configuration** - Define each master and slave port
- **connectivity matrix** - Specify which masters connect to which slaves
- **Version-control friendly** - Text-based, easy to diff and review

7.1.2 Example Configuration

Port Definition (TOML):

```
masters = [  
  {name = "cpu", prefix = "cpu_m_axi", data_width = 64, channels =  
"rw"},  
  {name = "dma", prefix = "dma_m_axi", data_width = 256, channels =  
"rw"}  
]  
slaves = [  
  {name = "ddr", prefix = "ddr_s_axi", data_width = 512, protocol =  
"axi4"},  
  {name = "uart", prefix = "uart_apb", data_width = 32, protocol =  
"apb"}  
]
```

Connectivity Matrix (CSV):

```
master\slave,ddr,uart  
cpu,1,1  
dma,1,0
```

7.2 Multi-Protocol Support

Table 2.1: Supported Protocols

Master Protocol	Slave Protocol	Conversion Type
AXI4	AXI4	Direct or width convert
AXI4	AXI4-Lite	Protocol downgrade
AXI4	APB	Full protocol conversion
AXI5	AXI4 / AXI4-Lite / APB	Base-subset interop; sideband terminates at the boundary (warning)
AXI5	AXI5 (width-matched)	Native sideband pass- through; store-class atomics; poison
AXI4 / AXI5	APB5	APB4 conversion core + APB5 sideband surface

AMBA5 ports are declared per port (protocol = "axi5" / "apb5" with an optional axi5_features list); the fabric stays AXI4 internally. See [AXI5 and APB5 Interfaces](#).

7.2.1 Protocol Features

- **AXI4 Full** - Complete 5-channel implementation with bursts
- **AXI4-Lite** - Simplified single-beat transactions
- **APB** - Low-power peripheral access

7.3 Channel-Specific Masters

7.3.1 Write-Only Masters (wr)

Generate only write channels: - AW (Write Address) - W (Write Data) - B (Write Response)

Use case: DMA write engines, descriptor writers

7.3.2 Read-Only Masters (rd)

Generate only read channels: - AR (Read Address) - R (Read Data)

Use case: DMA read engines, source data fetchers

7.3.3 Full Masters (rw)

Generate all five channels for complete read/write capability.

Use case: CPU interfaces, configuration masters

7.3.4 Resource Savings

Table 2.2: Channel-Specific Resource Savings

Master Type	Channels	Signal Reduction
Write-only (wr)	3 of 5	~39% fewer signals
Read-only (rd)	2 of 5	~61% fewer signals
Full (rw)	5 of 5	Baseline

7.4 Automatic Converters

7.4.1 Width Conversion

Bridge automatically inserts width converters:

- **Upsize** - Narrow master to wide slave (e.g., 64b to 512b)
- **Downsize** - Wide master to narrow slave (e.g., 512b to 32b)
- **Per-path** - Only where needed, not global conversion

7.4.2 Protocol Conversion

Bridge inserts protocol converters for mixed systems:

- **AXI4 to APB** - Full conversion with burst handling
- **AXI4 to AXI4-Lite** - Simplified conversion

7.5 Flexible Topology

7.5.1 Scalability

- **Masters:** 1-32 master ports
- **Slaves:** 1-256 slave ports
- **Partial connectivity** - Not all masters need access to all slaves

7.5.2 Mixed Configurations


- **Mixed protocols** - AXI4, AXI4-Lite, and APB slaves in same crossbar
- **Mixed data widths** - 32b, 64b, 128b, 256b, 512b
- **Mixed channels** - Write-only, read-only, and full masters

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

8 System Context

8.1 Bridge in SoC Architecture

8.1.1 Figure 2.2: Bridge System Context

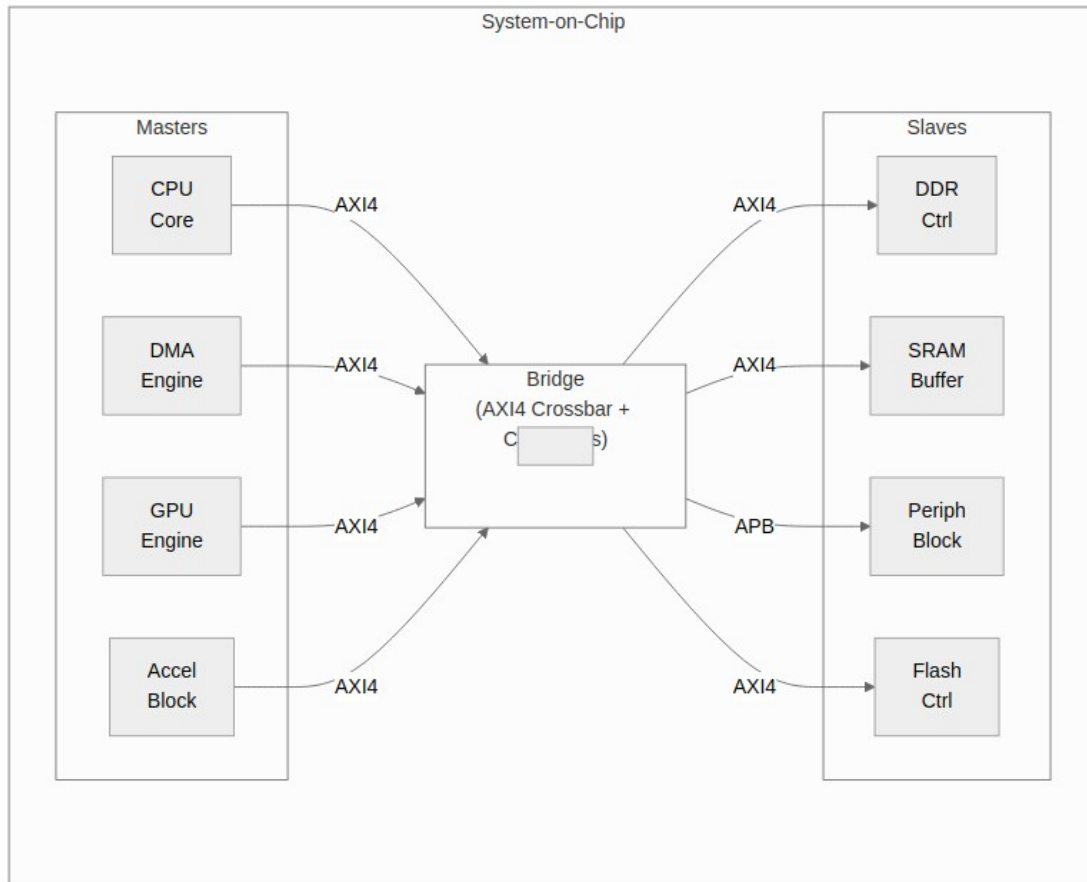

Bridge System Context

Bridge as central interconnect connecting masters to slaves with protocol conversion.

8.2 Interface Boundaries

8.2.1 Master-Side (Upstream)

Bridge presents slave interfaces to upstream masters:

- Accepts AXI4 transactions from masters
- Provides flow control via ready signals
- Returns responses (B/R channels) to correct master

8.2.2 Slave-Side (Downstream)

Bridge presents master interfaces to downstream slaves:

- Issues AXI4/APB transactions to slaves
- Accepts responses from slaves
- Routes responses back through ID tracking

8.3 Address Space

8.3.1 Address Map Organization

Each slave occupies a configurable address region:

Table 2.3: Address Map Organization

Slave	Base Address	Address Range	Size
Slave 0	BASE + 0x0000_0000	Configurable	Variable
Slave 1	BASE + addr_range_0	Configurable	Variable
Slave N	Sum of previous ranges	Configurable	Variable

8.3.2 Address Decode

- **Parallel decode** - All slaves checked simultaneously
- **One-hot result** - Exactly one slave selected per transaction
- **Out-of-range detection** - DECERR for unmapped addresses

8.4 Clock and Reset

8.4.1 Clock Domain

- **Single clock domain** - All Bridge logic synchronous to `aclk`
- **No CDC** - Masters and slaves must be in same clock domain

8.4.2 Reset

- **Active-low asynchronous** - Standard `aresetn` convention
- **Full reset** - All internal state cleared on reset
- **Transaction safety** - Outstanding transactions aborted on reset

8.5 Dependencies

8.5.1 Required Infrastructure

- AXI4-compliant masters and slaves
- Proper clock and reset distribution
- Address map configuration matching slave address ranges

8.5.2 Optional Features


- Width converters (only if widths mismatch)
- Protocol converters (only if protocols differ)
- ID tracking CAM (only if OOO support needed)

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

9 Block Diagram

9.1 Bridge Architecture Overview

9.1.1 Figure 3.1: Bridge Block Diagram

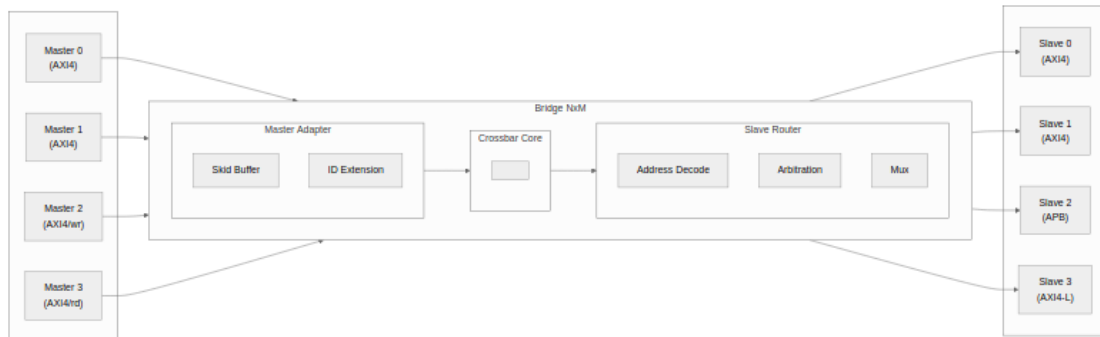

Bridge Block Diagram

Bridge high-level block diagram showing master adapters, crossbar core, and slave routers.

9.2 Functional Blocks

9.2.1 Master Adapter

Receives transactions from upstream masters:

- **Skid buffer** - Pipeline registration for timing
- **ID extension** - Prepend Bridge ID for response routing
- **Channel separation** - Route AW/W/AR independently

9.2.2 Crossbar Core

Central switching fabric:

- **5-channel routing** - Independent AW, W, B, AR, R paths
- **Address decode** - Determine target slave
- **Arbitration** - Per-slave round-robin selection


9.2.3 Slave Router

Delivers transactions to downstream slaves:

- **Protocol conversion** - AXI4 to APB/AXI4-Lite if needed
- **Width conversion** - Upsize/downsize data paths
- **Response collection** - Route B/R back to masters


9.3 Data Flow

9.3.1 Figure 3.2: Write Path

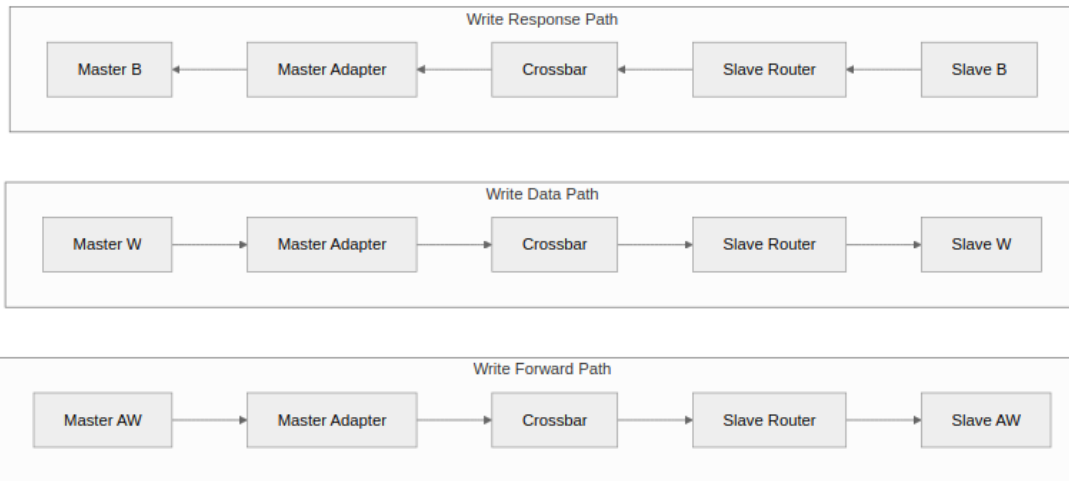

Write Path Flow

9.3.2 Figure 3.3: Read Path

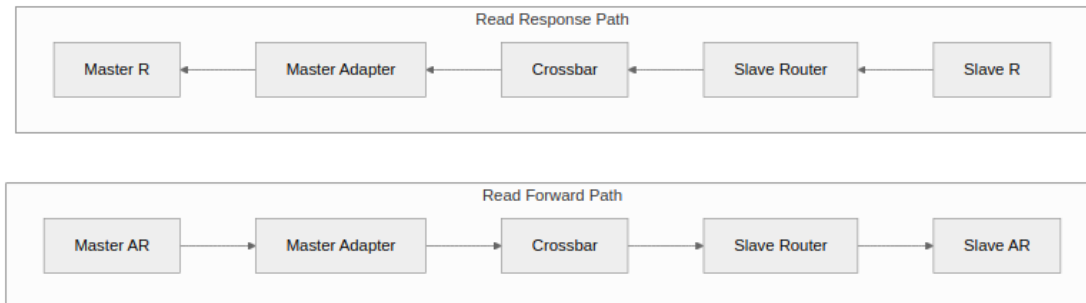

Read Path Flow

9.4 Scalability

9.4.1 Topology Parameters

Table 3.1: Topology Parameter Scaling

Parameter	Range	Impact
NUM_MASTERS	1-32	Linear MUX growth
NUM_SLAVES	1-256	Linear decoder growth
DATA_WIDTH	32-512	Linear data path growth
ID_WIDTH	1-16	Logarithmic CAM growth

9.4.2 Resource Scaling

- **Logic:** $O(M \times N)$ for crossbar core
- **Routing:** $O(M + N)$ for address/response paths
- **Memory:** $O(M \times \text{outstanding})$ for ID tracking

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

10.1 Transaction Flow Overview

10.1.1 Write Transaction Flow

1. **Master issues AW** - Address and control information
2. **Bridge decodes address** - Determines target slave
3. **Arbitration** - Grants access if multiple masters contend
4. **AW forwarded to slave** - With extended ID (Bridge ID prepended)
5. **Master sends W data** - Following the granted AW
6. **W forwarded to slave** - Using same grant
7. **Slave returns B response** - With extended ID
8. **Bridge routes B to master** - Using ID to find originator

10.1.2 Read Transaction Flow

1. **Master issues AR** - Address and control information
2. **Bridge decodes address** - Determines target slave
3. **Arbitration** - Grants access if multiple masters contend
4. **AR forwarded to slave** - With extended ID
5. **Slave returns R data** - Potentially multiple beats
6. **Bridge routes R to master** - Using ID to find originator

10.2 Channel Independence

10.2.1 AXI4 Channel Separation

Each AXI4 channel operates independently:

Table 3.2: AXI4 Channel Summary

Channel	Direction	Contents	Arbitration
AW	Master to Slave	Write address	Per-slave
W	Master to Slave	Write data	Follows AW grant
B	Slave to Master	Write response	ID-based routing
AR	Master to Slave	Read address	Per-slave
R	Slave to Master	Read data	ID-based routing

10.2.2 Parallel Operation

- Read and write transactions can proceed simultaneously
- Different masters can access different slaves in parallel
- Same slave serializes access via arbitration

10.3 ID Extension

10.3.1 Bridge ID (BID) Concept

Original Master ID: [ID_WIDTH-1:0]

Extended ID: [BID | Original ID]

BID Width: $\text{clog2}(\text{NUM_MASTERS})$


10.3.2 Example: 4 Masters, 4-bit ID

Master 0 ID = 4'b0101

Extended ID = 6'b00_0101 (BID=00, prepended)

Master 3 ID = 4'b1100

Extended ID = 6'b11_1100 (BID=11, prepended)

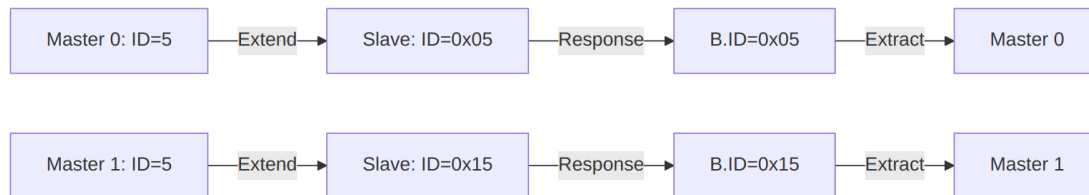

ID Flow

10.4 Response Routing

10.4.1 B Channel (Write Response)

1. Slave issues B with extended ID
2. Bridge extracts BID from upper bits
3. BID determines destination master
4. Original ID (lower bits) returned to master

10.4.2 R Channel (Read Data)

1. Slave issues R with extended ID
2. Bridge extracts BID from upper bits
3. BID determines destination master
4. Original ID (lower bits) returned to master
5. RLAST indicates final beat

10.5 Out-of-Order Support

10.5.1 Transaction Interleaving

Bridge supports out-of-order completion:

- Different IDs can complete in any order
- Same ID must complete in order (AXI4 rule)
- ID tracking tables manage outstanding transactions

10.5.2 Example Sequence

```
Time 0: Master 0 issues AR (ID=1) to Slave 0
Time 1: Master 0 issues AR (ID=2) to Slave 1
Time 2: Slave 1 returns R (ID=2) - fast slave
Time 3: Slave 0 returns R (ID=1) - slow slave
```

Result: ID=2 response arrives before ID=1 - valid 000

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

11 Protocol Support

11.1 Supported Protocols

11.1.1 AXI4 Full

Complete AMBA AXI4 protocol support:

- **5 channels:** AW, W, B, AR, R
- **Burst transactions:** FIXED, INCR, WRAP
- **Transaction IDs:** Configurable width
- **Out-of-order:** Response reordering supported
- **Data widths:** 32, 64, 128, 256, 512 bits

11.1.2 AXI4-Lite

Simplified AXI4 for register access:

- **5 channels:** Same as AXI4
- **Single-beat only:** AWLEN/ARLEN = 0
- **No IDs:** Transaction ordering by channel
- **Fixed width:** Typically 32 or 64 bits

11.1.3 APB (Advanced Peripheral Bus)

Low-power peripheral protocol:

- **Single channel:** Combined address and data
- **Simple handshake:** PSEL, PENABLE, PREADY
- **No bursts:** Single transfer per transaction
- **Low overhead:** Minimal logic for slow peripherals

11.2 Protocol Conversion Matrix

Table 3.3: Protocol Conversion Matrix

Master	Slave	Conversion Type	Notes
AXI4	AXI4	Direct	Width conversion if needed
AXI4	AXI4-Lite	Downgrade	Burst split to single beats
AXI4	APB	Full convert	Channel and timing conversion
AXI4-Lite	AXI4	Upgrade	Single-beat pass-through
AXI4-Lite	AXI4-Lite	Direct	Width conversion if needed
AXI4-Lite	APB	Convert	Simplified conversion

11.3 Automatic Conversion Shims at Slave Boundary

When a slave port's TOML entry names a protocol other than native AXI4 (e.g., `protocol = "axi4lite"` or `protocol = "apb"`), the generator emits the conversion shims between the crossbar core and that slave port. This happens once, at generation time; there is nothing to configure at runtime.


Supported Slave Protocols: - **axi4:** Native AXI4 (no shim required) - **axi4lite:** AXI4-Lite protocol (emits `axi4_to_axil4_{rd,wr}` shims) - **apb:** APB3/APB4 protocol (emits `axi4_to_axil4` shim followed by internal AXIL-to-APB bridge)

The shim modules live in `projects/components/converters/rtl/`; the generator instantiates them into each generated top-level module. The slave port still presents the configured protocol (AXIL or APB) to the outside; inside, the crossbar core is uniformly AXI4.

11.4 AXI4 to APB Conversion

11.4.1 Conversion Process

11.4.2 Figure 3.1: AXI4 to APB Conversion Sequence

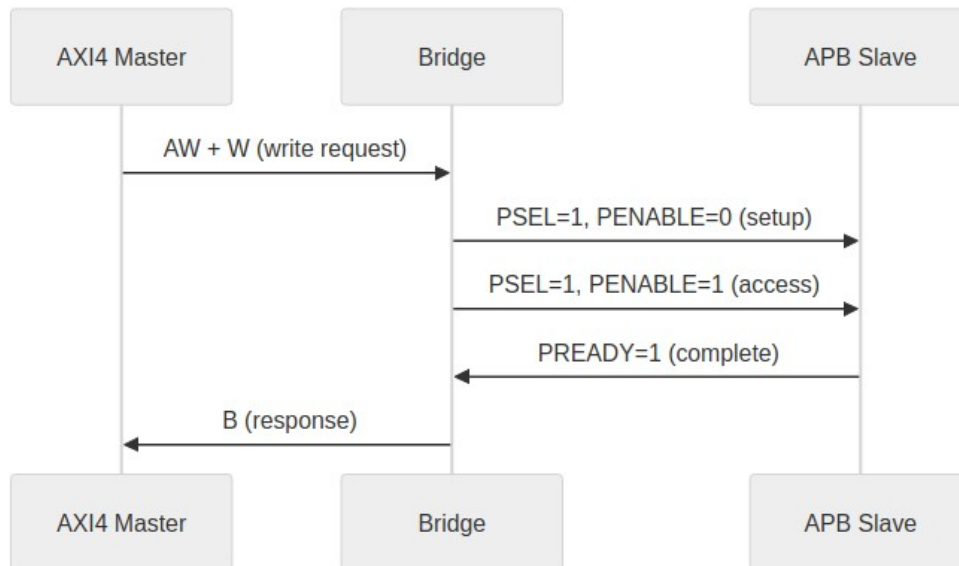

AXI4 to APB Conversion

11.4.3 Burst Handling

- AXI4 bursts split into individual APB transfers
- WSTRB converted to per-byte enables
- B response generated after all beats complete


11.4.4 Timing Considerations

- APB is inherently slower (minimum 2 cycles per transfer)
- Pipeline stalls during APB access
- Consider separate APB crossbar for multiple slow peripherals

11.5 Width Conversion

11.5.1 Upsize (Narrow to Wide)


11.5.2 Figure 3.2: Width Upsize Conversion

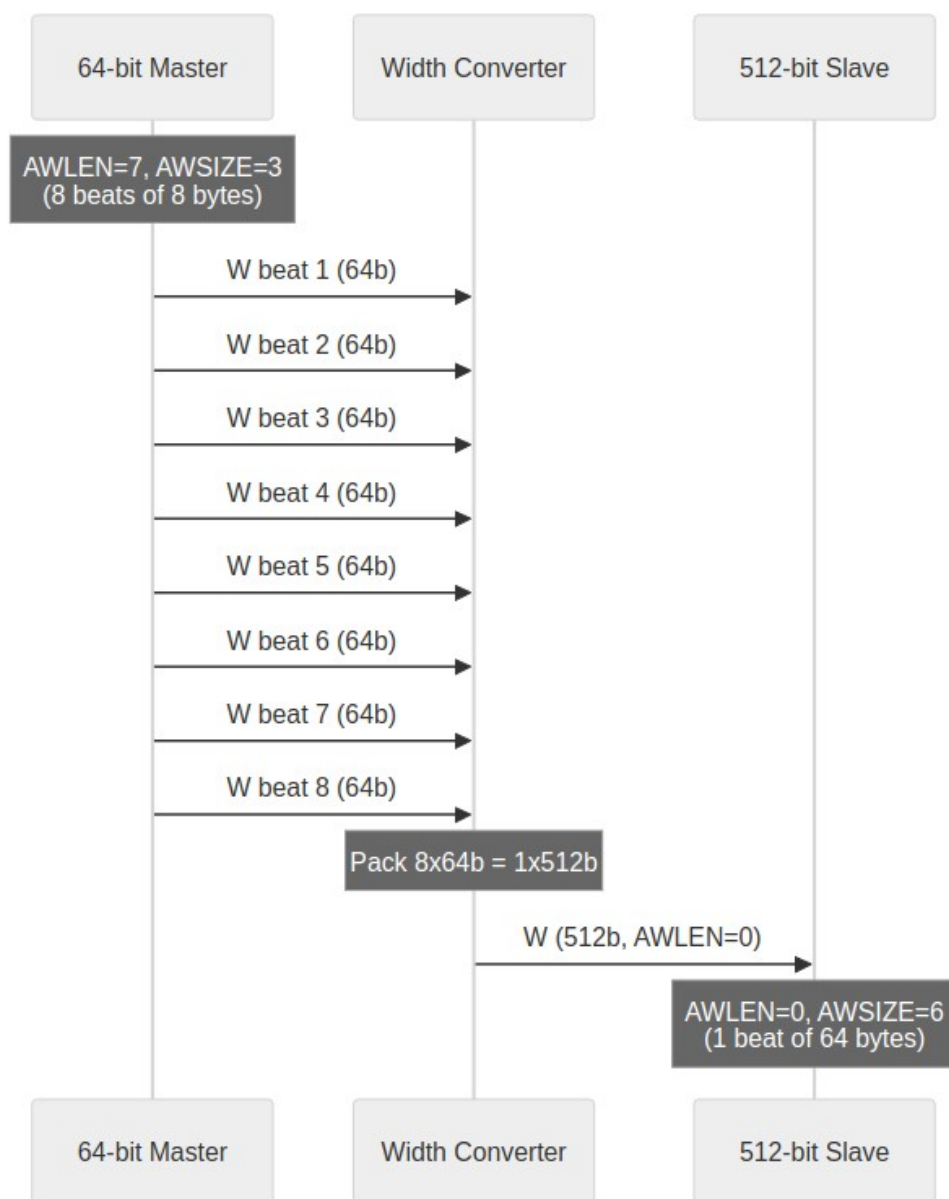

Width Upsize

11.5.3 Downsize (Wide to Narrow)

11.5.4 Figure 3.3: Width Downsize Conversion

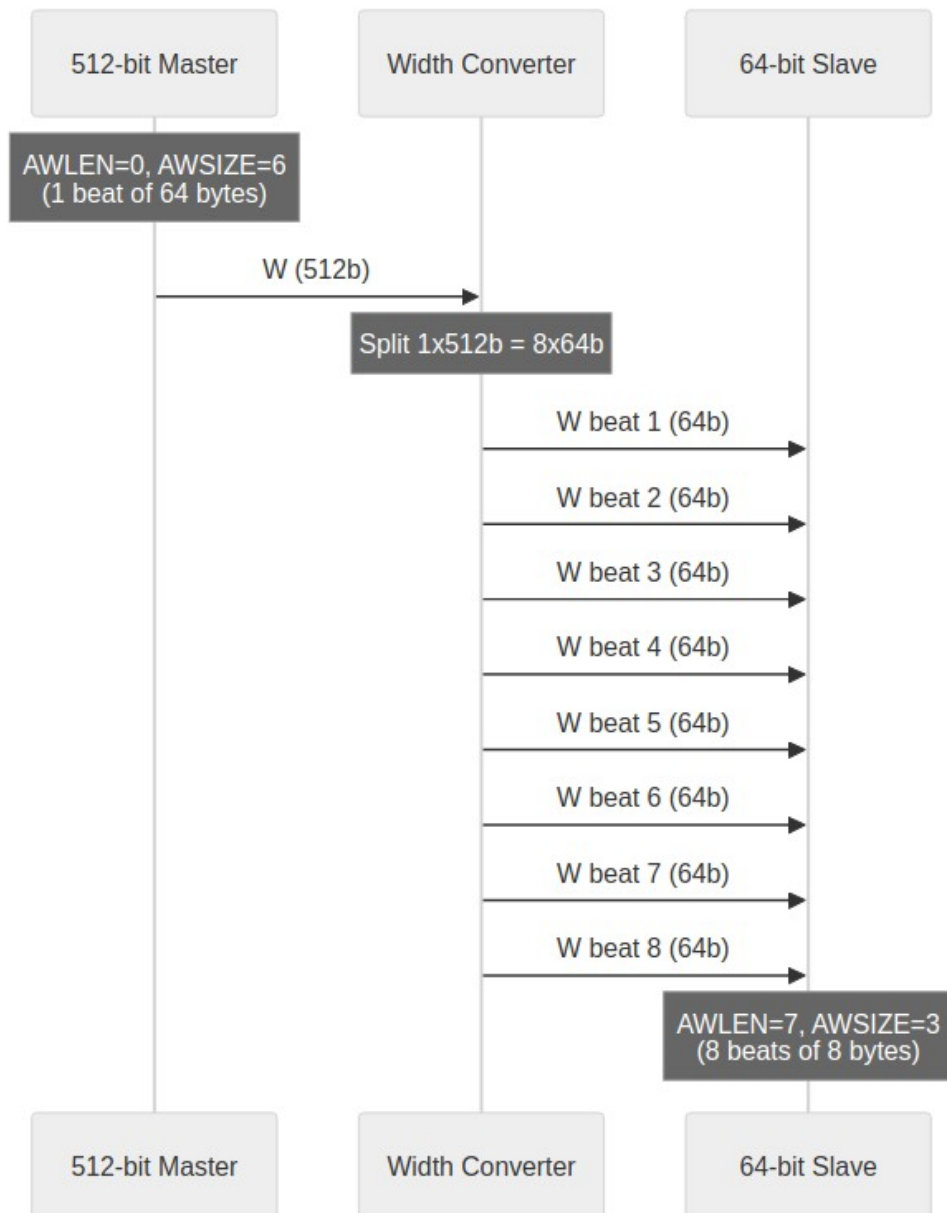

Width Downsize

11.6 Channel-Specific Protocol

11.6.1 Write-Only Masters

Only AW, W, B channels active:

- AR permanently deasserted
- R channel ignored (no routing logic)
- Reduced signal count and logic

11.6.2 Read-Only Masters

Only AR, R channels active:

- AW, W, B channels ignored
- No write arbitration for this master
- Reduced signal count and logic

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

12 AXI4 Interface Overview

12.1 Interface Organization

12.1.1 Master-Side Interfaces

Bridge presents **slave interfaces** to upstream masters. Each master port includes:

Table 4.9: Master-Side Interface Channels

Channel	Signals	Direction (to Bridge)
AW	AWVALID, AWREADY, AWADDR, AWID, AWLEN, AWSIZE, AWBURST, ...	Input
W	WVALID, WREADY, WDATA, WSTRB, WLAST	Input
B	BVALID, BREADY, BID, BRESP	Output
AR	ARVALID, ARREADY, ARADDR, ARID, ARLEN, ARSIZE, ARBURST, ...	Input
R	RVALID, RREADY, RDATA, RID, RRESP, RLAST	Output

12.1.2 Slave-Side Interfaces

Bridge presents **master interfaces** to downstream slaves. Each slave port includes:

Table 4.10: Slave-Side Interface Channels

Channel	Signals	Direction (from Bridge)
AW	AWVALID,	Output

Channel	Signals	Direction (from Bridge)
W	AWREADY, AWADDR, AWID, AWLEN, AWSIZE, AWBURST, ...	Output
	WVALID, WREADY, WDATA, WSTRB, WLAST	
B	BVALID, BREADY, BID, BRESP	Input
AR	ARVALID, ARREADY, ARADDR, ARID, ARLEN, ARSIZE, ARBURST, ...	Output
R	RVALID, RREADY, RDATA, RID, RRESP, RLAST	Input

12.2 Signal Naming Convention

12.2.1 Custom Prefixes

Each port uses a custom prefix for signal naming:

```
// Example: Master 0 with prefix "cpu_m_axi_"
input logic [31:0] cpu_m_axi_awaddr,
input logic [3:0]  cpu_m_axi_awid,
input logic       cpu_m_axi_awvalid,
output logic      cpu_m_axi_awready,
// ... remaining AW signals

// Example: Slave 0 with prefix "ddr_s_axi_"
output logic [31:0] ddr_s_axi_awaddr,
output logic [7:0]  ddr_s_axi_awid,  // Extended ID
output logic       ddr_s_axi_awvalid,
input logic        ddr_s_axi_awready,
```

12.2.2 ID Width Extension

Slave-side IDs are wider than master-side:

Master ID Width: ID_WIDTH (configuration parameter)

Bridge ID Width: $\text{clog2}(\text{NUM_MASTERS})$

Slave ID Width: $\text{ID_WIDTH} + \text{clog2}(\text{NUM_MASTERS})$

12.3 Channel-Specific Interfaces

12.3.1 Write-Only Master (wr)

Only AW, W, B channels generated:

```
// Write Address Channel
input logic [ADDR_WIDTH-1:0] descr_m_axi_awaddr,
input logic [ID_WIDTH-1:0]   descr_m_axi_awid,
// ... full AW channel

// Write Data Channel
input logic [DATA_WIDTH-1:0] descr_m_axi_wdata,
input logic [STRB_WIDTH-1:0] descr_m_axi_wstrb,
// ... full W channel

// Write Response Channel
output logic [ID_WIDTH-1:0] descr_m_axi_bid,
output logic [1:0]         descr_m_axi_bresp,
// ... full B channel

// NO AR or R channels
```

12.3.2 Read-Only Master (rd)

Only AR, R channels generated:

```
// Read Address Channel
input logic [ADDR_WIDTH-1:0] src_m_axi_araddr,
input logic [ID_WIDTH-1:0]   src_m_axi_arid,
// ... full AR channel

// Read Data Channel
output logic [DATA_WIDTH-1:0] src_m_axi_rdata,
output logic [ID_WIDTH-1:0]   src_m_axi_rid,
// ... full R channel

// NO AW, W, or B channels
```

12.4 Monitor Bus Output (when variants includes mon)

When monitor collection is enabled (via the bridge TOML variants list including "mon"), each bridge instance exposes a unified monitor interface at the bridge top level:

Signal	Type	Width	Direction	Description
s_mon_axil_* —	AXIL Slave	32-bit addr, 64-bit data	Input	Monitor packet read interface for CPU consumption
m_axil_mon_* —	AXIL Master	32-bit addr, 64-bit data	Output	Monitor packet write interface for bulk trace capture
stream_irq	logic	1-bit	Output	Interrupt signal (asserted when error FIFO has records)

Per-port collection comes from the `axi4_master_{rd,wr}_mon` and `axi4_slave_{rd,wr}_mon` wrappers; a tree of `monbus_arbiter` instances funnels them into a single `monbus_axil_group` at the bridge top. The group provides a 64-bit free-running timestamp counter, sampled at each packet arrival, and exposes both a slave interface (CPU read access) and a master interface (bulk DMA writes to system memory).

Packet Format: the canonical 128-bit packet layout and field definitions live in `docs/markdown/rtl-amba/includes/monitor_package_spec.md` — see that reference for bit-field descriptions, protocol-type enumerations, and packet-type codes.

12.5 Handshake Protocol

12.5.1 Valid/Ready Handshake

All channels use AXI4 valid/ready handshake:

Transfer occurs when: VALID && READY

12.5.2 Backpressure

- Bridge asserts READY when able to accept
- Masters must hold VALID until READY
- Bridge does not drop transactions

12.6 Burst Support

12.6.1 Supported Burst Types

Table 4.11: Supported Burst Types

AWBURST/ARBURST	Type	Description
2'b00	FIXED	Same address each beat
2'b01	INCR	Incrementing address
2'b10	WRAP	Wrapping at boundary
2'b11	Reserved	Not used

12.6.2 Burst Length

- AWLEN/ARLEN: 8-bit field
- Length = AXLEN + 1 (1 to 256 beats)
- Burst does not cross 4KB boundary (AXI4 rule)

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

13 APB Interface Overview

13.1 APB Protocol Summary

13.1.1 Signal Definition

Table 4.1: APB Signal Definitions

Signal	Width	Direction	Description
PSEL	1	Output	Slave select
PENABLE	1	Output	Transaction phase
PADDR	ADDR_WIDTH	Output	Address
PWRITE	1	Output	Write enable
PWDATA	DATA_WIDTH	Output	Write data
PSTRB	DATA_WIDTH/ 8	Output	Byte strobes
PPROT	3	Output	Protection
PRDATA	DATA_WIDTH	Input	Read data
PSLVERR	1	Input	Slave error
PREADY	1	Input	Slave ready

13.2 APB Slave Interface


13.2.1 Signal Naming

APB slave ports use custom prefixes:


```
// Example: APB slave with prefix "uart_apb_"
output logic      uart_apb_psel,
output logic      uart_apb_penable,
output logic [31:0] uart_apb_paddr,
output logic      uart_apb_pwrite,
output logic [31:0] uart_apb_pwdata,
output logic [3:0]  uart_apb_pstrb,
output logic [2:0]  uart_apb_pprot,
input  logic [31:0] uart_apb_prdata,
input  logic      uart_apb_pslverr,
input  logic      uart_apb_pready
```

13.3 APB Transaction Timing

13.3.1 Write Transaction

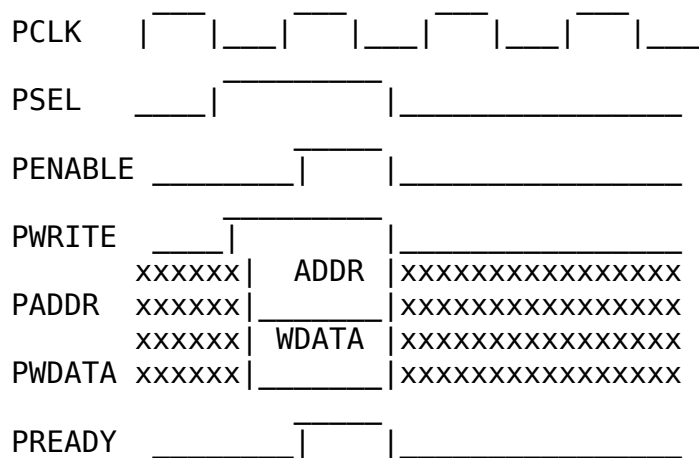

13.3.2 Read Transaction

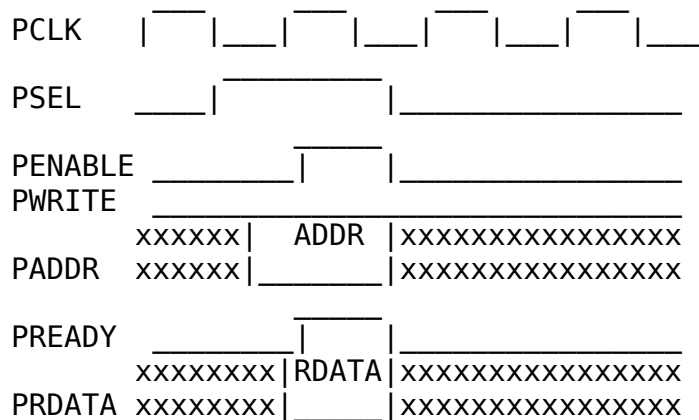

13.4 AXI4 to APB Conversion

13.4.1 Conversion Requirements

When an AXI4 master accesses an APB slave, the bridge:

1. **Burst splitting** - AXI4 bursts become multiple APB transfers
2. **Channel mapping** - AW+W combined into PADDR+PWDATA
3. **Response generation** - APB PSLVERR maps to AXI4 BRESP/RRESP
4. **Timing adaptation** - Insert wait states as needed

13.4.2 Burst Handling

Table 4.2: AXI4 to APB Burst Conversion

AXI4 AWLEN	APB Transfers
0 (1 beat)	1 transfer
1 (2 beats)	2 transfers
N (N+1 beats)	N+1 transfers

13.4.3 Error Mapping

Table 4.3: APB to AXI4 Error Mapping

APB PSLVERR	AXI4 BRESP/RRESP
0 (OK)	2'b00 (OKAY)
1 (Error)	2'b10 (SLVERR)

13.5 Performance Implications

13.5.1 APB Limitations

- **Minimum 2 cycles per transfer** (setup + access phase)
- **No pipelining** (sequential transfers only)
- **No bursts** (each beat requires full handshake)

13.5.2 Design Recommendations

- Use APB only for slow peripherals (UART, GPIO, config registers)
- Group APB slaves behind dedicated sub-crossbar
- Use AXI4/AXI4-Lite for higher-bandwidth slaves

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

14 Clock and Reset

14.1 Clock Requirements


14.1.1 Single Clock Domain

Bridge operates in a single synchronous clock domain:

Table 4.4: Clock Requirements

Signal	Description	Requirements
aclk	System clock	All interfaces synchronous
Frequency	Operating frequency	Design-dependent
Duty cycle	Clock duty cycle	40-60% typical

14.1.2 Figure 4.1: Clock Distribution

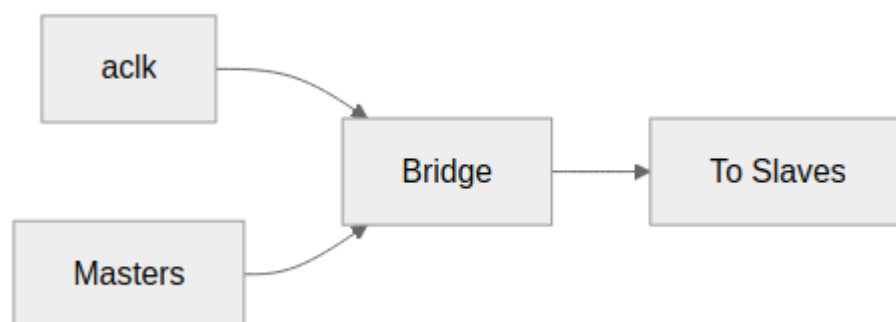

Clock Distribution

All masters and slaves must be in the same clock domain as Bridge.

14.1.3 No Clock Domain Crossing

Bridge does not include CDC logic:

- All inputs sampled on aclk rising edge
- All outputs generated on aclk rising edge
- External CDC required if masters/slaves use different clocks

14.2 Reset Requirements


14.2.1 Asynchronous Active-Low Reset

Table 4.5: Reset Signal

Signal	Description	Polarity
aresetn	Async reset	Active-low

14.2.2 Reset Behavior

14.2.3 Figure 4.3: Reset Timing

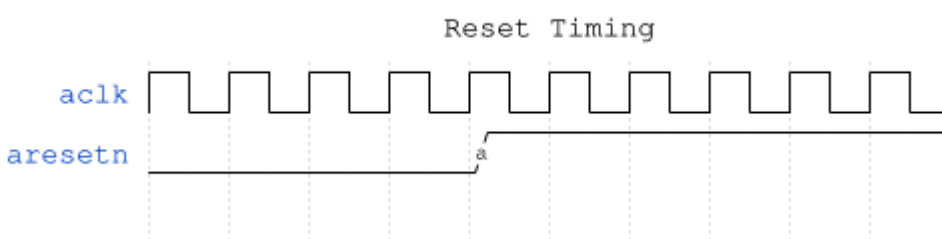

Reset Timing

Reset is active-low: the bridge is in reset whenever `aresetn = 0`.

14.2.4 Reset Effects

During reset (`aresetn = 0`):

Table 4.6: Reset Effects

Component	State
Arbiters	Cleared (no grants)
ID tables	Cleared (no outstanding)
FIFOs	Emptied
Outputs	Deasserted (<code>VALID = 0</code>)

14.2.5 Outstanding Transactions

Warning: reset discards transactions in flight:

- Master may see timeout (no response)
- Slave may receive partial transaction
- System must ensure quiescence before reset

14.2.6 Reset Release

After reset release (aresetn = 1):

1. Bridge accepts new transactions after 1 cycle
2. All state machines start in IDLE
3. No residual grants or locks

14.3 Timing Constraints

14.3.1 Setup and Hold

All inputs must meet setup/hold relative to aclk:

Table 4.7: Timing Constraints

Constraint	Typical Value
Setup time	Process-dependent
Hold time	Process-dependent

14.3.2 Clock-to-Output

All outputs appear after aclk rising edge:

Table 4.8: Clock-to-Output Delays

Path	Typical Delay
aclk to VALID	1 cycle (registered)
aclk to READY	Combinational
aclk to DATA	1 cycle (registered)

14.3.3 Recommended Constraints

Example SDC constraints

```
create_clock -period 10 [get_ports aclk] ;# 100 MHz
```

Reset is async - synchronize externally


```
set_false_path -from [get_ports aresetn]
```

14.4 Multi-Clock Systems

14.4.1 External CDC Required

For systems with multiple clock domains:

14.4.2 Figure 4.2: Multi-Clock CDC

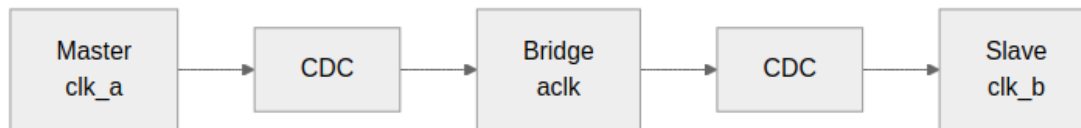

Multi-Clock CDC

14.4.3 CDC Recommendations

- Use AXI4 async FIFO bridges
- Consider AXI4 clock converter IP
- Ensure proper gray-coding for pointers

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

15 AXI5 and APB5 Interfaces (AMBA5 Support)

The bridge remains AMBA4-shaped internally — the crossbar fabric is always AXI4 — but any master or slave port can be declared AMBA5. This chapter covers the external surfaces; the mechanism lives in the MAS ([AMBA5 Boundary and Native Sideband](#)).

15.1 Declaring AMBA5 Ports

```
[[bridge.masters]]
```

```
name = "cpu_wr"
```

```
protocol = "axi5"
```

```
axi5_features = ["trace", "atomic"]    # optional; empty = base AXI5
```

```
# ... standard fields unchanged
```

```
[[bridge.slaves]]
```

```
name = "periph5"
```

```
protocol = "apb5"
```

```
# APB5 peripheral via the apb5
```

```
shim
```

```
channels = "rw"
```

```
# APB rules unchanged (rw-only,
```

```
32-bit)
```


15.2 AXI5 Port Surface

An axi5 port exposes the AXI4 signal set **minus** AW/ARREGION (AXI5 removed REGION) **plus** the enabled features' sideband signals. Disabled features' signals are not exposed at all — the boundary wrapper ties them off internally.

Feature	Signals added	Class
nsaid	aw/arnsaid[3:0]	Droppable sideband
trace	aw/artrace, btrace, rtrace	Droppable sideband
mpam	aw/armpam[10:0]	Droppable sideband
mecid	aw/armecid[15:0]	Droppable sideband
unique	aw/arunique	Droppable sideband
poison	wpoison, rpoison	Connectivity-gated
atomic	awatop[5:0]	Connectivity-gated (store-class only)
mte, chunking	—	Rejected at config time (deferred)

Droppable sideband passes natively end-to-end when both ends of a path are AXI5, feature-enabled, and width-matched; on any other path it terminates at the fabric boundary with a generation-time warning.

Connectivity-gated features are a config **error** unless *every* connected path is native (AXI5 both ends, feature enabled both ends, data widths matched — dwidth converters cannot carry per-beat sideband). Dropping POISON silently would launder corrupted data; dropping ATOP would turn an atomic into a plain write.

Atomics are store-class only. AWATOP = 01xxxx (AtomicStore) and plain writes forward natively. Read-return classes (AtomicLoad 10xxxx, AtomicSwap/Compare 11000x) return their data on the R channel of a path the split-wr/rd fabric cannot route, so the master boundary's axi5_atomic_filter answers them locally with **DECERR** — no slave-side AW handshake, no memory side effect.

15.3 APB5 Slave Surface

An apb5 slave exposes the APB4 requester surface plus the APB5 sideband, mirroring `rtl/amba/apb5/apb5_slave.sv` pin-for-pin:

Direction	Signals
Requester → completer	APB4 set + PAUSER, PWUSER (driven '0 — nothing upstream sources them)
Completer → requester	APB4 set + PWAKEUP, PRUSER, PBUSER (accepted and terminated)

The transfer protocol is unchanged from APB4, so the `axi4_to_apb5_shim` is a sideband wrapper over the APB4 conversion core; APB constraints (rw-only, 32-bit data) apply unchanged.

15.4 Interop Matrix

Master	Slave	axi4	axi5	apb / apb5 / axil
axi4		native	base subset	via shim
axi5		sideband drops (warning)	native sideband when width- matched	sideband drops (warning)

Connectivity-gated features tighten the axi5→axi5 cell: they *require* it.

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

16 Throughput Characteristics

16.1 Peak Throughput

16.1.1 Single Master to Single Slave

One master driving one slave — no contention, no conversion:

Table 5.1: Peak Throughput by Data Width

Data Width	Frequency	Peak Throughput
32-bit	100 MHz	400 MB/s
64-bit	100 MHz	800 MB/s
128-bit	100 MHz	1.6 GB/s
256-bit	100 MHz	3.2 GB/s
512-bit	100 MHz	6.4 GB/s

16.1.2 Formula

Peak Throughput = DATA_WIDTH (bits) × Frequency (Hz) / 8 bytes/bit

16.2 Sustained Throughput

16.2.1 Factors Affecting Throughput

Table 5.2: Factors Affecting Throughput

Factor	Impact	Mitigation
Arbitration contention	Reduces per-master throughput	Increase slave ports
Width conversion	1-cycle penalty per direction	Match widths where possible
Protocol conversion	2+ cycles for APB	Use AXI4 for high-bandwidth
Response routing	Minimal (pipelined)	N/A

16.2.2 Multi-Master Scaling

With fair round-robin arbitration:

Per-Master Throughput = Peak Throughput / Active Masters (to same slave)

16.2.3 Example: 4 Masters, 2 Slaves

All 4 masters accessing Slave 0:

Per-master = Peak / 4

2 masters to Slave 0, 2 masters to Slave 1:

Per-master = Peak / 2 (full parallelism)

16.3 Burst Efficiency

16.3.1 Burst vs Single-Beat

Table 5.3: Burst Efficiency Comparison

Transaction Type	Overhead	Efficiency
Single beat	1 cycle address + 1 cycle data	50%
4-beat burst	1 cycle address + 4 cycle data	80%
16-beat burst	1 cycle address + 16 cycle data	94%
256-beat burst	1 cycle address + 256 cycle data	99.6%

16.3.2 Recommendation

- Use bursts whenever possible
- AXI4 supports up to 256 beats per burst
- APB does not support bursts (split internally)

16.4 Width Conversion Impact

16.4.1 Upsize (Narrow to Wide)

64-bit to 512-bit (8:1 ratio):

Input: 8 beats $\times$ 64 bits = 512 bits

Output: 1 beat $\times$ 512 bits = 512 bits

Throughput: Preserved (same data, fewer beats)

Latency: +1 cycle (packing delay)

16.4.2 Downsize (Wide to Narrow)

512-bit to 64-bit (8:1 ratio):

Input: 1 beat $\times$ 512 bits = 512 bits

Output: 8 beats $\times$ 64 bits = 512 bits

Throughput: Preserved (same data, more beats)

Latency: +7 cycles (sequential output)

16.5 Protocol Conversion Impact

16.5.1 AXI4 to APB

Table 5.4: AXI4 vs APB Protocol Impact

Metric	AXI4 Direct	AXI4 to APB
Min cycles/transfer	1	2
Burst support	Yes	No (split)
Pipeline depth	1+	1
Peak throughput	DATA_WIDTH/cycle	DATA_WIDTH/2 cycles

16.5.2 Recommendation

- Keep high-bandwidth traffic on AXI4 paths
- Use APB only for low-bandwidth peripherals
- Group APB slaves to avoid impacting AXI4 traffic

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

17 Latency Analysis

17.1 Latency Components

17.1.1 Address Path Latency

Table 5.5: Address Path Latency

Stage	Cycles	Notes
Master Adapter (skid)	1	Pipeline registration
Address Decode	0	Combinational
Arbitration	0-1	0 if no contention, 1 if arbitrate
Slave Router	1	Pipeline registration
Total Address	2-3	Best/worst case

17.1.2 Data Path Latency

Table 5.6: Data Path Latency

Stage	Cycles	Notes
W follows AW	0	Same grant
Width conversion	0-1	0 if match, 1 if convert
Protocol conversion	0-2+	0 for AXI4, 2+ for APB
Total Data	0-3+	Best/worst case

17.1.3 Response Path Latency

Table 5.7: Response Path Latency

Stage	Cycles	Notes
Slave response	Variable	Slave-dependent
ID extraction	0	Combinational
Response routing	1	Pipeline registration
Master delivery	0	Direct connection
Total Response	1 + slave	Plus slave latency

17.2 End-to-End Latency

17.2.1 Write Transaction (Best Case)

Cycle 0: AW arrives at Bridge
Cycle 1: AW exits to Slave (skid buffer)
Cycle 2: Slave receives AW
Cycle 1: W arrives (same cycle as AW skid)
Cycle 2: W exits to Slave
Cycle 3: Slave receives W, generates B
Cycle 4: B routed back to Master

Total: 4 cycles (minimum)

17.2.2 Read Transaction (Best Case)

Cycle 0: AR arrives at Bridge
Cycle 1: AR exits to Slave (skid buffer)
Cycle 2: Slave receives AR, generates R
Cycle 3: R routed back to Master

Total: 3 cycles (minimum)

17.2.3 Contention Latency

When multiple masters contend for same slave:

Arbitration adds 1 cycle per contending master

Example: 4 masters requesting same slave

Worst case: Wait for 3 other masters = 3 extra cycles

Average case: Wait for 1.5 masters = 1-2 extra cycles

17.3 Width Conversion Latency

17.3.1 Upsize Latency

Table 5.8: Upsize Latency by Ratio

Ratio	Extra Cycles	Notes
1:1	0	No conversion
2:1	0	Pack on fly
4:1	0	Pack on fly
8:1	0-1	May need accumulation

17.3.2 Downsize Latency

Table 5.9: Downsize Latency by Ratio

Ratio	Extra Cycles	Notes
1:1	0	No conversion
1:2	+1	2 output beats
1:4	+3	4 output beats
1:8	+7	8 output beats

17.4 Protocol Conversion Latency

17.4.1 AXI4 to APB

Table 5.10: AXI4 to APB Conversion Latency

Phase	Cycles
AXI4 AW decode	1
APB setup	1
APB access	1+ (PREADY)
B generation	1
Total	4+ cycles

17.4.2 APB Wait States

APB slaves may insert wait states:

PREADY deasserted: +1 cycle per wait

Typical UART/GPIO: 0-2 wait states

Slow peripherals: May have many wait states

17.5 Latency Optimization

17.5.1 Design Recommendations

1. **Match data widths** - Avoid conversion latency
2. **Use AXI4 for fast paths** - Avoid APB latency
3. **Minimize contention** - Spread traffic across slaves
4. **Use bursts** - Amortize address latency
5. **Pipeline responses** - Don't block on slow slaves

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

18 Resource Estimates

18.1 FPGA Resource Summary

18.1.1 Baseline Configuration (2x2, 64-bit)

Table 5.11: Baseline Resource Requirements

Resource	Count	Notes
LUTs	~2,000-3,000	Logic and routing
Registers	~1,500-2,000	Pipeline stages
Block RAM	0-1	Optional ID CAM
DSP	0	No arithmetic

18.1.2 Scaling Factors

Table 5.12: Resource Scaling Factors

Component	Scaling
Crossbar core	$O(M \times N)$
Master adapters	$O(M)$
Slave routers	$O(N)$
ID tracking	$O(M \times \text{Outstanding})$
Width converters	$O(\text{per-path ratio})$

18.2 Component Breakdown

18.2.1 Per-Master Resources

Table 5.13: Per-Master Resource Breakdown

Component	LUTs	Registers
Skid buffer	~50-100	~DATA_WIDTH
ID extension	~20	~ID_WIDTH
Channel mux	~100	~50
Per Master Total	~200-300	~DATA_WIDTH + 100

18.2.2 Per-Slave Resources

Table 5.14: Per-Slave Resource Breakdown

Component	LUTs	Registers
Address decode	~50	0
Arbiter	~100-200	~50
Response mux	~100	~50
Per Slave Total	~250-350	~100

18.2.3 Crossbar Core

Table 5.15: Crossbar Core Resources

Component	LUTs	Registers
AW mux (N-way)	~100 x N	~50 x N
W mux (N-way)	~100 x N	~50 x N
B demux (M-way)	~50 x M	~50 x M
AR mux (N-way)	~100 x N	~50 x N
R demux (M-way)	~50 x M	~50 x M

18.3 Width Converter Resources

Table 5.16: Width Converter Resources

Ratio	LUTs	Registers	Notes
1:2 upsize	~200	~DATA_IN	Pack logic
1:4 upsize	~300	~DATA_IN	Pack logic
1:8 upsize	~400	~DATA_IN	Pack logic
2:1 downsize	~200	~DATA_OUT	Split logic
4:1 downsize	~300	~DATA_OUT	Split logic
8:1 downsize	~400	~DATA_OUT	Split logic

18.4 Protocol Converter Resources

18.4.1 AXI4 to APB

Table 5.17: AXI4 to APB Converter Resources

Component	LUTs	Registers
FSM	~100	~20
Burst counter	~50	~8
Data buffer	~100	~DATA_WIDTH
Response logic	~50	~10
Total	~300	~DATA_WIDTH + 50

18.5 Example Configurations

Table 5.18: Complete Bridge Resource Estimates

Config	Masters	Slaves	Data	LUTs	Registers
2x2 Basic	2	2	64	~2,500	~1,500
4x4 Standard	4	4	64	~5,000	~3,000
4x4 Wide	4	4	256	~8,000	~5,000
8x8 Large	8	8	128	~12,000	~8,000
RAPIDS (4x3)	4	3	512	~10,000	~6,000

18.5.1 Notes

- Estimates include all converters and adapters
- Actual results vary by synthesis tool and FPGA family
- Block RAM usage depends on ID table implementation
- DSP usage is zero (no multiplication/division)

18.6 Optimization Strategies

18.6.1 Resource Reduction

1. **Use channel-specific masters** - 40-60% port reduction
2. **Match data widths** - Avoid converter logic
3. **Use APB sparingly** - Reduces AXI4 overhead
4. **Limit outstanding transactions** - Smaller ID tables

18.6.2 Performance/Resource Trade-off

Table 5.19: Performance/Resource Trade-offs

Feature	Resource Impact	Performance Impact
Deeper skid buffers	+registers	+timing margin
Larger ID tables	+BRAM	+OOO depth
Pipeline stages	+registers	+frequency
Wider data paths	+routing	+throughput

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

19 System Requirements

19.1 Hardware Requirements

19.1.1 Clock Infrastructure

Table 6.1: Clock Requirements

Requirement	Specification
Clock source	Single clock domain (aclk)
Clock quality	Low jitter, stable frequency
Clock distribution	Must reach all Bridge ports

19.1.2 Reset Infrastructure

Table 6.2: Reset Requirements

Requirement	Specification
Reset type	Asynchronous, active-low (aresetn)
Reset synchronization	External synchronizer recommended
Reset distribution	Must reach all Bridge ports

19.1.3 Power

Table 6.3: Power Requirements

Requirement	Specification
Power domains	Single domain (no power gating)
Voltage	FPGA/ASIC process-dependent

19.2 Interface Requirements

19.2.1 Master Requirements

Masters connecting to Bridge must:

1. **Comply with AXI4 protocol** - Valid/ready handshake
2. **Use correct ID width** - Match configured ID_WIDTH
3. **Use correct data width** - Match configured DATA_WIDTH
4. **Use correct address width** - Match configured ADDR_WIDTH
5. **Stay within address range** - Target valid slave addresses

19.2.2 Slave Requirements

Slaves connecting to Bridge must:

1. **Comply with AXI4/APB protocol** - Based on configuration
2. **Accept extended IDs** - $ID_WIDTH + BID_WIDTH$
3. **Match configured data width** - Or use width conversion
4. **Respond to all transactions** - No hanging

19.3 Configuration Requirements

19.3.1 Address Map

Table 6.4: Address Map Requirements

Requirement	Specification
Slave ranges	Must not overlap
Range alignment	Power-of-2 recommended
Coverage	All master addresses must map to slaves or OOR

19.3.2 Connectivity

Table 6.5: Connectivity Requirements

Requirement	Specification
Matrix completeness	All masters must access at least one slave
Reachability	Consider traffic patterns for performance

19.4 Timing Requirements

19.4.1 Setup/Hold

Table 6.6: Timing Requirements

Constraint	Requirement
Input setup	Meet FPGA/ASIC requirements
Input hold	Meet FPGA/ASIC requirements
Clock-to-output	Per process characterization

19.4.2 Recommended Margins

Table 6.7: Recommended Timing Margins

Margin	Value	Purpose
Setup margin	10-20%	Variation tolerance
Hold margin	Positive	No hold violations
Clock uncertainty	Include in constraints	PLL/MMCM jitter

19.5 Verification Requirements

19.5.1 Pre-Integration Checks

1. **RTL lint clean** - No Verilator warnings
2. **Parameter validation** - All parameters in valid range
3. **Address map review** - No overlaps, complete coverage
4. **ID width calculation** - Sufficient for NUM_MASTERS

19.5.2 Integration Checks

1. **Signal connectivity** - All ports connected
2. **Width matching** - DATA_WIDTH, ADDR_WIDTH, ID_WIDTH
3. **Protocol matching** - AXI4 vs APB correctly configured
4. **Clock/reset connectivity** - All ports share same domain

19.5.3 Post-Integration Checks

1. **Basic transaction test** - Read/write to each slave
2. **Arbitration test** - Multi-master contention
3. **Error handling test** - OOR address response
4. **Performance validation** - Meet throughput targets

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

20 Parameter Configuration

20.1 Core Parameters

Table 6.8: Bridge Core Parameters

Parameter	Type	Range	Default	Description
NUM_MASTERS	int	1-32	2	Number of master ports
NUM_SLAVES	int	1-256	2	Number of slave ports
ADDR_WIDTH	int	12-64	32	Address bus width
DATA_WIDTH	int	32-512	64	Data bus width
ID_WIDTH	int	1-16	4	Master ID width
USER_WIDTH	int	1-16	1	User signal width

20.2 Derived Parameters

20.2.1 Calculated by Generator

Table 6.9: Derived Parameters

Parameter	Formula	Example
BID_WIDTH	$\text{clog2}(\text{NUM_MASTER S})$	4 masters = 2 bits
TOTAL_ID_WIDTH	$\text{ID_WIDTH} + \text{BID_WIDTH}$	4 + 2 = 6 bits
STRB_WIDTH	$\text{DATA_WIDTH} / 8$	64b = 8 strobes

20.3 Per-Port Configuration

20.3.1 Master Port Configuration

Table 6.10: Master Port Configuration

Field	Type	Description
name	string	Unique identifier
prefix	string	Signal prefix
channels	enum	“rw”, “wr”, or “rd”
data_width	int	Port data width
id_width	int	Port ID width
use_monitor	bool	Mandatory. Enable per-port monitor wrappers (true/false)

20.3.2 Slave Port Configuration

Table 6.11: Slave Port Configuration

Field	Type	Description
name	string	Unique identifier
prefix	string	Signal prefix
protocol	enum	“axi4”, “axi4lite”, “apb”
data_width	int	Port data width
base_addr	hex	Base address (must be 4K-aligned)
addr_range	hex	Address range size (must be multiple of 4K)
use_monitor	bool	Mandatory. Enable per-port monitor wrappers (true/false)

20.3.2.1 Slave Address Window Rules (MANDATORY)

Every slave must occupy a 4K-aligned address window that is a multiple of 4 KB:

Rule 1: Base Address Alignment

`base_addr & 0xFFF == 0x000`

Valid: 0x00000000, 0x00001000, 0x80000000, 0xFFFF0000

Invalid: 0x00000001, 0x80000800, 0xC0000100

Rule 2: Range Alignment

`addr_range % 0x1000 == 0`

Valid: 0x1000 (4 KB), 0x2000 (8 KB), 0x10000 (64 KB)

Invalid: 0x800 (2 KB), 0x1001, 0x7FFF

Rule 3: Non-Overlapping Windows

All slaves must have non-overlapping address ranges

Valid: Slave0: 0x00000000-0xFFFFFFFF, Slave1: 0x10000000-0xFFFFFFFF

Invalid: Slave0: 0x00000000-0x10000000, Slave1: 0x0FFFFFFF-0xFFFFFFFF

Why This Rule Exists: - Real memory systems use 4K page boundaries (virtual memory, MMU) - Linker scripts and memory maps assume 4K granularity - Address decoders simplify to bit masks with 4K alignment - Prevents ambiguity in address decode logic

20.4 Top-Level Monitor Configuration

When monitor collection is desired, the bridge TOML configuration includes:

Field	Type	Description
variants	list	List of bridge variants to generate. Supported: ["no"] (no monitor), ["mon"] (monitor only), ["no", "mon"] (both). Default: ["no"]

20.4.1 Monitor Identifiers

Each monitored port gets a unique (UNIT_ID, AGENT_ID) pair for identification in monitor packets:

UNIT_ID Assignment:

- UNIT_ID = 1: Master-side monitor wrappers (axi4_master_{rd,wr}_mon)
- UNIT_ID = 2: Slave-side monitor wrappers (axi4_slave_{rd,wr}_mon)

AGENT_ID Assignment (per port):

- AGENT_ID = (port_index << 4) | channel_bit
- channel_bit: 0 = read channel (AR/R), 1 = write channel (AW/W/B)
- Example: Master port 2, write direction → AGENT_ID = (2 << 4) | 1 = 0x21

20.4.2 AXIL→Wider-Slave Master-Side Alignment

When an AXI4-Lite master connects to a wider AXI4 slave through the bridge (e.g., 32-bit AXIL master to 64-bit AXI4 slave), the generator emits a master-side alignment converter (the axil_to_axi4_wide_align_{rd,wr} modules) between the master adapter and the crossbar core. The converter handles partial-word alignment on the narrow side while preserving AXIL's single-beat semantics; the protocol stays AXIL — protocol shims are a slave-boundary concern, applied separately.

20.5 Configuration File Format

20.5.1 TOML Configuration

[bridge]

```
name = "my_bridge"
description = "Example bridge configuration"

defaults.skid_depths = {ar = 2, r = 4, aw = 2, w = 4, b = 2}

masters = [
  {name = "cpu", prefix = "cpu_m_axi", channels = "rw",
   id_width = 4, addr_width = 32, data_width = 64, user_width = 1},
  {name = "dma", prefix = "dma_m_axi", channels = "rw",
   id_width = 4, addr_width = 32, data_width = 256, user_width = 1}
]

slaves = [
  {name = "ddr", prefix = "ddr_s_axi", protocol = "axi4",
   id_width = 6, addr_width = 32, data_width = 512, user_width = 1,
   base_addr = 0x80000000, addr_range = 0x40000000},
  {name = "uart", prefix = "uart_apb", protocol = "apb",
   addr_width = 12, data_width = 32,
   base_addr = 0x00000000, addr_range = 0x00001000}
]
```

20.5.2 CSV Connectivity

```
master\slave,ddr,uart
cpu,1,1
dma,1,0
```

20.6 Parameter Validation

20.6.1 Generator Checks

Table 6.12: Generator Validation Checks

Check	Error Condition
NUM_MASTERS	< 1 or > 32
NUM_SLAVES	< 1 or > 256
DATA_WIDTH	Not power of 2
Address overlap	Slave ranges intersect
Connectivity	Master with no slaves
ID width	Insufficient for masters

20.6.2 Runtime Validation

Bridge includes optional assertions for:

- Address alignment
- Burst boundary crossing
- Protocol violations
- ID mismatch

20.7 Example Configurations

20.7.1 Simple 2x2

```
[bridge]
  name = "bridge_simple"
  masters = [
    {name = "m0", prefix = "m0_axi", data_width = 64},
    {name = "m1", prefix = "m1_axi", data_width = 64}
  ]
  slaves = [
    {name = "s0", prefix = "s0_axi", base_addr = 0x0, addr_range =
0x100000000},
    {name = "s1", prefix = "s1_axi", base_addr = 0x100000000,
addr_range = 0x100000000}
  ]
```

20.7.2 Mixed Protocol

```
[bridge]
  name = "bridge_mixed"
  masters = [
    {name = "cpu", prefix = "cpu_axi", data_width = 64, channels =
"rw"}
  ]
  slaves = [
    {name = "mem", prefix = "mem_axi", protocol = "axi4", data_width =
512},
    {name = "gpio", prefix = "gpio_apb", protocol = "apb", data_width
= 32},
    {name = "uart", prefix = "uart_apb", protocol = "apb", data_width
= 32}
  ]
```

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

21 Verification Strategy

21.1 Verification Levels

21.1.1 Unit Level

Test individual Bridge components:

Table 6.13: Unit Level Test Focus

Component	Test Focus
Master Adapter	Skid buffer, ID extension
Slave Router	Address decode, arbitration
Width Converter	Upsize/downsize correctness
Protocol Converter	AXI4 to APB timing
Response Router	ID extraction, routing

21.1.2 Integration Level

Test complete Bridge functionality:

Table 6.14: Integration Test Coverage

Test Category	Coverage
Address routing	All master-slave paths
Arbitration	Contention, fairness
ID tracking	Response routing
Error handling	OOR, timeouts
Performance	Throughput, latency

21.1.3 System Level

Test Bridge in target system:

Table 6.15: System Level Tests

Test Category	Focus
End-to-end	CPU to memory
Multi-master	DMA + CPU
Mixed protocol	AXI4 + APB
Stress	Maximum traffic

21.2 Test Infrastructure

21.2.1 CocoTB Framework with Protocol-BFM-Only Driving

Bridge verification runs on CocoTB with protocol BFMs only: **all test stimulus is driven through protocol BFMs (AXI4Master, AXI4Slave, etc.) with no direct DUT signal manipulation.** Each slave port is backed by an in-memory model (MemoryModel), and checking is assertion-based (readback matches write) rather than routing-based.

```
from CocoTBFramework.components.axi4 import AXI4Master, AXI4Slave
from TBClasses.shared.tbbase import TBBase

class BridgeTB(TBBase):
    def __init__(self, dut):
        super().__init__(dut)
        self.masters = [AXI4Master(dut, dut.clk, f"m{i}_axi") for i in
range(NUM_MASTERS)]
        self.slaves = [MemoryModel(dut, dut.clk, f"s{i}_axi") for i in
range(NUM_SLAVES)]

@cocotb.test()
async def cocotb_test_basic_write(dut):
    tb = BridgeTB(dut)
    await tb.setup_clocks_and_reset()

    # Write transaction via BFM only
    await tb.masters[0].write(addr=0x1000, data=0xDEADBEEF)

    # Verify: readback matches write (memory-model assertion)
    readback = await tb.masters[0].read(addr=0x1000)
    assert readback == 0xDEADBEEF
```

21.2.2 Test Categories

Table 6.16: Test Categories

Category	Description	Example
Basic	Single transactions	Read/write
Burst	Multi-beat transactions	16-beat burst
Concurrent	Multiple masters active	M0 + M1
Boundary Probe	Address window edges	Top/mid/bottom of each slave page
Stress	Maximum utilization	Back-to-back

Category	Description	Example
Error	Error conditions	SLVERR injection, timeout
Monitor	Monitor packet collection	Packet capture, IRQ assertion

21.3 Test Execution Model

21.3.1 Serial Execution

Bridge tests run **serially only** (no parallel execution via pytest-xdist). Each test function is named per-module to avoid cross-test cocotb function name pollution:

```
# Naming convention: test_bridge_{N}x{M}_{variant}_{scenario}
def test_bridge_1x2_rd_basic(request):           # Test name indicates 1
master, 2 slaves, read-only
def test_bridge_1x2_rd_monitor_smoke(request): # Monitor test on 1x2
def test_bridge_4x4_rw_concurrent(request):     # Concurrent test on
4x4
```

Cocotb test functions inside each file follow the same naming pattern but with `cocotb_test_*` prefix to avoid pytest collection conflicts.

21.3.2 Boundary Probe Testing

Address-window boundary testing probes the **top, middle, and bottom** of each slave's address window to catch address-decode logic errors at window edges:

```
for slave_idx, (base, window_size) in enumerate(slave_windows):
    # Probe bottom (base address)
    await master.write(base + 0x000, data)

    # Probe middle (arbitrary address within window)
    await master.write(base + window_size // 2, data)

    # Probe top (base + window_size - 1)
    await master.write(base + window_size - 1, data)
```

21.4 Coverage Goals

21.4.1 Functional Coverage

Table 6.17: Functional Coverage Goals

Category	Target
Address paths	100% master-slave combinations via boundary probes
Transaction types	Read, write, burst, error (SLVERR)
Monitor modes	Enabled and disabled
ID values	Full ID range (representative)

21.4.2 Code Coverage

Table 6.18: Code Coverage Goals

Metric	Target
Line coverage	>95%
Branch coverage	>90%
FSM coverage	100% state transitions
Toggle coverage	>80% signals

21.5 Debug Features

21.5.1 Waveform Capture

Bridge tests support VCD/FST waveform dumps:

```
pytest test_bridge.py --vcd=waves.vcd
gtkwave waves.vcd
```

21.5.2 Debug Signals

Bridge includes optional debug signals:

Table 6.19: Debug Signals

Signal	Description
dbg_aw_grant	Current AW grant
dbg_ar_grant	Current AR grant
dbg_outstanding	Outstanding transaction count
dbg_state	FSM states

21.6 Regression Testing

21.6.1 Continuous Integration

Table 6.20: CI Test Schedule

Stage	Tests	Frequency
Pre-commit	Basic sanity	Each commit
Nightly	Full regression	Daily
Weekly	Performance	Weekly

21.6.2 Test Matrix

Table 6.21: Configuration Test Matrix

Config	Data Width	Protocol	Tested
2x2	64	AXI4	Yes
4x4	64	AXI4	Yes
4x4	256	AXI4	Yes
2x2	64	AXI4+APB	Yes
RAPIDS	512	AXI4+APB	Yes

21.7 Known Limitations

21.7.1 Test Gaps

Table 6.22: Known Test Gaps

Gap	Status	Plan
APB burst stress	Partial	Phase 3
Width downsize stress	Partial	Planned
32-master config	Not tested	Low priority

21.7.2 Simulator Support

Table 6.23: Simulator Support Status

Simulator	Status
Verilator	Fully supported
Icarus Verilog	Supported
Commercial (VCS, Questa)	Not tested

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

22 Bridge Micro-Architecture Specification Index

Component: Bridge (Multi-Protocol Crossbar Generator) **Version:** 1.1 **Date:** 2026-06-04 **Purpose:** Detailed micro-architecture specification for Bridge component

22.1 Document Organization

The Bridge component is a CSV-driven generator that produces AXI4 crossbars with automatic width conversion, protocol conversion (AXI4, AXI4-Lite, APB), and channel-specific masters (read-only, write-only, or full). Each chapter below is one source file.

22.1.1 Front Matter

- [Document Information](#)

22.1.2 Chapter 1: Introduction

- [Overview](#)

22.1.3 Chapter 2: Block Descriptions

- [Master Adapter](#)
- [Slave Router](#)
- [Crossbar Core](#)
- [Arbitration](#)
- [ID Management](#)
- [Width Conversion](#)
- [Protocol Conversion](#)
- [Response Routing](#)
- [Error Handling](#)
- [AMBA5 Boundary and Native Sideband](#)

22.1.4 Chapter 3: FSM Design

- [Arbiter FSMs](#)
- [Transaction Tracking](#)

22.1.5 Chapter 4: ID Management

- [CAM Architecture](#)
- [ID Tracking Tables](#)

22.1.6 Chapter 5: Converters

- [Width Converters](#)
- [APB Converters](#)

22.1.7 Chapter 6: Generated RTL

- [Module Structure](#)

- [Signal Naming](#)

22.1.8 Chapter 7: Verification

- [Test Strategy](#)
 - [Debug Guide](#)
-

22.2 Quick Navigation

22.2.1 For New Users

1. Start with [Overview](#) for a tour of what Bridge can do
2. Read [Block Diagram](#) for the architecture
3. Study [Arbitration](#) for operational details
4. Reference [Module Structure](#) for generated RTL

22.2.2 For Integration

- **Protocol support:** See [Protocol Conversion](#) for AXI4/APB/AXI-Lite
 - **Width handling:** See [Width Conversion](#) for data width mismatches
 - **ID management:** See [ID Management](#) for transaction tracking
 - **Error handling:** See [Error Handling](#) for OOR and timeout
-

22.3 Visual Assets

Diagram sources and their renders live in two directories:

- **Source Files:**
 - `assets/graphviz/*.gv` - Graphviz source diagrams
 - `assets/puml/*.puml` - PlantUML FSM diagrams
- **Rendered Files:**
 - `assets/graphviz/*.png` - Rendered block diagrams
 - `assets/puml/*.png` - Rendered FSM diagrams

22.3.1 Architecture Diagrams

1. **Master Adapter** - [assets/graphviz/master_adapter.png](#)
2. **Slave Router** - [assets/graphviz/slave_router.png](#)
3. **Crossbar Core** - [assets/graphviz/crossbar_core.png](#)
4. **ID Management** - [assets/graphviz/id_management.png](#)
5. **Width Conversion** - [assets/graphviz/width_conversion.png](#)
6. **Protocol Conversion** - [assets/graphviz/protocol_conversion_apb.png](#)
7. **Response Routing** - [assets/graphviz/response_routing.png](#)
8. **Error Handling** - [assets/graphviz/error_handling.png](#)

22.3.2 FSM Diagrams

1. **AW Arbiter FSM** - [assets/puml/aw_arbiter_fsm.png](#)
 2. **AR Arbiter FSM** - [assets/puml/ar_arbiter_fsm.png](#)
-

22.4 Component Overview

22.4.1 Key Features

- **Multi-Protocol Support:** AXI4, AXI4-Lite, and APB slave conversion
- **CSV-Driven Configuration:** Human-readable port and connectivity definitions
- **Channel-Specific Masters:** Write-only (wr), read-only (rd), or full (rw) support
- **Automatic Width Conversion:** Upsize/downsize for data width mismatches
- **Out-of-Order Support:** ID-based response routing with CAM tracking
- **Custom Signal Prefixes:** Unique prefixes per port for clean integration

22.4.2 Protocol Conversion Matrix

What happens to a transaction depends on the master/slave protocol pairing:

Master Protocol	Slave Protocol	Conversion
AXI4	AXI4	Direct or width convert
AXI4	AXI4-Lite	Protocol downgrade
AXI4	APB	Full protocol conversion

22.4.3 Design Philosophy

Efficient Multi-Width Routing: - Direct connections where widths match (zero conversion overhead) - Width converters only where needed - No fixed internal crossbar width

Resource Optimization: - Channel-specific masters reduce port count by 40-60% - Per-path width converters instead of global conversion - Minimal logic for matching-width connections

22.5 Related Documentation

22.5.1 Companion Specifications

- **Bridge HAS** - Hardware Architecture Specification (high-level)

22.5.2 Project-Level

- **PRD.md:** [../PRD.md](#) - Complete product requirements document
- **CLAUDE.md:** [../CLAUDE.md](#) - AI assistant integration guide

22.5.3 Generator

- **Generator:** `../bin/bridge_generator.py` - CSV/TOML-based generator script (with `../bin/bridge_pkg/`)
 - **Test Configs:** `../bin/test_configs/` - Example TOML/CSV configurations
-

22.6 Version History

Version 1.0 (2026-01-03): - Initial specification release - Restructured from single spec to HAS/MAS format - Complete block-level documentation - FSM and ID management details

Last Updated: 2026-01-03 **Maintained By:** RTL Design Sherpa Project

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

23 Bridge: AXI4 Full Crossbar Generator - Product Requirements Document

Project: Bridge **Version:** 2.1 **Status:** Phase 2 Complete - Simplified Architecture with Hard Limits
Created: 2025-10-18 **Last Updated:** 2025-11-02

23.1 Executive Summary

Bridge is a Python-based AXI4 crossbar generator that produces simple, performant SystemVerilog RTL for connecting multiple AXI4 masters to multiple AXI4 slaves. The name follows the infrastructure theme - bridges connect different regions, enabling communication across divides, just like crossbars connect masters and slaves.

Design Philosophy: A simple AMBA fabric that is performant, but makes no attempt to support all features. We enforce hard limits (8-bit ID width, 64-bit address width) to eliminate unnecessary complexity, focusing only on what real hardware needs.

Key Differentiator from Delta: - **Delta:** AXI-Stream crossbar (streaming data, single channel, simple routing) - **Bridge:** AXI4 full crossbar (memory-mapped, 5 channels, burst support, ID-based routing)

Key Differentiator from Commercial IP: - **Commercial AXI4 Crossbars:** Feature-complete, support every AXI4 edge case, complex configurability - **Bridge:** Simple and performant, supports common use cases, hard limits for simplicity

Target Use Case: High-performance memory-mapped interconnects for multi-core processors, accelerators, and memory controllers where simplicity and performance matter more than spec compliance.

23.2 Design Philosophy

Vision: A simple AMBA fabric that is performant, but makes no attempt to support all features.

23.2.1 Core Principles

- 1. Simplicity Over Completeness** - Focus on common use cases, not edge cases - Implement what's needed for real hardware, not AXI4 spec compliance theater - Prefer straightforward implementations over complex feature sets
- 2. Performance First** - Direct connections where possible (matching widths = zero overhead) - Minimal conversion logic in critical paths - Optimize for throughput and latency, not feature count
- 3. Hard Limits for Simplicity**

We enforce uniform widths on certain parameters to eliminate complexity:

Parameter	Hard Limit	Rationale
ID Width	8 bits (fixed)	Eliminates ID width conversion logic. 256 unique IDs is sufficient for all realistic use cases.
Address Width	64 bits (fixed)	Eliminates address width conversion. 64-bit addressing covers all memory-mapped systems.
Data Width	Variable (32b-512b)	Width converters ONLY for data. Commonly needed for bandwidth optimization.

Why This Works: - ID width conversion adds complexity with minimal benefit (nobody needs >256 outstanding transactions per master) - Address width conversion is rarely needed (peripheral addresses fit in 32-bit, but using 64-bit everywhere is simpler) - Data width conversion is the ONLY width conversion that provides real value (bandwidth matching)

4. What We DON'T Support (By Design)

Features intentionally excluded for simplicity: - No variable ID width per port - No variable address width per port - No AXI4-Lite protocol variant (use standard AXI4 with len=0) - No ACE protocol extensions (cache coherency) - No AXI5 features - No complete AXI4 sideband signal support (QoS, Region, User signals declared but not routed)

5. What We DO Support

Core AXI4 features that matter: - Full 5-channel AXI4 protocol (AW, W, B, AR, R) - Burst transactions (INCR, WRAP, FIXED) - Out-of-order completion via transaction IDs - Multiple outstanding transactions per master - Channel-specific masters (write-only, read-only, read-write) - Data width conversion (32b ↔ 64b ↔ 128b ↔ 256b ↔ 512b) - Configurable M×N topology (1-32 masters, 1-256 slaves) - Fair round-robin arbitration per slave

23.2.2 Architecture Philosophy

Target: Intelligent width-aware routing, not fixed-width crossbar

OLD Approach (What We're Moving Away From):

Master (64b) → Upsize(64→256) → Fixed 256b Crossbar → Downsize(256→64) → Slave (64b)

- Two conversions for same-width connections (wasteful!)
- Artificial bandwidth bottleneck
- Unnecessary logic and latency

NEW Approach (Target Architecture):

Master (64b) → Direct Connection → Slave (64b) [0 conversions!]
Master (512b) → Conv(512→64) → Slave (64b) [1 conversion]

- Per-master paths to each unique slave width it connects to
- Direct paths where widths match (zero overhead)
- Converters only where actually needed
- Router selects appropriate path based on address decode

Result: Minimal conversion logic, maximum performance, pragmatic simplicity.

23.3 CRITICAL: RTL Regeneration Requirements

ALL generated RTL files MUST be deleted and regenerated together whenever ANY generator code changes.

Why This Matters: - Generated RTL files may have interdependencies (bridges, wrappers, integrators) - Generator code changes can create version mismatches between files - Partial regeneration creates subtle incompatibilities that cause test failures - Even “small innocuous” generator changes can have cascading effects

The Rule:

```
# WRONG - Partial regeneration
./bridge_generator.py --masters 5 --slaves 3 --output ../rtl/
# Only regenerates bridge_axi4_flat_5x3.sv
# Other files (wrappers, integrators) now mismatched!

# CORRECT - Full regeneration
cd bin
make clean                    # Delete ALL generated
bridges (rtl/generated/)
make all                      # Regenerate everything from
bridge_batch.csv
```

Generator Files That Trigger Full Regeneration: - bin/bridge_generator.py - Main bridge generator (CSV/TOML driven) - Any Python file in bin/bridge_pkg/ (components/, generators/, config, csv_parser, ...) - Any Jinja template in bin/bridge_pkg/jinja_templates/ - bridge_wrapper_generator.py - Wrapper generation - **Any** Python file in projects/components/bridge/bin/

Symptoms of Version Mismatch: - Tests that previously passed now fail - Simulation errors about missing signals - Mismatched port widths or counts - Address decode routing to wrong slaves

Think of Generated RTL Like Compiled Code: When you update a compiler, you don't selectively recompile - you rebuild everything. When you update a generator, you don't selectively regenerate - you regenerate everything.

23.4 1. Product Overview

23.4.1 1.1 Purpose

Bridge automates generation of AXI4 crossbar infrastructure: - **Python code generation** - Parameterized RTL generation (similar to APB/Delta) - **Performance modeling** - Analytical + simulation validation - **Flat topology** - Full M×N interconnect matrix - **ID-based routing** - Out-of-order transaction support - **Burst optimization** - Pipelined burst transfers

23.4.2 1.2 Target Audience

Primary Users: - RTL designers building SoC interconnect - System architects evaluating interconnect topologies - Verification engineers needing crossbar testbenches - Students learning AXI4 protocol and interconnects

Educational Focus: - Demonstrates AXI4 protocol complexity - Shows arbitration strategies for memory-mapped busses - Teaches ID-based transaction tracking - Illustrates burst optimization techniques

23.4.3 1.3 Success Criteria

Functional: - [x] Generates working AXI4 crossbar RTL (bridge_generator.py) - [x] Generates CSV/TOML-configured bridges (bridge_generator.py + bridge_pkg/; the earlier separate bridge_csv_generator.py was merged in) - [x] Passes Verilator lint - [x] Supports 1-32 masters, 1-256 slaves - [x] Handles out-of-order completion via IDs (bridge_cam.sv) - [x] Supports burst lengths 1-256 beats - [x] Channel-specific masters (wr/rd/rw) for resource optimization (Phase 2) - [] APB converter integration (Phase 3 pending)

Performance: - [x] Latency ≤ 3 cycles for single-beat transactions - [x] Throughput: All M×N paths can transfer concurrently - [x] Performance models implemented (bridge_model.py - V1 Flat) - [] Fmax ≥ 300 MHz on UltraScale+ FPGAs (pending synthesis validation)

Quality: - [x] Complete specifications (PRD) before code - [x] Performance models validate requirements (bridge_model.py) - [x] All generated RTL Verilator verified - [x] Integration examples provided (CSV examples) - [x] Comprehensive documentation (GENERATOR_ARCHITECTURE.md, docs/bridge_has/, docs/bridge_mas/)

23.4.4 1.4 Implementation Status and Phases

Unified Generator (bridge_generator.py):

The bridge generator now supports both TOML/CSV configuration and legacy array-indexed modes:

Configuration Modes: 1. **TOML/CSV Mode (Preferred)** - TOML port configuration (bridge_name.toml) - CSV connectivity matrix (bridge_name_connectivity.csv) - Custom port prefixes (rapids_m_axi_, cpu_m_axi_, etc.) - Interface wrapper integration (timing

isolation) - Mixed protocols (AXI4 + APB + AXI4-Lite slaves) - Channel-specific masters (wr/rd/rw) - Status: Phase 2 complete, Phase 3 pending

2. Legacy CSV Mode (Backwards Compatible)

- Separate ports.csv and connectivity.csv files
- Migration path to TOML format
- See bin/test_configs/README.md for conversion guide

Phase Status:

Phase 1: CSV Configuration COMPLETE - CSV parser (ports.csv, connectivity.csv) - Port generation with custom prefixes - Converter identification logic - Basic crossbar instantiation

Phase 2: Channel-Specific Masters COMPLETE (2025-10-26) - Added channels field to PortSpec (rw/wr/rd) - Conditional port generation based on channels - **Resource Optimization:** - wr (write-only): AW, W, B channels only → 39% port reduction - rd (read-only): AR, R channels only → 61% port reduction - rw (full): All 5 channels - Width converter awareness (only generate needed converters) - Example: 4-master bridge saves 35% signals with optimized channels

Phase 3: APB Converter Integration PENDING - AXI2APB converter module (create or integrate existing) - APB signal packing/unpacking - APB converter instantiation in generated bridges - Width converter + APB converter chaining - End-to-end testing with APB slaves - Status: Placeholders in generated code with detailed TODO comments

Additional Resources: - models/bridge_model/bridge_model.py - Performance modeling (V1 Flat implemented) - rtl/bridge_cam.sv - Transaction ID tracking for OOO support - See GENERATOR_ARCHITECTURE.md for the generator/build architecture - See docs/bridge_has/ and docs/bridge_mas/ for architecture diagrams and specs (the older BRIDGE_CURRENT_STATE.md / BRIDGE_ARCHITECTURE_DIAGRAMS.md were superseded)

23.5 2. Architecture Overview


23.5.1 2.1 AXI4 vs AXIS vs APB


Feature	APB	AXI-Stream (Delta)	AXI4 (Bridge)
Protocol Type	Simpl e regist er bus	Streaming data	Memory-mapped burst
Channels	1 (addre ss + data)	1 (data stream)	5 (AW, W, B, AR, R)
Request Generation	Addre ss range decod e	TDEST decode	Address range decode
Arbitration	Per- slave, per- cycle	Per-slave, packet-locked	Per-slave, per-address- phase
Out-of-Order	No (seque ntial)	No (streaming order)	Yes (ID-based)
Burst Support	No	Packet (via TLAST)	Yes (AWLEN/ARLEN)
Complexity	Low	Medium	High
Latency	1-2 cycles	2 cycles	2-3 cycles
Use Case	Contr ol regist ers	Data streaming	Memory-mapped I/O

Bridge Complexity Sources: 1. **5 independent channels** requiring separate arbitration 2. **ID-based routing** for out-of-order completion 3. **Burst handling** with interleaving constraints 4.

Write response tracking (match AW with B channel) 5. Address decode + ID muxing for response routing

23.5.22.2 Block Diagram

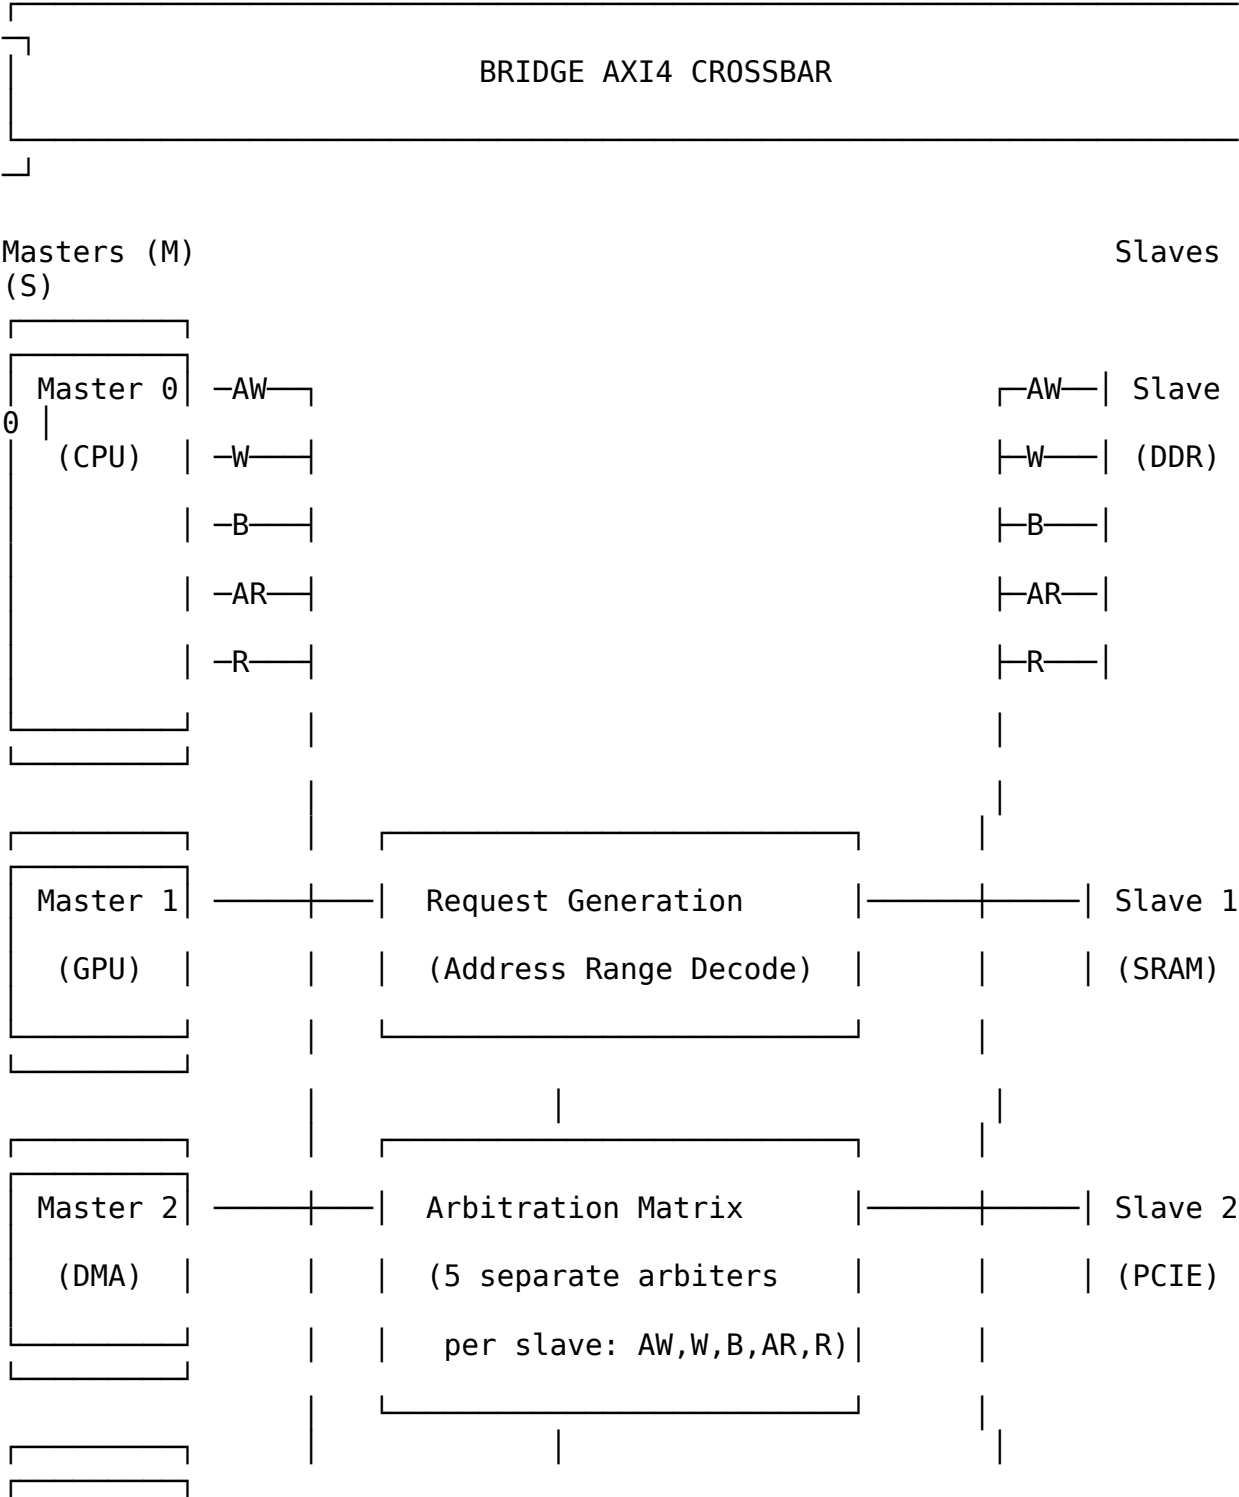

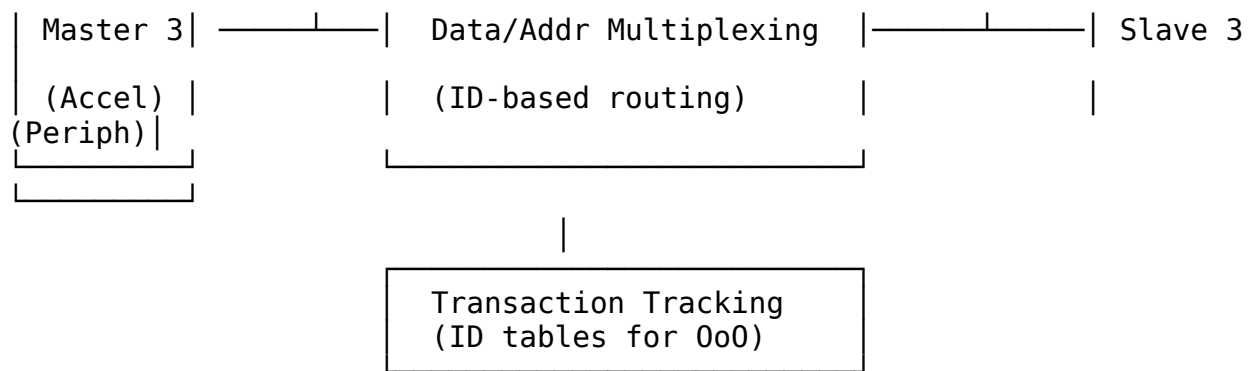

23.5.32.3 Key Components

- 1. Request Generation** - Address range decode for each slave - Generates M×S request matrix per channel (AW, AR) - Similar to APB but more complex (2 address channels)
 - 2. Per-Slave Arbitration - 5 separate arbiters per slave:** - AW channel arbiter (write address) - W channel arbiter (write data - locked to AW grant) - B channel arbiter (write response - routed by ID) - AR channel arbiter (read address) - R channel arbiter (read data - routed by ID) - Round-robin with burst locking - Separate read/write paths (no head-of-line blocking)
 - 3. Data Multiplexing** - Mux master signals to selected slave - ID-based response routing (B, R channels) - Burst tracking (hold grant until xlast)
 - 4. Transaction Tracking** - ID tables per slave for out-of-order support - Track {Master ID, Transaction ID} → Master mapping - Required for routing B/R channels back to correct master
 - 5. Optional Performance Counters** - Transaction counts per master/slave - Arbitration conflict counts - Latency histograms
-

23.6 3. Functional Requirements

23.6.1 3.1 AXI4 Protocol Compliance

FR-1: Full AXI4 Protocol Support - Support all 5 AXI4 channels: AW, W, B, AR, R - Comply with AMBA AXI4 specification (ARM IHI 0022) - Support burst lengths: 1-256 beats (AWLEN/ARLEN = 0-255) - Support burst types: INCR, WRAP, FIXED - Support burst sizes: 1-128 bytes (AWSIZE/ARSIZE = 0-7)

FR-2: Out-of-Order Transaction Support - Route responses via ID matching - Maintain transaction ID integrity (AWID → BID, ARID → RID) - Support configurable ID width (1-16 bits) - Track up to $2^{\text{ID_WIDTH}}$ outstanding transactions per slave

FR-3: Atomic Operations - Support exclusive access (AWLOCK/ARLOCK) - Track exclusive monitor per slave - Generate BRESP/RRESP errors for failed exclusives

23.6.2 3.2 Address Decoding

FR-4: Configurable Address Map - Support M masters × S slaves - Each slave has base address and size - Non-overlapping address ranges (verified at generation) - Default slave for unmapped addresses (optional)

FR-5: Address Range Configuration

```
# Example address map
address_map = {
    0: {'base': 0x00000000, 'size': 0x40000000, 'name': 'DDR'},      #
1GB
    1: {'base': 0x40000000, 'size': 0x00100000, 'name': 'SRAM'},    #
1MB
    2: {'base': 0x50000000, 'size': 0x01000000, 'name': 'PCIE'},    #
16MB
    3: {'base': 0x60000000, 'size': 0x00010000, 'name': 'Peripherals'}
# 64KB
}
```

23.6.3 3.3 Arbitration Strategy

FR-6: Round-Robin Arbitration - Fair bandwidth allocation (no starvation) - Separate arbiters for AW and AR channels - Burst locking: Grant held until xlast (WLAST/RLAST) - Configurable arbitration policy (round-robin default)

FR-7: Read/Write Independence - Separate read and write paths - No head-of-line blocking between read/write - Concurrent read and write to same slave (if slave supports)

23.6.4 3.4 Burst Handling

FR-8: Burst Optimization - Pipelined burst transfers (overlap address and data) - No artificial burst splitting - Full AXI4 burst protocol support

FR-9: Interleaving Constraints - W channel locked to AW grant master - R channel routed by transaction ID - Support ID-based interleaving (slave-dependent)

23.7 4. Non-Functional Requirements

23.7.1 4.1 Performance

NFR-1: Latency - Single-beat read: ≤ 3 cycles (address decode + arbitration + mux) - **Single-beat write:** ≤ 3 cycles (address decode + arbitration + mux) - **Burst transfer:** No additional latency per beat (pipelined)

NFR-2: Throughput - Concurrent transfers: All M×S paths can transfer simultaneously - **Burst efficiency:** Line-rate data transfer after address phase - **No artificial stalls:** Crossbar adds no wait states beyond arbitration

NFR-3: Fmax - Target: 300-400 MHz on Xilinx UltraScale+ - **Registered outputs:** All slave outputs registered for timing closure - **Pipelineable:** Optional pipeline stages for >400 MHz

23.7.2 4.2 Resource Usage (Estimated)

M = 4 masters, S = 4 slaves, DATA_WIDTH = 512, ADDR_WIDTH = 64, ID_WIDTH = 4:

Resource	Flat Crossbar	Notes
LUTs	~2,500	Address decode + arbiters + mux
FFs	~3,000	Registered outputs + ID tables
BRAM	0	Distributed RAM for small ID tables
DSP	0	No arithmetic operations

Scaling: ~150 LUTs per M×S connection

23.7.3 4.3 Quality Requirements

NFR-4: Code Generation Quality - Lint-clean SystemVerilog (Verilator) - Synthesizable (Vivado, Yosys, Design Compiler) - No vendor-specific primitives (technology-agnostic) - Clear structure (commented, readable)

NFR-5: Verification - CocoTB testbench framework - Transaction-level verification - Out-of-order test scenarios - Burst interleaving tests - >95% functional coverage

23.8 5. Interface Specifications

23.8.1 5.1 AXI4 Master Interfaces (M × 5 channels)

Write Address Channel (AW):

```
input logic [ADDR_WIDTH-1:0] s_axi_awaddr [NUM_MASTERS];
input logic [ID_WIDTH-1:0] s_axi_awid [NUM_MASTERS];
input logic [7:0] s_axi_awlen [NUM_MASTERS]; // Burst
length-1
input logic [2:0] s_axi_awsz [NUM_MASTERS]; // Burst
size
input logic [1:0] s_axi_awburst [NUM_MASTERS]; //
INCR/WRAP/FIXED
input logic s_axi_awlock [NUM_MASTERS]; //
Exclusive access
input logic [3:0] s_axi_awcache [NUM_MASTERS]; // Cache
attributes
input logic [2:0] s_axi_awprot [NUM_MASTERS]; //
Protection type
input logic s_axi_awvalid [NUM_MASTERS];
output logic s_axi_awready [NUM_MASTERS];
```

Write Data Channel (W):

```
input logic [DATA_WIDTH-1:0] s_axi_wdata [NUM_MASTERS];
input logic [DATA_WIDTH/8-1:0] s_axi_wstrb [NUM_MASTERS]; // Byte
strokes
input logic s_axi_wlast [NUM_MASTERS]; // Last
beat
input logic s_axi_wvalid [NUM_MASTERS];
output logic s_axi_wready [NUM_MASTERS];
```

Write Response Channel (B):

```
output logic [ID_WIDTH-1:0] s_axi_bid [NUM_MASTERS];
output logic [1:0] s_axi_bresp [NUM_MASTERS]; //
OKAY/EXOKAY/SLVERR/DECERR
output logic s_axi_bvalid [NUM_MASTERS];
input logic s_axi_bready [NUM_MASTERS];
```

Read Address Channel (AR):

```
input logic [ADDR_WIDTH-1:0] s_axi_araddr [NUM_MASTERS];
input logic [ID_WIDTH-1:0] s_axi_arid [NUM_MASTERS];
input logic [7:0] s_axi_arlen [NUM_MASTERS];
input logic [2:0] s_axi_arsz [NUM_MASTERS];
input logic [1:0] s_axi_arburst [NUM_MASTERS];
input logic s_axi_arlock [NUM_MASTERS];
input logic [3:0] s_axi_arcache [NUM_MASTERS];
```

```

input logic [2:0]
input logic
output logic
s_axi_arprot [NUM_MASTERS];
s_axi_arvalid [NUM_MASTERS];
s_axi_arready [NUM_MASTERS];

```

Read Data Channel (R):

```

output logic [DATA_WIDTH-1:0] s_axi_rdata [NUM_MASTERS];
output logic [ID_WIDTH-1:0] s_axi_rid [NUM_MASTERS];
output logic [1:0] s_axi_rresp [NUM_MASTERS];
output logic s_axi_rlast [NUM_MASTERS];
output logic s_axi_rvalid [NUM_MASTERS];
input logic s_axi_rready [NUM_MASTERS];

```

23.8.25.2 AXI4 Slave Interfaces (S × 5 channels)

Mirror of master interfaces, with M → S direction reversed.

23.8.35.3 Configuration Parameters

```

parameter int NUM_MASTERS = 4; // Number of master
interfaces
parameter int NUM_SLAVES = 4; // Number of slave
interfaces
parameter int DATA_WIDTH = 512; // Data bus width (bits)
parameter int ADDR_WIDTH = 64; // Address bus width (bits)
parameter int ID_WIDTH = 4; // Transaction ID width
(bits)
parameter int MAX_BURST_LEN = 256; // Maximum burst length
(beats)
parameter bit PIPELINE_OUTPUTS = 1; // Register slave outputs
parameter bit ENABLE_COUNTERS = 1; // Performance counters

```

23.9 6. Performance Modeling

23.9.16.1 Analytical Model

Latency Components (Flat Crossbar):

Single-Beat Read Latency:

1. Address Decode: 0 cycles (combinatorial)
2. Arbitration: 1 cycle (AR arbiter decision)
3. Address Mux: 0 cycles (combinatorial)
4. Slave Access: (slave-dependent, not crossbar)
5. Response Mux: 1 cycle (R channel ID lookup + mux)
6. Output Register: 1 cycle (optional, for timing closure)

Total (no pipeline): 2 cycles
Total (pipelined): 3 cycles

Burst Transfer Throughput:

After address phase completes, data transfer is line-rate:

- W channel: 1 beat/cycle (locked to AW grant)
- R channel: 1 beat/cycle (ID-routed from slave)

Example: 256-beat burst

Address phase: 2-3 cycles (one-time)
Data phase: 256 cycles (line-rate)
Total: 258-259 cycles
Efficiency: 98.8%

Concurrent Throughput:

Maximum concurrent transfers (4×4 crossbar):

- Read: 4 concurrent (one per master-slave pair)
- Write: 4 concurrent (one per master-slave pair)
- Total: 8 concurrent read+write (separate paths)

Throughput @ 100 MHz, 512-bit data:

Per path: 100 MHz × 512 bits = 51.2 Gbps
Total: 8 paths × 51.2 Gbps = 409.6 Gbps theoretical

23.9.26.2 Resource Scaling

LUT Usage Formula (empirical):

$LUTs \approx 500 \text{ (base)} + 150 \times M \times S + 20 \times ID_TABLE_DEPTH$

Example (4×4 crossbar, ID_WIDTH=4, ID_TABLE_DEPTH=16 per slave):

$$\begin{aligned}
 \text{LUTs} &\approx 500 + 150 \times 16 + 20 \times 16 \times 4 \\
 &\approx 500 + 2,400 + 1,280 \\
 &\approx 4,180 \text{ LUTs}
 \end{aligned}$$

23.9.36.3 Comparison with Other Crossbars

Crossbar Type	Latency	Throughput	Complexity	Use Case
APB	1-2 cycles	Low (serialized)	Low	Control registers
AXI-Stream (Delta)	2 cycles	High (streaming)	Medium	Data streaming
AXI4 (Bridge)	2-3 cycles	High (burst)	High	Memory-mapped I/O
AXI4 + Slices	4-6 cycles	High (burst)	Very High	>400 MHz designs

Bridge Sweet Spot: High-performance memory-mapped interconnects where out-of-order and burst efficiency are critical.

23.10 7. Generator Architecture

23.10.1 7.1 Python Generator Structure

```
class BridgeGenerator:
    """AXI4 crossbar RTL generator"""

    def __init__(self, config):
        self.num_masters = config.num_masters
        self.num_slaves = config.num_slaves
        self.data_width = config.data_width
        self.addr_width = config.addr_width
        self.id_width = config.id_width
        self.address_map = config.address_map

    def generate_address_decode(self) -> str:
        """Generate address range decode logic"""
        # For each master x slave, check if address in range
        # More complex than AXIS (uses address), simpler than full
decode

    def generate_aw_arbiter(self, slave_idx) -> str:
        """Generate write address channel arbiter for one slave"""
        # Round-robin arbiter
        # Grants locked until corresponding B response completes

    def generate_ar_arbiter(self, slave_idx) -> str:
        """Generate read address channel arbiter for one slave"""
        # Round-robin arbiter
        # Grants locked until corresponding R response completes
(RLAST)

    def generate_w_channel_mux(self, slave_idx) -> str:
        """Generate write data channel multiplexer"""
        # W channel follows AW grant (locked until WLAST)

    def generate_b_channel_demux(self, slave_idx) -> str:
        """Generate write response channel demultiplexer"""
        # Route by ID: lookup master from {slave_idx, BID}

    def generate_r_channel_demux(self, slave_idx) -> str:
        """Generate read data channel demultiplexer"""
        # Route by ID: lookup master from {slave_idx, RID}

    def generate_id_table(self, slave_idx) -> str:
        """Generate transaction ID tracking table"""
```



```

# Maps {slave, transaction_id} → master_id
# Indexed on AW/AR grant, looked up on B/R response

def generate_crossbar(self) -> str:
    """Generate complete crossbar module"""
    # Instantiate all arbiters, muxes, demuxes, ID tables

```

23.10.2 7.2 Address Map Configuration

Python Configuration:

```

bridge_config = {
    'num_masters': 4,
    'num_slaves': 4,
    'data_width': 512,
    'addr_width': 64,
    'id_width': 4,
    'address_map': {
        0: {'base': 0x00000000, 'size': 0x40000000, 'name': 'DDR'},
        1: {'base': 0x40000000, 'size': 0x00100000, 'name': 'SRAM'},
        2: {'base': 0x50000000, 'size': 0x01000000, 'name': 'PCIE'},
        3: {'base': 0x60000000, 'size': 0x00010000, 'name':
'Peripherals'}
    },
    'pipeline_outputs': True,
    'enable_counters': True
}

```

Generated Address Decode:

```

// Address decode for each master
always_comb begin
    for (int s = 0; s < NUM_SLAVES; s++)
        aw_request_matrix[s] = '0;

    for (int m = 0; m < NUM_MASTERS; m++) begin
        if (s_axi_awvalid[m]) begin
            // Slave 0: DDR (0x00000000 - 0x3FFFFFFF)
            if (s_axi_awaddr[m] >= 64'h00000000 &&
                s_axi_awaddr[m] < 64'h40000000)
                aw_request_matrix[0][m] = 1'b1;

            // Slave 1: SRAM (0x40000000 - 0x400FFFFF)
            if (s_axi_awaddr[m] >= 64'h40000000 &&
                s_axi_awaddr[m] < 64'h40100000)
                aw_request_matrix[1][m] = 1'b1;

            // ... slaves 2-3 ...

```

end
end
end

23.11 8. Comparison with APB and Delta

23.11.1 8.1 Code Reuse from APB Generator

Similar Components (~70% reuse): - Address range decode logic (same pattern, different signals) - Round-robin arbiter (same algorithm) - Data multiplexing pattern (same approach) - Backpressure handling (similar to PREADY)

New Components for Bridge: - 5× **the arbiters** (AW, W, B, AR, R instead of single channel) - **ID-based routing** (B and R channel demuxing) - **Transaction tracking** (ID tables for out-of-order) - **Burst handling** (grant locking until xlast)

Migration Effort from APB: - ~120 minutes (vs ~75 min for AXIS, due to higher complexity) - Most time: ID table logic and response demuxing

23.11.2 8.2 Code Reuse from Delta Generator

Similar Components (~60% reuse): - Python generation framework - Command-line interface - Performance modeling structure - Arbitration pattern (round-robin with locking)

Key Differences: - 5 **channels** vs 1 channel (Delta only has TDATA/TVALID/TREADY/TLAST) - **ID-based routing** vs TDEST-based routing - **Address decode** vs TDEST decode (Bridge more complex) - **Transaction tracking** vs packet atomicity (different mechanisms)

23.11.3 8.3 Complexity Comparison

Metric	APB Crossbar	Delta (AXIS)	Bridge (AXI4)
Channels to arbitrate	1	1	5 ★
Request generation	Address ranges	TDEST decode	Address ranges
Response routing	Grant-based	Grant-based	ID-based ★
Burst support	No	Packet (TLAST)	Yes (AWLEN/ARLEN) ★
Out-of-order	No	No	Yes (ID tables) ★
Transaction tracking	No	No	Yes ★

Metric	APB Crossbar	Delta (AXIS)	Bridge (AXI4)
Lines of Python	~500	~697	~900 (est.)
Lines of generated SV	~200 (4×4)	~250 (4×4)	~400 (4×4) (est.)

★ = Additional complexity in Bridge

23.12 9. Use Cases

23.12.1 9.1 Multi-Core Processor Interconnect

Scenario: 4 CPU cores + GPU accessing DDR + SRAM + Peripherals

Configuration:

Masters: 5 (4 CPUs, 1 GPU)
Slaves: 3 (DDR, SRAM, Peripherals)
Data: 512-bit (cache line width)
Address: 64-bit (large memory space)
ID: 4-bit (up to 16 outstanding per master)

Benefits: - Concurrent access to all slaves - Out-of-order completion for high-performance CPUs - Burst transfers for cache line fills - Separate read/write paths (no head-of-line blocking)

23.12.2 9.2 DMA + Accelerator System

Scenario: DMA engine + 4 accelerators accessing shared memory

Configuration:

Masters: 5 (1 DMA, 4 accelerators)
Slaves: 2 (DDR, Control registers)
Data: 512-bit (high-bandwidth DMA)
Address: 32-bit (limited address space)
ID: 2-bit (simple ID space)

Benefits: - High-bandwidth memory access for DMA - Fair arbitration prevents accelerator starvation - Control register access doesn't block data transfers

23.12.3 9.3 FPGA System Integration

Scenario: MicroBlaze CPU + custom accelerators + memory controllers

Configuration:

Masters: 8 (1 CPU, 7 accelerators)
Slaves: 4 (DDR, BRAM, AXI GPIO, AXI DMA)
Data: 128-bit (AXI4 standard width)
Address: 32-bit (standard FPGA address space)
ID: 4-bit (moderate outstanding transactions)

Benefits: - Standard AXI4 interfaces (Xilinx IP compatibility) - Scalable to many masters/slaves - Performance counters for profiling

23.13 10. Testing Strategy

23.13.1 10.1 FUB (Functional Unit Block) Tests

Address Decode Tests: - Verify all address ranges correctly decoded - Test boundary conditions (base, base+size-1) - Test unmapped addresses (error response)

Arbiter Tests: - Round-robin fairness (all masters get turns) - Burst locking (grant held until xlast) - Starvation prevention

ID Table Tests: - Correct ID → master mapping - Out-of-order transaction handling - Table full condition

Mux/Demux Tests: - Data integrity through crossbar - Response routing to correct master - Concurrent transfers don't interfere

23.13.2 10.2 Integration Tests

Single-Master, Single-Slave: - Basic read/write transactions - Burst transfers (various lengths) - Out-of-order completions

Multi-Master, Single-Slave: - Arbitration correctness - Fairness verification - Burst interleaving (if supported)

Multi-Master, Multi-Slave: - Concurrent transfers - No crosstalk between paths - Full M×S matrix coverage

Stress Tests: - All masters active simultaneously - Maximum burst lengths - Full ID space utilization - Back-to-back bursts

23.13.3 10.3 Performance Validation

Latency Measurement: - Single-beat read: measure actual vs analytical - Single-beat write: measure actual vs analytical - Compare with specification (≤ 3 cycles)

Throughput Measurement: - Burst transfer efficiency (should be ~98%) - Concurrent path throughput (should be line-rate × M×S) - Compare with theoretical maximum

Resource Validation: - Synthesize for Xilinx UltraScale+ - Compare LUT/FF usage with estimates - Verify $F_{max} \geq 300$ MHz

23.14 11. Documentation Plan

23.14.1 11.1 Specifications (Before Code)

- ☒ **PRD.md** - This document (complete requirements)
- ☐ **README.md** - User guide with quick start
- ☐ **BRIDGE_VS_APB_GENERATOR.md** - Migration guide from APB
- ☐ **BRIDGE_VS_DELTA_GENERATOR.md** - Comparison with Delta
- ☐ **AXI4_PROTOCOL_GUIDE.md** - AXI4 primer for students

23.14.2 11.2 Performance Analysis (Before Implementation)

- ☒ **models/bridge_model/bridge_model.py** - Analytical model (V1 Flat implemented)
 - Latency calculations (single-beat, burst)
 - Throughput estimates (concurrent paths)
 - Resource estimates (LUT/FF scaling)
- ☐ **bridge simulator** - Discrete event simulation (optional, not implemented)
 - Cycle-accurate modeling
 - Traffic pattern support
 - Validation against RTL

23.14.3 11.3 Code Generation

- ☐ **bin/bridge_generator.py** - Main RTL generator
 - Command-line interface
 - Address map configuration
 - Generated RTL output

23.14.4 11.4 Verification

- ☐ **dv/tests/** - CocoTB testbenches
 - FUB tests (individual blocks)
 - Integration tests (multi-block)
 - Stress tests (corner cases)
-

23.15 12. Success Metrics

23.15.1 12.1 Functional Completeness

- ☐ Generates working AXI4 crossbar RTL
- ☐ Passes all CocoTB tests
- ☐ Verilator lint clean
- ☐ Xilinx Vivado synthesis clean

23.15.2 12.2 Performance Targets

- ☐ Latency ≤ 3 cycles (measured in simulation)
- ☐ Throughput = line-rate $\times$ M $\times$ S paths (measured)
- ☐ Fmax ≥ 300 MHz (post-synthesis)

23.15.3 12.3 Educational Value

- ☐ Complete specifications demonstrating rigor
- ☐ Performance models validate requirements
- ☐ Clear code structure (readable generated RTL)
- ☐ Integration examples provided

23.15.4 12.4 Reusability

- ☐ ~70% code reuse from APB generator (measured by LOC)
 - ☐ Similar patterns to Delta generator
 - ☐ Can be extended (weighted arbitration, QoS, etc.)
-

23.16 12. Attribution and Contribution Guidelines

23.16.1 12.1 Git Commit Attribution

When creating git commits for Bridge documentation or implementation:

Use:

Documentation and implementation support by Claude.

Do NOT use:

Co-Authored-By: Claude <noreply@anthropic.com>

Rationale: Bridge documentation and organization receives AI assistance for structure and clarity, while design concepts and architectural decisions remain human-authored.

23.17 12.2 PDF Generation Location

IMPORTANT: PDF files should be generated in the docs directory:

projects/components/bridge/docs/

Quick Commands: Use the provided shell scripts:

```
cd projects/components/bridge/docs
./generate_has_pdf.sh    # Bridge_HAS_v<rev>.docx/.pdf
./generate_mas_pdf.sh    # Bridge_MAS_v<rev>.docx/.pdf
```

The shell scripts will automatically: 1. Use the md_to_docx.py tool from bin/ 2. Process the bridge_has/bridge_mas index files 3. Generate both DOCX and PDF files in the docs/ directory 4. Create table of contents and title page

See: bin/md_to_docx.py for complete implementation details

23.18 13. Future Enhancements

23.18.1 13.1 Short-Term (Post-Initial Release)

- ☐ **Optional pipeline stages** - For Fmax >400 MHz
- ☐ **Weighted arbitration** - QoS support
- ☐ **Default slave** - Unmapped address handling
- ☐ **Exclusive monitor** - Full atomic operation support

23.18.2 13.2 Long-Term

- ☐ **Tree topology** - Hierarchical crossbar (like Delta)
 - ☐ **AXI4-Lite variant** - Simplified for control registers
 - ☐ **ACE support** - Coherent cache interconnect
 - ☐ **GUI configurator** - Visual address map setup
-

23.19 14. Risk Assessment

Risk	Probability	Impact	Mitigation
ID table complexity	Medium	High	Start with small ID_WIDTH (2-4), test thoroughly
Out-of-order corner cases	High	High	Extensive CocoTB tests with random delays
Fmax below target	Low	Medium	Optional pipeline stages for timing closure
Resource usage exceeds	Low	Low	Empirical formulas guide expectations
Burst interleaving bugs	Medium	High	Separate test suite for burst scenarios

23.20 15. Project Timeline (Estimated)

Week 1: Specifications and Models - ☒ Day 1-2: PRD.md (complete) - ☐ Day 3-4: Performance modeling (analytical) - ☐ Day 5-7: README.md, migration guides

Week 2-3: Core Implementation - ☐ Day 1-3: Address decode + arbiter generation - ☐ Day 4-5: Data mux/demux generation - ☐ Day 6-8: ID table generation - ☐ Day 9-10: Integration and testing

Week 4: Verification and Examples - ☐ Day 1-5: CocoTB testbenches - ☐ Day 6-7: Integration examples

23.21 16. References

AXI4 Specifications: - ARM IHI 0022 - AMBA AXI and ACE Protocol Specification - Xilinx UG1037 - Vivado AXI Reference Guide

Related Projects: - **APB Crossbar** - Simple register bus crossbar (existing) - **Delta (AXIS Crossbar)** - Streaming data crossbar (projects/components/delta/) - **RAPIDS** - DMA engine with AXI4 masters (projects/components/dmas/rapids/)

Tools: - Verilator - RTL linting and simulation - CocoTB - Python-based verification - Xilinx Vivado - FPGA synthesis

23.22 17. Glossary

- **AXI4:** Advanced eXtensible Interface version 4 (AMBA standard)
 - **Burst:** Multi-beat transaction ($AWLEN/ARLEN > 0$)
 - **Crossbar:** Full $M \times N$ interconnect matrix
 - **ID:** Transaction identifier for out-of-order support
 - **Out-of-order:** Responses can return in different order than requests
 - **xlast:** WLAST (write) or RLAST (read) - last beat indicator
-

Version: 1.0 **Status:** Specification Complete - Ready for Implementation **Next Steps:** Create performance models, then implement generator

Project Bridge - Connecting masters and slaves across the divide

RTL Design Sherpa · Learning Hardware Design Through Practice [GitHub](#) · [Documentation Index](#) · [MIT License](#)

24 Claude Code Guide: Bridge Subsystem

Version: 2.1 **Last Updated:** 2025-11-03 **Purpose:** AI-specific guidance for working with Bridge subsystem

24.1 CRITICAL: Read Architecture Documents First

Before making ANY changes to bridge generator or understanding signal flow:

READ: projects/components/bridge/GENERATOR_ARCHITECTURE.md (generator structure) and projects/components/bridge/docs/bridge_mas/ (micro-architecture spec; rendered as docs/Bridge_MAS_v1.1.pdf)

These documents contain the **definitive bridge architecture** including: - Correct signal flow (wrappers → decoder → converters → crossbar → slaves) - Component purposes and placement - Common misconceptions that previous agents made - Why there's NO fixed crossbar width

If you skip these documents, you WILL make incorrect assumptions.

24.2 Quick Context

What: Bridge - Two complementary AXI4 Crossbar Generators (framework-based and CSV-based)

Status: Phase 2 Complete - CSV generator with channel-specific masters (wr/rd/rw) **Your Role:**

Help users configure CSV files, generate bridges, understand architecture, and create tests

Complete Documentation (Read in This Order): 1.

projects/components/bridge/GENERATOR_ARCHITECTURE.md ← **START HERE** (generator

architecture reference) 2. projects/components/bridge/PRD.md ← Product requirements 3.

projects/components/bridge/TASKS.md ← Task history and current status 4.

projects/components/bridge/docs/bridge_has/bridge_has_index.md ← Hardware
Architecture Spec (rendered: docs/Bridge_HAS_v1.1.pdf) 5.

projects/components/bridge/docs/bridge_mas/bridge_mas_index.md ← Micro-
Architecture Spec (rendered: docs/Bridge_MAS_v1.1.pdf)

(The older BRIDGE_ARCHITECTURE.md, BRIDGE_CURRENT_STATE.md,
BRIDGE_ARCHITECTURE_DIAGRAMS.md, CSV_BRIDGE_STATUS.md, and docs/bridge_spec/
documents were superseded by the HAS/MAS above.)

24.3 Target Architecture: Intelligent Width-Aware Routing

Core Principle: Direct connections where possible, converters only where needed, no fixed crossbar width.

24.3.1 Efficient Multi-Width Design

Master_A (64b)

└ Direct → Slave_0 (64b)	[0 conversions, minimal latency]
└ Conv(64→128) → Slave_1 (128b)	[1 conversion]
└ Conv(64→512) → Slave_2 (512b)	[1 conversion]

Master_B (512b)

└ Conv(512→64) → Slave_0 (64b)	[1 conversion]
└ Conv(512→128) → Slave_1 (128b)	[1 conversion]
└ Direct → Slave_2 (512b)	[0 conversions, full bandwidth]

Router Logic: Address decoder determines target slave, selects correctly-sized path for that master-slave pair.

24.3.2 Why This Architecture

Naive Fixed-Width Approach (Don't Do This):

Master (64b) → Upsize(64→256) → Fixed 256b Crossbar → Downsize(256→64) → Slave (64b)

- TWO conversions for same-width connections (wasteful!)
- Reduced bandwidth on narrow paths
- Unnecessary logic and area
- Higher latency

Intelligent Routing (Target):

Master (64b) → Router → Direct Connection → Slave (64b)

- ZERO conversions for matching widths
- Full native bandwidth
- Minimal logic
- Lowest latency

24.3.3 Per-Master Output Paths

Each master has N output paths (one per unique slave width it connects to):

```
// Master_A connects to slaves at 64b, 128b, 512b
// Generate 3 output paths:
```

```

logic [63:0] master_a_64b_wdata;    // For 64b slaves (direct)
logic [127:0] master_a_128b_wdata; // For 128b slaves (via converter)
logic [511:0] master_a_512b_wdata; // For 512b slaves (via converter)

// Router selects based on address decode:
always_comb begin
    case (decoded_slave_id)
        SLAVE_0: select master_a_64b_wdata;    // Slave_0 is 64b
        SLAVE_1: select master_a_128b_wdata;   // Slave_1 is 128b
        SLAVE_2: select master_a_512b_wdata;   // Slave_2 is 512b
    endcase
end

```

24.3.4 Benefits

1. **Resource Efficient** - Only instantiate converters actually needed
2. **Maximum Performance** - Direct paths have zero conversion overhead
3. **Optimal Bandwidth** - No artificial width bottlenecks
4. **Lower Latency** - Minimal logic in critical path for matching widths
5. **Scalable** - Works for any combination of master/slave widths

24.3.5 Implementation Status

Current State: Fixed-width crossbar with master-side upsizing (Phase 1 architecture) **Target State:** Intelligent per-master multi-width routing (your vision) **Migration:** Requires generator architecture rework (see TASKS.md)

24.4 CRITICAL RULE #0: RTL Regeneration Requirements

READ THIS FIRST - FAILURE TO FOLLOW CAUSES TEST FAILURES

24.4.1 The Golden Rule

ALL generated RTL files MUST be deleted and regenerated together whenever ANY generator code changes.

24.4.2 Why This Is Non-Negotiable

Generated RTL files have interdependencies: - Each `rtl/generated/<bridge_name>/` directory holds a matched set (top module, crossbar, adapters, package) - Generator changes affect signal names, port widths, interface structure - **Partial regeneration creates version mismatches that cause silent failures**

24.4.3 Real Example (Historical Session)

WHAT WENT WRONG:

1. Updated the address decode logic in the generator
2. Regenerated ONLY one bridge configuration
3. Did NOT regenerate the wrapper that instantiated it
4. Result: All tests that were passing now FAIL
5. Cause: Version mismatch between wrapper and core bridge

WHAT SHOULD HAVE BEEN DONE:

1. Update the generator
2. Delete ALL generated bridge directories (`rtl/generated/bridge_*/`)
3. Regenerate ALL bridges from scratch (`make all in bin/`)
4. Run ALL tests to verify

24.4.4 Generator Files That Trigger Full Regeneration

Any change to these files requires regenerating ALL bridges:

- `bin/bridge_generator.py` - Core bridge generator (CSV/TOML driven)
- **ANY** Python file in `bin/bridge_pkg/` (components/, generators/, config, csv_parser, signal_naming, ...)
- Any Jinja template in `bin/bridge_pkg/jinja_templates/`

24.4.5 The Regeneration Workflow

Step 1: Make generator code changes

```
vim bin/bridge_pkg/generators/crossbar_generator.py
```

Step 2: Delete ALL generated RTL (be aggressive!)

```
cd projects/components/bridge/bin
```

```
make clean    # Removes rtl/generated/ output
```

```
# Step 3: Regenerate everything from bridge_batch.csv
make all      # Runs bridge_generator.py --bulk bridge_batch.csv
```

```
# Step 4: Run ALL tests
cd ../dv/tests
pytest -v     # ALL tests, not just the one you think changed
```

```
# Step 5: Verify git diff makes sense
git diff ../rtl/ # Review all changes
```

24.4.6 Symptoms of Version Mismatch

If you see these symptoms, you probably did partial regeneration:

- Tests that previously passed now fail
- “Signal not found” errors in simulation
- Port width mismatches in instantiation
- Address decode routing to wrong slaves
- Missing debug signals (dbg_*)
- Unexpected compile errors in working code

24.4.7 Think Like a Compiler Developer

Generated RTL = Compiled Object Files

When you update a compiler, you don’t selectively recompile - you make `clean` && `make all`.

When you update a generator, you don’t selectively regenerate - you **delete all and regenerate all**.

24.4.8 Exception: Hand-Written RTL

These files are **never** regenerated: - `bridge_cam.sv` - CAM module (hand-written) - Any file in `rtl/` that is NOT generated

Check file headers - generated files say “Generated by: `bridge_generator.py`”

24.5 Critical Pitfalls: slave_select_* Reversion After Handshake

24.5.1 The Problem: Combinational Address Decode

The master adapter's R/B response MUX and the crossbar's AR/AW gating both relied on `<master>_slave_select_{ar,aw}` — a combinational decode of `fub_axi_{ar,aw}addr`. This signal reverts immediately when the address port is freed:

1. AR/AW handshake completes (arvalid && arready, awvalid && awready)
2. Wrapper pops skid buffer and releases the address port
3. `fub_axi_araddr` / `fub_axi_awaddr` reverts to next transaction or zero
4. Decode flips to different slave
5. Response MUX is now gated on WRONG slave
6. Response path closes, transaction hangs

This happens BEFORE the converter even finishes pushing to the crossbar, and ALWAYS before response arrives.

24.5.2 Visible Symptoms

- Fails: Multi-slave multi-master bridges hang (timeout)
- Fails: Multi-width masters fail basic connectivity
- Fails: APB/AXIL slaves consistently timeout (longer converter latency = more decode changes)
- Works: Single-slave or single-master systems (no decode change)

24.5.3 The Solution (MANDATORY in All Generators)

For Crossbar AR/AW Gating: - Replace `<master>_slave_select_ar/aw` gates with **inline address re-decode** on stable `m_axi` buses - Address on `m_axi` is held stable across the entire AXI handshake

For Master Adapter Response MUX: - Add **per-channel response-tracking FIFOs** that capture slave index at request time - Use FIFO head for response MUX instead of live combinational decode

Crossbar Code Pattern:

```
// WRONG (old implementation):
assign gate_ar_s0 = m0_slave_select_ar && m0_arvalid;
//                               ^^^^^^^^^^^^^^^^^^ Reverts after handshake!
```

```
// CORRECT (new implementation):
assign gate_ar_s0 = ((m0_m_axi_araddr >= S0_BASE) &&
                    (m0_m_axi_araddr < S0_END) &&
```

```
                                m0_arvalid); // Re-decode on stable m_axi
address
```

Master Adapter Code Pattern:

```
// WRONG (old implementation):
assign r_slave_select = comb_slave_select_ar; // Stale after pop!

// CORRECT (new implementation):
// Capture at request time
always_ff @(posedge aclk) begin
    if (fub_axi_arvalid && fub_axi_arready) begin
        ar_trk_fifo <= comb_slave_select_ar;
    end
end

// Use stable value for response MUX
assign r_slave_select = ar_trk_fifo_out;
```

24.5.4 When This Bug Appears

- Works: Single-master, single-slave systems (no address re-evaluation)
 - Fails: Multi-master to same slave (multiple addresses decode differently)
 - Fails: Multi-slave same master (address decode changes per transaction)
 - Fails: Multi-width paths (W beats re-evaluate AW decode mid-burst)
-

24.6 MANDATORY: Project Organization Pattern

THIS SUBSYSTEM MUST FOLLOW THE RAPIDS/AMBA ORGANIZATIONAL PATTERN - NO EXCEPTIONS

24.6.1 Required Directory Structure

```
projects/components/bridge/
├── bin/                                # Bridge-specific tools
├── (generators, scripts)
├── └── bridge_generator.py            # AXI4 crossbar generator (CSV/TOML
├── driven)
├── └── bridge_pkg/                  # Generator implementation package
├── └── test_configs/               # TOML port configs + CSV
├── connectivity
├── └── Makefile                     # make all / make single / make
├── clean
├── docs/                            # Design documentation
├── (bridge_has/, bridge_mas/, PDFs)
├── dv/                              # Design Verification (MANDATORY
├── structure)
├── └── tbclasses/                  # Testbench classes (MANDATORY - TB
├── classes here!)
├── └── └── __init__.py
├── └── └── bridge2x2_rw_tb.py      # Per-config generated TB classes
├── └── └── components/            # Bridge-specific BFM (if needed)
├── └── └── scoreboards/           # Bridge-specific scoreboards (if
├── needed)
├── └── testplans/                  # Test plans
├── └── tests/                      # All test files (test runners
├── only, flat)
├── └── └── conftest.py             # Pytest configuration (MANDATORY)
├── └── └── test_bridge_*.py        # Per-config tests
├── (test_bridge_2x2_rw.py, ...)
├── rtl/                             # RTL source files
├── └── bridge_cam.sv              # Hand-written CAM
├── └── filelists/                 # Generated filelists
├── └── generated/                 # Generated bridges (one subdir per
├── config)
├── └── CLAUDE.md                  # This file
├── └── PRD.md                     # Product requirements
├── └── TASKS.md                   # Task history and status
```

24.6.2 Testbench Class Location (MANDATORY)

WRONG: Testbench class in test file

```
# projects/components/bridge/dv/tests/test_bridge_2x2_rw.py
class Bridge2x2RwTB: # WRONG LOCATION!
    """Embedded TB - NOT REUSABLE"""
```

CORRECT: Testbench class in PROJECT AREA dv/tbclasses/

```
# projects/components/bridge/dv/tbclasses/bridge2x2_rw_tb.py
class Bridge2x2RwTB(TBBase): # CORRECT LOCATION!
    """Reusable TB class - imported by the matching test runner"""
```

CRITICAL: TB classes are PROJECT-SPECIFIC and MUST be in the project area (projects/components/{name}/dv/tbclasses/), NOT in the framework (bin/TBClasses/).

24.6.3 Test File Pattern (MANDATORY)

Test files MUST follow this structure:

```
# projects/components/bridge/dv/tests/test_bridge_2x2_rw.py

import os
import pytest
import cocotb
from cocotb_test.simulator import run

# IMPORT testbench class from PROJECT AREA
import sys
from TBClasses.shared.utilities import get_repo_root
sys.path.insert(0, get_repo_root())
from projects.components.bridge.dv.tbclasses.bridge2x2_rw_tb import
Bridge2x2RwTB
from TBClasses.shared.utilities import get_paths, get_wave_config
from TBClasses.shared.filelist_utils import get_sources_from_filelist

#
=====
=====
# COCOTB TEST FUNCTIONS - Prefix with "cocotb_" to prevent pytest
collection
#
=====
=====

@cocotb.test(timeout_time=100, timeout_unit='us')
async def cocotb_test_basic_routing(dut):
    """Test basic address routing"""
    tb = Bridge2x2RwTB(dut) # Imported TB
    await tb.setup_clocks_and_reset()
    result = await tb.test_basic_routing()
```

```

    assert result, "Basic routing test failed"

# More cocotb test functions...

#
=====
=====
# PYTEST WRAPPER FUNCTIONS - At bottom of file
#
=====
=====

@pytest.mark.bridge
def test_bridge_2x2_rw(request):
    """Pytest wrapper for the generated 2x2 rw bridge"""
    module, repo_root, tests_dir, log_dir, rtl_dict = get_paths({
        'rtl_bridge': '../rtl'
    })

    # ... verilog_sources from the bridge's filelist, parameters,
    etc ...

    run(
        verilog_sources=verilog_sources,
        toplevel="bridge_2x2_rw",
        module=module,
        testcase="cocotb_test_basic_routing", # ← cocotb function
name
        parameters=rtl_parameters,
        sim_build=sim_build,
        # ...
    )

```

See `dv/tests/test_bridge_2x2_rw.py` for the real, complete pattern (tests and TB classes are generated per bridge configuration alongside the RTL).

24.7 Critical Rules for This Subsystem

24.7.1 Rule #0: Attribution Format for Git Commits

IMPORTANT: When creating git commit messages for Bridge documentation or code:

Use:

Documentation and implementation support by Claude.

Do NOT use:

Co-Authored-By: Claude <noreply@anthropic.com>

Rationale: Bridge receives AI assistance for structure and clarity, while design concepts and architectural decisions remain human-authored.

24.7.2 Rule #0.1: Testbench Architecture - MANDATORY SEPARATION

THIS IS A HARD REQUIREMENT - NO EXCEPTIONS

NEVER embed testbench classes inside test runner files!

The same testbench logic will be reused across multiple test scenarios. Having testbench code only in test files makes it COMPLETELY WORTHLESS for reuse.

MANDATORY Structure:

```
projects/components/bridge/
├── dv/
│   ├── tbclasses/                # TB classes HERE (not in
│   │   ├── __init__.py           framework!)
│   │   ├── bridge2x2_rw_tb.py    ← REUSABLE TB CLASS (per config)
│   │   └── bridge5x3_channels_tb.py
│   └── components/              # Bridge-specific BFM's (if
│       ├── __init__.py           needed)
│       ├── scoreboards/          # Bridge-specific scoreboards
│       │   ├── __init__.py
│       └── tests/                # Test runners (flat, one per
│           ├── conftest.py        config)
│           ├── test_bridge_2x2_rw.py ← MANDATORY pytest config
│           └── test_bridge_5x3_channels.py ← TEST RUNNER ONLY (imports TB)
```

Why This Matters:

1. **Reusability:** Same TB class used in:

- Per-config functional tests
 - Monitor stress tests (test_bridge*_mon_monitor.py)
 - User projects (external imports)
2. **Maintainability:** Fix bug once in TB class, all tests benefit
 3. **Composition:** TB classes can inherit/compose for complex scenarios
-

24.7.3 Rule #1: All Testbenches Inherit from TBBase

Every testbench class **MUST** inherit from TBBase:

```
from TBClasses.shared.tbbase import TBBase
```

```
class BridgeAXI4FlatTB(TBBase):  
    """Testbench for Bridge crossbar - inherits base functionality"""  
  
    def __init__(self, dut, num_masters=2, num_slaves=2, **kwargs):  
        super().__init__(dut)  
        # Bridge-specific initialization
```

TBBase Provides: - Clock management (start_clock, wait_clocks) - Reset utilities (assert_reset, deassert_reset) - Logging (self.log) - Progress tracking (mark_progress) - Safety monitoring (timeouts, memory limits)

24.7.4 Rule #2: Mandatory Testbench Methods

Every testbench class **MUST** implement these three methods:

```
async def setup_clocks_and_reset(self):  
    """Complete initialization - starts clocks and performs reset"""  
    await self.start_clock('aclk', freq=10, units='ns')  
  
    # Set config signals before reset (if needed)  
    # self.dut.cfg_param.value = initial_value  
  
    # Reset sequence  
    await self.assert_reset()  
    await self.wait_clocks('aclk', 10)  
    await self.deassert_reset()  
    await self.wait_clocks('aclk', 5)  
  
async def assert_reset(self):
```

```
"""Assert reset signal (active-low for AXI4)"""
self.dut.aresetn.value = 0
```

```
async def deassert_reset(self):
    """Deassert reset signal"""
    self.dut.aresetn.value = 1
```

Why Required: - Consistency across all testbenches - Reusability for mid-test resets - Clear test structure and intent

24.7.5 Rule #3: Use GAXI Components for Protocol Handling

For Bridge testing, use GAXI Master/Slave components for AXI4 channel handling:

```
from CocoTBFramework.components.gaxi.gaxi_master import GAXIMaster
from CocoTBFramework.components.gaxi.gaxi_slave import GAXISlave
from CocoTBFramework.components.axi4.axi4_field_configs import
AXI4FieldConfigHelper
```

```
# CORRECT: Use GAXI for AXI4 channels
```

```
self.aw_master = GAXIMaster(
    dut=dut,
    title="AW_M0",
    prefix="s0_axi4_",
    clock=clock,
```

```
    field_config=AXI4FieldConfigHelper.create_aw_field_config(id_width,
    addr_width, 1),
    pkt_prefix="aw",
    multi_sig=True,
    log=log
)
```

Never manually drive AXI4 valid/ready handshakes - Use GAXI components.

24.7.6 Rule #4: Queue-Based Verification

For simple in-order verification, use direct monitor queue access:

```
# CORRECT: Direct queue access
```

```
aw_pkt = self.aw_slave._recvQ.popleft()
w_pkt = self.w_slave._recvQ.popleft()
```

```
# Verify
```

```
assert aw_pkt.addr == expected_addr
```

```
assert w_pkt.data == expected_data
```

```
# WRONG: Memory model for simple test
```

```
memory_model = MemoryModel() # Unnecessary complexity
```

When to Use Memory Models: - Simple in-order tests → Use queue access - Single-master systems
→ Use queue access - Complex out-of-order scenarios → Memory model may help - Multi-master
with address overlap → Memory model tracks state

24.8 TOML/CSV-Based Bridge Generator (Phase 2 Complete)

24.8.1 Overview

The Bridge generator creates parameterized SystemVerilog crossbars from TOML configuration files with CSV connectivity matrices, eliminating manual RTL editing for complex interconnects.

Key Benefits: - **Human-readable configuration** - TOML for ports, CSV for connectivity - **Custom signal prefixes** - Each port has unique prefix (rapids_m_axi_, apb0_, etc.) - **Channel-specific masters** - Write-only (wr), read-only (rd), or full (rw) - **Interface modules** - Timing isolation via axi4_master/slave wrappers with configurable skid depths - **Automatic converters** - Width and protocol conversion inserted automatically - **Resource efficient** - Only generates needed channels and converters

24.8.2 Quick Start

1. Create bridge_mybridge.toml:

```
[bridge]
  name = "bridge_mybridge"
  description = "Custom bridge example"

  # Default skid buffer depths (can be overridden per port)
  defaults.skid_depths = {ar = 2, r = 4, aw = 2, w = 4, b = 2}

  masters = [
    {name = "cpu", prefix = "cpu_m_axi", id_width = 4, addr_width =
32, data_width = 64, user_width = 1,
    interface = {type = "axi4_master"}}},
    {name = "dma", prefix = "dma_m_axi", id_width = 4, addr_width =
32, data_width = 512, user_width = 1,
    interface = {type = "axi4_master", skid_depths = {ar = 4, r = 8,
aw = 4, w = 8, b = 4}}}}
  ]

  slaves = [
    {name = "ddr", prefix = "ddr_s_axi", id_width = 4, addr_width =
32, data_width = 512, user_width = 1,
    base_addr = 0x00000000, addr_range = 0x80000000, interface =
{type = "axi4_slave"}}},
    {name = "sram", prefix = "sram_s_axi", id_width = 4, addr_width =
32, data_width = 256, user_width = 1,
    base_addr = 0x80000000, addr_range = 0x80000000, interface =
{type = "axi4_slave"}}}
  ]
```

2. Create bridge_mybridge_connectivity.csv:


```
master\slave,ddr,sram
cpu,1,1
dma,1,1
```

3. Generate bridge:

```
cd projects/components/bridge/bin
python3 bridge_generator.py --ports test_configs/bridge_mybridge.toml
# Auto-finds bridge_mybridge_connectivity.csv

# Or use bulk generation
python3 bridge_generator.py --bulk bridge_batch.csv
```

Result: Complete SystemVerilog module with: - Custom port prefixes per port - Timing isolation via interface wrappers - Only needed AXI4 channels (wr/rd/rw optimized) - Width converters for data mismatches - Internal crossbar instantiation - APB/AXI4-Lite converter integration points

24.8.3 Configuration Format Details

TOML Port Configuration:

The primary format is now **TOML** (preferred over CSV for better structure and interface configuration):

Port Specifications: - name - Unique identifier (cpu, dma, ddr, etc.) - prefix - Signal prefix (cpu_m_axi_, ddr_s_axi_, etc.) - id_width - AXI4 ID width in bits - addr_width - Address width in bits - data_width - Data width in bits (32, 64, 128, 256, 512) - user_width - AXI4 user signal width - base_addr - Slave base address (slaves only) - addr_range - Slave address range (slaves only) - interface - Interface wrapper configuration (optional) - type - “axi4_master”, “axi4_slave”, “axi4_master_mon”, “axi4_slave_mon”, or omit for direct connection - skid_depths - Per-channel buffer depths: {ar, r, aw, w, b} (valid: 2, 4, 6, 8)

CSV Connectivity Matrix:

```
master\slave,slave0,slave1,slave2
master0,1,0,1
master1,0,1,1
```

- 1 = connected, 0 = not connected
- Partial connectivity supported (not all masters to all slaves)
- Auto-detected based on TOML filename: bridge_name.toml → bridge_name_connectivity.csv

Legacy CSV Format:

For backwards compatibility, the generator still supports CSV port files: - See bin/test_configs/README.md for migration guide from CSV to TOML - TOML is now preferred for new bridges (better structure, interface config support)

24.8.4 Channel-Specific Masters (Phase 2 Feature)

Why Channel-Specific? Real hardware often has dedicated read or write masters. Generating all 5 AXI4 channels wastes resources:

Traditional (wasteful):

```
// Write-only master gets unused read channels
input logic [63:0] rapids_descr_m_axi_awaddr, // USED
input logic [511:0] rapids_descr_m_axi_wdata, // USED
output logic [7:0] rapids_descr_m_axi_bid, // USED
input logic [63:0] rapids_descr_m_axi_araddr, // UNUSED (50%
waste!)
output logic [511:0] rapids_descr_m_axi_rdata, // UNUSED
```

Channel-Specific (optimized):

rapids_descr_wr, master, axi4, wr, rapids_descr_m_axi_, 512, 64, 8, N/A, N/A

Generated:

```
// Write-only master - only AW, W, B channels
input logic [63:0] rapids_descr_m_axi_awaddr,
input logic [511:0] rapids_descr_m_axi_wdata,
output logic [7:0] rapids_descr_m_axi_bid,
// NO READ CHANNELS (araddr, rdata, etc.)
```

Resource Savings: - 40-60% fewer ports for dedicated masters - Only necessary width converters instantiated - Channel-aware direct connection wiring - Faster synthesis, smaller netlists

24.8.5 Example: RAPIDS-Style Configuration

RAPIDS Architecture: - Descriptor write master (wr) - Writes descriptors to memory - Sink write master (wr) - Writes incoming packets to memory - Source read master (rd) - Reads outgoing packets from memory - CPU master (rw) - Full access for configuration

TOML Configuration (bridge_rapids.toml):

```
[bridge]
  name = "bridge_rapids"
  description = "RAPIDS accelerator bridge"
  defaults.skid_depths = {ar = 2, r = 4, aw = 2, w = 4, b = 2}

  masters = [
    {name = "rapids_descr_wr", prefix = "rapids_descr_m_axi", channels
= "wr",
      id_width = 8, addr_width = 64, data_width = 512, user_width = 1,
      interface = {type = "axi4_master"}},
    {name = "rapids_sink_wr", prefix = "rapids_sink_m_axi", channels =
"wr",
```

```

        id_width = 8, addr_width = 64, data_width = 512, user_width = 1,
        interface = {type = "axi4_master"}}},
{name = "rapids_src_rd", prefix = "rapids_src_m_axi", channels =
"rd",
    id_width = 8, addr_width = 64, data_width = 512, user_width = 1,
    interface = {type = "axi4_master"}}},
{name = "cpu", prefix = "cpu_m_axi", channels = "rw",
    id_width = 4, addr_width = 32, data_width = 64, user_width = 1,
    interface = {type = "axi4_master"}}}
]

slaves = [
{name = "ddr", prefix = "ddr_s_axi", protocol = "axi4",
    id_width = 8, addr_width = 64, data_width = 512, user_width = 1,
    base_addr = 0x80000000, addr_range = 0x80000000,
    interface = {type = "axi4_slave"}}},
{name = "apb_periph", prefix = "apb0_", protocol = "apb",
    addr_width = 32, data_width = 32,
    base_addr = 0x00000000, addr_range = 0x00010000}
]

```

Connectivity CSV (bridge_rapids_connectivity.csv):

```

master\slave,ddr,apb_periph
rapids_descr_wr,1,0
rapids_sink_wr,1,0
rapids_src_rd,1,0
cpu,1,1

```

Generated RTL Features: - rapids_descr_wr: 37 signals (write channels only) vs 61 signals (full) = **39% reduction** - rapids_sink_wr: 37 signals (write channels only) vs 61 signals (full) = **39% reduction** - rapids_src_rd: 24 signals (read channels only) vs 61 signals (full) = **61% reduction** - cpu_master: Width converters for 64b→512b upsize (both wr and rd converters) - ddr_controller: Direct 512b connection (no conversion) - apb_periph0: APB converter placeholder (Phase 3)

24.8.6 Common User Questions

Q: “How do I generate a bridge?”

A: Three steps:

1. Create TOML port configuration file
2. Create CSV connectivity matrix
3. Run bridge_generator.py

Create bridge_mybridge.toml (port configuration)

Create bridge_mybridge_connectivity.csv (connectivity matrix)

cd projects/components/bridge/bin

```
python3 bridge_generator.py --ports test_configs/bridge_mybridge.toml
# Auto-finds bridge_mybridge_connectivity.csv
```

```
# Or use bulk generation for multiple bridges
python3 bridge_generator.py --bulk bridge_batch.csv
```

Q: “What’s the difference between wr/rd/rw channels?”

A: Number of AXI4 channels generated:

- **rw** (read/write) - All 5 channels: AW, W, B, AR, R
- **wr** (write-only) - 3 channels: AW, W, B (no read channels)
- **rd** (read-only) - 2 channels: AR, R (no write channels)

Benefits: 40-60% fewer ports for dedicated masters, less logic, faster synthesis

Q: “Can I add timing isolation to ports?”

A: Yes, use interface configuration:

```
masters = [
    {name = "cpu", prefix = "cpu_m_axi", ...,
      interface = {type = "axi4_master", skid_depths = {ar = 2, r = 4, aw
= 2, w = 4, b = 2}}}}
]
```

Available interface types: - "axi4_master" - Timing isolation on master port - "axi4_slave" - Timing isolation on slave port - "axi4_master_mon" - Timing + monitoring - "axi4_slave_mon" - Timing + monitoring - Omit interface field for direct connection

Q: “Can I mix AXI4 and APB slaves?”

A: Yes, use protocol field in TOML:

```
slaves = [
    {name = "ddr", prefix = "ddr_s_axi", protocol = "axi4", ...},
    {name = "apb0", prefix = "apb0_", protocol = "apb", ...}
]
```

Generator inserts AXI2APB converters automatically (Phase 3 for full implementation).

Q: “Can ports be AMBA5 (AXI5 / APB5)?”

A: Yes — per port, while the fabric stays AXI4 (BRIDGE-002):

```
[[bridge.masters]]
protocol = "axi5"
axi5_features = ["trace", "atomic"] # nsaid/trace/mpam/mecid/unique
are
                                     # droppable sideband;
```

```
poison/atomic are                                     # connectivity-gated (every
connected path                                         # must be AXI5 + feature + width-
matched);                                              # mte/chunking rejected
```

```
[[bridge.slaves]]
protocol = "apb5"   # APB4 rules apply (rw-only, 32-bit); adds the
APB5 pins
```

Sideband passes natively on width-matched AXI5<->AXI5 paths and terminates with a generation-time warning elsewhere. Atomics are store-class only: read-return classes DECERR at the boundary (axi5_atomic_filter). Details: docs/bridge_has/ch04_interfaces/04_axi5_apb5_interfaces.md and docs/bridge_mas/ch02_blocks/10_amba5_boundary.md.

Q: “What if data widths don’t match?”

A: Generator inserts width converters automatically:

```
masters = [
  {name = "cpu", data_width = 64, ...}, # 64b master
]
slaves = [
  {name = "ddr", data_width = 512, ...} # 512b slave
]
# Generator creates width converter: 64b → 512b
```

Q: “Do all masters need to connect to all slaves?”

A: No, use partial connectivity in CSV:

```
master\slave,ddr,sram,apb
rapids_descr,1,1,0      # Connects to ddr and sram only
cpu,1,1,1               # Connects to all three
```

24.8.7 Generator Output Structure

Generated File Contains:

1. **Module Header** - Parameterized with NUM_MASTERS, NUM_SLAVES, widths
2. **Port Declarations** - Custom prefix per port, channel-specific signals
3. **Internal Signals** - Crossbar interface arrays (xbar_m_, xbar_s_)
4. **Width Converters** - Master-side upsize instances (channel-aware)
5. **Crossbar Instance** - Internal AXI4 full crossbar

6. **Direct Connections** - For matching-width interfaces

7. **APB Converters** - Placeholder TODO comments (Phase 3)

Example Output Size: - Simple 2x2 bridge: ~400 lines - Complex 5x3 with mixed protocols: ~900 lines - Includes comprehensive comments and structure

24.8.8 Testing Generated Bridges

For Pure AXI4 Bridges (Working Now):

```
# Generate bridge (outputs to rtl/generated/<bridge_name>/)
python3 bridge_generator.py --ports test_configs/bridge_2x2_rw.toml

# Run its test (per-config TB classes live in dv/tbclasses/, e.g.
bridge2x2_rw_tb.py)
cd ../dv/tests
pytest test_bridge_2x2_rw.py -v
```

For Mixed AXI4/APB (Requires Phase 3): APB converter placeholders need implementation before end-to-end testing.

24.9 Bridge Architecture Quick Reference

24.9.1 Generated Bridge Crossbar Structure

Illustrative shape (see rtl/generated/bridge_2x2_rw/bridge_2x2_rw.sv for a real example):

```
module bridge_2x2_rw #(
    parameter NUM_MASTERS = 2,
    parameter NUM_SLAVES = 2,
    parameter DATA_WIDTH = 32,
    parameter ADDR_WIDTH = 32,
    parameter ID_WIDTH = 4
) (
    input logic aclk,
    input logic aresetn,

    // Master-side interfaces (slave ports on bridge)
    // AW, W, B, AR, R channels for each master

    // Slave-side interfaces (master ports on bridge)
    // AW, W, B, AR, R channels for each slave
);
```

24.9.2 Key Features

1. **5-Channel Implementation:** Complete AW, W, B, AR, R routing
2. **Round-Robin Arbitration:** Per-slave arbitration with grant locking
3. **Transaction ID Tracking:** Distributed RAM for B/R response routing
4. **ID-Based Routing:** Enables out-of-order responses
5. **Configurable Parameters:** NxM topology, data/addr/ID widths

24.9.3 Address Map

Default address map (configurable): - Slave 0: 0x00000000 - 0xFFFFFFFF (256MB) - Slave 1: 0x10000000 - 0x1FFFFFFF (256MB) - Slave N: N * 0x10000000

24.10 Test Organization

24.10.1 Test Hierarchy

```
projects/components/bridge/dv/tests/
├── conftest.py                # Pytest configuration with
fixtures                      # Per-config functional tests
├── test_bridge_1x2_rd.py
├── test_bridge_2x2_rw.py
├── test_bridge_4x4_rw.py
├── test_bridge_5x3_channels.py
├── test_bridge_mix_a_mon_monitor.py  # Monitor stress tests (mon
configs)
└── monitor_stress_common.py        # Shared monitor-stress helpers
```

24.10.2 Test Levels

Per-Config Functional Tests: - Individual bridge functionality - Address routing - ID tracking - Arbitration

Monitor Stress Tests (*_mon_monitor.py): - Bridges generated with monitor interfaces - Monitor packet generation under traffic

24.11 Common User Questions and Responses

24.11.1 Q: "How does the Bridge work?"

A: Direct answer:

The Bridge AXI4 crossbar connects multiple AXI4 masters to multiple slaves:

1. **Address Decode (AW/AR):** Routes master requests to appropriate slave based on address
2. **Write Path:** AW → arbitration → slave, W follows locked grant
3. **Read Path:** AR → arbitration → slave, R returns via ID table
4. **Arbitration:** Per-slave round-robin with grant locking until burst complete
5. **Response Routing:** B/R responses use ID lookup tables (not grant-based)

Key Features: - Out-of-order response support via ID tracking - Burst-aware arbitration (grant locked until WLAST/RLAST) - Configurable NxM topology - Single-clock domain

See: - projects/components/bridge/PRD.md - Complete specification -
projects/components/bridge/bin/bridge_generator.py - Generator implementation

24.11.2 Q: "How do I generate a Bridge?"

A: Use the bridge_generator.py tool:

```
cd projects/components/bridge/bin
python3 bridge_generator.py --ports test_configs/bridge_2x2_rw.toml
# Auto-finds test_configs/bridge_2x2_rw_connectivity.csv
# Or regenerate everything: make all (bulk from bridge_batch.csv)
```

Generated files: - RTL: projects/components/bridge/rtl/generated/<bridge_name>/ (top module, crossbar, adapters, package) - Contains complete 5-channel crossbar with ID tracking

24.11.3 Q: "How do I test a Bridge?"

A: Use the Bridge testbench class:

```
# Import from project area
import sys
from TBClasses.shared.utilities import get_repo_root
sys.path.insert(0, get_repo_root())
from projects.components.bridge.dv.tbclasses.bridge2x2_rw_tb import
Bridge2x2RwTB

@cocotb.test()
async def cocotb_test_basic(dut):
    tb = Bridge2x2RwTB(dut)
```

```
    await tb.setup_clocks_and_reset()

    # Send write to slave 0
    await tb.write_transaction(master_idx=0, address=0x00001000,
data=0xDEADBEEF)

    # Verify routing
    assert len(tb.aw_slaves[0]._recvQ) > 0, "Slave 0 should receive
AW"
```

Run tests:

```
cd projects/components/bridge/dv/tests
pytest test_bridge_2x2_rw.py -v
```

24.12 Anti-Patterns to Avoid

24.12.1 Anti-Pattern 1: Embedded Testbench Classes

WRONG: TB **class** in test file

```
class BridgeTB:  
    """NOT REUSABLE - WRONG LOCATION"""
```

CORRECT: Import **from** project area

```
import sys  
from TBClasses.shared.utilities import get_repo_root  
sys.path.insert(0, get_repo_root())  
from projects.components.bridge.dv.tbclasses.bridge2x2_rw_tb import  
Bridge2x2RwTB
```

24.12.2 Anti-Pattern 2: Manual AXI4 Handshaking

WRONG: Manual signal driving

```
self.dut.s0_axi4_awvalid.value = 1  
while self.dut.s0_axi4_awready.value == 0:  
    await RisingEdge(self.clock)
```

CORRECT: Use GAXI components

```
await self.aw_master.send(aw_pkt)
```

24.12.3 Anti-Pattern 3: Memory Models for Simple Tests

WRONG: Unnecessary complexity

```
memory = MemoryModel()  
memory.write(addr, data)  
result = memory.read(addr)
```

CORRECT: Direct queue verification

```
aw_pkt = self.aw_slave._recvQ.popleft()  
assert aw_pkt.addr == expected_addr
```

24.13 Quick Reference

24.13.1 Finding Existing Components

Bridge TB classes (in PROJECT AREA, not framework!)

```
ls projects/components/bridge/dv/tbclasses/
```

Bridge generator

```
cat projects/components/bridge/bin/bridge_generator.py
```

Test examples

```
ls projects/components/bridge/dv/tests/
```

24.13.2 Common Commands

*# Generate 2x2 bridge (from bin/, outputs to
rtl/generated/bridge_2x2_rw/)*

```
cd projects/components/bridge/bin
```

```
python3 bridge_generator.py --ports test_configs/bridge_2x2_rw.toml
```

Run tests

```
pytest projects/components/bridge/dv/tests/test_bridge_2x2_rw.py -v
```

Lint generated RTL

```
verilator --lint-only
```

```
projects/components/bridge/rtl/generated/bridge_2x2_rw/bridge_2x2_rw.sv
```

24.14 Remember

1. **MANDATORY: Testbench architecture** - TB classes in framework, tests import them
 2. **MANDATORY: Directory structure** - Follow RAPIDS/AMBA pattern exactly
 3. **MANDATORY: conftest.py** - Must exist in dv/tests/
 4. **Use GAXI components** - Never manually drive AXI4 handshakes
 5. **Queue-based verification** - Simple tests use direct queue access
 6. **Three-layer architecture** - TB (framework) + Test (runner) + Scoreboard (verification)
 7. **Three mandatory methods** - setup_clocks_and_reset, assert_reset, deassert_reset
 8. **Search first** - Use existing components before creating new ones
 9. **Test scalability** - Support basic/medium/full test levels
 10. **100% success** - All tests must achieve 100% success rate
-

24.15 PDF Generation Location

IMPORTANT: PDF files should be generated in the docs directory:

projects/components/bridge/docs/

Quick Commands: Use the provided shell scripts:

```
cd projects/components/bridge/docs
./generate_has_pdf.sh    # Builds Bridge_HAS_v<rev> from bridge_has/
./generate_mas_pdf.sh    # Builds Bridge_MAS_v<rev> from bridge_mas/
```

The shell scripts will automatically: 1. Use the md_to_docx.py tool from bin/ 2. Process the bridge_has/bridge_mas index files 3. Generate both DOCX and PDF files in the docs/ directory 4. Create table of contents and title page

See: bin/md_to_docx.py for complete implementation details

Version: 1.0 **Last Updated:** 2025-10-18 **Maintained By:** RTL Design Sherpa Project