

feather

nRF52

PINOUT

- Power
- GND
- Physical PIN
- Port PIN
- Analog PIN
- Serial PIN
- PIN Function
- Control PIN


PWM Pin

For 0.28 and 0.29 pin recommended
Low drive, low frequency I/O only

Absolute MAX per pin
10mA, 7mA recommended

Absolute MAX per pin 130mA
for the entire package


USB JACK
Micro Type B

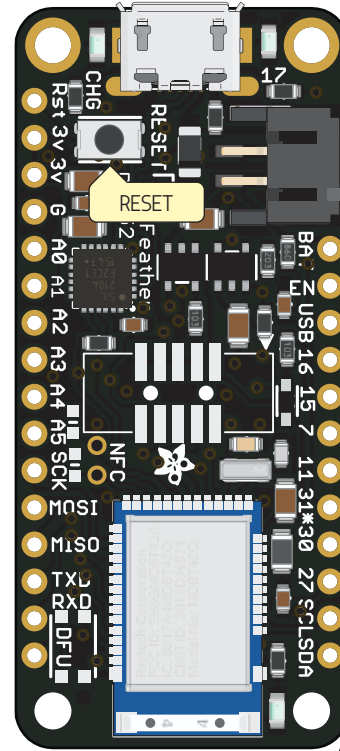

- Any GPIO pin can be configured as a PWM output
- Any GPIO pin support interrupts

Extra Functions

23	0.10	10	NFC2
22	0.09	9	NFC1
33	0.19	19	LED2
31	0.17	17	LED1



Optional Lipoly Battery

- Connect to ground to disable the 3.3V regulator

	30	0.16	TD[1]	16
	29	0.15	TD[2]	15
	28	0.07		7
	25	0.11		11
	31	0.31	AIN7	31 A7
	7	0.30	AIN6	30 A6
	4	0.27		27
	3	0.26	SCL	26
	2	0.25	SDA	25

Avoid use this pin directly
Used to measure the lipo battery level

VBAT Connected to 5V USB Port
Absolute MAX 500mA

VBUS It's the positive voltage
from to JST Batt jack

3V3 3V3 output from regulator
Absolute MAX 400mA