

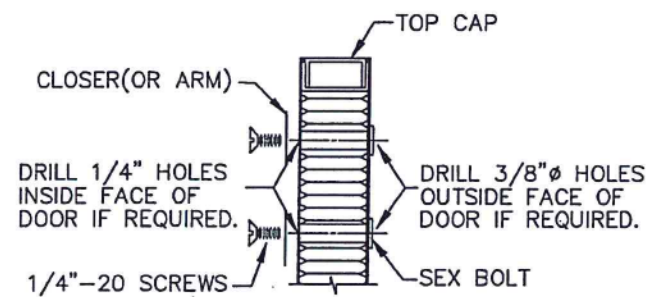


MEC/VMEC
Drum End Enclosure-Walk Door Closer And Weather Stripping Details With 3' Frames

Thomas L. Hardy
6-13-13

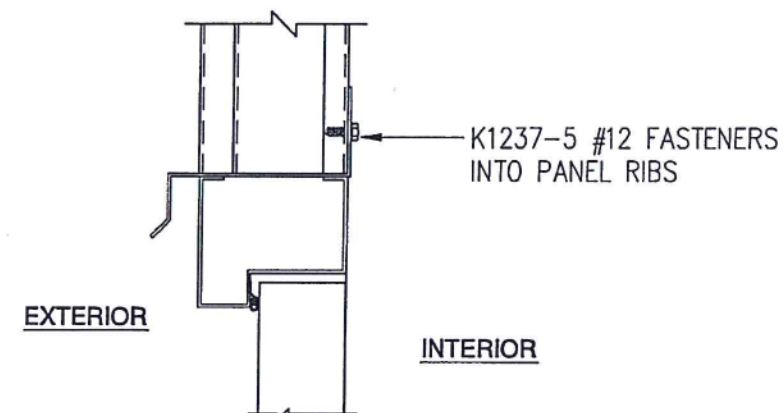


SECTION THRU DOOR LEAF

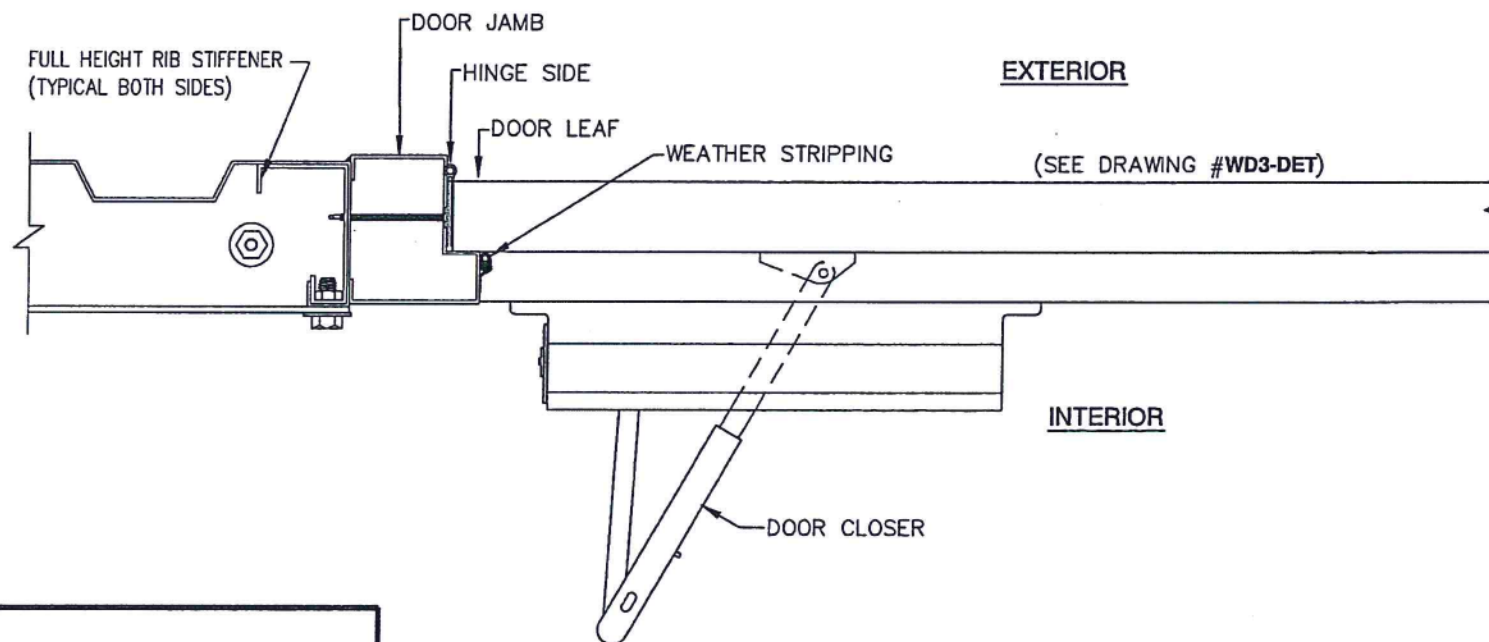


SECTION THRU HEAD

NOTE:
REGULAR ARM MOUNTING OF CLOSER IS
RECOMMENDED WHEN CLOSER IS INSTALLED
ON "PUSH-SIDE" OF DOOR.

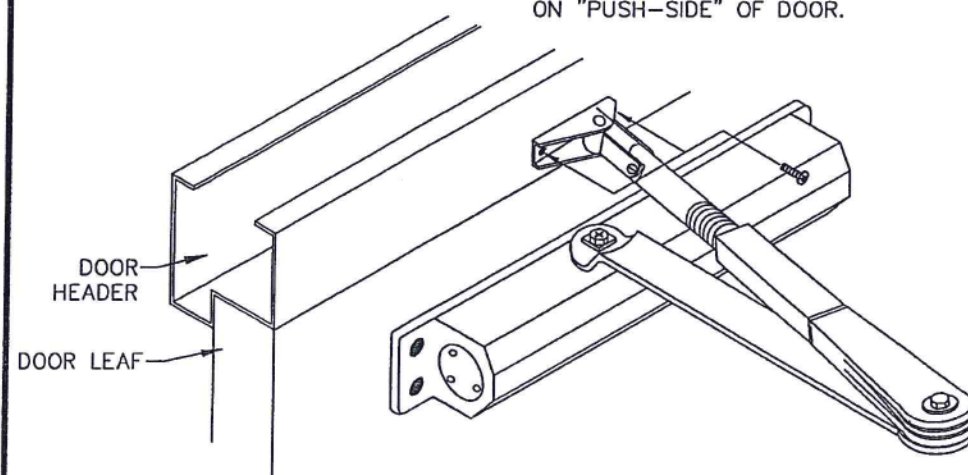

OPTIONAL DOOR CLOSER MOUNTING DETAILS
(FOR SWING-IN DOORS ONLY)

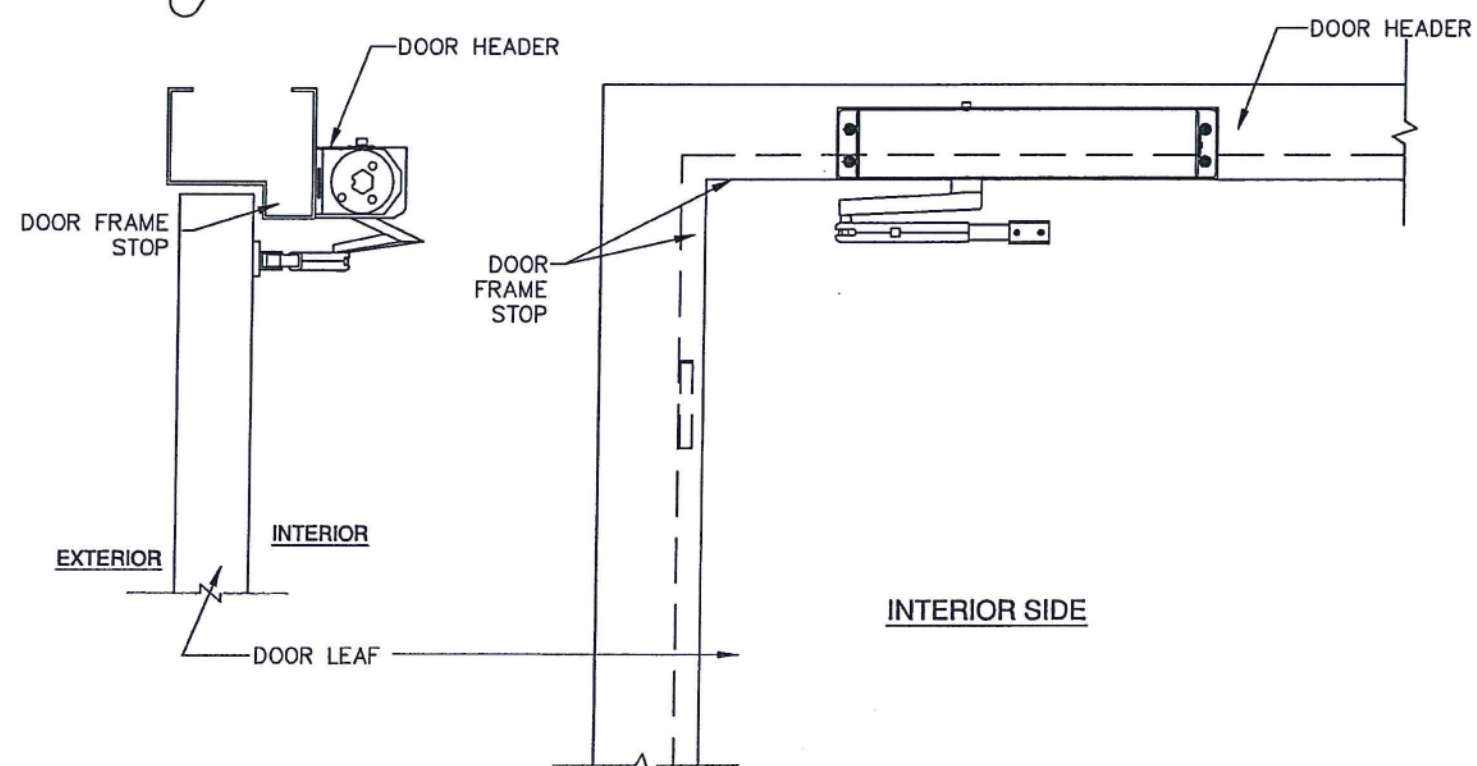

VOGT POWER INTERNATIONAL
V17494-BEXD-5063-02
06-Aug-2016

NOTES:

- 1). WHEN MEASURING BOTH SIDES OF DOOR, BE SURE TO ALLOW FOR BEVELED EDGE OF DOOR, MAKING CERTAIN THAT HOLES ALIGN.
- 2). REFER TO INSTRUCTIONS PACKED IN DOOR CLOSER BOX FOR CLOSER INSTALLATION DIMENSIONS.

REVISIONS	BY
12-20-10	TLC
02-28-11	TLC
07-06-11	RAP
10-18-11	RAP
06-08-13	TLC

PARKLINE, INC
P O Box 65 Winfield, WV 25213
phone: (304) 586-2113

**WALK DOOR CLOSER
INSTALLATION**
SHEET TITLE
DETAILS

DATE	10-21-10
DRAWN BY	TLC
SCALE	N.T.S.
ORDER NO.	
REVISION	5

WD3-CLOS