



MECKMEC  
Drum End Enclosure-Framed Opening With Head Panels

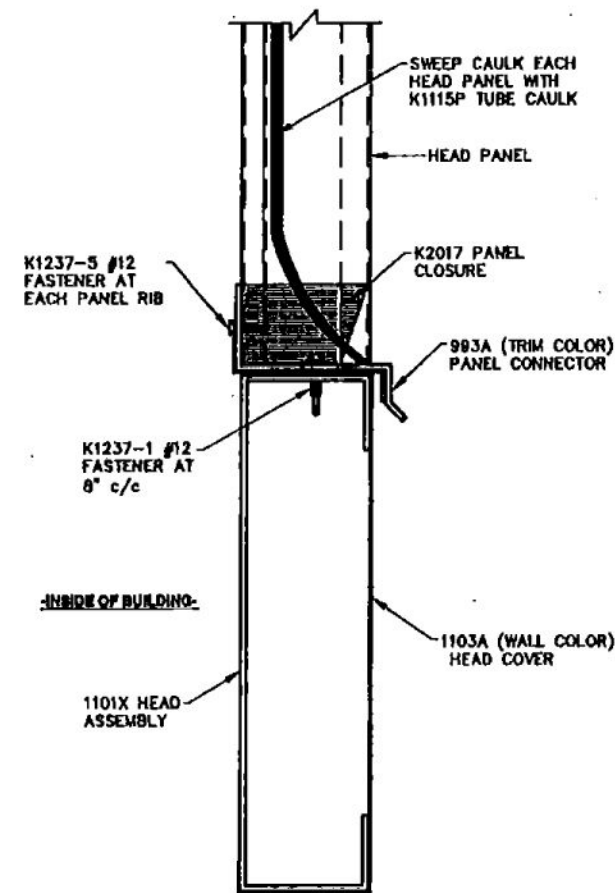


**CROSS SECTION THRU  
HEAD ASSEMBLY**


**NOTE:**  
PARKLINE RECOMMENDS THAT THE 1101X HEAD ASSEMBLY BE INSTALLED WITH THE FACE TOWARD THE INSIDE OF THE BUILDING. MANY TIMES THIS IS NECESSARY FOR MOUNTING OF DOOR HARDWARE, HOWEVER THE HEAD ASSEMBLY CAN BE INSTALLED IN EITHER DIRECTION AT BUILDER'S DISCRETION.

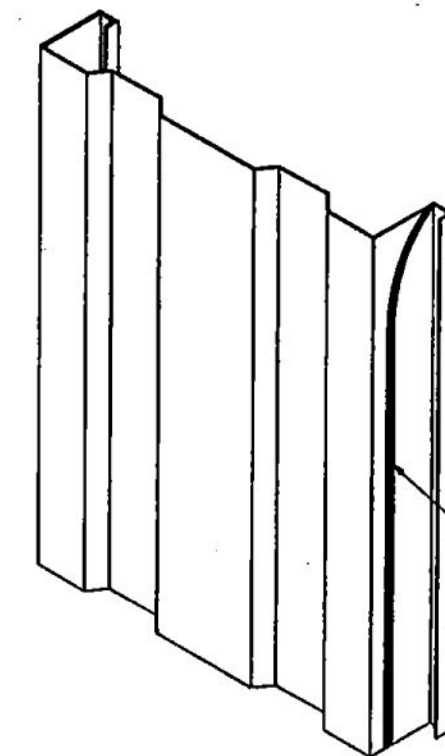

**CAULKING DETAIL  
FOR WALL PANELS NEXT TO JAMBS.  
SEE STEP-5 ON DWG.# FO-2A.**

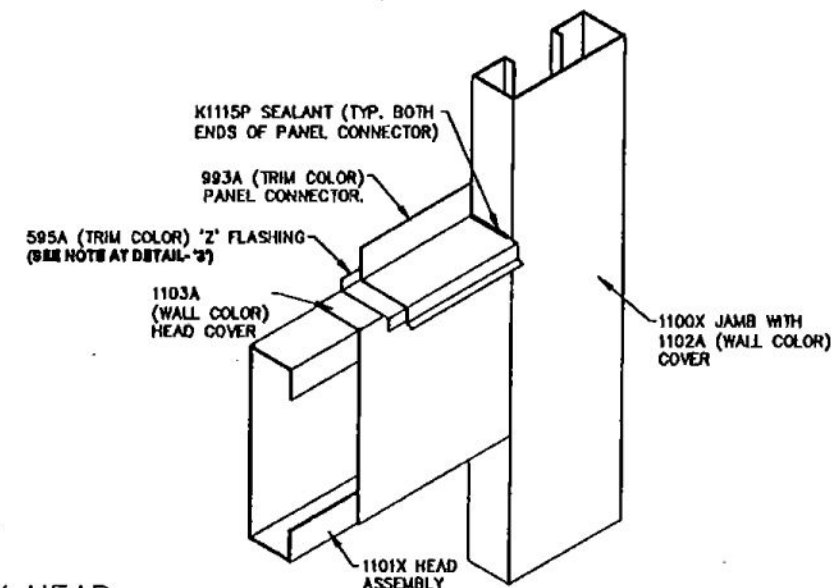


**PANEL CONNECTOR  
CAULKING DETAIL  
VIEWED FROM EXTERIOR**

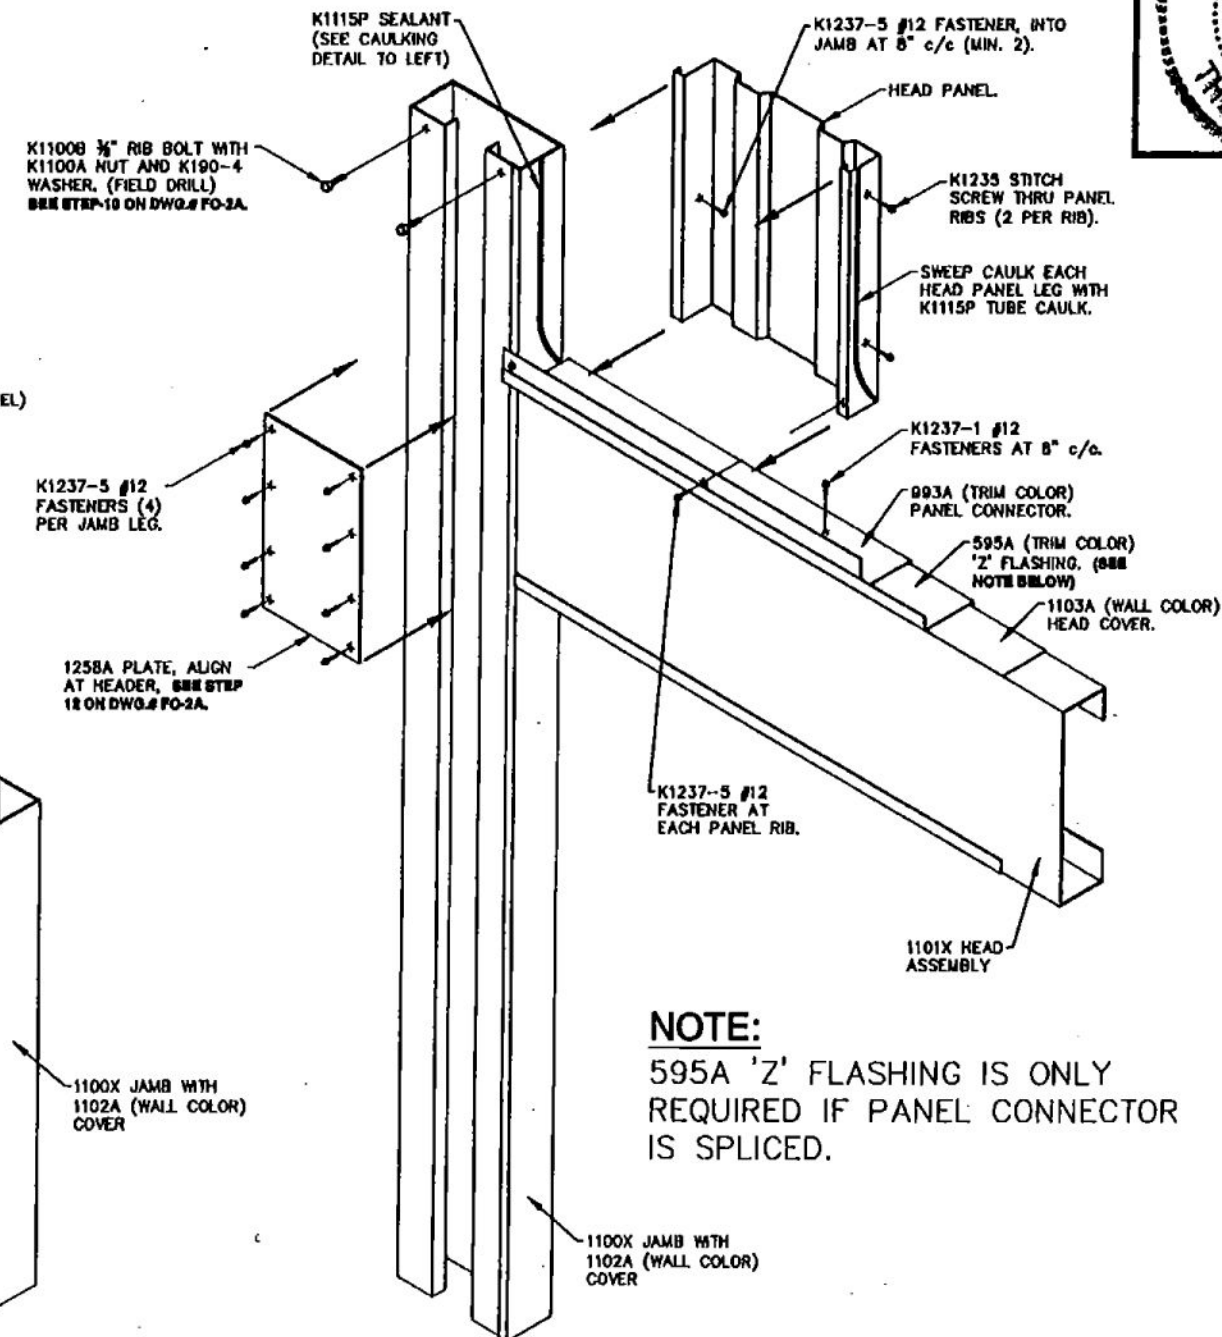

**DETAIL - '3'  
VIEWED FROM INTERIOR**

**NOTE:**  
595A 'Z' FLASHING IS ONLY REQUIRED IF PANEL CONNECTOR IS SPLICED.

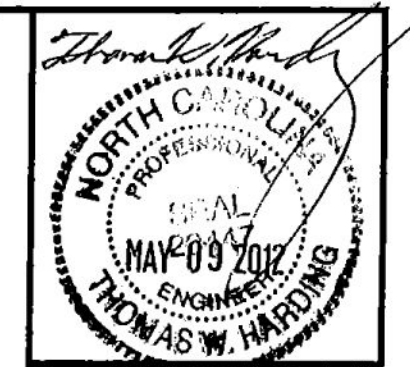

REVISIONS	BY
03-08-94	WS
04-05-94	DB
01-18-98	JCH
08-05-98	JCH
01-15-98	CM
04-29-99	CLA
01-23-03	CSP
1-11-08	YBD
07-28-10	RAP
01-18-11	TLC



JOB DESCRIPTION	SHEET TITLE
DETAILS FOR FRAMED OPENING WITH HEAD PANELS	DETAILS

DATE	10-05-93
DRAWN BY	WS
SCALE	NTS
ORDER NO.	
REVISION	10

FO-2B

VOGT POWER INTERNATIONAL  
V17494-BEXD-5099-02  
08-Aug-2016