

COTING WILL BE REQUIRED AT VARIOUS LOCATIONS.

1. TWO EXTRA LONGEST WALL PANELS (REY #13) PROVIDED FOR FIELD WORK IF REQUIRED.

5. ANY PIPE PENETRATIONS THROUGH PANELS MUST MISS PANEL RIBS AND ARE TO BE FIELD LOCATED, CUT, AND FLASHED BY OTHERS.

6. (1) EXTRA LONGEST WALL PANELS KEY #15 PROVIDED FOR FIELD WORK IF REQUIRED.

VOGT POWER INTERNATIONAL V17494-BEXD-5003-05 06-Aug-2016

MEC/KMEC HP Drum End Enclosure-Elevations


VOGT POWER INTERNATIONAL

Released, Work May Proceed

Aug-20-2016

→ 'B' - CABLE OR BAND AROUND DRUM Bell. Milton 98033A 2"X 2" ANGLE, SAW CUT AS NEEDED TO FORM RADIUS OF DRUM SECTION 'A'-'A'

> SITE WORK REQUIRED

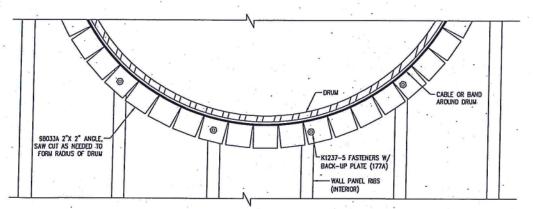

SECTION 'B'-'B'

INTERIOR CONNECTION DETAILS

03-24-16 JCC 07-12-16 JCC 07-25-16 DJM

BUILDING FINISH WALL COLOR: ARCTIC WHITE

WALL PANEL THICKNESS: .028 TRIM COLOR: ARCTIC WHITE



PARKLINE, INC.

D-2

3'-4"

ELEVATION 'C'

RT. 62, ELEANOR INDUSTRIAL PARK ELEANOR, WV 25070 EMAIL: PARKLINE@PARKLINE.COM PHONE: 800-786-4855 FAX: 304-586-3842

-USE 309B156.000 RIB STIFF. AT BOTH DOOR LOCATIONS.


JOB NO. V17495 - KINGS MT. ENERGY - DESTINATION: KINGS MT., NC

INC.	VOGT POWER INTERNATIONAL,
	LOUISVILLE, KY
0.00	

JOB NO. V17494 - MIDDLETOWN ENERGY - DESTINATION: MIDDLETOWN, OH VPI PO#: V0009691

ELEVATIONS


VOG-AA-4

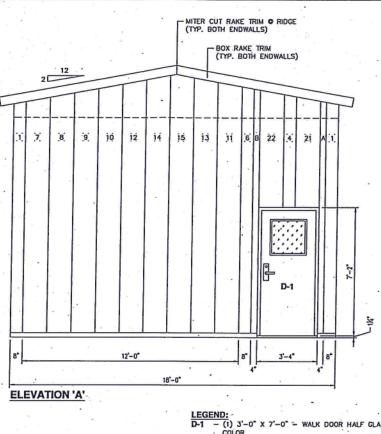

12

12'-0"

SEE SECTION "A" ON DWG | VOG-AA-BA
(TYP. 0 2 WALK DOORS)

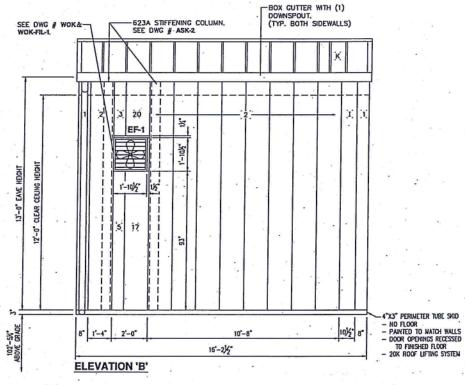


- (1) 3'-0" X 7'-0" - WALK DOOR HALF GLASS W/ POLYCARBONATE GLAZING - RHSO - ADVISE FINISH D-2 - (1) 3'-0" X 7'-0" - WALK DOOR HALF GLASS W/ POLYCARBONATE GLAZING - LHSO - ADVISE FINISH COLOR

FO-1 - (1) 9'-10" X 10'-8" FRAMED OPENING FOR DRUM PENETRATION (PANEL FILLED)

EF-1 - (1) SBE-2H20-7 EXHAUST FAN (480/60/3, ½HP, 3000 CFM © .25 SP), WITH WEATHERHOOD, BIRD SCREEN, BACKDRAFT DAMPER, SHORT WALL HOUSING & NEMA-1 TOGGLE.

AL-1 - (3) 1'-4" X 2'-0" ADJUSTABLE LOUVER W/ 120V AC MOTOR ACTUATOR.

7-113" 12" HEADER





8" 1'-4"

ELEVATION 'D'

AL-1 -USE 3098156,000 RIB STIFFENERS, BOLT TOP AND BOTTOM (1) ONLY REQUIRED. AL-1 'A'

9'-10"

16'-2/2"

5/13/2016

JCC

DATE:

DRAWN BY:

8'-2%"

-BOTH DOWNSPOUTS TO RUN TO GROUND (130' 3"X4" DOWNSPOUT 6 EACH LOCATION, TYP OF 2) -(2) 3098127.750 RIB STIFFENERS, BOLT TOP AND BOTTOM, SANE AS AT WALK DOORS.

1'-4"

7%

JAMB

ROOF COLOR: GALVALUME ROOF PANEL THICKNESS: .042