

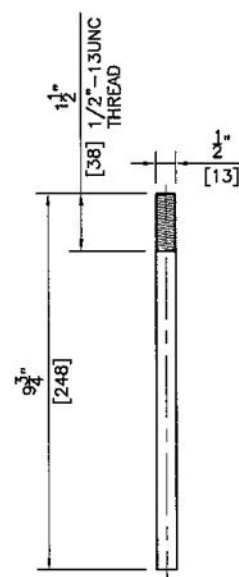


STUD LAYOUT (INSIDE VIEW)

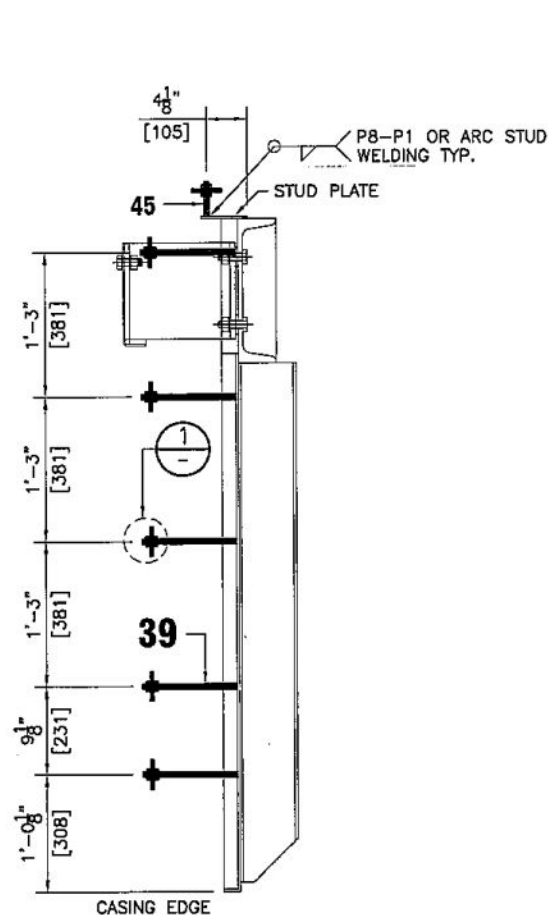


VOGT POWER INTERNATIONAL
V17494-CCXD-5096-02
30-May-2016


CC22 39 = 139 Pcs.
STUD 1/2" DIA. x 9-3/4" LG.
A-479 TP309S




CC22 41 = 340 Pcs.
WASHER 12 GA. (3mm)
A-240 TP309S

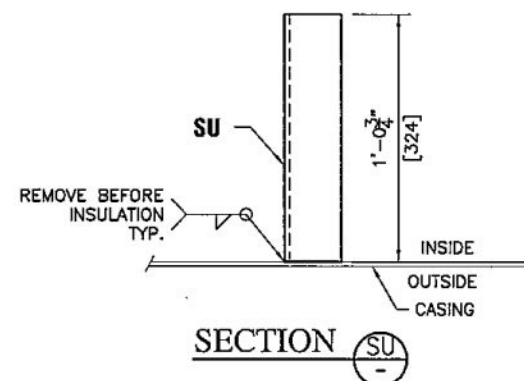

SECTION SU

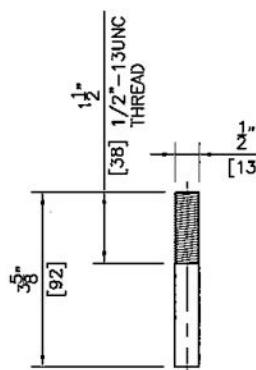

CC22 45 = 31 Pcs.
STUD 1/2" DIA. x 3-5/8" LG.
A-479 TP309S




CC22 SU = 8 Pcs.
C-125x65x6x8
G3101 SS400

VOGT POWER INTERNATIONAL

Review Waived

Bell, Milton Jun-01-2016

MATERIAL LIST FOR ASSEMBLY MK'D CC22 Q'TY: 1 No. Required									
PartNo	Description	Width	ID	Length	OD	Qty	Mat. Grade	Weight	Area
10	PL-1.5	76		171		6	A-240 TP309S	0.94	0.08
10A	PL-1.5	76		330		6	A-240 TP309S	1.81	0.15
10-1	PL-1.5	748		1133		1	A-240 TP309S	10.17	0.85
10-2	PL-1.5	1133		1219		1	A-240 TP309S	18.57	1.38
10-3	PL-1.5	1133		1219		1	A-240 TP309S	18.57	1.38
10-4	PL-1.5	1133		1219		1	A-240 TP309S	18.57	1.38
10-5	PL-1.5	1133		1219		1	A-240 TP309S	18.57	1.38
10-6	PL-1.5	1133		1219		1	A-240 TP309S	18.57	1.38
10-7	PL-1.5	1133		1219		1	A-240 TP309S	18.57	1.38
10-8	PL-1.5	1133		1219		1	A-240 TP309S	18.57	1.38
10-9	PL-1.5	1133		1219		1	A-240 TP309S	18.57	1.38
10-10	PL-1.5	1133		1219		1	A-240 TP309S	18.57	1.38
10-11	PL-1.5	367		1133		1	A-240 TP309S	4.99	0.42
10-12	PL-1.5	367		768		1	A-240 TP309S	3.38	0.28
10-13	PL-1.5	768		1219		1	A-240 TP309S	11.23	0.94
10-14	PL-1.5	768		1219		1	A-240 TP309S	11.23	0.94
10-15	PL-1.5	768		1219		1	A-240 TP309S	11.23	0.94
10-16	PL-1.5	768		1219		1	A-240 TP309S	11.23	0.94
10-17	PL-1.5	768		1219		1	A-240 TP309S	11.23	0.94
10-18	PL-1.5	768		1219		1	A-240 TP309S	11.23	0.94
10-19	PL-1.5	768		1219		1	A-240 TP309S	11.23	0.94
10-20	PL-1.5	768		1219		1	A-240 TP309S	11.23	0.94
10-21	PL-1.5	768		1219		1	A-240 TP309S	11.23	0.94
10-22	PL-1.5	768		748		1	A-240 TP309S	6.89	0.57
15	PL-3	51		103		24	A-240 TP309S	3.03	0.13
16	INSULATION 2" THK. 8# DENSITY (46 ROLLS)					5	Superwool Plus	646.40	101.00 m2
16A	INSULATION 2" THK. 8# DENSITY (1 ROLL)					1	Superwool Plus	7.36	1.15 m2
17	INSULATION 1" THK. 8# DENSITY (1 ROLLS)					1	Superwool Plus	5.18	1.62 m2
35	PL-3	178	ID	279	OD	6	A-240 TP309S	7.15	0.30
39	STUD 1/2" DIA. x 9 3/4" LG.					139	A-479 TP309S	36.89	1.37
40	HEX NUT REGULAR 1/2"					340	A194 GR 8MA*	5.76	-
41	WASHER 12GA. (3mm)	14	ID	76	OD	340	A-240 TP309S	47.13	1.96
45	STUD 1/2" DIA. x 3 5/8" LG.					31	A-479 TP309S	3.05	0.11
SU	C-125x65x6x8					8	G3101 SS400		
Total								1,040.42	130.85

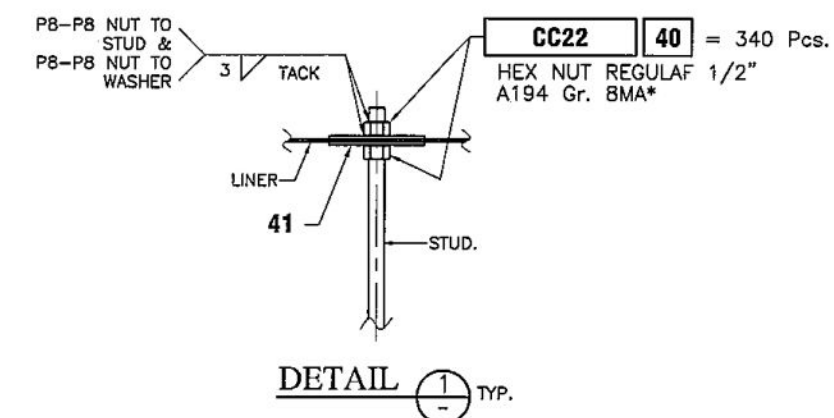

DETAIL 1 TYP.

This drawing contains Visavakit Patana Corp., Ltd.'s confidential and proprietary information and cannot be used, duplicated or disclosed in whole or in part, except with the express written permission of Visavakit Patana Corp., Ltd.
© Visavakit Patana Corp., Ltd. all rights reserved as an unpublished work.

VISAVAKIT PATANA CORPORATION LIMITED
OFFICE : 215/148-149 Pracharad 1 Road, Bangsue, Bangkok 10800 Tel: 0-2585-2556-8 Fax: 0-2587-6068
PLANT 1 : 28/2 Moo 4, Soi Chai Ua, Pathumthani 12000 Tel: 0-2975-2811-4 Fax: 0-2975-2815
PLANT 2 : 52 Moo 7, Kubangsuang, Ladunskae, Pathumthani 12140 Tel: 0-2979-4001-9 Fax: 0-2979-4010
www.vipco-thai.com Email : vipco@vipco-thai.com

TITLE		JOB NO.	
VOGT POWER INTERNATIONAL		1711	
MIDDLETOWN ENERGY CENTER PROJECT			
ATTIC PANEL ASSEMBLY			
OUTLET BOX 2 (CC22) (LINER)			
REF.DWG.NO.	VIPCO DWG.NO.	REV	
V17494-CCND-0004	Y15-1711-CC22-05	2	

GENERAL NUT TIGHTENING TO STUD ON LINER PLATE [TYP.]

NUT SHALL BE HAND TIGHTENED FULLY TO STUD AND THEN BACKED OFF 1/2 RETURN, AND TACK WELDED PER DRAWING

ข้อกหนดทั่วไปของการขันน๊อตเข้ากับสตั๊ดบนแผ่นไลเนอร์

ขันน๊อตให้แน่นแล้วคลายกลับครึ่งรอบ

จากนั้น เชื่อมด้วย (TACK WELD) ตามแบบของลูกค้า