


VOGT POWER INTERNATIONAL

Released, Work May Proceed

Bell, Milton      Jul-28-2016

MEC/KMEC

HP Interstage Attenuator Control Valve -1HP-TCV-3203

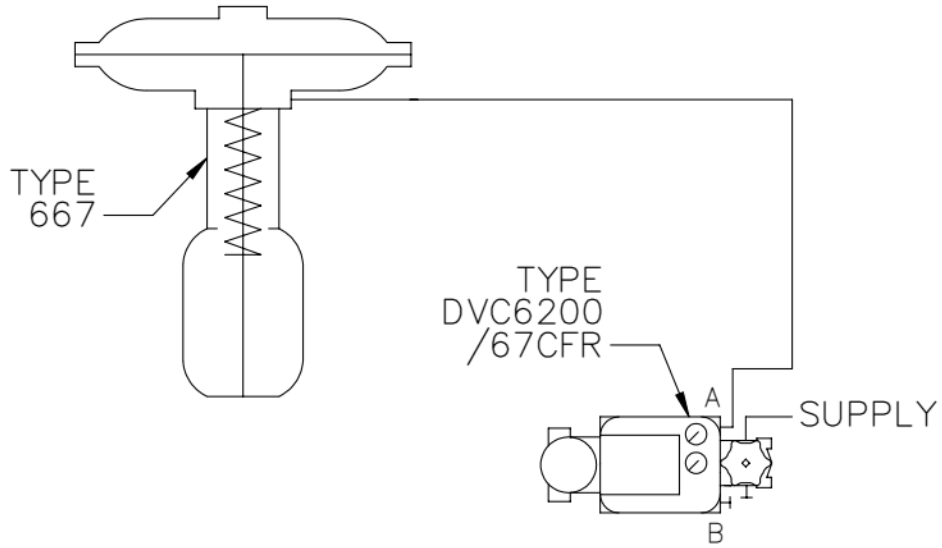

JOB V17494 - OMEC  
JOB V17495 - KMEC  
PO: V0009816 (OMEC)  
PO: V0009946 (KMEC)  
SERVICE: HP INTERSTAGE ATTEMPERATOR SPRAY WATER VALVE  
FLUD: WATER  
BODY MATERIAL: WCC  
INLET/OUTLET PIPING: 2" SCH 160 / 2" SCH 160  
SITE HYDROTEST PRESSURE: 4,553 PSIG

FACE TO FACE TOLERANCE IS +/- 2 mm/0.06 Inch  
TOTAL CALCULATED Wt +/- 10%  
BODY WEIGHT: 88 kg/192.8 lb  
TOTAL WEIGHT: 223 kg/488.8 lb  
AR = ACTUATOR REMOVAL CLEARANCE  
UNLESS OTHERWISE SPECIFIED  
UNIT OF MEASURE: MILLIMETER/INCH.



DRAWING REVISIONS

REV A: INITIAL ISSUE  
REV B: ADD KMEC PO, ADD SITE HYDROTEST PRESSURE, ADD INLET/  
OUTLET PIPING INFO, CLARIFY TITLE BLOCK DESCRIPTION  
REV C: CUSTOMER'S REVISED HYDROTEST PRESSURE  
REV D: FINAL GA DRAWING

VOGT POWER INTERNATIONAL

V17494-CIXD-5801-03

19-Jul-2016

DIMENSIONS CERTIFIED CORRECT BY FISHER CONTROLS										DATE 7/19/2016			
CUST: VOT POWER INTERNATIONAL, INC CUST REF NO.: V17494-OMEC V17495-KMEC FISHER REF NO.: TAG NO.: 1HP-TCV3203						HPS VALVE BODY SIZE 2 667 ACTUATOR SIZE 70							
SERIAL NO.:F001095229 (OMEC) F001160413 (KMEC) CUST LINE NO:						GENERAL ARRANGEMENT, SCHEMATIC							
REVISIONS - CHANGES INDICATED BY						 <b>EMERSON.</b> Process Management		DWN. ADS 4/11/2016		REP LINE NO:		D	
B	AOP	4/12/2016	C	AOP	4/12/2016			CHKD. ZCS 4/12/2016		DWG. NO.		REV.	
					D			AOP	7/19/2016	AAE11090			D
©Fisher Controls Intl. LLC 2016								SCALE:		NONE			
										SHEET 1 OF 1			