



Substructures in Compact Protoplanetary Disks

2018.1.00271.S

ABSTRACT

ALMA has shown in spectacular fashion that bright rings, gaps, and spirals are a common features of protoplanetary disks. While the origin of the structures remain highly debated, the ubiquity of substructures must be indicative of an important step in the planet formation process, either from the gravitational interaction of already-formed embedded planets, or from one step along the planet-formation process. Since the existing high resolution observations are biased toward the largest and most luminous disks, an important question is whether such substructures are prevalent in the more typical, compact systems. In this proposal, we request time with ALMA to image a carefully selected sample of disks that are smaller and less luminous than 95% of the disks in the recently completed Large Program. The goal is to empirically establish the prevalence of substructure, or lack thereof, in compact disks. Our sample consists of 9 sources that have radii between between 18 au and 46 au, and thus are far more typical of disk sizes and indeed more akin in size to our Solar System.

PI NAME:	John Carpenter			SCIENCE CATEGORY:	Circumstellar disks, exoplanets and the solar system
ESTIMATED 12M TIME:	24.5 h	ESTIMATED ACA TIME:	0.0 h	ESTIMATED NON-STANDARD MODE TIME (12-M):	0.0 h
CO-PI NAME(S): (Large & VLBI Proposals only)					
CO-INVESTIGATOR NAME(S):	Viviana Guzman; Sean Andrews; Myriam Benisty; Andrea Isella; Laura Perez; Jane Huang; David Wilner; Luca Ricci				
DUPLICATE OBSERVATION JUSTIFICATION:	While all of our sources have been previously observed by ALMA, there are no duplications. These archival data in fact were used to select the sample of disks for this proposal. Four of our sources are in the observing queue for Cycle 5, but no observations have been taken and there are no formal duplications. Our proposed observations will achieve 4-8.4 times better resolution in terms of beam area, 2.5 times better sensitivity per beam, and 6 times denser u,v sampling for superior imaging.				

REPRESENTATIVE SCIENCE GOALS (UP TO FIRST 30)

SCIENCE GOAL	POSITION	BAND	ANG.RES.(")	LAS.(")	ACA?	NON-STANDARD MODE
Long baselines: group 1 cluster 1	ICRS 16:27:38.3220, -24:36:58.590	6	0.024 - 0.017	0.200	N	N
Long baselines: group 1 cluster 2	ICRS 15:39:27.7660, -34:46:17.170	6	0.024 - 0.017	0.200	N	N
Long baselines: group 1 cluster 3	ICRS 15:45:08.8710, -34:17:33.810	6	0.024 - 0.017	0.200	N	N
Long baselines: group 2 cluster 1	ICRS 15:47:56.9440, -35:14:34.760	6	0.024 - 0.017	0.200	N	N
Long baselines: group 2 cluster 2	ICRS 16:23:09.2200, -24:17:05.360	6	0.024 - 0.017	0.200	N	N
Long baselines: group 2 cluster 3	ICRS 16:09:00.7610, -19:08:52.680	6	0.024 - 0.017	0.200	N	N
Long baselines: group 2 cluster 4	ICRS 16:14:20.2990, -19:06:48.140	6	0.024 - 0.017	0.200	N	N
Short baselines cluster 1	ICRS 15:39:27.7660, -34:46:17.170	6	0.130	1.000	N	N
Short baselines cluster 2	ICRS 16:27:38.3220, -24:36:58.590	6	0.130	1.000	N	N
Total # Science Goals : 9						
SCHEDULING TIME CONSTRAINTS		NONE		TIME ESTIMATES OVERRIDDEN ?		No

Scientific justification

The spectacular ALMA image of the disk around HL Tau shattered pre-conceived notions about the formation of planetary systems (ALMA Partnership et al. 2015). The discovery of a series of concentric gaps in HL Tau out to a radius of 91 AU demonstrates that some disks are highly structured even at an age of <1 Myr. Other disks have now been observed at high or moderate resolution that also reveal gaps of various widths and depths (e.g., Fedele et al. 2018), spirals (Pérez et al. 2016), and asymmetries (van der Marel et al. 2013). In Cycle 4, our group was awarded an ALMA Large Program (2016.1.00484.L) to conduct the first comprehensive census of substructure in disks. While the data delivery was only completed in March 2018, the preliminary images clearly demonstrate that bright rings, gaps, and spirals are a common features of disks (see Figure 1) with a diversity of widths and depths.

The origin of the substructures in disks remains controversial. While numerical simulations show that while the width and depths of many gaps are consistent with dynamically clearing from Jovian-mass planets (e.g., Isella et al. 2016), it remains a theoretical challenge to explain how such massive planets can form at ages $\lesssim 1$ -2 Myr, and especially at tens of astronomical units from the host star. Other mechanisms have been proposed to explain the appearance of gaps in disks, including magnetohydrodynamic effects (e.g., Pinilla et al. 2016), and chemical and size variations as dust particles drift toward the sublimation fronts of volatile ices (“snowlines”) (e.g., Okuzumi et al. 2016).

Regardless of the correct physical origin(s), the ubiquity of substructures must be indicative of an important step in the planet formation process. More generally, a long standing puzzle in the evolution of disks is how millimeter-sized dust particles can persist in disks, as gas drag has long been recognized as an efficient mechanism to remove millimeter-size particles from disks on time scales far shorter than the disk lifetime (Weidenschilling 1977). Substructure in disks present an appealing solution to this problem if they represent local maximum in the gas pressure, which can “trap” dust to prevent further dust migration (Pinilla et al. 2012), and thereby promote the planet formation process.

The impressive ALMA results motivate the next surveys to understand how the presence of substructure extends over the full spectrum of disk and stellar properties. In particular, the high resolution studies to date have preferentially targeted the largest, most luminous disks. For example, the median disk in the Large Program survey has a 340 GHz flux density of ~ 0.4 Jy and a radius of ~ 80 au (see Figure 2). The vast majority of young disks are not only less luminous by about an order of magnitude (Ansdell et al. 2017), they are also more compact, with typical radii less $\lesssim 30$ au (Pietu et al. 2014; Tripathi et al. 2017; Barenfeld et al. 2017; Tazzari et al. 2017).

Any evolutionary connection between the disks of various sizes remains unclear. The inward migration of millimeter-sized dust particles due to gas drag will make disks appear smaller over time. Evidence in support of this scenario is that the gas disk is often more extended than the dust disk (Ansdell et al. 2018), consistent with the dust migration hypothesis. Thus small disks may merely reflect systems that were unable to set up dust traps at larger radii. For example, in AS 209 (see zoom in Figure 3), the disk contains a nest of bright rings of radii of 15, 27, 43, 78, and 126 au with a concentration of dust centered on the host star. Thus the inner two rings would yield a flux and size comparable to many of the compact disks that have been detected. It is interesting to note that in this regard, that the one disk in Figure 1 that has a size and luminosity comparable to our proposed sample (DoAr 33, shown in the bottom right corner) shows no obvious evidence for substructure.

In this proposal, we request time with ALMA to image a carefully selected sample of disks that are less luminous and smaller than 95% of the disks in the Large Program survey. The goal is to empirically establish the prevalence of substructure, or lack thereof, in compact disks in spatial scales of ~ 3 au. Our sample consists of 9 sources that have radii between between 18 au and 46 au, and thus are far more typical of disk radii and indeed more akin in size to our Solar System.

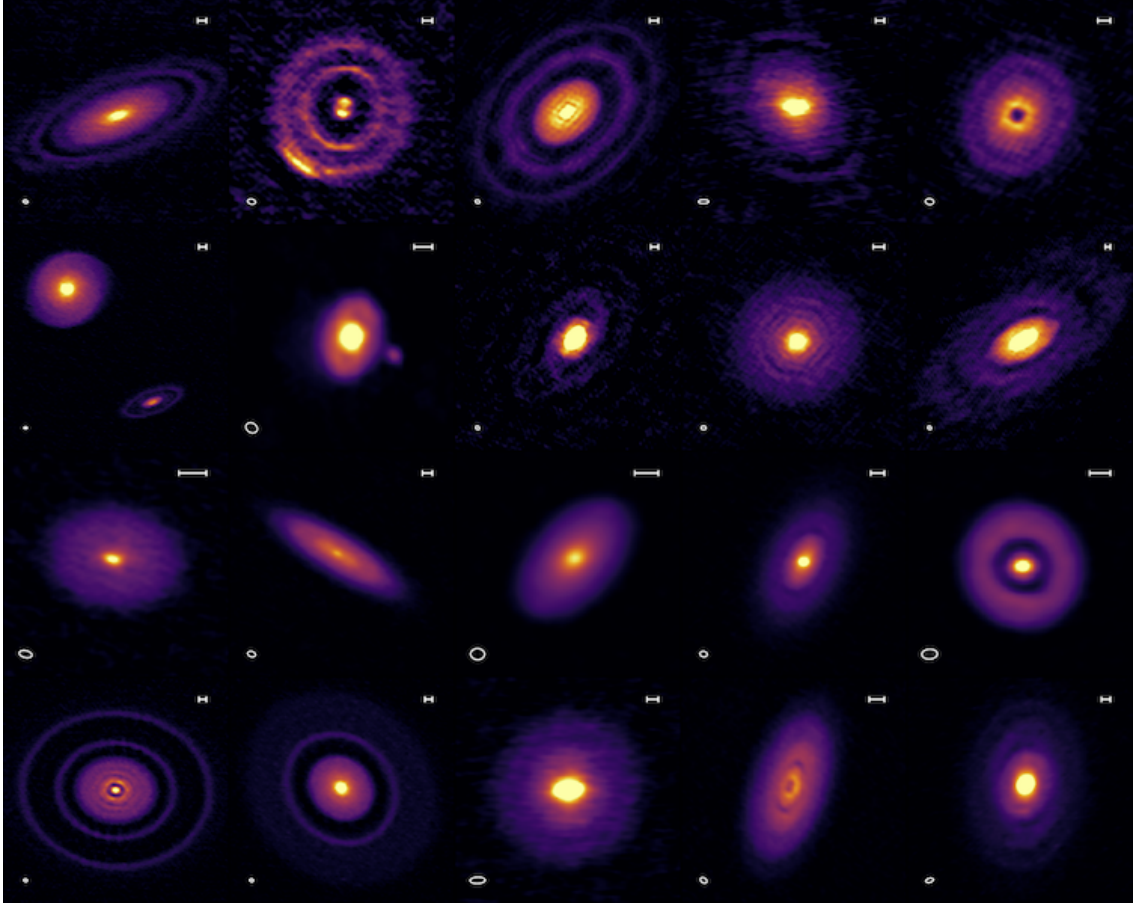


Figure 1: Preliminary ALMA images of the 1.3 mm dust continuum of 20 primordial disks in the Cycle 4 Large Program (2016.1.00324.L) imaged with a spatial resolution of ~ 5 au. The scale bar in each panel denotes a spatial scale of 10 AU. These observations demonstrate the prevalence of bright rings, gaps, spirals, and asymmetries in bright, extended disks.

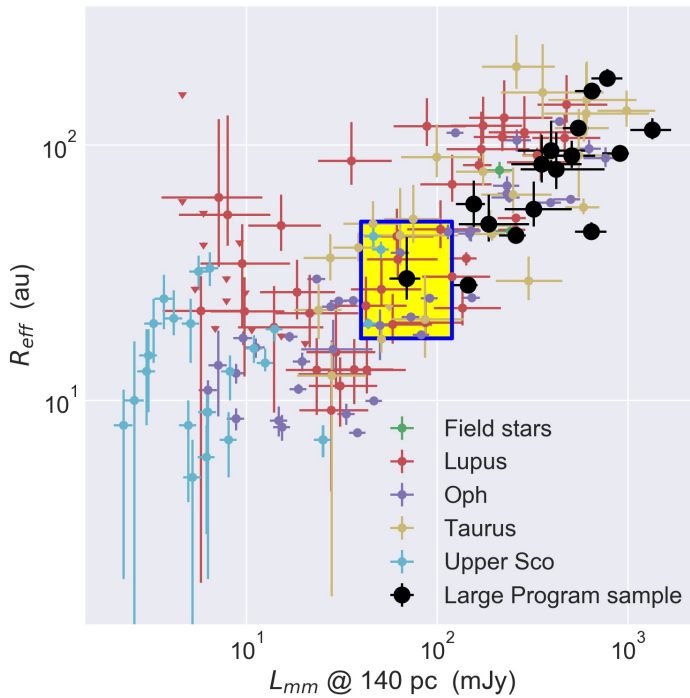


Figure 2: Correlation between effective disk radius (R_{eff}) and disk flux density at a distance of 140 pc for disks with well measured sizes (Tripathi et al. 2017; Barenfeld et al. 2016; Ansdell et al. 2017; Cox et al. 2017). The filled black circles indicate the sources that were the subject of the Cycle 4 Large Program. Our proposed sources, bounded by the yellow-shaded box, will target a complete sample of 9 sources where the combined sizes and luminosities are smaller and fainter than 95% of the sources shown in Figure 1.

Sample Selection

Figure 2 shows the correlation between the effective radius and the submillimeter luminosity for disks that have well measured disk sizes and submillimeter fluxes based on observations of disks in Taurus, Lupus, Ophiuchus, Upper Sco, and field stars (Tripathi et al. 2017; Barenfeld et al. 2016; Ansdell et al. 2017; Cox et al. 2017). The effective radius (R_{eff}) is defined as the radius containing 68% of the submillimeter luminosity, and the luminosity is the flux density at a distance of 140 pc (L_{mm}). A general correlation is seen, spanning four different star formation regions and field stars, in that more luminous disks tend to have larger radii.

Based on these results, we carefully selected a complete sample of disks that would promise to provide high-quality images while achieving our scientific goals. The selection criteria are as follows:

- The stellar distance is less than 150 pc to optimize the spatial resolution and sensitivity to spatial structure.
- The effective disk radius is $R_{eff} < 50$ AU and the submillimeter luminosity is between 40 and 120 mJy at 345 GHz for a distance of 140 pc, which is smaller and less luminous than 95% of the disks previously imaged at high spatial resolution.
- The source have effective radii > 17 AU, such that there will be at least 10 independent linear resolution elements across the disk diameter to well-resolve any disk structure.
- The disk shows no evidence of significant substructure from a previous high angular resolution submillimeter observations at $\sim 0.2''$ resolution.
- The stars transits at night during the scheduled long baseline observations in Cycle 6 to maximize the opportunity to obtain high-quality data in the best weather conditions. This criterion effectively selects sources in Lupus, Ophiuchus, and Upper Sco.
- The source has an inclination $\lesssim 60^\circ$ to select more face-on disks to better reveal disk structure.
- The host stars have spectral types between G and M, to select a stellar sample that coincides with stellar masses of previous disk observations.

Table 1 summarizes the complete list of nine sources that satisfy these selection criteria.

Table 1: Proposed Sources

Name	RA (J2000)	Dec (J2000)	Spectral Type	S_ν (mJy)	R_{eff} (au)	Region
Sz 65	15:39:27.75	−34:46:17.56	K7	104	31	Lupus
2MASS J15450887-3417333	15:45:08.85	−34:17:33.81	M5.5	76	20	Lupus
Sz 73	15:47:56.92	−35:14:35.15	K7	54	36	Lupus
2MASS J16090075-1908526	16:09:00.75	−19:08:52.68	K9	51	39	USco
2MASS J16142029-1906481	16:14:20.29	−19:06:48.14	M0	44	29	USco
IRAS 16201-2410	16:23:09.22	−24:17:05.36	G0	114	46	Oph
WL 18	16:26:48.98	−24:38:25.24	M3.5	51	20	Oph
WL 10	16:27:09.10	−24:34:08.71	K9	91	25	Oph
YLW 47	16:27:38.31	−24:36:59.00	M0	83	18	Oph

The columns are (1) the source name, (2) right ascension, (3) declination, (4) spectral type, (5) integrated flux density at a frequency of 340 GHz, (6) effective radius that encloses 68% of the total flux density, and (7) name of the star-forming region.

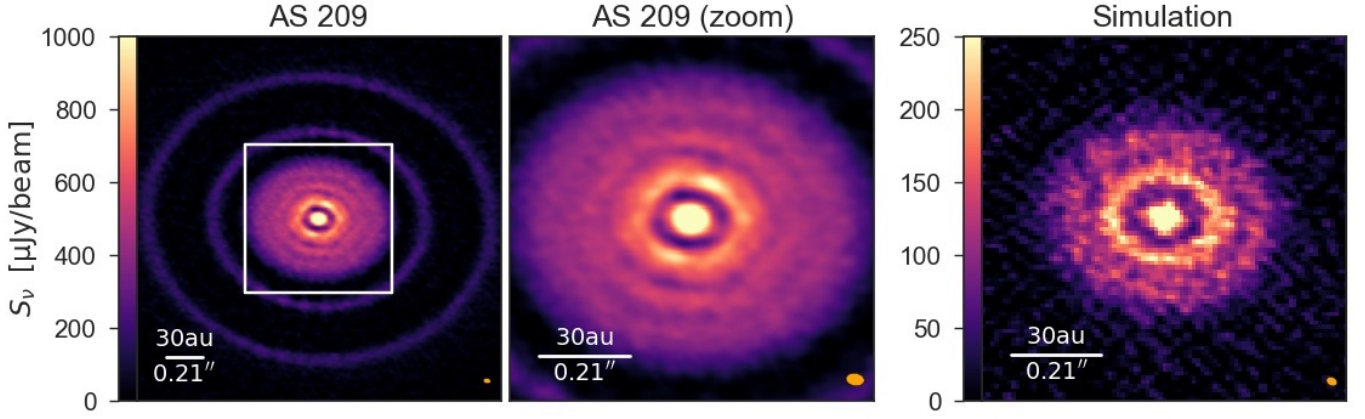


Figure 3: *Left:* ALMA Cycle 4 image of the circumstellar disk around AS 209, and a zoom of the inner portion of the disk (*middle*) to highlight the substructure within the inner 30 au in radius. The disk consists of a series of five concentric bright rings that extend from a radius 15 au to 126 au. *Right:* Simulated CASA image of a disk that contains only the two inner rings found in AS 209 at radius of 15 and 27 au, but with the total flux density at 240 GHz scaled to 31 mJy, which is the median flux density in our sample. The simulation was obtained with the configurations in the proposed observations.

Proposed Observations

We propose to image the dust continuum for all 9 disks listed in Table 1 using the extended configurations C43-9 or C43-10. While the sources were selected using a flux criteria in Band 7 since most moderate-resolution surveys have been conducted in that band, we propose for the Band 6 continuum to allow direct comparison to the results from the Large Program. In addition, Band 6 provides the highest spatial resolution since Band 7 is not permitted for C43-9 and C43-10 in Cycle 6.

Either configuration C43-9 (0.024'') or C43-10 (0.017'') are suitable to achieve a spatial resolution of 2.4-3.5 au. This will provide a minimum of 10 independent linear resolution elements across the disk diameter to yield between 50 and 650 independent pixels across the face of the disk given the range of R_{eff} in the sample (see Table 1). The sensitivity was set to match that of the Large Program so that comparable structures in the inner disk can be detected. As recommended by the ALMA Proposer's Guide, we also request observations in C43-6 to recover larger angular scales with a recommended time multiplier of 0.21.

Figure 3 shows a simulated CASA image using our proposed configurations and integration times of a compact disk. The synthetic disk contains two rings that have the same radii (15 and 27 au) and width as observed in AS 209, but were reduced in surface brightness by a factor of two to agree with the median flux density of sources in our sample. The CASA simulation demonstrates that our observing strategy will be able to detect substructures in the inner regions of compact disks, if present.

References

- | | |
|---|---|
| ALMA Partnership et al. 2015, ApJ, 808L | Okuzumi, S., et al. 2016, ApJ, 821, 82 |
| Ansdell, M., et al. 2017, AJ, 153, 240 | Pérez et al. 2016, Science, 353, 1519 |
| Ansdell, M., et al. 2018, astro-ph 1803.05923 | Piétu, V., et al. 2014, A&A, 564, 95 |
| Barenfeld, S., et al. 2016, ApJ, 827, 142 | Pinilla, P., et al. 2012, A&A, 538, 114 |
| Barenfeld, S., et al. 2017, ApJ, 851, 85 | Pinilla, P., et al. 2016, A&A, 596, 81 |
| Cox, E., et al. 2017, ApJ, 851, 83 | Tazzari, M., et al. 2017, A&A, 606, 88 |
| Fedele, D., et al. 2017, A&A, 610, 24 | Tripathi, A., et al. 2017, ApJ, 845, 44 |
| Isella, A., et al. 2016, PRL, 117, 251101 | Weidenschilling, S. J. 1977, MNRAS, 180, 57 |

2018.1.00271.S

SG : 1 of 3 Long baselines: group 1 cluster 1 Band 6

Long baselines observations in C43-9 or C43-10 achieve a spatial resolution of 2.4-3.5 au.

Science Goal Parameters

Ang.Res.	LAS	Requested RMS	RMS Bandwidth	Rep.Freq.	Cont. RMS	Cont. Bandwidth	Poln.Prod.	Non-standard mode
0.0240" - 0.0170"	0.2"	17 μJy, 592.6 mK-1.2 K	9110.999 km/s, 7.5 GHz	246.775000 GHz	16.974 μJy, 591.7 mK-1.2 K	7.500 GHz	XX,YY	No

Use of 12m Array (43 antennas)

t_total(all configs)	t_science(C43-9,C4...	t_total()	Imaged area	#12m pointing	12m Mosaic spacing	HPBW	t_per_point	Data Vol	Avg. Data Rate
6.7 h	2.8 h	0.0 h	7.9 "	3	offset	23.6 "	3338.1 s	291.5 GB	18.0 MB/s

Use of ACA 7m Array (10 antennas) and TP Array

t_total(ACA)	t_total(7m)	t_total(TP)	Imaged area	#7m pointing	7m Mosaic spacing	HPBW	t_per_point	Data Vol	Avg. Data Rate

Spectral Setup : Spectral Line

BB	Center Freq Rest GHz	spw name	Eff #Ch p.p.	Bandwidth	Resolution	Vel. Bandwidth	Vel. Res.	Res. El. per FWHM
1	231.000000	CO v=0 2-1	3840	1875.00 MHz	976.563 kHz	2433.3 km/s	1.267 km/s	2
2	232.900000	Continuum	128	1875.00 MHz	31.250 MHz	2413.4 km/s	40.224 km/s	0
3	246.775000	Continuum	128	1875.00 MHz	31.250 MHz	2277.7 km/s	37.962 km/s	0
4	248.650000	Continuum	128	1875.00 MHz	31.250 MHz	2260.6 km/s	37.676 km/s	0

3 Targets

No.	Target	Ra,Dec (ICRS)	V_def,frame --OR--z
1	1-YLW_47	16:27:38, -24:36:58	0.00 km/s,lsrk,RADIO
2	2-WL_10	16:27:09, -24:34:08	0.00 km/s,lsrk,RADIO
3	3-WL_18	16:26:48, -24:38:25	0.00 km/s,lsrk,RADIO

Expected Source Properties

	Peak Flux	SNR	Linewidth	RMS (over 1/3 linewidth)	linewidth / bandwidth used for sensitivity	Pol.	Pol. SNR
Line	1.00 mJy	0.5	2 km/s	1.98 mJy, 137.9 K	0.0002	0.0%	0.0
Continuum	330.00 uJy	19.4				0.0%	0.0

Dynamic range (cont flux/line rms): 0.4

1 Tuning

Tuning	Target	Rep. Freq. Sky GHz	RMS (Rep. Freq.)	RMS Achieved
1	1,2,3	246.775000	16.97 μJy, 1.2 K	16.53 uJy - 17.30 uJy

Sensitivity Comments

Note that one or more of the S/N estimates are < 3 . Please double-check the RMS and/or line fluxes entered and/or address the issue below.
 Note that the bandwidth used for sensitivity is larger than 1/3 of the linewidth.
 The S/N achieved for a resolution element that allows the line to be resolved will be lower than that reported.

Justification for requested RMS and resulting S/N (and for spectral lines the bandwidth selected) for the sensitivity calculation.

The RMS was set to match that of the Cycle 4 Large Program 2016.1.00484.L, which achieved a sensitivity limit of 17 microJy in the continuum. The simulations shown in Figure 3 demonstrate this can be used to achieve the goals if similar structures are present in the compact disks.

My generally, we estimate the signal to noise per pixel given the effective radius (which contains 68% of the total flux), the observed 340 GHz integrated flux density, and assuming the emission varies with frequency as $\nu^{2.5}$. The effective radius and luminosities are listed in Table 1 of the scientific justification. Assuming that the emission is uniformly distributed, we estimated the signal to noise per beam for both C43-9 and 10. The sample of sources in this source goal will achieve a minimum of signal-to-noise ratio per beam of 8 even in configuration C43-10.

Justification of the chosen angular resolution and largest angular scale for the source(s) in this Science Goal.

We request an angular resolution of 0.017-0.024 arcsec (configurations C43-9 or 10) to measure substructures at a spatial resolution of ~ 3 au. The high spatial resolution is needed since our sample by design are relatively compact disks, and the goal of the proposal is to identify any substructures. We used the angular resolution to impose a minimum disk radius of $0.024 \text{ arcsec} \times 140 \text{ parsec} \times 10 \times 0.5 = 17 \text{ au}$ in selecting the sample.

The largest angular scale was set to 0.2 arcsec so that only the long baselines will be triggered in this science goal. The compact baselines are requested in a separate science goal where they can be observed in fewer clusters and therefore save integration time on the 12-m array. (The long baselines using a 1 deg radius to define the clusters, while the compact baselines use 10 deg.)

Correlator Comments

Note that the spectral resolution is larger than 1/3 of the spectral line width and that your line may not be resolved.

Justification of the correlator set-up with particular reference to the number of spectral resolution elements per line width.

The correlator is optimized for continuum observations. One of the windows is set for CO 2-1 observations in FDM mode to measure the CO extent. However, the sensitivity requirements are set solely for the continuum.

2018.1.00271.S

SG : 1 of 3 Long baselines: group 1 cluster 2 Band 6

Long baselines observations in C43-9 or C43-10 achieve a spatial resolution of 2.4-3.5 au.

Science Goal Parameters

Ang.Res.	LAS	Requested RMS	RMS Bandwidth	Rep.Freq.	Cont. RMS	Cont. Bandwidth	Poln.Prod.	Non-standard mode
0.0240" - 0.0170"	0.2"	17 μJy, 592.6 mK-1.2 K	9111.134 km/s, 7.5 GHz	246.775000 GHz	16.915 μJy, 589.6 mK-1.2 K	7.500 GHz	XX,YY	No

Use of 12m Array (43 antennas)

t_total(all configs)	t_science(C43-9,C4...	t_total()	Imaged area	#12m pointing	12m Mosaic spacing	HPBW	t_per_point	Data Vol	Avg. Data Rate
2.5 h	0.9 h	0.0 h	7.9 "	1	offset	23.6 "	3410.9 s	105.7 GB	17.8 MB/s

Use of ACA 7m Array (10 antennas) and TP Array

t_total(ACA)	t_total(7m)	t_total(TP)	Imaged area	#7m pointing	7m Mosaic spacing	HPBW	t_per_point	Data Vol	Avg. Data Rate

Spectral Setup : Spectral Line

BB	Center Freq Rest GHz	spw name	Eff #Ch p.p.	Bandwidth	Resolution	Vel. Bandwidth	Vel. Res.	Res. El. per FWHM
1	231.000000	CO v=0 2-1	3840	1875.00 MHz	976.563 kHz	2433.3 km/s	1.267 km/s	2
2	232.900000	Continuum	128	1875.00 MHz	31.250 MHz	2413.5 km/s	40.225 km/s	0
3	246.775000	Continuum	128	1875.00 MHz	31.250 MHz	2277.8 km/s	37.963 km/s	0
4	248.650000	Continuum	128	1875.00 MHz	31.250 MHz	2260.6 km/s	37.677 km/s	0

1 Target

Expected Source Properties

	Peak Flux	SNR	Linewidth	RMS (over 1/3 linewidth)	linewidth / bandwidth used for sensitivity	Pol.	Pol. SNR
Line	1.00 mJy	0.5	2 km/s	1.98 mJy, 137.4 K	0.0002	0.0%	0.0
Continuum	330.00 uJy	19.5				0.0%	0.0

Dynamic range (cont flux/line rms): 0.2

No.	Target	Ra,Dec (ICRS)	V,def,frame --OR--z
1	1-Sz 65	15:39:27, -34:46:17	0.00 km/s,lsrk,RADIO

1 Tuning

Tuning	Target	Rep. Freq. Sky GHz	RMS (Rep. Freq.)	RMS Achieved
1	1	246.775000	16.91 μJy, 1.2 K	16.47 uJy - 17.24 uJy

Sensitivity Comments

Note that one or more of the S/N estimates are < 3 . Please double-check the RMS and/or line fluxes entered and/or address the issue below.

Note that the bandwidth used for sensitivity is larger than 1/3 of the linewidth.

The S/N achieved for a resolution element that allows the line to be resolved will be lower than that reported.

Justification for requested RMS and resulting S/N (and for spectral lines the bandwidth selected) for the sensitivity calculation.

The RMS was set to match that of the Cycle 4 Large Program 2016.1.00484.L, which achieved a sensitivity limit of 17 microJy in the continuum. The simulations shown in Figure 3 demonstrate this can be used to achieve the goals if similar structures are present in the compact disks.

My generally, we estimate the signal to noise per pixel given the effective radius (which contains 68% of the total flux), the observed 340 GHz integrated flux density, and assuming the emission varies with frequency as $\nu^{2.5}$. The effective radius and luminosities are listed in Table 1 of the scientific justification. Assuming that the emission is uniformly distributed, we estimated the signal to noise per beam for both C43-9 and 10. The sample of sources in this source goal will achieve a minimum of signal-to-noise ratio per beam of 8 even in configuration C43-10.

Justification of the chosen angular resolution and largest angular scale for the source(s) in this Science Goal.

We request an angular resolution of 0.017-0.024 arcsec (configurations C43-9 or 10) to measure substructures at a spatial resolution of ~ 3 au. The high spatial resolution is needed since our sample by design are relatively compact disks, and the goal of the proposal is to identify any substructures. We used the angular resolution to impose a minimum disk radius of $0.024 \text{ arcsec} \times 140 \text{ parsec} \times 10 \times 0.5 = 17 \text{ au}$ in selecting the sample.

The largest angular scale was set to 0.2 arcsec so that only the long baselines will be triggered in this science goal. The compact baselines are requested in a separate science goal where they can be observed in fewer clusters and therefore save integration time on the 12-m array. (The long baselines using a 1 deg radius to define the clusters, while the compact baselines use 10 deg.)

Correlator Comments

Note that the spectral resolution is larger than 1/3 of the spectral line width and that your line may not be resolved.

Justification of the correlator set-up with particular reference to the number of spectral resolution elements per line width.

The correlator is optimized for continuum observations. One of the windows is set for CO 2-1 observations in FDM mode to measure the CO extent. However, the sensitivity requirements are set solely for the continuum.

2018.1.00271.S

SG : 1 of 3 Long baselines: group 1 cluster 3 Band 6

Long baselines observations in C43-9 or C43-10 achieve a spatial resolution of 2.4-3.5 au.

Science Goal Parameters

Ang.Res.	LAS	Requested RMS	RMS Bandwidth	Rep.Freq.	Cont. RMS	Cont. Bandwidth	Poln.Prod.	Non-standard mode
0.0240" - 0.0170"	0.2"	17 μJy, 592.6 mK-1.2 K	9111.123 km/s, 7.5 GHz	246.775000 GHz	16.995 μJy, 592.4 mK-1.2 K	7.500 GHz	XX,YY	No

Use of 12m Array (43 antennas)

t_total(all configs)	t_science(C43-9,C4...	t_total()	Imaged area	#12m pointing	12m Mosaic spacing	HPBW	t_per_point	Data Vol	Avg. Data Rate
2.5 h	0.9 h	0.0 h	7.9 "	1	offset	23.6 "	3374.6 s	104.9 GB	17.8 MB/s

Use of ACA 7m Array (10 antennas) and TP Array

t_total(ACA)	t_total(7m)	t_total(TP)	Imaged area	#7m pointing	7m Mosaic spacing	HPBW	t_per_point	Data Vol	Avg. Data Rate

Spectral Setup : Spectral Line

BB	Center Freq Rest GHz	spw name	Eff #Ch p.p.	Bandwidth	Resolution	Vel. Bandwidth	Vel. Res.	Res. El. per FWHM
1	231.000000	CO v=0 2-1	3840	1875.00 MHz	976.563 kHz	2433.3 km/s	1.267 km/s	2
2	232.900000	Continuum	128	1875.00 MHz	31.250 MHz	2413.5 km/s	40.225 km/s	0
3	246.775000	Continuum	128	1875.00 MHz	31.250 MHz	2277.8 km/s	37.963 km/s	0
4	248.650000	Continuum	128	1875.00 MHz	31.250 MHz	2260.6 km/s	37.677 km/s	0

1 Target

Expected Source Properties

	Peak Flux	SNR	Linewidth	RMS (over 1/3 linewidth)	linewidth / bandwidth used for sensitivity	Pol.	Pol. SNR
Line	10.00 mJy	5.0	2 km/s	1.99 mJy, 138 K	0.0002	0.0%	0.0
Continuum	570.00 uJy	33.5				0.0%	0.0

Dynamic range (cont flux/line rms): 0.3

No.	Target	Ra,Dec (ICRS)	V,def,frame --OR--z
1	1-2MASS_J15450...	15:45:08, -34:17:33	0.00 km/s,lsrk,RADIO

1 Tuning

Tuning	Target	Rep. Freq. Sky GHz	RMS (Rep. Freq.)	RMS Achieved
1	1	246.775000	17 μJy, 1.2 K	16.55 uJy - 17.32 uJy

Sensitivity Comments

Note that the bandwidth used for sensitivity is larger than 1/3 of the linewidth.

The S/N achieved for a resolution element that allows the line to be resolved will be lower than that reported.

Justification for requested RMS and resulting S/N (and for spectral lines the bandwidth selected) for the sensitivity calculation.

The RMS was set to match that of the Cycle 4 Large Program 2016.1.00484.L, which achieved a sensitivity limit of 17 microJy in the continuum. The simulations shown in Figure 3 demonstrate this can be used to achieve the goals if similar structures are present in the compact disks.

My generally, we estimate the signal to noise per pixel given the effective radius (which contains 68% of the total flux), the observed 340 GHz integrated flux density, and assuming the emission varies with frequency as $\nu^{2.5}$. The effective radius and luminosities are listed in Table 1 of the scientific justification. Assuming that the emission is uniformly distributed, we estimated the signal to noise per beam for both both C43-9 and 10. The sample of sources in this source goal will achieve a minimum of signal-to-noise ratio per beam of 8 even in configuration C43-10.

Justification of the chosen angular resolution and largest angular scale for the source(s) in this Science Goal.

We request an angular resolution of 0.017-0.024 arcsec (configurations C43-9 or 10) to measure substructures at a spatial resolution of ~ 3 au. The high spatial resolution is needed since our sample by design are relatively compact disks, and the goal of the proposal is to identify any substructures. We used the angular resolution to impose a minimum disk radius of $0.024 \text{ arcsec} \times 140 \text{ parsec} \times 10^3 \times 0.5 = 17 \text{ au}$ in selecting the sample.

The largest angular scale was set to 0.2 arcsec so that only the long baselines will be triggered in this science goal. The compact baselines are requested in a separate science goal where they can be observed in fewer clusters and therefore save integration time on the 12-m array. (The long baselines using a 1 deg radius to define the clusters, while the compact baselines use 10 deg.)

Correlator Comments

Note that the spectral resolution is larger than 1/3 of the spectral line width and that your line may not be resolved.

Justification of the correlator set-up with particular reference to the number of spectral resolution elements per line width.

The correlator is optimized for continuum observations. One of the windows is set for CO 2-1 observations in FDM mode to measure the CO extent. However, the sensitivity requirements are set solely for the continuum.

2018.1.00271.S

SG : 2 of 3 Long baselines: group 2 cluster 1 Band 6

Long baselines observations in C43-9 or C43-10 achieve a spatial resolution of 2.4-3.5 au.

Science Goal Parameters

Ang.Res.	LAS	Requested RMS	RMS Bandwidth	Rep.Freq.	Cont. RMS	Cont. Bandwidth	Poln.Prod.	Non-standard mode
0.0240" - 0.0170"	0.2"	17 μJy, 592.6 mK-1.2 K	9111.129 km/s, 7.5 GHz	246.775000 GHz	16.925 μJy, 590 mK-1.2 K	7.500 GHz	XX,YY	No

Use of 12m Array (43 antennas)

t_total(all configs)	t_science(C43-9,C4...	t_total()	Imaged area	#12m pointing	12m Mosaic spacing	HPBW	t_per_point	Data Vol	Avg. Data Rate
2.5 h	0.9 h	0.0 h	7.9 "	1	offset	23.6 "	3410.9 s	105.7 GB	17.8 MB/s

Use of ACA 7m Array (10 antennas) and TP Array

t_total(ACA)	t_total(7m)	t_total(TP)	Imaged area	#7m pointing	7m Mosaic spacing	HPBW	t_per_point	Data Vol	Avg. Data Rate

Spectral Setup : Spectral Line

BB	Center Freq Rest GHz	spw name	Eff #Ch p.p.	Bandwidth	Resolution	Vel. Bandwidth	Vel. Res.	Res. El. per FWHM
1	231.000000	CO v=0 2-1	3840	1875.00 MHz	976.563 kHz	2433.3 km/s	1.267 km/s	2
2	232.900000	Continuum	128	1875.00 MHz	31.250 MHz	2413.5 km/s	40.225 km/s	0
3	246.775000	Continuum	128	1875.00 MHz	31.250 MHz	2277.8 km/s	37.963 km/s	0
4	248.650000	Continuum	128	1875.00 MHz	31.250 MHz	2260.6 km/s	37.677 km/s	0

1 Target

Expected Source Properties

	Peak Flux	SNR	Linewidth	RMS (over 1/3 linewidth)	linewidth / bandwidth used for sensitivity	Pol.	Pol. SNR
Line	1.00 mJy	0.5	2 km/s	1.98 mJy, 137.5 K	0.0002	0.0%	0.0
Continuum	130.00 uJy	7.7				0.0%	0.0

Dynamic range (cont flux/line rms): 0.1

No.	Target	Ra,Dec (ICRS)	V,def,frame --OR--z
1	1-Sz 73	15:47:56, -35:14:34	0.00 km/s,lsrk,RADIO

1 Tuning

Tuning	Target	Rep. Freq. Sky GHz	RMS (Rep. Freq.)	RMS Achieved
1	1	246.775000	16.93 μJy, 1.2 K	16.48 uJy - 17.25 uJy

Sensitivity Comments

Note that one or more of the S/N estimates are < 3 . Please double-check the RMS and/or line fluxes entered and/or address the issue below. Note that the bandwidth used for sensitivity is larger than 1/3 of the linewidth. The S/N achieved for a resolution element that allows the line to be resolved will be lower than that reported.

Justification for requested RMS and resulting S/N (and for spectral lines the bandwidth selected) for the sensitivity calculation.

The RMS was set to match that of the Cycle 4 Large Program 2016.1.00484.L, which achieved a sensitivity limit of 17 microJy in the continuum. The simulations shown in Figure 3 demonstrate this can be used to achieve the goals if similar structures are present in the compact disks.

My generally, we estimate the signal to noise per pixel given the effective radius (which contains 68% of the total flux), the observed 340 GHz integrated flux density, and assuming the emission varies with frequency as $\nu^{2.5}$. The effective radius and luminosities are listed in Table 1 of the scientific justification. Assuming that the emission is uniformly distributed, we estimated the signal to noise per beam for both C43-9 and 10. The sample of sources in this source goal will achieve a minimum signal-to-noise ratio per beam of 2-2.9 even in configuration C43-10, and a minimum signal-to-noise of 4.3-6.3 in C43-9. If the emission shows substructure, the signal-to-noise ratios will be higher.

Justification of the chosen angular resolution and largest angular scale for the source(s) in this Science Goal.

We request an angular resolution of 0.017-0.024 arcsec (configurations C43-9 or 10) to measure substructures at a spatial resolution of ~ 3 au. The high spatial resolution is needed since our sample by design are relatively compact disks, and the goal of the proposal is to identify any substructures. We used the angular resolution to impose a minimum disk radius of $0.024 \text{ arcsec} \times 140 \text{ parsec} \times 10 \times 0.5 = 17 \text{ au}$ in selecting the sample.

The largest angular scale was set to 0.2 arcsec so that only the long baselines will be triggered in this science goal. The compact baselines are requested in a separate science goal where they can be observed in fewer clusters and therefore save integration time on the 12-m array. (The long baselines using a 1 deg radius to define the clusters, while the compact baselines use 10 deg.)

Correlator Comments

Note that the spectral resolution is larger than 1/3 of the the spectral line width and that your line may not be resolved.

Justification of the correlator set-up with particular reference to the number of spectral resolution elements per line width.

The correlator is optimized for continuum observations. One of the windows is set for CO 2-1 observations in FDM mode to measure the CO extent. However, the sensitivity requirements are set solely for the continuum.

2018.1.00271.S

SG : 2 of 3 Long baselines: group 2 cluster 2 Band 6

Long baselines observations in C43-9 or C43-10 achieve a spatial resolution of 2.4-3.5 au.

Science Goal Parameters

Ang.Res.	LAS	Requested RMS	RMS Bandwidth	Rep.Freq.	Cont. RMS	Cont. Bandwidth	Poln.Prod.	Non-standard mode
0.0240" - 0.0170"	0.2"	17 μJy, 592.6 mK-1.2 K	9111 km/s, 7.5 GHz	246.775000 GHz	16.973 μJy, 591.6 mK-1.2 K	7.500 GHz	XX,YY	No

Use of 12m Array (43 antennas)

t_total(all configs)	t_science(C43-9,C4...	t_total()	Imaged area	#12m pointing	12m Mosaic spacing	HPBW	t_per_point	Data Vol	Avg. Data Rate
2.4 h	0.9 h	0.0 h	7.9 "	1	offset	23.6 "	3338.3 s	103.9 GB	17.8 MB/s

Use of ACA 7m Array (10 antennas) and TP Array

t_total(ACA)	t_total(7m)	t_total(TP)	Imaged area	#7m pointing	7m Mosaic spacing	HPBW	t_per_point	Data Vol	Avg. Data Rate

Spectral Setup : Spectral Line

BB	Center Freq Rest GHz	spw name	Eff #Ch p.p.	Bandwidth	Resolution	Vel. Bandwidth	Vel. Res.	Res. El. per FWHM
1	231.000000	CO v=0 2-1	3840	1875.00 MHz	976.563 kHz	2433.3 km/s	1.267 km/s	2
2	232.900000	Continuum	128	1875.00 MHz	31.250 MHz	2413.4 km/s	40.224 km/s	0
3	246.775000	Continuum	128	1875.00 MHz	31.250 MHz	2277.8 km/s	37.963 km/s	0
4	248.650000	Continuum	128	1875.00 MHz	31.250 MHz	2260.6 km/s	37.676 km/s	0

1 Target

Expected Source Properties

	Peak Flux	SNR	Linewidth	RMS (over 1/3 linewidth)	linewidth / bandwidth used for sensitivity	Pol.	Pol. SNR
Line	1.00 mJy	0.5	2 km/s	1.98 mJy, 137.8 K	0.0002	0.0%	0.0
Continuum	16.00 mJy	942.7				0.0%	0.0

Dynamic range (cont flux/line rms): 8.1

No.	Target	Ra,Dec (ICRS)	V,def,frame --OR--z
1	1-IRAS_16201-24...	16:23:09, -24:17:05	0.00 km/s,lsrk,RADIO

1 Tuning

Tuning	Target	Rep. Freq. Sky GHz	RMS (Rep. Freq.)	RMS Achieved
1	1	246.775000	16.97 μJy, 1.2 K	16.53 uJy - 17.30 uJy

Sensitivity Comments

Note that one or more of the S/N estimates are < 3 . Please double-check the RMS and/or line fluxes entered and/or address the issue below.
 Note that the bandwidth used for sensitivity is larger than 1/3 of the linewidth.
 The S/N achieved for a resolution element that allows the line to be resolved will be lower than that reported.

Justification for requested RMS and resulting S/N (and for spectral lines the bandwidth selected) for the sensitivity calculation.

The RMS was set to match that of the Cycle 4 Large Program 2016.1.00484.L, which achieved a sensitivity limit of 17 microJy in the continuum. The simulations shown in Figure 3 demonstrate this can be used to achieve the goals if similar structures are present in the compact disks.

My generally, we estimate the signal to noise per pixel given the effective radius (which contains 68% of the total flux), the observed 340 GHz integrated flux density, and assuming the emission varies with frequency as $\nu^{2.5}$. The effective radius and luminosities are listed in Table 1 of the scientific justification. Assuming that the emission is uniformly distributed, we estimated the signal to noise per beam for both C43-9 and 10. The sample of sources in this source goal will achieve a minimum signal-to-noise ratio per beam of 2-2.9 even in configuration C43-10, and a minimum signal-to-noise of 4.3-6.3 in C43-9. If the emission shows substructure, the signal-to-noise ratios will be higher.

Justification of the chosen angular resolution and largest angular scale for the source(s) in this Science Goal.

We request an angular resolution of 0.017-0.024 arcsec (configurations C43-9 or 10) to measure substructures at a spatial resolution of ~ 3 au. The high spatial resolution is needed since our sample by design are relatively compact disks, and the goal of the proposal is to identify any substructures. We used the angular resolution to impose a minimum disk radius of $0.024 \text{ arcsec} \times 140 \text{ parsec} \times 10 \times 0.5 = 17 \text{ au}$ in selecting the sample.

The largest angular scale was set to 0.2 arcsec so that only the long baselines will be triggered in this science goal. The compact baselines are requested in a separate science goal where they can be observed in fewer clusters and therefore save integration time on the 12-m array. (The long baselines using a 1 deg radius to define the clusters, while the compact baselines use 10 deg.)

Correlator Comments

Note that the spectral resolution is larger than 1/3 of the the spectral line width and that your line may not be resolved.

Justification of the correlator set-up with particular reference to the number of spectral resolution elements per line width.

The correlator is optimized for continuum observations. One of the windows is set for CO 2-1 observations in FDM mode to measure the CO extent. However, the sensitivity requirements are set solely for the continuum.

2018.1.00271.S

SG : 2 of 3 Long baselines: group 2 cluster 3 Band 6

Long baselines observations in C43-9 or C43-10 achieve a spatial resolution of 2.4-3.5 au.

Science Goal Parameters

Ang.Res.	LAS	Requested RMS	RMS Bandwidth	Rep.Freq.	Cont. RMS	Cont. Bandwidth	Poln.Prod.	Non-standard mode
0.0240" - 0.0170"	0.2"	17 μJy, 592.5 mK-1.2 K	9111.088 km/s, 7.5 GHz	246.775000 GHz	16.986 μJy, 592.1 mK-1.2 K	7.500 GHz	XX,YY	No

Use of 12m Array (43 antennas)

t_total(all configs)	t_science(C43-9,C4...	t_total()	Imaged area	#12m pointing	12m Mosaic spacing	HPBW	t_per_point	Data Vol	Avg. Data Rate
2.4 h	0.9 h	0.0 h	7.9 "	1	offset	23.6 "	3338.3 s	103.9 GB	17.8 MB/s

Use of ACA 7m Array (10 antennas) and TP Array

t_total(ACA)	t_total(7m)	t_total(TP)	Imaged area	#7m pointing	7m Mosaic spacing	HPBW	t_per_point	Data Vol	Avg. Data Rate

Spectral Setup : Spectral Line

BB	Center Freq Rest GHz	spw name	Eff #Ch p.p.	Bandwidth	Resolution	Vel. Bandwidth	Vel. Res.	Res. El. per FWHM
1	231.000000	CO v=0 2-1	3840	1875.00 MHz	976.563 kHz	2433.3 km/s	1.267 km/s	2
2	232.900000	Continuum	128	1875.00 MHz	31.250 MHz	2413.5 km/s	40.225 km/s	0
3	246.775000	Continuum	128	1875.00 MHz	31.250 MHz	2277.8 km/s	37.963 km/s	0
4	248.650000	Continuum	128	1875.00 MHz	31.250 MHz	2260.6 km/s	37.677 km/s	0

1 Target

Expected Source Properties

	Peak Flux	SNR	Linewidth	RMS (over 1/3 linewidth)	linewidth / bandwidth used for sensitivity	Pol.	Pol. SNR
Line	1.00 mJy	0.5	2 km/s	1.99 mJy, 138 K	0.0002	0.0%	0.0
Continuum	100.00 uJy	5.9				0.0%	0.0

Dynamic range (cont flux/line rms): 0.1

1 Tuning

No.	Target	Ra,Dec (ICRS)	V,def,frame --OR--z
1	1-2MASS_J16090...	16:09:00, -19:08:52	-7.30 km/s, hel,RELATIVISTIC

Tuning	Target	Rep. Freq. Sky GHz	RMS (Rep. Freq.)	RMS Achieved
1	1	246.781009	16.99 μJy, 1.2 K	16.55 uJy - 17.31 uJy

Sensitivity Comments

Note that one or more of the S/N estimates are < 3 . Please double-check the RMS and/or line fluxes entered and/or address the issue below.
 Note that the bandwidth used for sensitivity is larger than 1/3 of the linewidth.
 The S/N achieved for a resolution element that allows the line to be resolved will be lower than that reported.

Justification for requested RMS and resulting S/N (and for spectral lines the bandwidth selected) for the sensitivity calculation.

The RMS was set to match that of the Cycle 4 Large Program 2016.1.00484.L, which achieved a sensitivity limit of 17 microJy in the continuum. The simulations shown in Figure 3 demonstrate this can be used to achieve the goals if similar structures are present in the compact disks.

My generally, we estimate the signal to noise per pixel given the effective radius (which contains 68% of the total flux), the observed 340 GHz integrated flux density, and assuming the emission varies with frequency as $\nu^{2.5}$. The effective radius and luminosities are listed in Table 1 of the scientific justification. Assuming that the emission is uniformly distributed, we estimated the signal to noise per beam for both C43-9 and 10. The sample of sources in this source goal will achieve a minimum signal-to-noise ratio per beam of 2-2.9 even in configuration C43-10, and a minimum signal-to-noise of 4.3-6.3 in C43-9. If the emission shows substructure, the signal-to-noise ratios will be higher.

Justification of the chosen angular resolution and largest angular scale for the source(s) in this Science Goal.

We request an angular resolution of 0.017-0.024 arcsec (configurations C43-9 or 10) to measure substructures at a spatial resolution of ~ 3 au. The high spatial resolution is needed since our sample by design are relatively compact disks, and the goal of the proposal is to identify any substructures. We used the angular resolution to impose a minimum disk radius of $0.024 \text{ arcsec} \times 140 \text{ parsec} \times 10 \times 0.5 = 17 \text{ au}$ in selecting the sample.

The largest angular scale was set to 0.2 arcsec so that only the long baselines will be triggered in this science goal. The compact baselines are requested in a separate science goal where they can be observed in fewer clusters and therefore save integration time on the 12-m array. (The long baselines using a 1 deg radius to define the clusters, while the compact baselines use 10 deg.)

Correlator Comments

Note that the spectral resolution is larger than 1/3 of the the spectral line width and that your line may not be resolved.

Justification of the correlator set-up with particular reference to the number of spectral resolution elements per line width.

The correlator is optimized for continuum observations. One of the windows is set for CO 2-1 observations in FDM mode to measure the CO extent. However, the sensitivity requirements are set solely for the continuum.

2018.1.00271.S

SG : 2 of 3 Long baselines: group 2 cluster 4 Band 6

Long baselines observations in C43-9 or C43-10 achieve a spatial resolution of 2.4-3.5 au.

Science Goal Parameters

Ang.Res.	LAS	Requested RMS	RMS Bandwidth	Rep.Freq.	Cont. RMS	Cont. Bandwidth	Poln.Prod.	Non-standard mode
0.0240" - 0.0170"	0.2"	17 μJy, 592.5 mK-1.2 K	9111.104 km/s, 7.5 GHz	246.775000 GHz	16.987 μJy, 592.1 mK-1.2 K	7.500 GHz	XX,YY	No

Use of 12m Array (43 antennas)

t_total(all configs)	t_science(C43-9,C4...	t_total()	Imaged area	#12m pointing	12m Mosaic spacing	HPBW	t_per_point	Data Vol	Avg. Data Rate
2.4 h	0.9 h	0.0 h	7.9 "	1	offset	23.6 "	3338.3 s	103.9 GB	17.8 MB/s

Use of ACA 7m Array (10 antennas) and TP Array

t_total(ACA)	t_total(7m)	t_total(TP)	Imaged area	#7m pointing	7m Mosaic spacing	HPBW	t_per_point	Data Vol	Avg. Data Rate

Spectral Setup : Spectral Line

BB	Center Freq Rest GHz	spw name	Eff #Ch p.p.	Bandwidth	Resolution	Vel. Bandwidth	Vel. Res.	Res. El. per FWHM
1	231.000000	CO v=0 2-1	3840	1875.00 MHz	976.563 kHz	2433.3 km/s	1.267 km/s	2
2	232.900000	Continuum	128	1875.00 MHz	31.250 MHz	2413.5 km/s	40.225 km/s	0
3	246.775000	Continuum	128	1875.00 MHz	31.250 MHz	2277.8 km/s	37.963 km/s	0
4	248.650000	Continuum	128	1875.00 MHz	31.250 MHz	2260.6 km/s	37.677 km/s	0

1 Target

Expected Source Properties

	Peak Flux	SNR	Linewidth	RMS (over 1/3 linewidth)	linewidth / bandwidth used for sensitivity	Pol.	Pol. SNR
Line	1.00 mJy	0.5	2 km/s	1.99 mJy, 138 K	0.0002	0.0%	0.0
Continuum	160.00 uJy	9.4				0.0%	0.0

Dynamic range (cont flux/line rms): 0.1

1 Tuning

No.	Target	Ra,Dec (ICRS)	V,def,frame --OR--z
1	1-2MASS_J16142...	16:14:20, -19:06:48	-6.77 km/s, hel,RELATIVISTIC

Tuning	Target	Rep. Freq. Sky GHz	RMS (Rep. Freq.)	RMS Achieved
1	1	246.780573	16.99 μJy, 1.2 K	16.55 uJy - 17.31 uJy

Sensitivity Comments

Note that one or more of the S/N estimates are < 3 . Please double-check the RMS and/or line fluxes entered and/or address the issue below.
 Note that the bandwidth used for sensitivity is larger than 1/3 of the linewidth.
 The S/N achieved for a resolution element that allows the line to be resolved will be lower than that reported.

Justification for requested RMS and resulting S/N (and for spectral lines the bandwidth selected) for the sensitivity calculation.

The RMS was set to match that of the Cycle 4 Large Program 2016.1.00484.L, which achieved a sensitivity limit of 17 microJy in the continuum. The simulations shown in Figure 3 demonstrate this can be used to achieve the goals if similar structures are present in the compact disks.

My generally, we estimate the signal to noise per pixel given the effective radius (which contains 68% of the total flux), the observed 340 GHz integrated flux density, and assuming the emission varies with frequency as $\nu^{2.5}$. The effective radius and luminosities are listed in Table 1 of the scientific justification. Assuming that the emission is uniformly distributed, we estimated the signal to noise per beam for both C43-9 and 10. The sample of sources in this source goal will achieve a minimum signal-to-noise ratio per beam of 2-2.9 even in configuration C43-10, and a minimum signal-to-noise of 4.3-6.3 in C43-9. If the emission shows substructure, the signal-to-noise ratios will be higher.

Justification of the chosen angular resolution and largest angular scale for the source(s) in this Science Goal.

We request an angular resolution of 0.017-0.024 arcsec (configurations C43-9 or 10) to measure substructures at a spatial resolution of ~ 3 au. The high spatial resolution is needed since our sample by design are relatively compact disks, and the goal of the proposal is to identify any substructures. We used the angular resolution to impose a minimum disk radius of $0.024 \text{ arcsec} \times 140 \text{ parsec} \times 10 \times 0.5 = 17 \text{ au}$ in selecting the sample.

The largest angular scale was set to 0.2 arcsec so that only the long baselines will be triggered in this science goal. The compact baselines are requested in a separate science goal where they can be observed in fewer clusters and therefore save integration time on the 12-m array. (The long baselines using a 1 deg radius to define the clusters, while the compact baselines use 10 deg.)

Correlator Comments

Note that the spectral resolution is larger than 1/3 of the the spectral line width and that your line may not be resolved.

Justification of the correlator set-up with particular reference to the number of spectral resolution elements per line width.

The correlator is optimized for continuum observations. One of the windows is set for CO 2-1 observations in FDM mode to measure the CO extent. However, the sensitivity requirements are set solely for the continuum.

2018.1.00271.S

SG : 3 of 3 Short baselines cluster 1 Band 6

Observations in C43-6 to obtain compact observations and recover the larger angular scales.

Science Goal Parameters

Ang.Res.	LAS	Requested RMS	RMS Bandwidth	Rep.Freq.	Cont. RMS	Cont. Bandwidth	Poln.Prod.	Non-standard mode
0.1300"	1.0"	38 μ Jy, 45.1 mK	9111.134 km/s, 7.5 GHz	246.775000 GHz	37.46 μ Jy, 44.5 mK	7.500 GHz	XX,YY	No

Use of 12m Array (43 antennas)

t_total(all configs)	t_science(C43-6)	t_total()	Imaged area	#12m pointing	12m Mosaic spacing	HPBW	t_per_point	Data Vol	Avg. Data Rate
1.0 h	0.6 h	0.0 h	7.9 "	3	offset	23.6 "	695.4 s	32.2 GB	10.8 MB/s

Use of ACA 7m Array (10 antennas) and TP Array

t_total(ACA)	t_total(7m)	t_total(TP)	Imaged area	#7m pointing	7m Mosaic spacing	HPBW	t_per_point	Data Vol	Avg. Data Rate

Spectral Setup : Spectral Line

BB	Center Freq Rest GHz	spw name	Eff #Ch p.p.	Bandwidth	Resolution	Vel. Bandwidth	Vel. Res.	Res. El. per FWHM
1	231.000000	CO v=0 2-1	3840	1875.00 MHz	976.563 kHz	2433.3 km/s	1.267 km/s	2
2	232.900000	Continuum	128	1875.00 MHz	31.250 MHz	2413.5 km/s	40.225 km/s	0
3	246.775000	Continuum	128	1875.00 MHz	31.250 MHz	2277.8 km/s	37.963 km/s	0
4	248.650000	Continuum	128	1875.00 MHz	31.250 MHz	2260.6 km/s	37.677 km/s	0

3 Targets

No.	Target	Ra,Dec (ICRS)	V,def,frame --OR--z
1	1-Sz_65	15:39:27. -34:46:17	0.00 km/s,lsrk,RADIO
2	2-Sz_73	15:47:56. -35:14:34	0.00 km/s,lsrk,RADIO
3	3-2MASS_J15450...	15:45:08. -34:17:33	0.00 km/s,lsrk,RADIO

Expected Source Properties

	Peak Flux	SNR	Linewidth	RMS (over 1/3 linewidth)	linewidth / bandwidth used for sensitivity	Pol.	Pol. SNR
Line	1.00 mJy	0.2	2 km/s	4.38 mJy, 5.2 K	0.0002	0.0%	0.0
Continuum	130.00 uJy	3.5				0.0%	0.0

Dynamic range (cont flux/line rms): 0.1

1 Tuning

Tuning	Target	Rep. Freq. Sky GHz	RMS (Rep. Freq.)	RMS Achieved
1	1,2,3	246.775000	37.48 μ Jy, 44.5 mK	36.49 uJy - 38.21 uJy

Sensitivity Comments

Note that one or more of the S/N estimates are < 3 . Please double-check the RMS and/or line fluxes entered and/or address the issue below. Note that the bandwidth used for sensitivity is larger than 1/3 of the linewidth.

The S/N achieved for a resolution element that allows the line to be resolved will be lower than that reported.

Justification for requested RMS and resulting S/N (and for spectral lines the bandwidth selected) for the sensitivity calculation.

The Proposer's Guide recommends a time multiplier of 0.21 for Configuration C43-6 to complement the long baseline observations requested in the first science goal. Given the typical on-source integration of 58 minutes in C43-9 or C43-10, we set the sensitivity limit to obtain 12 minute integrations per source in C43-6.

Justification of the chosen angular resolution and largest angular scale for the source(s) in this Science Goal.

The angular resolution is set according the recommendations in the Proposer's Guide to select C43-6, which is needed to recover the larger angular scales.

Correlator Comments

Note that the spectral resolution is larger than 1/3 of the the spectral line width and that your line may not be resolved.

Justification of the correlator set-up with particular reference to the number of spectral resolution elements per line width.

The correlator is optimized for continuum observations. One of the windows is set for CO 2-1 observations in FDM mode to measure the CO. However, the sensitivity requirements are set solely for the continuum.

2018.1.00271.S

SG : 3 of 3 Short baselines cluster 2 Band 6

Observations in C43-6 to obtain compact observations and recover the larger angular scales.

Science Goal Parameters

Ang.Res.	LAS	Requested RMS	RMS Bandwidth	Rep.Freq.	Cont. RMS	Cont. Bandwidth	Poln.Prod.	Non-standard mode
0.1300"	1.0"	38 μJy, 45.1 mK	9110.999 km/s, 7.5 GHz	246.775000 GHz	36.408 μJy, 43.3 mK	7.500 GHz	XX,YY	No

Use of 12m Array (43 antennas)

t_total(all configs)	t_science(C43-6)	t_total()	Imaged area	#12m pointing	12m Mosaic spacing	HPBW	t_per_point	Data Vol	Avg. Data Rate
2.1 h	1.1 h	0.0 h	7.9 "	6	offset	23.6 "	725.6 s	66.5 GB	10.8 MB/s

Use of ACA 7m Array (10 antennas) and TP Array

t_total(ACA)	t_total(7m)	t_total(TP)	Imaged area	#7m pointing	7m Mosaic spacing	HPBW	t_per_point	Data Vol	Avg. Data Rate

Spectral Setup : Spectral Line

BB	Center Freq Rest GHz	spw name	Eff #Ch p.p.	Bandwidth	Resolution	Vel. Bandwidth	Vel. Res.	Res. El. per FWHM
1	231.000000	CO v=0 2-1	3840	1875.00 MHz	976.563 kHz	2433.3 km/s	1.267 km/s	2
2	232.900000	Continuum	128	1875.00 MHz	31.250 MHz	2413.4 km/s	40.224 km/s	0
3	246.775000	Continuum	128	1875.00 MHz	31.250 MHz	2277.7 km/s	37.962 km/s	0
4	248.650000	Continuum	128	1875.00 MHz	31.250 MHz	2260.6 km/s	37.676 km/s	0

6 Targets

No.	Target	Ra,Dec (ICRS)	V,def,frame --OR--z
1	1-YLW_47	16:27:38, -24:36:58	0.00 km/s,lsrk,RADIO
2	2-WL_10	16:27:09, -24:34:08	0.00 km/s,lsrk,RADIO
3	3-IRAS_16201-24...	16:23:09, -24:17:05	0.00 km/s,lsrk,RADIO
4	4-2MASS_J16090...	16:09:00, -19:08:52	-7.30 km/s,hel,RELATIVISTIC
5	5-WL_18	16:26:48, -24:38:25	0.00 km/s,lsrk,RADIO
6	6-2MASS_J16142...	16:14:20, -19:06:48	-6.77 km/s,hel,RELATIVISTIC

Expected Source Properties

	Peak Flux	SNR	Linewidth	RMS (over 1/3 linewidth)	linewidth / bandwidth used for sensitivity	Pol.	Pol. SNR
Line	1.00 mJy	0.2	2 km/s	4.26 mJy, 5.1 K	0.0002	0.0%	0.0
Continuum	100.00 uJy	2.7				0.0%	0.0

Dynamic range (cont flux/line rms): 3.8

1 Tuning

Tuning	Target	Rep. Freq. Sky GHz	RMS (Rep. Freq.)	RMS Achieved
1	1,2,3,4,5,6	246.775000	36.41 μJy, 43.3 mK	35.46 uJy - 37.10 uJy

Sensitivity Comments

Note that one or more of the S/N estimates are < 3 . Please double-check the RMS and/or line fluxes entered and/or address the issue below. Note that the bandwidth used for sensitivity is larger than 1/3 of the linewidth.

The S/N achieved for a resolution element that allows the line to be resolved will be lower than that reported.

Justification for requested RMS and resulting S/N (and for spectral lines the bandwidth selected) for the sensitivity calculation.

The Proposer's Guide recommends a time multiplier of 0.21 for Configuration C43-6 to complement the long baseline observations requested in the first science goal. Given the typical on-source integration of 58 minutes in C43-9 or C43-10, we set the sensitivity limit to obtain 12 minute integrations per source in C43-6.

Justification of the chosen angular resolution and largest angular scale for the source(s) in this Science Goal.

The angular resolution is set according the recommendations in the Proposer's Guide to select C43-6, which is needed to recover the larger angular scales.

Correlator Comments

Note that the spectral resolution is larger than 1/3 of the the spectral line width and that your line may not be resolved.

Justification of the correlator set-up with particular reference to the number of spectral resolution elements per line width.

The correlator is optimized for continuum observations. One of the windows is set for CO 2-1 observations in FDM mode to measure the CO. However, the sensitivity requirements are set solely for the continuum.