



AquaFuse ControlFlo™ Ball Valves

High Density PE4710



Item	Operating Feature
Sizes	2" IPS & 63mm
Design/Testing	ASME B16.40, AWWA C901, AWWA C906
Materials	High Density PE 4710
Operating Pressure	(SDR 11) 200 PSI
Temperature	32° F to 140° F / 0° C to 60° C
Bore	Full Port
Pipe Connection	Butt Fusion, Socket Fusion, or Electrofusion
Operation	360° Turn
Valve Boxes	Supported by all leading valve box manufacturers


IPS & Metric Valve Sizes and Dimensions (approx.)									
Nominal Valve Size	D inch/mm	L inch/mm	H inch/mm	C inch/mm	I inch/mm	Port	Cv	E inch/mm	Weight lbs/kg
2 IPS / SDR 11	2.37 / 60.3	19.60 / 498	9.65 / 250	7.01 / 178	1.77 / 45	Full	164	6.69 / 170	4.19 / 1.90
63mm / SDR 11	2.48 / 63	19.60 / 498	9.65 / 250	7.01 / 178	1.77 / 45	Full	164	6.69 / 170	4.19 / 1.90

Part Number	Description
AFBV0200Y-MFN0-360	AquaFuse ControlFlo 2" IPS Ball Valve 4710 DR11 Full Port
AFBV0063M-MFN0-360	AquaFuse ControlFlo 63mm Ball Valve 4710 DR11 Full Port

www.cmfglobal.com



AquaFuse ControlFlo™ Ball Valves

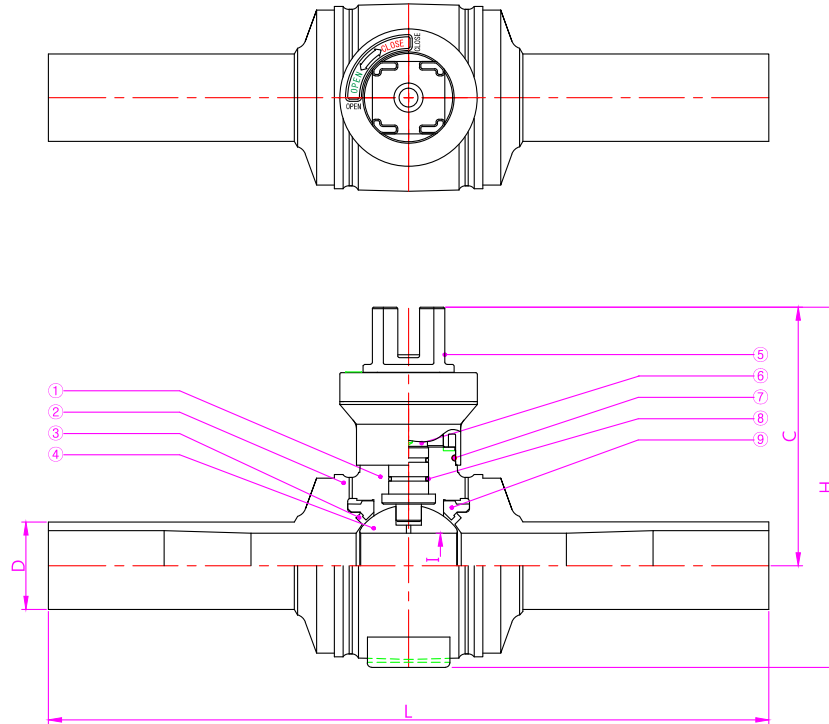

No.	Component	Material
1	Body	Polyethylene
2	End	Polyethylene
3	Ball Seal	Nitrile
4	Ball	Polypropylene
5	P.G. Operator	Acetal (POM)
6	Stem	Acetal (POM)
7	Weather Seal	Nitrile
8	Stem Seal	Nitrile
9	Retainer	Polypropylene

Note: All AquaFuse ball valves far exceed the minimum requirements set forth by ASME B16.40, AWWA C901 and AWWA C906. Please contact your AquaFuse representative for a complete Test Data Package (TDP) that includes more detail on the testing that was performed.

Telephone: 619-869-8919
Fax: 619-330-4532



2445 Fenton Street
Chula Vista, CA 91914-3517

1-877-586-6060 24 Hour Technical Hotline ■ 25 YEAR LIMITED SYSTEM WARRANTY
PRODUCT INSTALLATION TRAINING AVAILABLE

www.cmfglobal.com

