

PVC Connection Kit

There are times when it is useful to be able to quickly connect directly to PVC pipe. Rather than have to solvent weld a threaded fitting to the PVC pipe, simply remove the nut, grip ring and seal from one end of the Philmac compression fitting. Then replace it with the PVC connection kit components. What could be easier or simpler?


Kit connects to PVC conforming to ASTM D2241.

FEATURES & BENEFITS

- Kits fit simply into Philmac's range of 3G® compression fittings, so no matter what type of PE connection you have, the connection kit allows you to directly couple to PVC.
- Grip ring is fitted with a high quality stainless steel grip ring.
- PVC connection kit incorporates all the key benefits of Philmac's unique Slide and Tighten technology for fast and simple connection.
- Philmac's PVC connection kit does not impart to water any odour, taste, colour or constituents in concentrations that could be injurious to health.
- Rated to 230 psi to meet the needs of high pressure systems.
- The PVC connection kit is not fully end-load resistant; however, the end-load resistance exceeds that of the pressure performance.



Remove the nut, the grip ring and the seal. Insert the new seal followed by the green grip ring (with stainless steel ring).

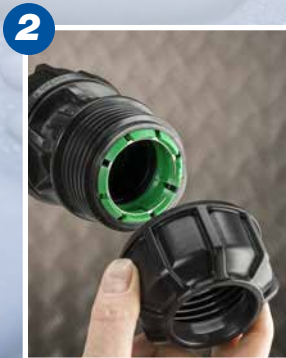

Screw on the nut until two threads are showing.



Ensure the PVC pipe is cut square and insert into the fitting.



Tighten the nut with a wrench.

*

*Refer 3G® Compression Fittings Technical Manual for full installation details.