




The connection you can trust.

FAST FIT Curb Stop Straight CTS x FI NPT

Submittal Information

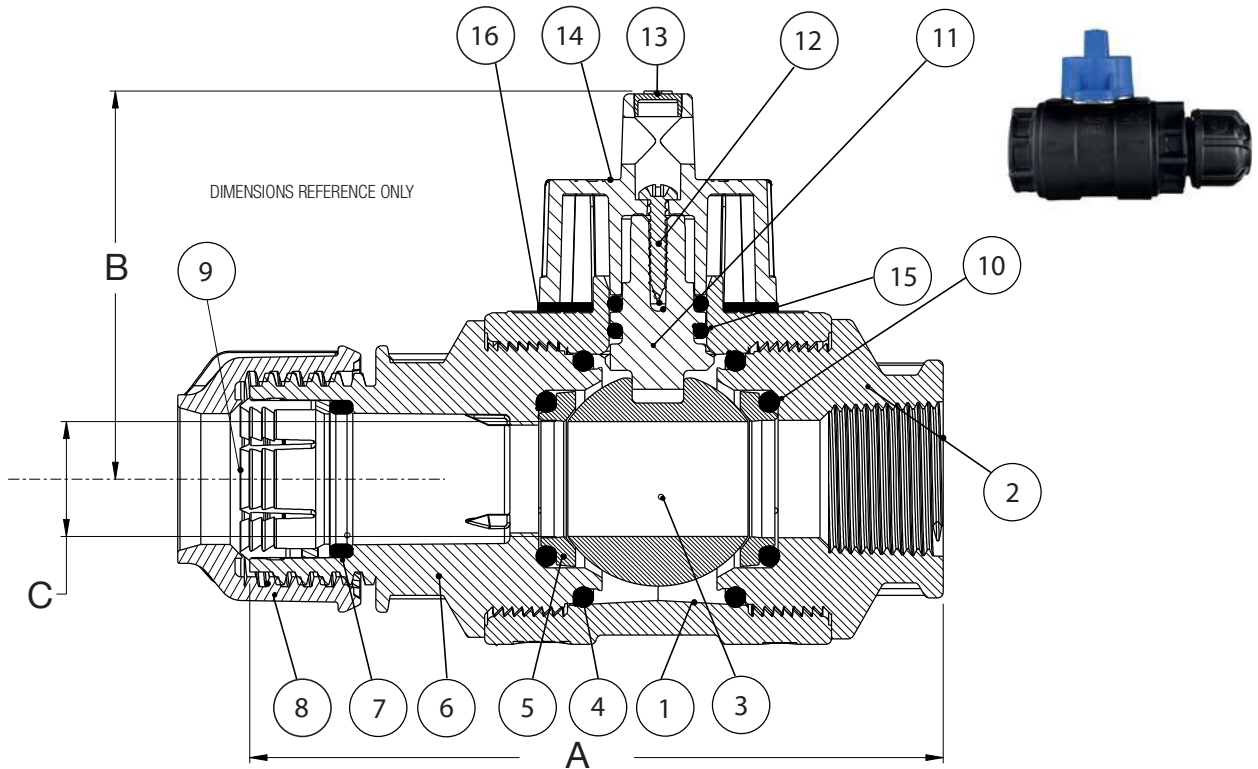

Product Number	CTS	FNPT	Dimensions		
			A	B	C
76-091743	1"	3/4"	4.85	2.7	0.8
76-091744	1"	1"	4.85	2.7	0.8

Certified to NSF 61 - Conforms to AWWA C800 and AWWA C521
- Rated to 230 PSI

- Valve is non-directional and is water-tight with flow in either direction
- Reinforced polyamide composite valve which is corrosion resistant
- Reinforced polyamide composite materials which are lead and contaminant free
- Reinforced polyamide composite material to allow the use of any normal tightening wrench
- Valve and handle lugs to enable valve to be locked in closed position with either padlock or barrel lock
- Compression gripping mechanism to ensure full tensile performance without the use of an internal pipe stiffener

1	Valve Body	Nylon 6 30% GF Black
2	Female NPT Body	Noryl GTX 810 10% Black
3	Ball	20% PIFE Filled Polypropylene
4	Body O-ring	NBR Black
5	Ball Seal Ring	20% PIFE Filled Polypropylene
6	Compression Body	Nylon 6 30% GF Black
7	Compression Seal	NBR Black
8	Compression Nut	Acetal Black
9	Compression Grip Ring	Acetal Black
10	Ball O-ring	NBR Black
11	Spindle	Noryl GTX 810 10% Black
12	Screw	Stainless Steel 316
13	Plug	Polypropylene Blue
14	Handle	Nylon 6 30% GF Blue
15	Dual Spindle O-ring	NBR Black
16	Lock Plate	Stainless Steel 316

Submitted by:

Distributed for Philmac by
Harco Fittings LLC
3721 Cohen Place, Lynchburg, VA 24501
Phone 434-845-7094

Philmac PTY. LTD.
Email: export@phimac.com.au - Phone 61 8 8300 9200
www.phimacinc.com
47-59 Deeds Road, North Plympton, SA, Australia