




The connection you can trust.

# FAST FIT Curb Stop Straight CTS x Meter Submittal Information

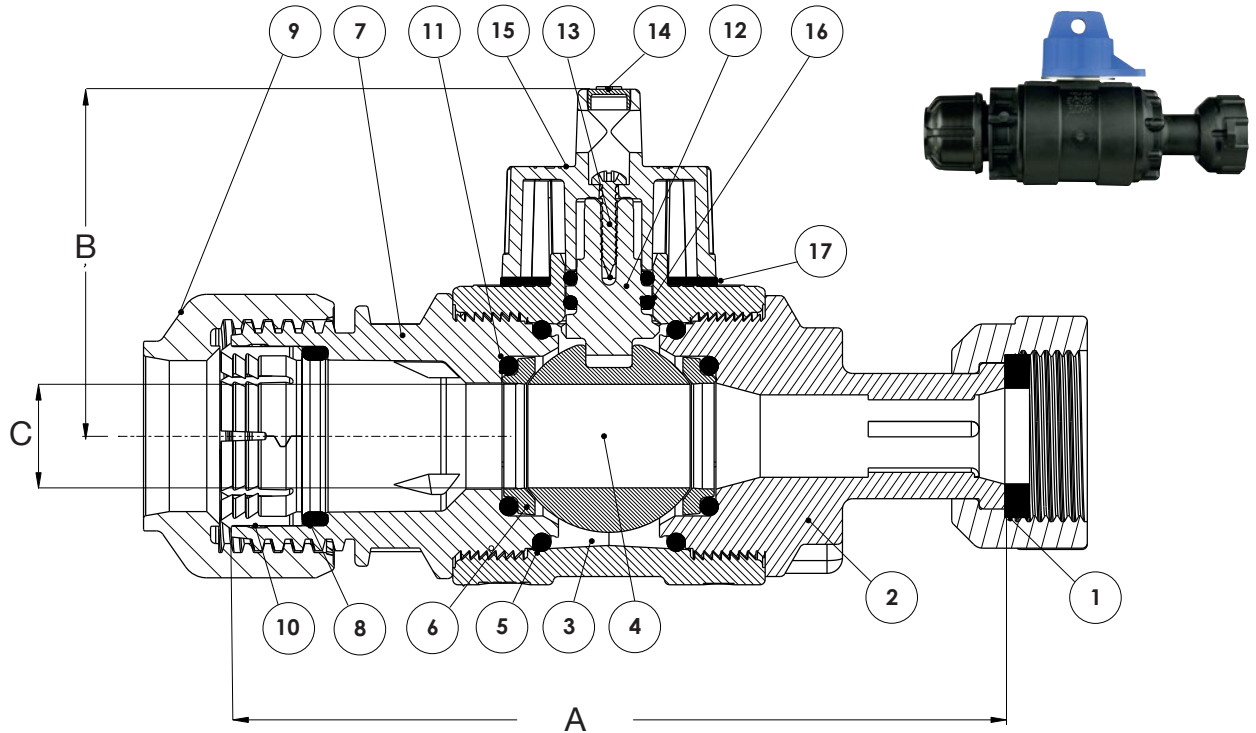

| Product Number | CTS  | Meter | Dimensions |     |     |
|----------------|------|-------|------------|-----|-----|
|                |      |       | A          | B   | C   |
| 76-091933      | 3/4" | 3/4"  | 5.83       | 2.7 | 0.8 |
| 76-091943      | 1"   | 3/4"  | 5.91       | 2.7 | 0.8 |
| 76-091944      | 1"   | 1"    | 5.91       | 2.7 | 0.8 |

#### Certified to NSF 61 - Conforms to AWWA C800 and AWWA C521 - Rated to 230 PSI

- Valve is non-directional and is water-tight with flow in either direction
- Reinforced polyamide composite valve which is corrosion resistant
- Reinforced polyamide composite materials which are lead and contaminant free
- Reinforced polyamide composite material to allow the use of any normal tightening wrench
- Valve and handle lugs to enable valve to be locked in closed position with either padlock or barrel lock
- Compression gripping mechanism to ensure full tensile performance without the use of an internal pipe stiffener
- Compliant with the following meters - 5/8" x 3/4", 3/4" & 1"

Submitted by:

|    |                     |                               |
|----|---------------------|-------------------------------|
| 1  | Meter Nut Washer    | NBR Black                     |
| 2  | Meter Nut Body      | Noryl GTX 810 10% Black       |
| 3  | Valve Body          | Nylon 6 30% GF Black          |
| 4  | Ball                | 20% PIFE Filled Polypropylene |
| 5  | Body O-ring         | NBR Black                     |
| 6  | Ball Seal Ring      | 20% PIFE Filled Polypropylene |
| 7  | Compression Body    | Nylon 6 30% GF Black          |
| 8  | Compression Seal    | NBR Black                     |
| 9  | Compression Nut     | Acetal Black                  |
| 10 | Compression Grip    | Acetal Black                  |
| 11 | Ball O-ring         | NBR Black                     |
| 12 | Spindle             | Noryl GTX 810 10% Black       |
| 13 | Screw               | Stainless Steel 316           |
| 14 | Plug                | Polypropylene Blue            |
| 15 | Handle              | Nylon 6 30% GF Blue           |
| 16 | Dual Spindle O-ring | NBR Black                     |
| 17 | Lock Plate          | Stainless Steel 316           |

Distributed for Philmac by

**Harco Fittings LLC**

3721Cohen Place, Lynchburg, VA 24501

Phone 434-845-7094

**Philmac**PTY. LTD.

Email: [export@phimac.com.au](mailto:export@phimac.com.au) - Phone 61 8 8300 9200

[www.phimacinc.com](http://www.phimacinc.com)

47-59 Deeds Road, North Plympton, SA, Australia

FFCS-CTS-230503