




The connection you can trust.

FAST FIT Curb Stop Straight UTC x Meter Submittal Information

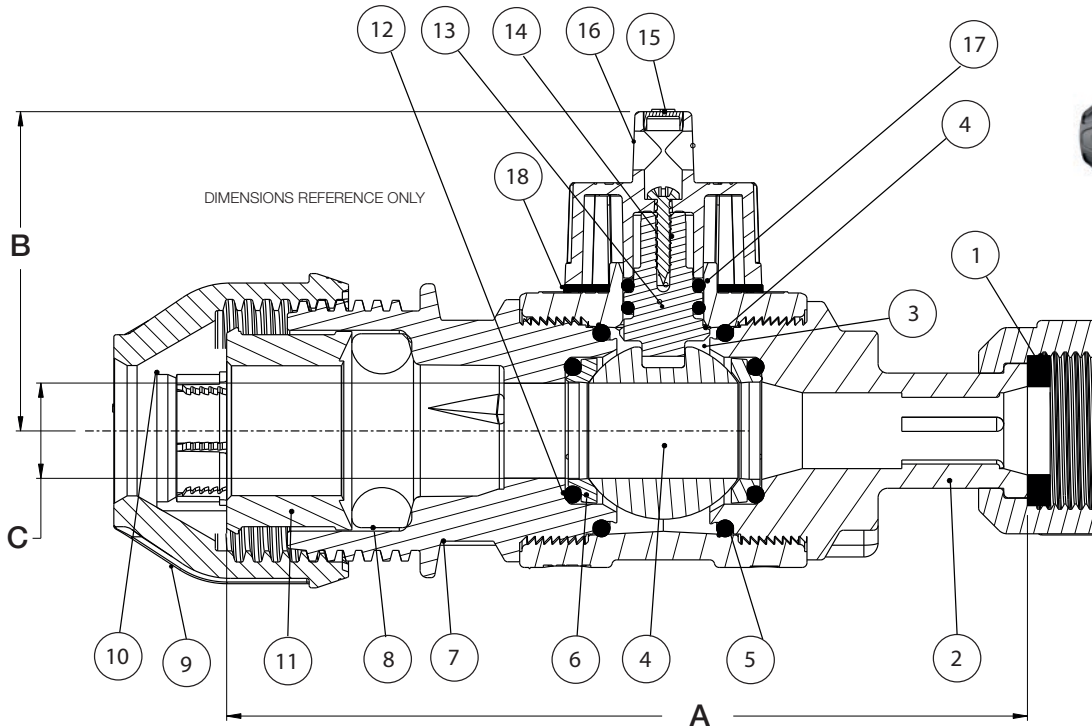

Product Number	UTC	Meter	Dimensions		
			A	B	C
76-0969C3	1.06"-1.34" (27-34mm)	3/4"	6.42	2.7	0.8
76-0969B4	0.83"-1.06" (21-27mm)	1"	6.15	2.7	0.8

Certified to NSF 61 - Conforms to AWWA C800 and AWWA C521 - Rated to 230 PSI

- Valve is non-directional and is water-tight with flow in either direction
- Reinforced polyamide composite valve which is corrosion resistant
- Reinforced polyamide composite materials which are lead and contaminant free
- Reinforced polyamide composite material to allow the use of any normal tightening wrench
- Valve and handle lugs to enable valve to be locked in closed position with either padlock or barrell lock
- Compression gripping mechanism to ensure full tensile performance without the use of an internal pipe stiffener
- Compliant with the following meters - 5/8" x 3/4", 3/4" & 1"

Submitted by:

1	Meter Nut Washer	NBR Black
2	Meter Nut Body	Noryl GTX 810 10% Black
3	Valve Body	Nylon 6 30% GF Black
4	Ball	20% PIFE Filled Polypropylene
5	Body O-ring	NBR Black
6	Ball Seal Ring	20% PIFE Filled Polypropylene
7	Compression Body	Nylon 6 30% GF Black
8	UTC Seal	EPDM
9	UTC Nut	Acetal Black
10	UTC Grip Ring	Acetal Black/Stainless Steel
11	UTC Spacer	Acetal Black
12	Ball O-ring	NBR Black
13	Spindle	Noryl GTX 810 10% Black
14	Screw	Stainless Steel 316
15	Plug	Polypropylene Blue
16	Handle	Nylon 6 30% GF Blue
17	Dual Spindle O-ring	NBR Black
18	Lock Plate	Stainless Steel 316

Distributed for Philmac by

Harco Fittings LLC

3721 Cohen Place, Lynchburg, VA 24501

Phone 434-845-7094

Philmac PTY. LTD.

Email: export@phimac.com.au - Phone 61 8 8300 9200

www.phimacinc.com

47-59 Deeds Road, North Plympton, SA, Australia

FFCS-UTC-230503