

A

B


C

D

E

APPLICABLE STANDARDS

Fittings	F1336
PVC Materials	ASTM D1784
Joints	ASTM D3212
SBR Gaskets	ASTM F477
Installation	ASTM D2321

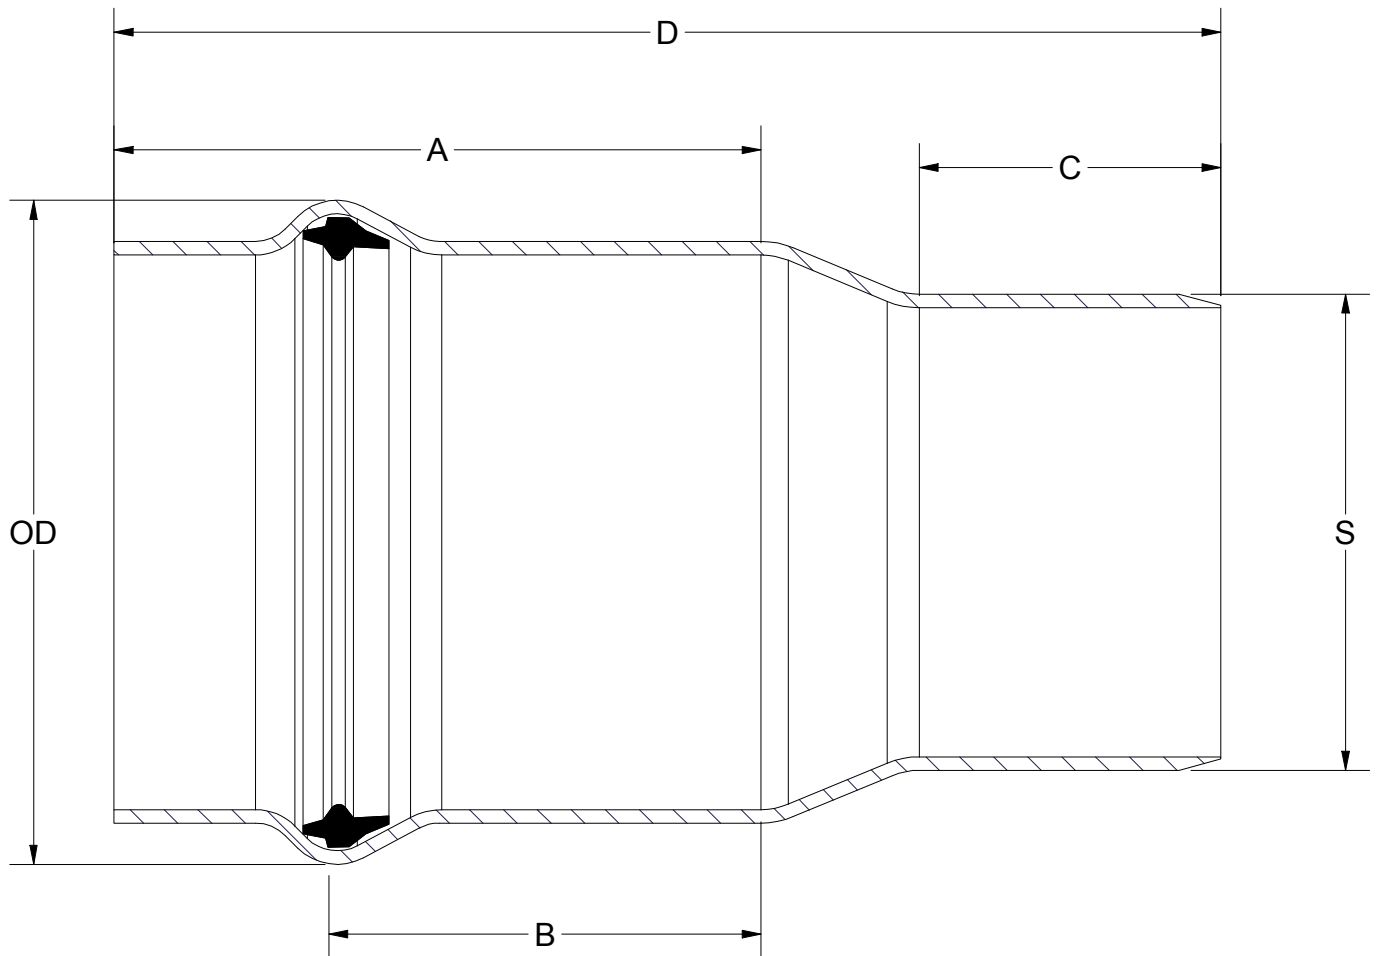

4" - 8" ADAPTER, C900xSEWER, GxS, SDR35

SIZE	PT#	OD	A	B	C	D	S
4"	35-3920404	5.9	6.3	4.1	2.3	9.8	4.215
6"	35-3920606	8.2	7.2	5.1	3.2	12.0	6.275
8"	35-3920808	10.7	7.8	5.7	6.2	10.7	8.400

NOTE:

1. C900 BELLS ARE INTENDED FOR USE WITH PVC PIPE. IF USED WITH DUCTILE IRON PIPE (DIP) THE GASKET MAY NOT PROVIDE AN AIR TIGHT SEAL NEEDED FOR AIR TESTING DUE TO THE PEENING OF THE DIP SURFACE. ALSO THE DIP OUTSIDE DIAMETER SHOULD BE MEASURED TO INSURE THAT THE DIAMETER FALLS WITHIN THE TOLERANCES FOR PVC PIPE. NOTE THAT JOINT DEFLECTION IN THE PVC BELL IS NOT PERMITTED. USE OF THIS PRODUCT ON DIP IS AT USER'S RISK.

DRWN BY: LHT	CHK'D BY: WDM	DWG DATE: 6/24/2022
MATERIAL:	DWG FILE: S4"-8" FAB35 GxS C900xSWR.idw	
FILE NAME: 4"-8" ADAPTER, C900xSEWER, GxS, SDR35.PDF		

B**Harco Fittings LLC**

TITLE:

4" - 8" ADAPTER, C900xSEWER, GxS, SDR35