


# HARCO

## FITTINGS

# PVC ACME SERVICE TEE

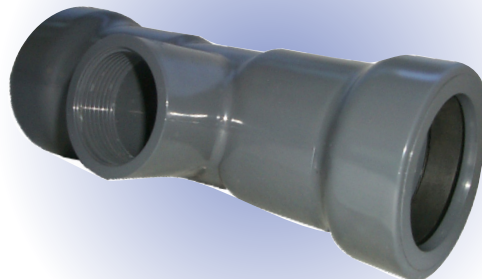

**PVC  
PRESSURE**

**315 psi Long  
Term  
Pressure  
Rating**

**Gasketed  
Mainline  
Bells**

**Straight  
Thread,  
O-Ring Seal  
Branch  
Outlet**

**Faster  
Installation**

**No Teflon  
Tape or  
Paste**

**Eliminates  
Split Threads**


## Gasket x Gasket x Acme, O-Ring

### Application

For use with swing joints having compatible inlet (threads and O-ring for Rainbird/Toro/Hunter Acme standard).

### Installation

Fully thread swing joint into service tee. Back off to final position per swing joint manufacturer at least  $\frac{1}{4}$  rotation, but no more than  $1\frac{1}{4}$  rotation.



HARCO gasketed swing joint tee with O-ring seal outlet.

Swing joint supplied by others.

Straight (non-tapered) Acme thread connections.

O-ring pressure seal.

### Suggested Specifications

Service tees for swing joints shall be push-on gasketed and molded in one piece as manufactured by The Harrington Corporation of Lynchburg, Virginia. Branch outlets shall have a straight thread and an O-ring sealing surface compatible with the O-ring joint inlet of the mating swing joint. Fittings shall meet the requirements of a 315 psi long term pressure rating per ASTM D3139, per ASTM F1970, and per the methods of AWWA C907.

### Product Information

| SIZE                              | PART NUMBER | CTN. QTY. | CTN. WT. |
|-----------------------------------|-------------|-----------|----------|
| 2 x 1                             | 153-204     | 16        | 17       |
| 2 x 1 $\frac{1}{4}$               | 153-205     | 16        | 17       |
| 2 x 1 $\frac{1}{2}$               | 153-206     | 16        | 17       |
| 2 $\frac{1}{2}$ x 1               | 153-254     | 16        | 29       |
| 2 $\frac{1}{2}$ x 1 $\frac{1}{4}$ | 153-255     | 16        | 29       |
| 2 $\frac{1}{2}$ x 1 $\frac{1}{2}$ | 153-256     | 16        | 24       |
| 3 x 1                             | 153-304     | 16        | 42       |
| 3 x 1 $\frac{1}{4}$               | 153-305     | 16        | 42       |
| 3 x 1 $\frac{1}{2}$               | 153-306     | 16        | 42       |

Outlet fits all brands of single O-Ring ACME inlet swing joints. 2", 2 $\frac{1}{2}$ ", 3" and 4" ACME service tees available in HARCO Ductile Iron.



HARRINGTON CORPORATION • P.O. BOX 10335 • LYNCHBURG, VIRGINIA 24506

PHONE: 434-845-7094 • FAX: 434-845-8562 • E-MAIL: sales@harcofittings.com • WEB: www.harcofittings.com

PF107-071304