
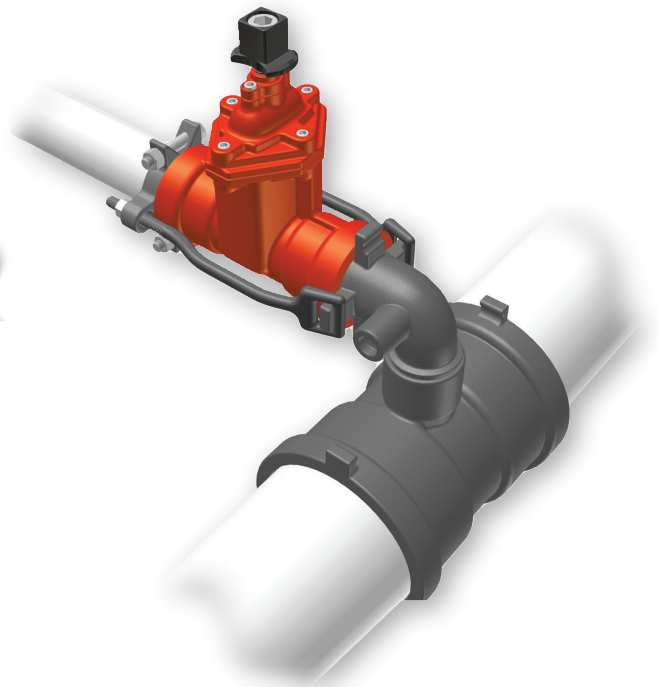
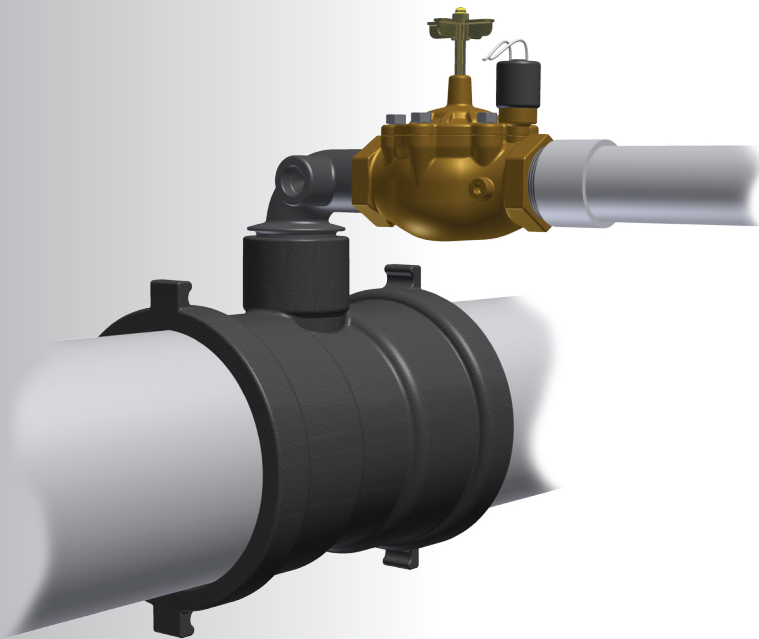



SWIVEL JOINT LATERAL CONNECTION

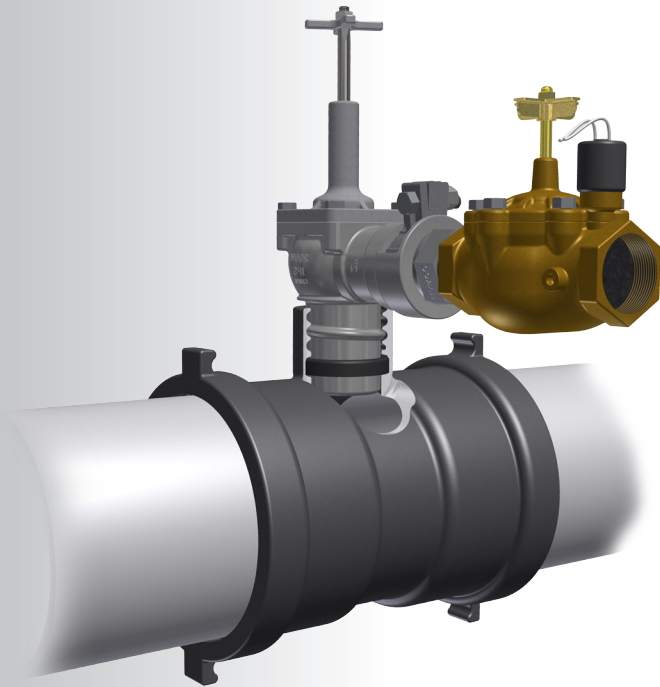

SWIVEL JOINT LATERAL CONNECTION

Lateral to main connections are now quick, easy, and durable

HARCO ductile iron Lateral 90°s, Lateral Nipples, Service Tees, Saddles, and Lateral Isolation Valves equipped with the Swivel Joint make for quick and problem free connections that are easy to seal and orient unlike conventional NPT pipe joints. Ductile Iron construction makes for long term reliability. The Swivel Joint Lateral Connection System can be used in PVC or PE systems. The Swivel Joint Lateral Connection System is covered by U.S. Patent # 4,055,865.



No tape or paste and true 360° of lateral orientation


Simply lube the gasket and spigot with ordinary pipe lube, thread the connection home, and then rotate the joint back to the desired lateral line direction. No risk or strain of over tightening a joint or risk of losing seal.

Universal mainline branch connection

Swivel Tees and Swivel Saddles are provided with a universal branch design serving all sizes of Lateral 90°s and Lateral Nipples. No more ordering the wrong size branch outlet. The joint is based on the proven 2½" joint used in HARCO ductile iron fittings. The flow way is maximized and transitions are tapered to smooth flow through the joint.

CAST "ROPE THREAD" CONNECTION

PROVEN HARCO GASKET SEAL

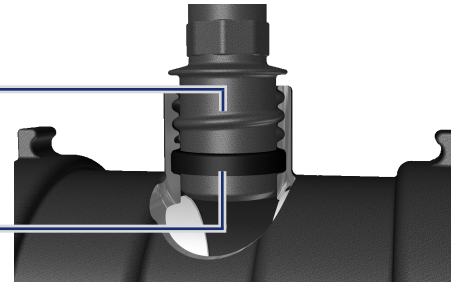

Eliminate NPT threads and glue joints with Swivel Joint systems for push-on valves

Outlets of valves are restrained to the pipe with mechanical joint restraint. See information on HARCO Restraints for additional options.

Different riser elevations

Different riser elevations are served with Lateral 90°s and Lateral Nipples of various lengths. For special situations Swivel Extensions are available that provide height adjustments in 6" increments.

Side Outlet Taps

Side Outlet Taps are available for all Lateral 90°s, Lateral Nipples, and Lateral Isolation Valves to utilize quick coupler valves.

No extra pieces

With the Swivel Joint there is no need for "collar style clamps" that must be bolted together. There are no restraint links requiring screws to attach to valves. There are no "clips" required to permit 360° of rotation or to hold the valve in place. Joint restraint for Lateral Isolation Valves require only one clamp bolt to actuate.

INSTALLATION INSTRUCTIONS

1. See that gasket in female Swivel Joint is properly installed and that joint is free of debris.
2. See that spigot and thread of male Swivel Joint is smooth and free of debris.
3. Lubricate the gasket and the spigot with the lubricant supplied by the pipe manufacturer.
4. Insert male Swivel Joint into female Swivel Joint so that the threads are "started."
5. Rotate male thread "in" until joint "bottoms out."
6. Rotate male thread "out" to proper horizontal orientation up to and no more than 360°.

SUGGESTED SPECIFICATION

Fittings connecting mainlines to lateral lines shall be HARCO Ductile Iron Swivel Joint Fittings. The connection shall be sealed by a gasketed joint and separately restrained by means of a threaded connection. The connection shall permit 360° adjustment of the lateral line orientation while maintaining the joint seal. All fittings shall be Ductile Iron to ASTM A536 and rated for 350 psi. Gaskets shall be SBR and meet ASTM F477. Fittings shall be as manufactured by The Harrington Corporation of Lynchburg, Virginia

SWIVEL JOINT LATERAL CONNECTION

STAINLESS STEEL LATERAL ISOLATION VALVES

GASKET x MALE SWIVEL

(OUTLET SIZE x HEIGHT FROM TOP OF MAIN TO TOP OF LATERAL)



CROSS HANDLE PART# SQUARE NUT PART #

STAINLESS STEEL GRIP RING STAINLESS STEEL GRIP RING

SIZE

2 x 6

8411062PQ

8411062PR

2 x 12"

8411122PQ

8411122PR

2½ x 6

8412062PQ

8412062PR

3 x 6

8413062PQ

8413062PR


4 x 6

8414062PQ

8414062PR

IPS ELECTROFUSION SWIVEL SADDLE

EF X SWIVEL; NUPI BASED



SIZE

PART #

3

70-5303S

4

70-5304S

6

70-5306S

8

70-5308S

10

70-5310S

12

70-5312S

14 - 24

70-5314S

IPS ELECTROFUSION SWIVEL SADDLE

1" SIDE OUTLET PLUGGED



SIZE

PART #

3

70-5303S-SOP

4

70-5304S-SOP

6

70-5306S-SOP

8

70-5308S-SOP

10

70-5310S-SOP

12

70-5312S-SOP

14 - 24

70-5314S-SOP

LATERAL TEE

BELL X MALE SWIVEL



SIZE

PART #

2 x 6

80191

2½ x 6


80291

3 x 7

80391

LATERAL 90°

BELL X MALE SWIVEL



SIZE

PART #

2 x 6

80190

2½ x 6

80290

3 x 7

80390

STANDARD PORT LIV STAINLESS STEEL

SWIVEL x GASKET



SIZE

PART #

2 x 6

843106SQ

STANDARD PORT LIV STAINLESS STEEL

GASKET x GASKET



SIZE

PART #

2" G x G

8431GGSQ

DOUBLE STRAP SWIVEL SADDLE FOR PVC & PE



SWIVEL SADDLE



SIZE

PART #

3

80381

4

80481

6

80681

8

80881

10

81081

12

81281

SIZE

IPS PART #

DIPS PART #

3

80381H

80491H

4

80481H

80691H

6

80681H

80891H

8

80881H

80891H

10

81081H

81091H

12

81281H

81291H

14

81481H

81491H

16

81681H

81691H

SWIVEL TEE



SIZE

PART #

2

8015405

2½

8025405

3

8035405

4

8045405

6

8065405

8

8085405

10

8105405

12

8125405

14



8145405

16

8165405

SWIVEL LATERAL KIT

PUSH-ON IRON GATE VALVE



SIZE x
RISE

STANDARD
PART #

1" SIDE
OUTLET

1" SIDE
OUTLET
PLUGGED

2 x 6

8018506K

80185062K

80185062PK

2½ x 6

8028506K

80285062K

80285062PK

3 x 7

8038507K

80385072K

80385072PK

3 x 4 x 7

803048527K

8030485272K

8030485272PK

SWIVEL JOINT LATERAL CONNECTION

LATERAL 90°


MALE NPT X MALE SWIVEL



SIZE x RISE	STANDARD PART #	1" SIDE OUTLET	1" SIDE OUTLET PLUGGED
1 x 6	80B86	80B862	80B862P
1½ x 6	80086	800862	800862P
2 x 6	80186	801862	801862P
2½ x 6	80286	802862	802862P
3 x 7	80386	803862	803862P

LATERAL 90°


SPIGOT X MALE SWIVEL



For use with Push-on Gate Valves

SIZE x RISE	STANDARD PART #	1" SIDE OUTLET	1" SIDE OUTLET PLUGGED
2 x 6	8018506	80185062	80185062P
2 x 12	8018512	80185122	80185122P
2½ x 6	8028506	80285062	80285062P
3 x 7	8038507	80385072	80385072P

SPIGOT x MALE NPT ADAPTER



SIZE	PART #
1½ x 6	8740606
2 x 4	8740408
2 x 6	8740608
2 x 8	8740808
2 x 10	8741008
2 x 12	8741208
2½ x 6	8740610
3 x 6	8740612

SPIGOT x MALE NPT ADAPTER, COMPACT



SIZE	PART #
2 x 1	874030804
2 x 1¼	874030805
2 x 1½	874030806
2 x 2	874030808
2 x 2½	874030810

LATERAL NIPPLE

MALE NPT X MALE SWIVEL



SIZE x RISE	STANDARD PART #	1" SIDE OUTLET
2 x 8	8720808	87208082
2 x 12	8721208	87212082
2 x 18	8721808	87218082
2½ x 8	8720810	87208102
3 x 10	8721012	87210122

LATERAL NIPPLE

SPIGOT X MALE SWIVEL



SIZE x RISE	STANDARD PART #	1" SIDE OUTLET
2 x 10	8731008	87310082
2 x 12	8731208	87312082
2 x 18	8731808	87318082

ADAPTER

FEMALE SWIVEL X THREAD



SIZE	PART #
2 MNPT	873-008

ADAPTER

FEMALE NPT X MALE SWIVEL



SIZE	PART #
1½	875-025-06
2	875-025-08
2½	875-025-10
3	875-025-12

SWIVEL EXTENSIONS

MALE SWIVEL X FEMALE SWIVEL



FBC COATED



STAINLESS STEEL

RISE	1" SIDE OUTLET	1" SIDE OUTLET PLUGGED
4	87106SOF	87106SOPF
	87106SOS	87106SOPS

Note: "F" - Ductile iron swivel extension with FBC coating.
"S" - Stainless steel swivel extension.

SWIVEL EXTENSION

MALE SWIVEL X FEMALE SWIVEL



RISE	PART #
6	87106
12	87112



Harco Fittings LLC
P.O. Box 10335 • Lynchburg, VA 24506-0335
Phone: (434) 845-7094 Fax: (434) 845-8562

customerservice@harcofittings.com
www.harcofittings.com

PF134-230126