


PHILMAC BALL VALVES

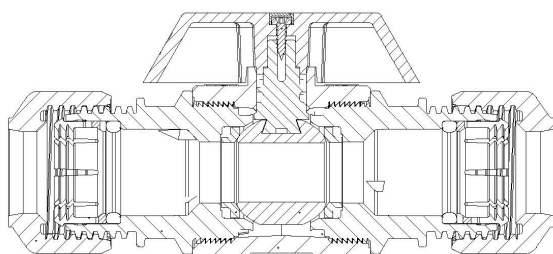

About Philmac Ball Valves

Philmac ball valves manufactured of advanced thermoplastic materials with self-restraining compression ends featuring "slide and tighten" design are available from HARCO. They are available for PE pipes to SDR IPS, SIDR IPS, and CTS standards in sizes up to 2". They can be used with substitute grip rings on SDR IPS PVC pipe. Threaded ends are also available.

Systems using PE pipe can be installed without fusion equipment or adapters for conventional valves. This speeds installation, eliminates reliance on specially trained personnel, eliminates the inherent workmanship risk of fusion joints, and eliminates investment in fusion equipment.

SIZES

• $\frac{3}{4}$ " to 2"

CONFIGURATIONS

- Compression ends
- FNPT ends
- Tee handle
- Curb Stop handle
- Others available

COMPRESSION END OPTIONS

- IPS OD controlled PE, SDR
- IPS ID controlled PE, SIDR
- IPS PVC *with appropriate grip ring*
- CTS PE
- Universal Transition *limited sizes*

FEATURES

- 230 psi rating except for valves with UTC(200 psi)
- 2-way flow
- Install in any orientation
- Positive stop open-close
- Visual indication open-close
- Corrosion resistant
- Impact resistant
- UV resistant
- Ratcheting Curb Stop handle
- SIDR's served: 11.5, 9 & 7

MATERIALS

- Ball - Talc filled polypropylene
- Seal Ring - polypropylene
- Body - Glass filled nylon
- Tee Handle- Glass filled nylon
- Curb Stop Handle - Acetal
- Cap - Noryl GTX/GF Nylon
- Stem- Noryl GTX
- Stem screw- 316 SS
- O-rings- Nitrile

CALL FOR OTHER FEATURES AVAILABLE

- MNPT ends
- Locking handles
- Color coded handles
- Other sizes

STANDARDS

- AWWA C521

