




## HARCO FIELD TAP

For use on HARCO Drain Basins

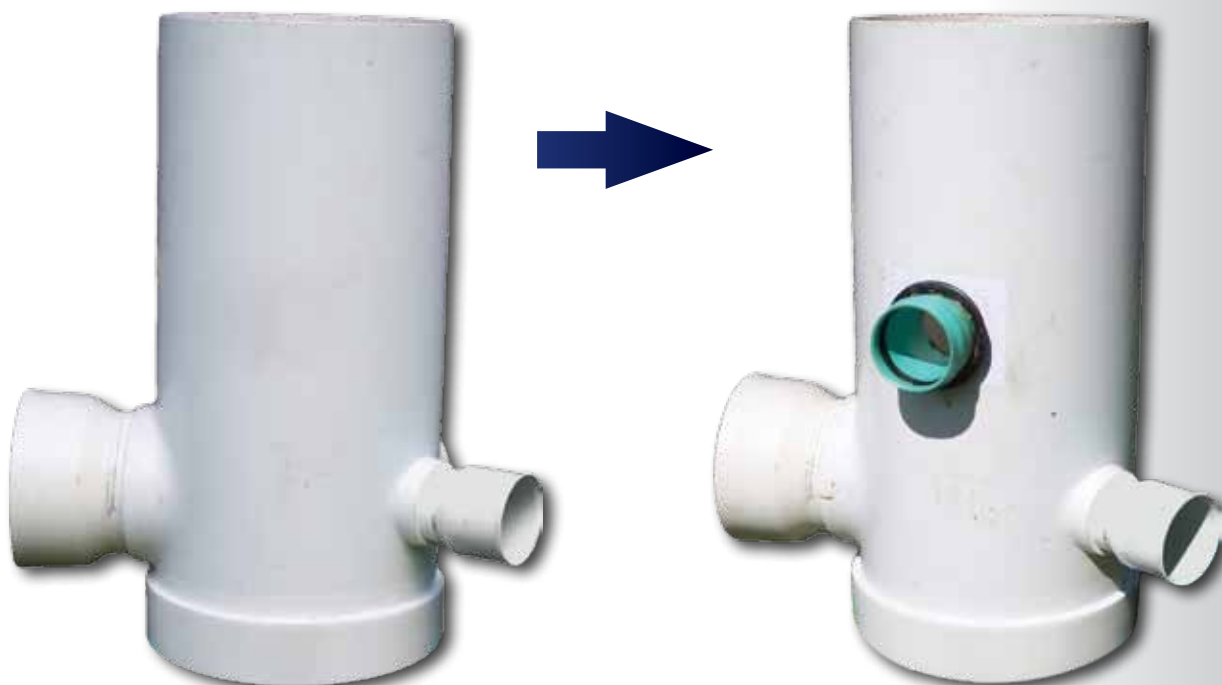

The HARCO Field Tap allows you the flexibility to add an inlet or outlet to your HARCO drain basin in-the-field when that unexpected additional line is identified, or if the exact location of that line was not able to be determined prior to basin installation.

HARCO Field Taps are available in 4" through 18" diameters. For installation, a drain basin 2 sizes larger than the HARCO Field Tap outlet is required.

**Kit includes:**

The HARCO Field Tap contains:

- An adhesive cutting template
- A gasket
- A Bell x Spigot adapter (manufactured from PVC pipe stock conforming to ASTM D1784, D3034, and F679)

**Equipment needed:**

Installation requires the use of a standard drill, a jigsaw, a file, and pipe lubricant.

**Installation instructions are provided on the reverse side of this flyer**




THE HARRINGTON CORPORATION  
P.O. Box 10335 ♦ Lynchburg, VA 24506-0335  
Phone: (434) 845-7094 Fax: (434) 845-8562

[sales@harcofittings.com](mailto:sales@harcofittings.com)  
[www.harcofittings.com](http://www.harcofittings.com)

PF162-071212

# HARCO FIELD TAP

## Installation Instructions

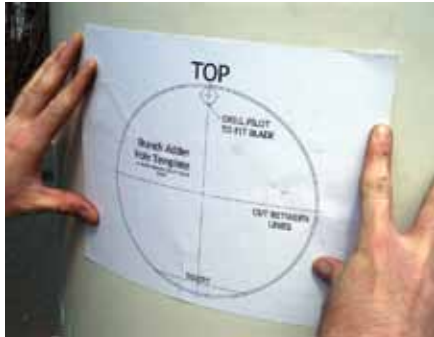

**1. Align adhesive template to the location where the HARCO Field Tap will be used. Carefully apply the template to the basin.**



**2. Use a 1/2" drill bit to drill a pilot hole into the basin to accommodate the saw blade.**



**3. Use a metal jigsaw blade to saw the basin, cutting between the two lines. Once the basin is cut, use a file to remove any high spots and burrs**



**4. Using a metal file, remove all burrs**



**5. Install the gasket starting at the top and working around until the inside flange is seated.**



**NOTE: When properly inserted, the gasket may not sit flat against the basin.**



**6. Lubricate the inner surface of the gasket and outside of the spigot with pipe lubricant and insert the top edge of the branch into the gasket while pressing and turning the bell.**



**7. Insert the branch up to the bell.**



**8. Installation is complete. The basin is now ready to be put into service.**

**NOTE: When installing the HARCO Field Tap, the gasket may need to be pulled out from the basin approximately 1/2" to make installation easier**



THE HARRINGTON CORPORATION  
P.O. Box 10335 • Lynchburg, VA 24506-0335  
Phone: (434) 845-7094 Fax: (434) 845-8562

sales@harcofittings.com  
www.harcofittings.com

PF162-071212