


PJ ADAPTER for PUSH-JOINT GATE VALVES


Engineered for Durability (U.S. Patent No. 11,306,856)

HDPE

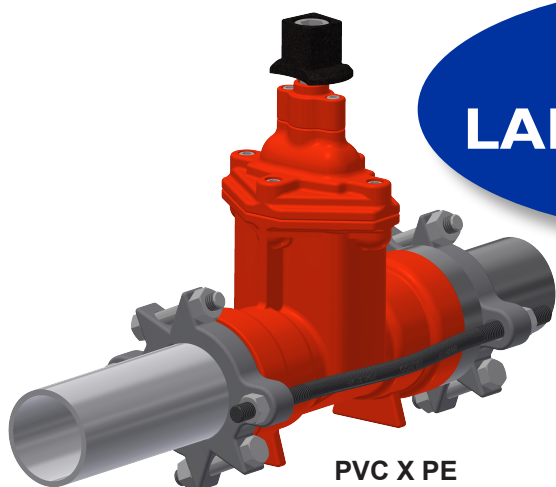

PVC X PE

**Looking for
LABOR SAVINGS?**

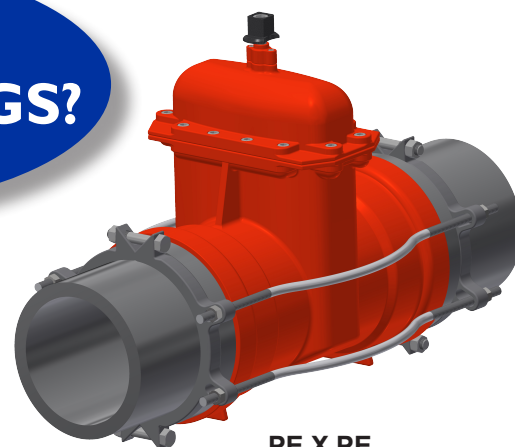

PE X PE

FEATURES	BENEFITS
Use readily available Push-Joint Gate Valves	Simplifies installation of iron gate valves to PE or PVC pipe: Use readily available Push-Joint Gate Valves from local distributor inventory.
Connects IPS Push-Joint Gate Valves to IPS PE Pipe	Fits any IPS push-joint gate valve: The HARCO PJ Adapter System fits push-joint gate valves for IPS pipe in common usage in waterworks and irrigation industries. Typical brands it will work with are made by American, AVK, Clow, Kennedy, Matco-Norca, M&H, and Nibco. Call for others.
No handling of awkward Fusible PE Gate Valves	No fusion of awkward PE-ended gate valve: Gate Valves with PE ends can be awkward to handle and fuse. There is a risk the valve is not vertical after fusing. Recovery is difficult. There are no such issues with the PJ Adapter System from HARCO.
No bolt torquing and retorquing required for Flanged or MJ Gate Valves	Torquing of flange & MJ joints eliminated: Installation of flange and mechanical joints in PE piping is essentially time consuming. Assembly of these type joints requires a long waiting period and then retorquing. HARCO's PJ Adapter System has fewer parts and allows for speedy installation requiring no retorquing of bolts. With this system there is no "wait time" for retorquing.

Note: FBE coating and Stainless Steel bolts & restraint rods available.



Harco Fittings LLC
P.O. Box 10335 • Lynchburg, VA 24506-0335
Phone: (434) 845-7094 Fax: (434) 845-8562

customerservice@harcofittings.com
www.harcofittings.com

PF179-220727

HARCO Fittings

Push-Joint Adapter

PRODUCT SHEET

Assembly Instructions

(U.S. Patent No. 11,306,856)

Items to be assembled:

A - 3" - 8" include (2) Split Rings or Solid Rings.
10" & 12" include (2) Solid Rings.

B - 3" - 8" include (2) Restraint Rods & (4) Nuts.
10" & 12" include (4) Restraint Rods, (8) Nuts.

C - (2) Push-Joint Adapters.

Step 1: Fuse the first PJ adapter to inlet pipe with beveled end facing out. If solid ring is used, slip it on to PJ adapter before fusing to pipe. DO NOT DISASSEMBLE SOLID RING.

Step 2: Push PJ valve on to inlet pipe.

Step 3: Fuse the second PJ adapter to outlet pipe with beveled end facing out. If solid ring is used, slip it on to PJ adapter before fusing to pipe. DO NOT DISASSEMBLE SOLID RING.

Step 4: Push outlet pipe into outlet of PJ valve.

Step 5: Install split rings about adapters at this point if used. Insert restraint rods through receiving holes in rings and cinch up assembly firmly with nuts. Tighten restraint rod nuts evenly side to side to 40 ft-lbs.



Suggested Specification

Push Joint Adapters shall be PE 4710. Back Up Rings shall be Ductile Iron to ASTM A536. Restraint rods, bolts and nuts shall be made from low alloy steel per AWWA C111 or ASTM A307. Push Joint Adapters for Push-On Gate Valves are to be supplied by Harco Fittings LLC of Lynchburg, Virginia.

Suggested Specification

(with FBE & 316 SS rods/bolts/nuts)

Push Joint Adapters shall be PE 4710. Back Up Rings shall be Ductile Iron to ASTM A536. Back Up Rings shall be fusion bond epoxy coated per AWWA C116. Restraint rods, bolts and nuts shall be 316 Stainless Steel. Push Joint Adapters for Push Joint Gate Valves are to be supplied by Harco Fittings LLC of Lynchburg, VA.

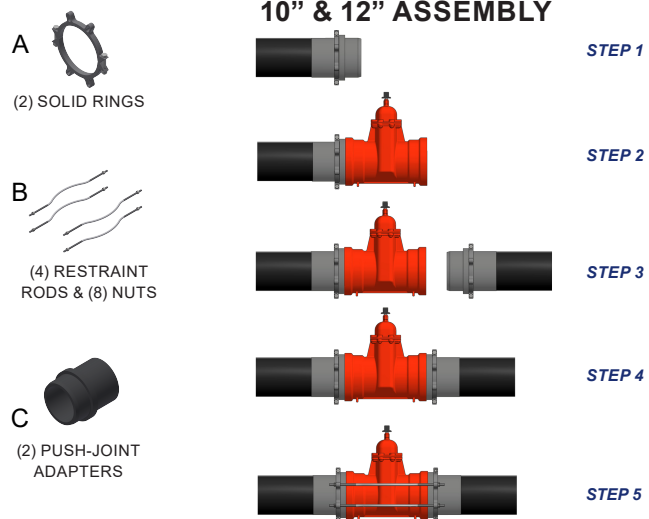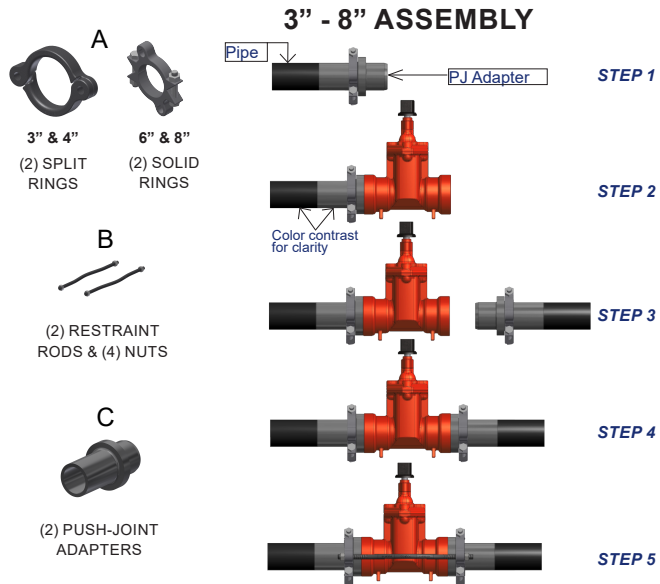

Ordering Information

SIZE	DR11 ADAPTER	DR11 x 13.5 ADAPTER	Coating & Rod/Bolt Material	PE x PE	PVC x PE
3"	65-317503	65-327503	Standard	65-077503	65-078103
			FBE, 316 SS	65-077503S	65-078103S
4"	65-317504	65-327504	Standard	65-077504	65-078104
			FBE, 316 SS	65-077504S	65-078104S
6"	65-317506	65-327506	Standard	65-077506	65-078106
			FBE, 316 SS	65-077506S	65-078106S
8"	65-317508	65-327508	Standard	65-077508	65-078108
			FBE, 316 SS	65-077508S	65-078108S
10"	65-317510	65-327510	Standard	65-077510	65-078110
			FBE, 316 SS	65-077510S	65-078110S
12"	65-317512	65-327512	Standard	65-077512	65-078112
			FBE, 316 SS	65-077512S	65-078112S

Note: PE x PVC accessories have a PJ Adapter on one side of valve and restraint for PVC pipe on the other side.



Harco Fittings LLC
P.O. Box 10335 • Lynchburg, VA 24506-0335
Phone: (434) 845-7094 Fax: (434) 845-8562

customerservice@harcofittings.com
www.harcofittings.com

PF179-220727