


CTS fittings for PE or PEX^I Water Service Tube to CTS dimensions (suits PE to ASTM D2737 or PEX^I to ASTM F876)


COUPLERS (POL X POL) (also available as Slip Couplers)

Size	Dimensions inches			lb.
	S	D	L	Wt
3/4" x 3/4"	0.39	1.85	3.55	0.18
1" x 1"	0.43	2.17	3.82	0.26
1-1/4" x 1-1/4"	0.55	2.64	4.65	0.44
1-1/2" x 1-1/2"	0.71	3.19	5.36	0.72
2" x 2"	0.95	3.70	6.34	1.14

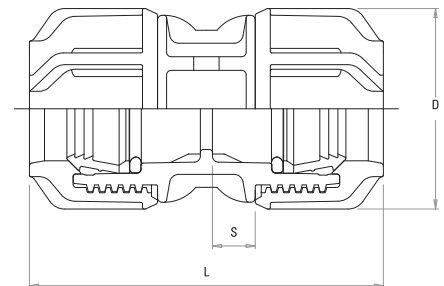

REDUCING COUPLERS (POL X POL)


Size	Dimensions inches					lb.
	S	S1	D	D1	L	Wt
1" x 3/4"	0.43	0.39	2.17	1.85	3.70	0.22
1-1/4" x 3/4"	0.55	0.39	2.64	1.85	4.33	0.31
1-1/4" x 1"	0.55	0.43	2.64	2.17	4.26	0.36
1-1/2" x 1"	0.71	0.43	3.19	2.17	4.93	0.62
1-1/2" x 1-1/4"	0.71	0.55	3.19	2.64	5.04	0.84

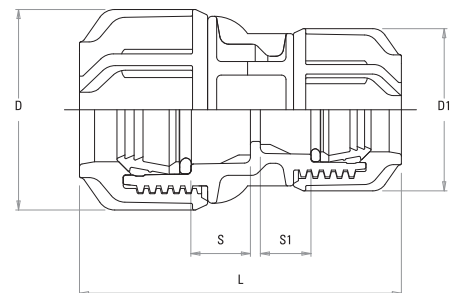

CTS fittings for PE or PEX^I Water Service Tube to CTS dimensions (suits PE to ASTM D2737 or PEX^I to ASTM F876)


MALE ADAPTER (POL X MI NPT)

Size	Dimensions inches				lb.
	S	D	L	T	Wt
3/4" x 1/2"	0.67	1.85	2.88	0.78	0.10
3/4" x 3/4"	0.67	1.85	2.96	0.83	0.11
1" x 1/2"	0.75	2.17	3.19	0.78	0.16
1" x 3/4"	0.75	2.17	3.23	0.83	0.16
1" x 1"	0.75	2.17	3.35	0.96	0.17
1-1/4" x 3/4"	0.87	2.64	3.59	0.83	0.26
1-1/4" x 1"	0.87	2.64	3.70	0.96	0.27
1-1/4" x 1-1/4"	0.87	2.64	3.82	1.05	0.28
1-1/2" x 1"	1.10	3.19	4.18	0.96	0.43
1-1/2" x 1-1/4"	1.10	3.19	4.29	1.05	0.44
1-1/2" x 1-1/2"	1.10	3.19	4.29	1.05	0.44
2" x 1-1/2"	1.18	3.70	4.65	1.05	0.66
2" x 2"	1.18	3.70	4.69	1.22	0.67

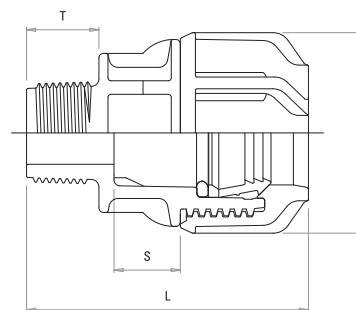

FEMALE ADAPTER (POL X FI NPT)

Size	Dimensions inches				lb.
	S	D	L	T	Wt
3/4" x 1/2"	0.39	1.85	2.71	0.90	0.12
3/4" x 3/4"	0.39	1.85	2.76	0.95	0.12
1" x 1/2" *	0.43	2.17	2.91	0.90	0.18
1" x 3/4"	0.43	2.17	2.80	0.95	0.17
1" x 1"	0.43	2.17	3.03	1.08	0.18
1-1/4" x 3/4" *	0.55	2.64	3.50	0.95	0.26
1-1/4" x 1"	0.55	2.64	3.47	1.08	0.28
1-1/4" x 1-1/4"	0.55	2.64	3.59	1.19	0.29
1-1/2" x 1-1/4"	0.71	3.19	3.98	1.19	0.45
1-1/2" x 1-1/2"	0.71	3.19	3.98	1.19	0.46
2" x 1-1/2"	0.95	3.70	4.18	1.19	0.63
2" x 2"	0.95	3.70	4.22	1.36	0.73




* NPT compatible, however NPT compatible, however marked as BSP

^I 3G[®] is cold water rated fitting designed for Water Service Tube. It is rated at 50+ year design life at 200psi and 73 °F, please consult Philmac or a local representative for de rating factors in excess of 73 °F.

CTS fittings for PE or PEX^I Water Service Tube to CTS dimensions (suits PE to ASTM D2737 or PEX^I to ASTM F876)


TEES (POL X POL X POL) (Also available as Slip Tees)

Size	Dimensions inches					lb.
	S	D	H	G	L	
3/4" x 3/4" x 3/4"	0.39	1.85	2.32	1.22	4.61	0.37
1" x 1" x 1"	0.43	2.17	2.64	1.58	5.28	0.43
1-1/4" x 1-1/4" x 1-1/4"	0.55	2.64	3.15	1.89	6.30	0.72
1-1/2" x 1-1/2" x 1-1/2"	0.71	3.19	3.74	1.97	7.17	1.17

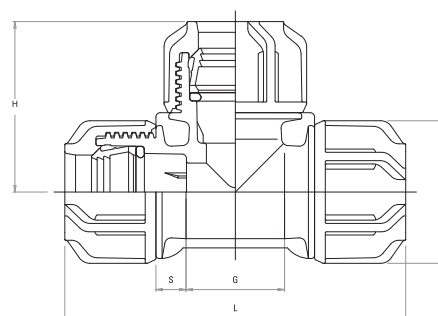

REDUCING TEES (POL X POL X POL)

Size	Dimensions inches							lb.
	S	S1	D	D1	H	G	L	
1" x 1" x 3/4"	0.43	0.39	2.17	1.85	2.52	1.58	5.28	0.53
1" x 1" x 1-1/4"	0.43	0.55	2.17	2.64	2.72	1.58	5.28	0.71
1-1/4" x 1-1/4" x 1"	0.55	0.43	2.64	2.17	2.92	3.47	6.30	0.83
1-1/2" x 1-1/2" x 1"	0.71	0.43	3.19	2.17	2.92	1.34	6.54	1.17
1-1/2" x 1-1/2" x 1-1/4"	0.71	0.55	3.19	2.64	3.31	1.54	6.74	1.27

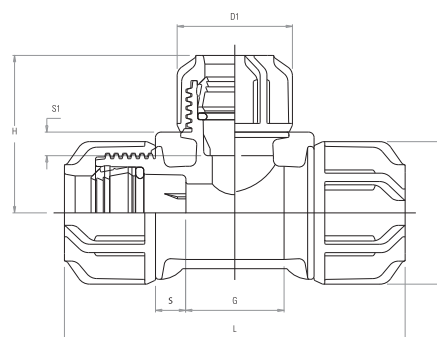


^I 3G[®] is cold water rated fitting designed for Water Service Tube. It is rated at 50+ year design life at 200psi and 73 °F, please consult Philmac or a local representative for de rating factors in excess of 73 °F.

CTS fittings for PE or PEX¹ Water Service Tube to CTS dimensions (suits PE to ASTM D2737 or PEX¹ to ASTM F876)


TEES (POL X POL X FI NPT)

Size	Dimensions inches						lb.
	S	D	H	G	L	T	Wt
3/4" x 3/4" x 1/2"	0.39	1.85	1.50	1.22	4.61	0.90	0.20
3/4" x 3/4" x 3/4"	0.39	1.85	1.50	1.22	4.61	0.95	0.22
1" x 1" x 1/2"	0.43	2.17	1.58	1.58	5.28	0.90	0.32
1" x 1" x 3/4"	0.43	2.17	1.62	1.58	5.28	0.95	0.33
1" x 1" x 1"	0.43	2.17	1.73	1.58	5.28	1.08	0.35
1-1/4" x 1-1/4" x 1/2"	0.55	2.64	1.65	0.79	5.32	0.90	0.45
1-1/4" x 1-1/4" x 3/4"	0.55	2.64	1.73	1.89	6.30	0.95	0.53
1-1/4" x 1-1/4" x 1"	0.55	2.64	1.73	1.89	6.30	1.08	0.54
1-1/4" x 1-1/4" x 1-1/4"	0.55	2.64	1.97	1.89	6.30	1.19	0.57
1-1/2" x 1-1/2" x 1/2"	0.71	3.19	1.89	0.75	5.95	0.90	0.73
1-1/2" x 1-1/2" x 3/4"	0.71	3.19	1.97	0.95	6.15	0.95	0.76
1-1/2" x 1-1/2" x 1-1/4"	0.71	3.19	2.21	1.97	7.17	1.19	0.91
1-1/2" x 1-1/2" x 1-1/2"	0.71	3.19	2.20	1.97	7.17	1.19	0.91

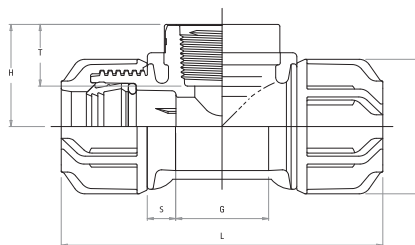


TEES (POL X POL X MI NPT)

Size	Dimensions inches						lb.
	S	D	H	G	L	T	Wt
1" x 1" x 1/2" *	0.43	2.17	2.09	1.38	4.49	0.78	0.31
1" x 1" x 3/4" *	0.43	2.17	2.09	1.38	4.49	0.83	0.33

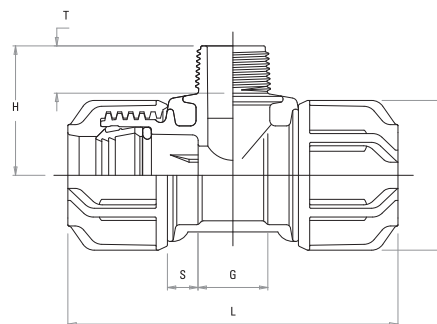

ELBOWS (POL X POL)

Size	Dimensions inches			lb.
	S	D	L	Wt
3/4" x 3/4"	0.39	1.85	2.32	0.18
1" x 3/4"	0.43	2.17	2.56	0.24
1" x 1"	0.43	2.17	2.64	0.29
1-1/4" x 1-1/4"	0.55	2.64	3.15	0.49
1-1/2" x 1-1/2"	0.71	3.19	3.59	0.79
2" x 2"	0.95	3.70	3.98	1.21

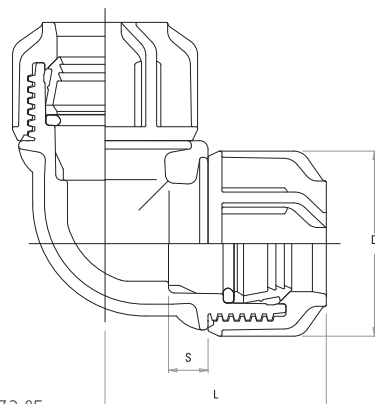


* NPT compatible, however marked as BSP

¹ 3G[®] is cold water rated fitting designed for Water Service Tube. It is rated at 50+ year design life at 200psi and 73 °F, please consult Philmac or a local representative for de rating factors in excess of 73 °F.

CTS fittings for PE or PEX^I Water Service Tube to CTS dimensions (suits PE to ASTM D2737 or PEX^I to ASTM F876)


ELBOWS (POL X FI NPT)

Size	Dimensions inches					lb.
	S	D	H	L	T	Wt
3/4" x 1/2"	0.39	1.85	2.88	2.32	0.90	0.11
3/4" x 3/4"	0.39	1.85	2.88	2.32	0.95	0.12
1" x 1/2" *	0.43	2.17	3.47	2.64	0.90	0.17
1" x 3/4"	0.43	2.17	3.47	2.64	0.95	0.18
1" x 1"	0.43	2.17	3.47	2.64	1.08	0.20
1-1/4" x 1"	0.55	2.64	4.14	3.15	1.08	0.30
1-1/4" x 1-1/4"	0.55	2.64	4.14	3.19	1.19	0.33
1-1/2" x 1-1/4"	0.71	3.19	4.96	3.59	1.19	0.50
1-1/2" x 1-1/2"	0.71	3.19	4.96	3.59	1.19	0.52
2" x 2"	0.95	3.70	5.59	4.18	1.36	0.84

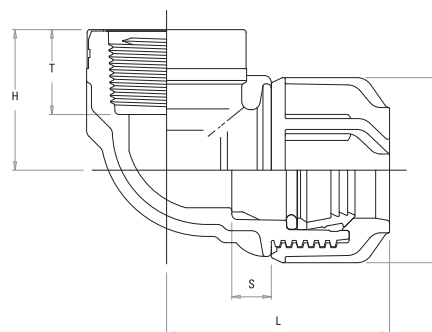


ELBOWS (POL X MI NPT)

Size	Dimensions inches					lb.
	S	D	H	L	T	Wt
3/4" x 1/2" *	0.47	1.85	1.69	2.24	0.78	0.13
1" x 3/4" *	0.51	2.17	1.93	2.56	0.83	0.15

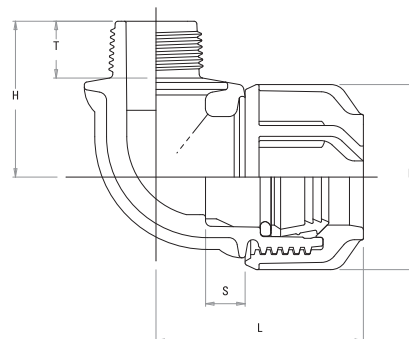

ENDCAPS

Size	Dimensions inches			lb.
	S	D	L	Wt
3/4"	0.75	1.85	2.29	0.11
1"	0.91	2.17	2.68	0.15
1-1/4"	0.95	2.64	3.07	0.25
1-1/2"	1.22	3.19	3.62	0.42




* NPT compatible, however marked as BSP

^I 3G[®] is cold water rated fitting designed for Water Service Tube. It is rated at 50+ year design life at 200psi and 73 °F, please consult Philmac or a local representative for de rating factors in excess of 73 °F.

CTS fittings for PE or PEX^I Water Service Tube to CTS dimensions (suits PE to ASTM D2737 or PEX^I to ASTM F876)


BLANKING PLUGS (see also page 48)

Size	lb. Wt
3/4"	0.018
1"	0.026
1-1/4"	0.043
1-1/2"	0.062




TANK CONNECTORS (POL X MI) (Includes Seal Washers and Nut)

Size	Dimensions inches			lb.
	S	D	L	Wt
1" x 3/4" NPT/BSP	0.51	2.17	4.29	0.09
1-1/4" x 1" BSP	0.55	2.64	4.61	0.15

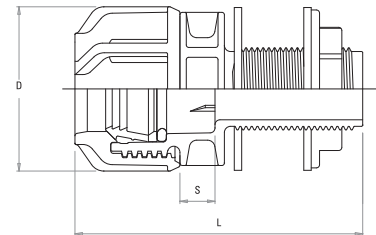

WALL PLATE ELBOWS (POL X FI NPT) (Includes three holes for mounting to wall)

Size	Dimensions inches		lb.
	S	D	Wt
3/4" x 1/2"	1.85	2.20	0.13
1" x 3/4"	2.17	2.56	0.21

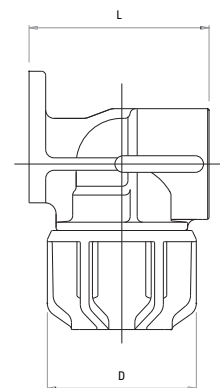


^I 3G[®] is cold water rated fitting designed for Water Service Tube. It is rated at 50+ year design life at 200psi and 73 °F, please consult Philmac or a local representative for de rating factors in excess of 73 °F.

ID Series fittings for IPS Inside Dimensioned (SIDR) PE Pipe

(suits PE to ASTM D2239)


COUPLERS (POL X POL)

Size	Dimensions inches		lb.
	D	L	Wt
1/2" x 1/2"	1.85	3.78	0.20
3/4" x 3/4"	2.17	4.14	0.31
1" x 1"	2.64	4.89	0.52
1-1/4" x 1-1/4"	3.19	5.75	0.85
1-1/2" x 1-1/2"	3.70	6.82	1.33
2" x 2"	4.33	7.72	2.03

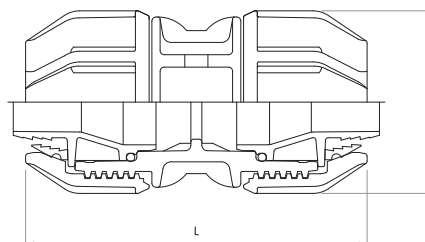


REDUCING COUPLERS (POL X POL)

Size	Dimensions inches			lb.
	D	D1	L	Wt
3/4" x 1/2"	2.17	1.85	3.90	0.26
1" x 1/2"	2.64	1.85	4.57	0.34
1" x 3/4"	2.64	2.17	4.53	0.42
1-1/4" x 3/4"	3.19	2.17	5.24	0.53
1-1/4" x 1"	3.19	2.64	5.40	0.71
1-1/2" x 3/4"	3.70	2.17	5.91	0.90
1-1/2" x 1"	3.70	2.64	6.30	1.02
1-1/2" x 1-1/4"	3.70	3.19	6.30	1.14
2" x 1"	4.33	2.64	7.41	1.39
2" x 1-1/4"	4.33	3.19	7.29	1.55
2" x 1-1/2"	4.33	3.70	7.37	1.73

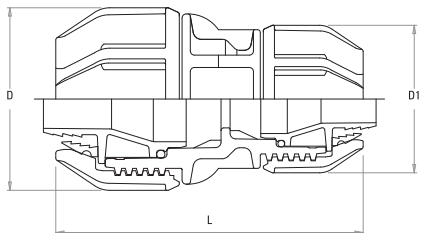

MALE ADAPTER (POL X MI NPT)


Size	Dimensions inches			lb.
	D	L	T	Wt
1/2" x 1/2"	1.85	2.96	0.78	0.12
1/2" x 3/4"	1.85	3.03	0.83	0.12
3/4" x 1/2"	2.17	3.31	0.78	0.18
3/4" x 3/4"	2.17	3.35	0.83	0.18
3/4" x 1"	2.17	3.47	0.96	0.19
1" x 3/4"	2.64	3.74	0.83	0.30
1" x 1"	2.64	3.86	0.96	0.31
1" x 1-1/4"	2.64	3.98	1.05	0.32
1-1/4" x 1"	3.19	4.37	0.96	0.49
1-1/4" x 1-1/4"	3.19	4.49	1.05	0.50
1-1/4" x 1-1/2"	3.19	4.49	1.05	0.50
1-1/2" x 1-1/2"	3.70	4.89	1.05	0.75
1-1/2" x 2"	3.70	4.93	1.22	0.77
2" x 2"	4.33	5.28	1.22	1.08



ID Series fittings for IPS Inside Dimensioned (SIDR) PE Pipe (suits PE to ASTM D2239)


FEMALE ADAPTER (POL X FI NPT)

Size	Dimensions inches			lb.
	D	L	T	Wt
1/2" x 1/2"	1.85	2.88	0.90	0.12
1/2" x 3/4"	1.85	2.84	0.95	0.13
3/4" x 1/2" *	2.17	2.99	0.90	0.22
3/4" x 3/4"	2.17	2.99	0.95	0.19
3/4" x 1"	2.17	3.15	1.08	0.20
1" x 3/4" *	2.64	3.50	0.95	0.28
1" x 1"	2.64	3.62	1.08	0.32
1" x 1-1/4"	2.64	3.74	1.19	0.33
1-1/4" x 1-1/4"	3.19	4.18	1.19	0.51
1-1/4" x 1-1/2"	3.19	4.18	1.19	0.52
1-1/2" x 1-1/2"	3.70	4.41	1.19	0.72
1-1/2" x 2"	3.70	4.45	1.36	0.82
2" x 2"	4.33	5.04	1.36	1.15



TEES (POL X POL X POL)

Size	Dimensions inches				lb.
	D	H	G	L	Wt
1/2" x 1/2" x 1/2"	1.85	2.40	1.22	4.77	0.32
3/4" x 3/4" x 3/4"	2.17	2.76	1.58	5.52	0.49
1" x 1" x 1"	2.64	3.31	1.89	6.62	0.85
1-1/4" x 1-1/4" x 1-1/4"	3.19	3.94	1.97	7.56	1.36
1-1/2" x 1-1/2" x 1-1/2"	3.70	4.22	2.36	8.43	2.03
2" x 2" x 2"	4.33	4.93	2.88	9.85	3.21

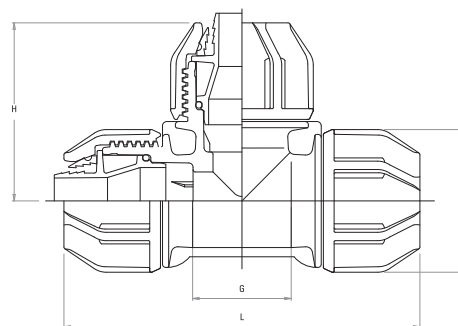


* NPT compatible, however marked as BSP

ID Series fittings for IPS Inside Dimensioned (SIDR) PE Pipe (suits PE to ASTM D2239)


REDUCING TEES (POL X POL X POL)

Size	Dimensions inches					lb.
	D	D1	H	G	L	Wt
3/4" x 3/4" x 1/2"	2.17	1.85	2.60	1.58	5.52	0.45
3/4" x 3/4" x 1"	2.17	2.64	2.88	1.58	5.52	0.61
1" x 1" x 3/4"	2.64	2.17	3.03	3.47	6.62	0.72
1-1/4" x 1-1/4" x 3/4"	3.19	2.17	3.03	1.34	6.93	1.03
1-1/4" x 1-1/4" x 1"	3.19	2.64	3.47	1.54	7.13	1.12
1-1/2" x 1-1/2" x 3/4"	3.70	2.17	3.31	1.38	7.64	1.51
1-1/2" x 1-1/2" x 1"	3.70	2.64	3.70	1.58	7.84	1.63
1-1/2" x 1-1/2" x 1-1/4"	3.70	3.19	4.06	2.36	7.84	1.79
2" x 2" x 3/4"	4.33	2.17	3.59	1.14	8.27	2.17
2" x 2" x 1"	4.33	2.64	4.02	1.34	8.47	2.31
2" x 2" x 1-1/2"	4.33	3.70	4.61	2.88	9.26	2.60

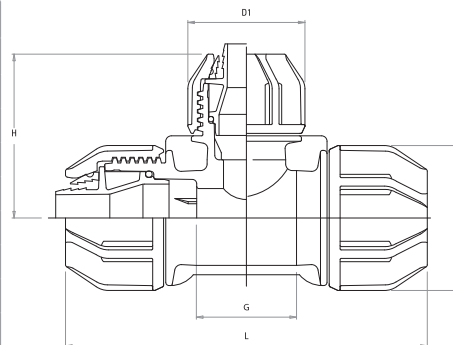

TEES (POL X POL X FI NPT)


Size	Dimensions inches					lb.
	D	H	G	L	T	Wt
1/2" x 1/2" x 1/2"	1.85	1.50	1.22	4.77	0.90	0.24
1/2" x 1/2" x 3/4"	1.85	1.50	1.22	4.77	0.95	0.25
3/4" x 3/4" x 1/2"	2.17	1.58	1.58	5.52	0.90	0.36
3/4" x 3/4" x 3/4"	2.17	1.62	1.58	5.52	0.95	0.37
3/4" x 3/4" x 1"	2.17	1.73	1.58	5.52	1.08	0.39
1" x 1" x 1/2"	2.64	1.65	0.79	5.63	0.90	0.54
1" x 1" x 3/4"	2.64	1.73	1.89	6.62	0.95	0.61
1" x 1" x 1"	2.64	1.73	1.89	6.62	1.08	0.62
1" x 1" x 1-1/4"	2.64	1.97	1.89	6.62	1.19	0.65
1-1/4" x 1-1/4" x 1/2"	3.19	1.89	0.75	6.34	0.90	0.85
1-1/4" x 1-1/4" x 3/4"	3.19	1.97	0.95	6.54	0.95	0.88
1-1/4" x 1-1/4" x 1-1/4"	3.19	2.21	1.97	7.56	1.19	1.03
1-1/4" x 1-1/4" x 1-1/2"	3.19	2.20	1.97	7.55	1.19	0.99
1-1/2" x 1-1/2" x 1/2"	3.70	2.13	0.75	7.37	0.90	1.31
1-1/2" x 1-1/2" x 3/4"	3.70	2.25	0.95	7.60	0.95	1.35
1-1/2" x 1-1/2" x 1-1/2"	3.70	2.64	2.36	8.23	1.19	1.46
1-1/2" x 1-1/2" x 2"	3.70	2.80	2.36	8.87	1.36	1.57
2" x 2" x 2"	4.33	3.03	2.88	9.46	1.36	2.32

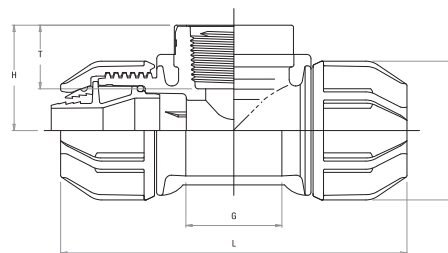

TEES (POL X POL X MI NPT)

Size	Dimensions inches						lb.
	S	D	H	G	L	T	Wt
3/4" x 3/4" x 1/2" *	0.43	2.17	2.09	1.38	4.81	0.78	0.36
3/4" x 3/4" x 3/4" *	0.43	2.17	2.09	1.38	4.81	0.83	0.38


* NPT compatible, however marked as BSP

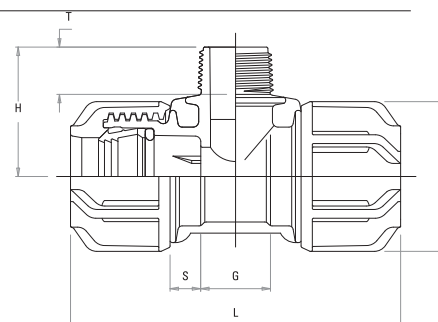

ID Series fittings for IPS Inside Dimensioned (SIDR) PE Pipe (suits PE to ASTM D2239)


ELBOWS (POL X POL)

Size	Dimensions inches		lb.
	D	L	Wt
1/2" x 1/2"	1.85	2.40	0.21
3/4" x 1/2"	2.17	2.68	0.28
3/4" x 3/4"	2.17	2.76	0.34
1" x 1"	2.64	3.31	0.57
1-1/4" x 1-1/4"	3.19	3.78	0.91
1-1/2" x 1-1/2"	3.70	4.22	1.39
2" x 2"	4.33	4.93	2.23

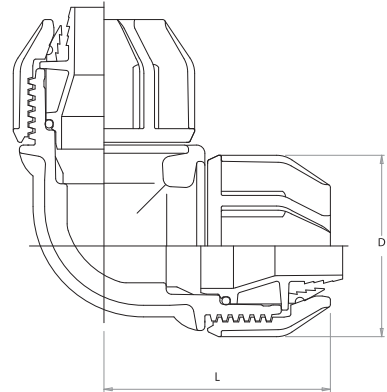


ELBOWS (POL X FI NPT)

Size	Dimensions inches				lb.
	D	H	L	T	Wt
1/2" x 1/2"	1.85	2.88	2.40	0.90	0.11
1/2" x 3/4"	1.85	2.88	2.40	0.95	0.14
3/4" x 1/2" *	2.17	3.47	2.76	0.90	0.19
3/4" x 3/4"	2.17	3.47	2.76	0.95	0.20
3/4" x 1"	2.17	3.47	2.76	1.08	0.22
1" x 1"	2.64	4.14	3.31	1.08	0.34
1" x 1-1/4"	2.64	4.14	3.35	1.19	0.37
1-1/4" x 1-1/4"	3.19	4.96	3.78	1.19	0.56
1-1/4" x 1-1/2"	3.19	4.96	3.78	1.19	0.58
1-1/2" x 1-1/2"	3.70	5.59	4.22	1.19	0.82
1-1/2" x 2"	3.70	5.59	4.41	1.36	0.93
2" x 2"	4.33	6.30	4.73	1.36	1.35

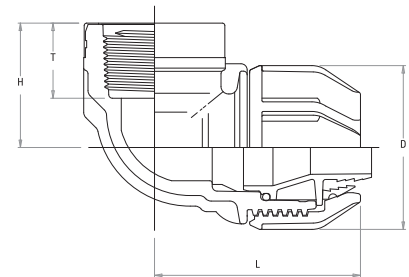

ELBOWS (POL X MI NPT)

Size	Dimensions inches					lb.
	S	D	H	L	T	Wt
1/2" x 1/2" *	0.47	1.85	1.69	2.40	0.78	0.15
3/4" x 3/4" *	0.51	2.17	1.93	2.72	0.83	0.18

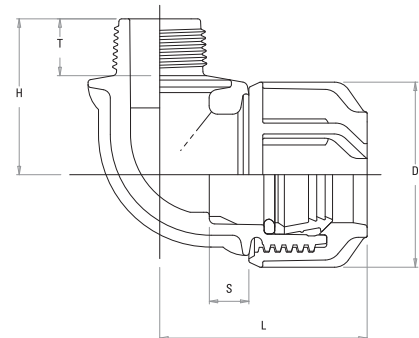


* NPT compatible, however marked as BSP

ID Series fittings for IPS Inside Dimensioned (SIDR) PE Pipe

(suits PE to ASTM D2239)


END CAPS

Size	Dimensions inches		lb.
	D	L	Wt
1/2"	1.85	2.36	0.11
3/4"	2.17	2.80	0.17
1"	2.64	3.23	0.29
1-1/4"	3.19	3.82	0.48
1-1/2"	3.70	4.37	0.73
2"	4.33	5.16	1.16



BLANKING PLUGS (see also page 48)


Size	lb.
	Wt
1/2"	0.018
3/4"	0.026
1"	0.043
1-1/4"	0.062
1-1/2"	0.094
2"	0.143



TANK CONNECTORS (POL X MI)

(Includes Seal, Washers and Nut)


Size	Dimensions inches			lb.
	S	D	L	Wt
3/4" x 3/4" NPT/BSP	0.51	2.17	4.29	0.09
1" x 1" BSP	0.55	2.64	4.61	0.15

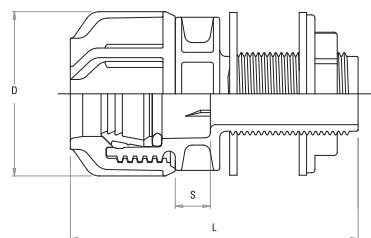

WALL PLATE ELBOWS (POL X FI NPT)

(Includes three holes for mounting to wall)


Size	Dimensions inches		lb.
	D	L	Wt
1/2" x 1/2"	1.85	2.20	0.13
3/4" x 3/4"	2.17	2.56	0.21

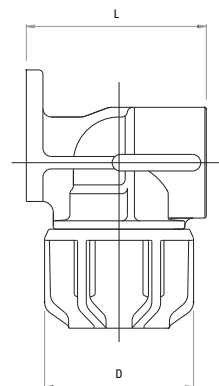

IPS OD fittings for IPS OD (DR) PE Pipe (suits PE to ASTM D3035 or ASTM D2447)


COUPLERS (POL X POL) (Also available as Slip Couplers)

Size	Dimensions inches			lb.
	S	D	L	Wt
1/2" x 1/2"	0.39	1.85	3.55	0.18
3/4" x 3/4"	0.43	2.17	3.82	0.26
1" x 1"	0.55	2.64	4.65	0.44
1-1/4" x 1-1/4"	0.71	3.19	5.36	0.72
1-1/2" x 1-1/2"	0.95	3.70	6.34	1.14
2" x 2"	1.14	4.33	7.17	1.68

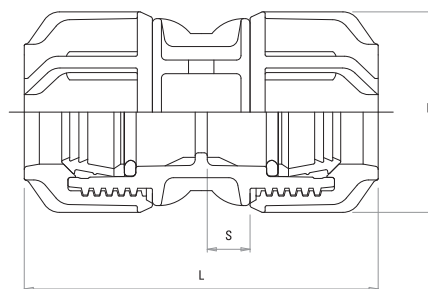


REDUCING COUPLERS (POL X POL)

Size	Dimensions inches					lb.
	S	S1	D	D1	L	Wt
3/4" x 1/2"	0.43	0.39	2.17	1.85	3.70	0.22
1" x 1/2"	0.55	0.39	2.64	1.85	4.33	0.31
1" x 3/4"	0.55	0.43	2.64	2.17	4.26	0.36
1-1/4" x 3/4"	0.71	0.43	3.19	2.17	4.93	0.53
1-1/4" x 1"	0.71	0.55	3.19	2.64	5.04	0.62
1-1/2" x 3/4"	0.95	0.43	3.70	2.17	5.56	0.75
1-1/2" x 1"	0.95	0.55	3.70	2.64	5.91	0.84
1-1/2" x 1-1/4"	0.95	0.71	3.70	3.19	5.87	0.97
2" x 1"	1.14	0.55	4.33	2.64	6.58	1.12
2" x 1-1/4"	1.14	0.71	4.33	3.19	6.82	1.26
2" x 1-1/2"	1.14	0.95	4.33	3.70	6.86	1.46

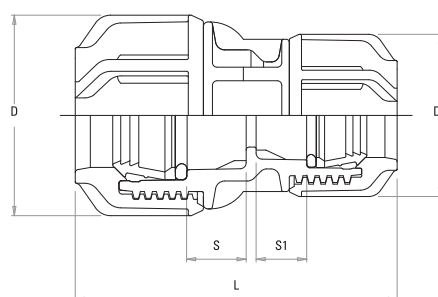

MALE ADAPTERS (POL X MI NPT)


Size	Dimensions inches				lb.
	S	D	L	T	Wt
1/2" x 1/2"	0.67	1.85	2.88	0.78	0.10
1/2" x 3/4"	0.67	1.85	2.96	0.83	0.11
3/4" x 1/2"	0.75	2.17	3.19	0.78	0.16
3/4" x 3/4"	0.75	2.17	3.23	0.83	0.16
3/4" x 1"	0.75	2.17	3.35	0.96	0.17
1" x 3/4"	0.87	2.64	3.59	0.83	0.26
1" x 1"	0.87	2.64	3.70	0.96	0.27
1" x 1-1/4"	0.87	2.64	3.82	1.05	0.28
1-1/4" x 1"	1.10	3.19	4.18	0.96	0.43
1-1/4" x 1-1/4"	1.10	3.19	4.29	1.05	0.44
1-1/4" x 1-1/2"	1.10	3.19	4.29	1.05	0.44
1-1/2" x 1-1/2"	1.18	3.70	4.65	1.05	0.66
1-1/2" x 2"	1.18	3.70	4.69	1.22	0.67
2" x 2"	1.42	4.33	5.00	1.22	0.90

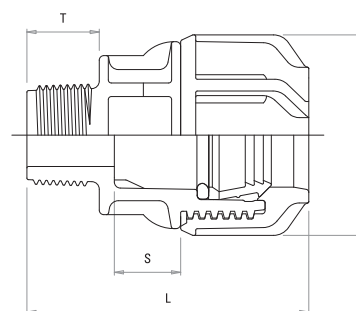

IPS OD fittings for IPS OD (DR) PE Pipe (suits PE to ASTM D3035 or ASTM D2447)


FEMALE ADAPTER (POL X FI NPT)

Size	Dimensions inches				lb.
	S	D	L	T	Wt
1/2" x 1/2"	0.39	1.85	2.71	0.90	0.12
1/2" x 3/4"	0.39	1.85	2.76	0.95	0.12
3/4" x 1/2" *	0.43	2.17	2.91	0.90	0.18
3/4" x 3/4"	0.43	2.17	2.80	0.95	0.17
3/4" x 1"	0.43	2.17	3.03	1.08	0.18
1" x 3/4" *	0.43	2.17	3.50	0.95	0.26
1" x 1"	0.55	2.64	3.47	1.08	0.28
1" x 1-1/4"	0.55	2.64	3.59	1.19	0.29
1-1/4" x 1-1/4"	0.71	3.19	3.98	1.19	0.45
1-1/4" x 1-1/2"	0.71	3.19	3.98	1.19	0.46
1-1/2" x 1-1/2"	0.95	3.70	4.18	1.19	0.63
1-1/2" x 2"	0.95	3.70	4.22	1.36	0.73
2" x 2"	1.14	4.33	4.77	1.36	0.97

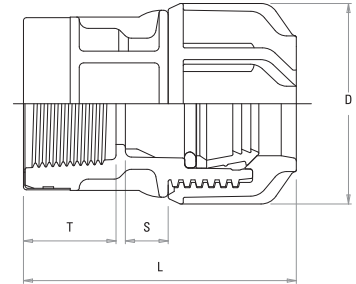


TEES (POL X POL X POL) (Also available as Slip Tees)

Size	Dimensions inches					lb.
	S	D	H	G	L	Wt
1/2" x 1/2" x 1/2"	0.39	1.85	2.32	1.22	4.61	0.37
3/4" x 3/4" x 3/4"	0.43	2.17	2.64	1.58	5.28	0.43
1" x 1" x 1"	0.55	2.64	3.15	1.89	6.30	0.72
1-1/4" x 1-1/4" x 1-1/4"	0.71	3.19	3.74	1.97	7.17	1.17
1-1/2" x 1-1/2" x 1-1/2"	0.95	3.70	3.98	2.36	7.96	1.76
2" x 2" x 2"	1.14	4.33	4.65	2.88	9.30	2.69

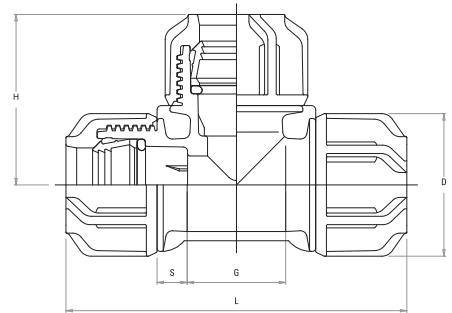

REDUCING TEES (POL X POL X POL)

Size	Dimensions inches							lb.
	S	S1	D	D1	H	G	L	Wt
3/4" x 3/4" x 1/2"	0.43	0.39	2.17	1.85	2.52	1.58	5.28	0.53
3/4" x 3/4" x 1"	0.43	0.55	2.17	2.64	2.72	1.58	5.28	0.52
1" x 1" x 3/4"	0.55	0.43	2.64	2.17	2.92	3.47	6.30	0.62
1-1/4" x 1-1/4" x 3/4"	0.71	0.43	3.19	2.17	2.92	1.34	6.54	0.88
1-1/4" x 1-1/4" x 1"	0.71	0.55	3.19	2.64	3.31	1.54	6.74	0.96
1-1/2" x 1-1/2" x 3/4"	0.79	0.43	3.70	2.17	3.19	1.38	7.17	1.30
1-1/2" x 1-1/2" x 1"	0.79	0.55	3.70	2.64	3.55	1.58	7.37	1.40
1-1/2" x 1-1/2" x 1-1/4"	0.95	0.83	3.70	3.19	3.86	2.36	7.76	1.54
2" x 2" x 3/4"	0.95	0.43	4.33	2.17	3.47	1.14	7.72	1.80
2" x 2" x 1"	0.95	0.55	4.33	2.64	3.86	1.34	7.92	1.92
2" x 2" x 1-1/2"	1.14	0.95	4.33	3.70	4.37	2.88	8.67	2.16

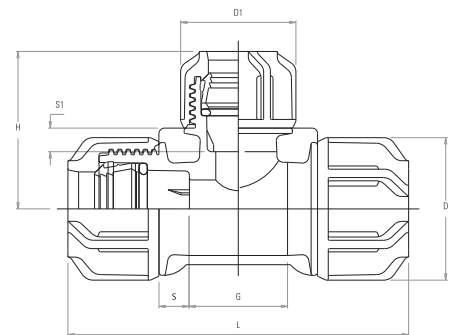


* NPT compatible, however marked as BSP

IPS OD fittings for IPS OD (DR) PE Pipe (suits PE to ASTM D3035 or ASTM D2447)


TEES (POL X POL X FI NPT)

Size	Dimensions inches						lb.
	S	D	H	G	L	T	Wt
1/2" x 1/2" x 1/2"	0.39	1.85	1.50	1.22	4.61	0.90	0.20
1/2" x 1/2" x 3/4"	0.39	1.85	1.50	1.22	4.61	0.95	0.22
3/4" x 3/4" x 1/2"	0.43	2.17	1.58	1.58	5.28	0.90	0.32
3/4" x 3/4" x 3/4"	0.43	2.17	1.62	1.58	5.28	0.95	0.33
3/4" x 3/4" x 1"	0.43	2.17	1.73	1.58	5.28	1.08	0.35
1" x 1" x 1/2"	0.55	2.64	1.65	0.79	5.32	0.90	0.45
1" x 1" x 3/4"	0.55	2.64	1.73	1.89	6.30	0.95	0.53
1" x 1" x 1"	0.55	2.64	1.73	1.89	6.30	1.08	0.54
1" x 1" x 1-1/4"	0.55	2.64	1.97	1.89	6.30	1.19	0.57
1-1/4" x 1-1/4" x 1/2"	0.71	3.19	1.89	0.75	5.95	0.90	0.73
1-1/4" x 1-1/4" x 3/4"	0.71	3.19	1.97	0.95	6.15	0.95	0.76
1-1/4" x 1-1/4" x 1-1/4"	0.71	3.19	2.21	1.97	7.17	1.19	0.91
1-1/4" x 1-1/4" x 1-1/2"	0.71	3.19	2.20	1.97	7.17	1.19	0.91
1-1/2" x 1-1/2" x 1/2"	0.95	3.70	2.13	0.75	6.90	0.90	1.13
1-1/2" x 1-1/2" x 3/4"	0.95	3.70	2.25	0.95	7.13	0.95	1.17
1-1/2" x 1-1/2" x 1-1/2"	0.95	3.70	2.64	2.36	7.76	1.19	1.28
1-1/2" x 1-1/2" x 2"	0.95	3.70	2.80	2.36	8.39	1.36	1.39
2" x 2" x 2"	1.14	4.33	3.03	2.88	8.90	1.36	1.97

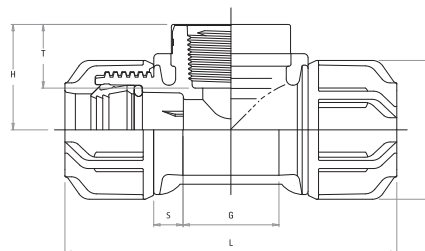


TEES (POL X POL X MI NPT)

Size	Dimensions inches						lb.
	S	D	H	G	L	T	Wt
3/4" x 3/4" x 1/2" *	0.43	2.17	2.09	1.38	4.49	0.78	0.31
3/4" x 3/4" x 3/4" *	0.43	2.17	2.09	1.38	4.49	0.83	0.33

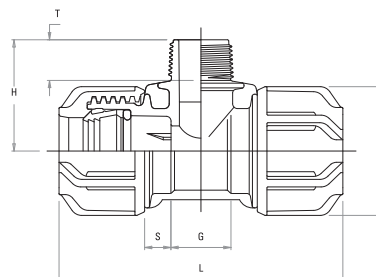

ELBOWS (POL X POL)

Size	Dimensions inches			lb.
	S	D	L	Wt
1/2" x 1/2"	0.39	1.85	2.32	0.18
3/4" x 1/2"	0.43	2.17	2.56	0.24
3/4" x 3/4"	0.43	2.17	2.64	0.29
1" x 1"	0.55	2.64	3.15	0.49
1-1/4" x 1-1/4"	0.71	3.19	3.59	0.79
1-1/2" x 1-1/2"	0.95	3.70	3.98	1.21
2" x 2"	1.14	4.33	4.65	1.88

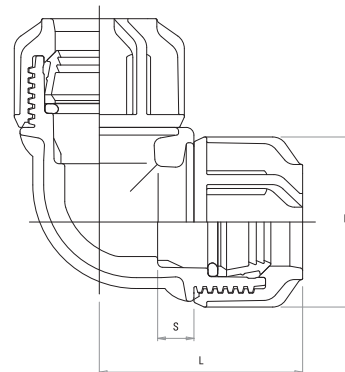


* NPT compatible, however marked as BSP

IPS OD fittings for IPS OD (DR) PE Pipe (suits PE to ASTM D3035 or ASTM D2447)


ELBOWS (POL X FI NPT)

Size	Dimensions inches					lb.
	S	D	H	L	T	Wt
1/2" x 1/2"	0.39	1.85	2.88	2.32	0.90	0.11
1/2" x 3/4"	0.39	1.85	2.88	2.32	0.95	0.12
3/4" x 1/2" *	0.43	2.17	3.47	2.64	0.90	0.17
3/4" x 3/4"	0.43	2.17	3.47	2.64	0.95	0.18
3/4" x 1"	0.43	2.17	3.47	2.64	1.08	0.20
1" x 1"	0.55	2.64	4.14	3.15	1.08	0.30
1" x 1-1/4"	0.55	2.64	4.14	3.19	1.19	0.33
1-1/4" x 1-1/4"	0.71	3.19	4.96	3.59	1.19	0.50
1-1/4" x 1-1/2"	0.71	3.19	4.96	3.59	1.19	0.52
1-1/2" x 1-1/2"	0.95	3.70	5.59	3.98	1.19	0.73
1-1/2" x 2"	0.95	3.70	5.59	4.18	1.36	0.84
2" x 2"	1.14	4.33	6.30	4.45	1.36	1.17

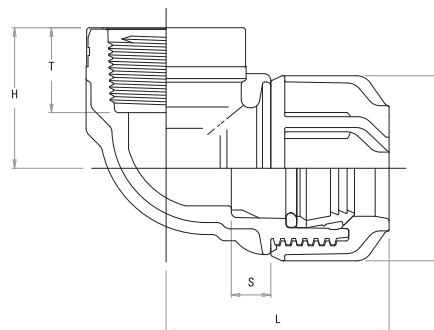


ELBOWS (POL X MI NPT)

Size	Dimensions inches					lb.
	S	D	H	L	T	Wt
1/2 x 1/2" *	0.47	1.85	1.69	2.24	0.78	0.13
3/4" x 3/4" *	0.51	2.17	1.93	2.56	0.83	0.15

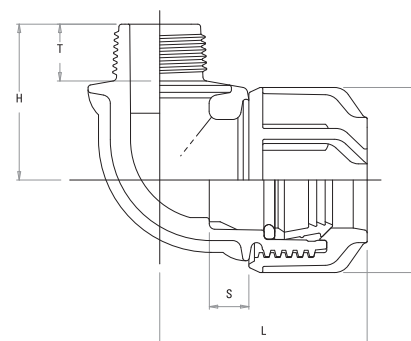

END CAPS

Size	Dimensions inches			lb.
	S	D	L	Wt
1/2"	0.71	1.85	2.36	0.11
3/4"	0.91	2.17	2.68	0.15
1"	0.95	2.64	3.07	0.25
1-1/4"	1.22	3.19	3.62	0.42
1-1/2"	1.30	3.70	4.14	0.64
2"	1.62	4.33	4.89	0.99




* NPT compatible, however marked as BSP

IPS OD fittings for IPS OD (DR) PE Pipe (suits PE to ASTM D3035 or ASTM D2447)


BLANKING PLUGS (See also page 48)

Size	lb.
	Wt
1/2"	0.018
3/4"	0.026
1"	0.043
1-1/4"	0.062
1-1/2"	0.094
2"	0.143




TANK CONNECTORS (POL X MI) (Includes Seal Washers and Nut)

Size	Dimensions inches			lb.
	S	D	L	Wt
3/4" x 3/4" NPT/BSP	0.51	2.17	4.29	0.09
1" x 1" BSP	0.55	2.64	4.61	0.15

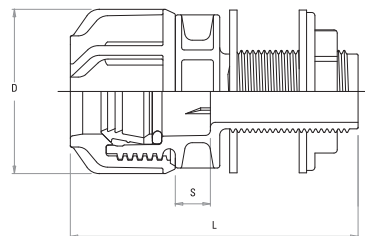

WALL PLATE ELBOWS (POL X FI NPT) (Includes three holes for mounting to wall)

Size	Dimensions inches		lb.
	D	L	Wt
1/2" x 1/2"	1.85	2.20	0.13
3/4" x 3/4"	2.17	2.56	0.21

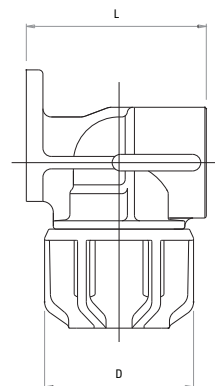


IPS OD**Dimensions - inches and pounds****Coupling w/Stop**


Part Number	Size	L	D	S	Wt.
77-30888	2"	9.17	4.44	1.14	1.96
75-3081212	3"	13.78	6.18		4.54

Repair Coupler


Part Number	Size	L	D	S	Wt.
77-30988	2"	9.17	4.44	1.14	1.96
75-3091212	3"	13.78	6.18		4.54

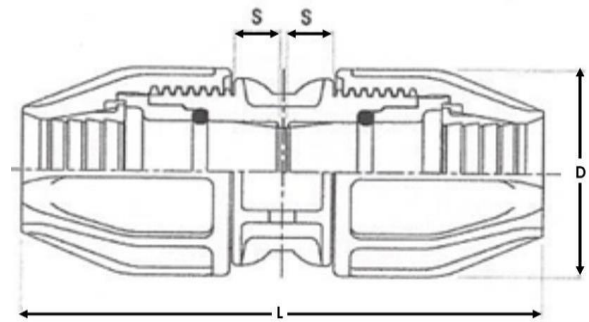**Tee**

Part Number	Size	S	D	H	G	L	Wt.
77-31288	2"	0.94	4.44	7.82	2.72	11.1	3.33
75-312121212	3"			11.99		17.76	8.00

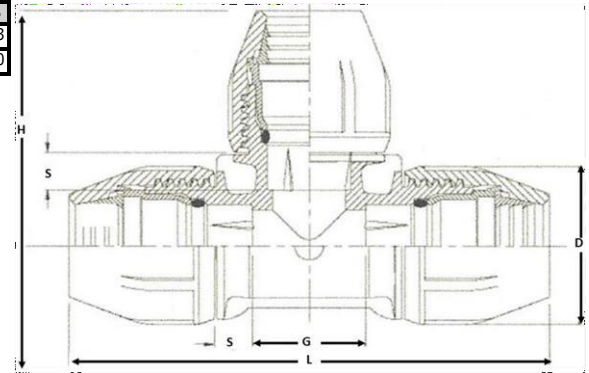**Elbow**

Part Number	Size	L	D	S	Wt.
77-31888	2"	7.82	7.82	0.94	0.94
75-3181212	3"	12.26	12.26		5.38

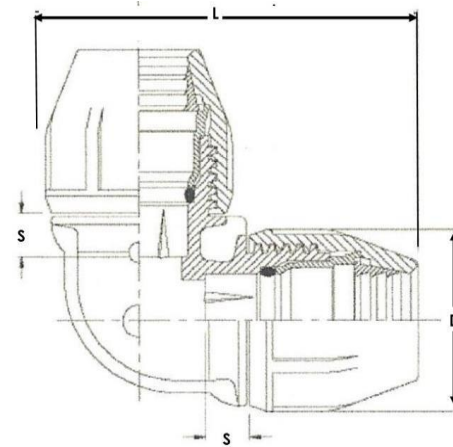**IPS OD****Dimensions - inches and pounds**

		Length	Height	Weight
Male Adaptor				
77-33088	2" x 2" MI NPT	6.73	4.44	1.16
Female Adaptor				
77-33288	2" x 2" FI NPT	6.34	4.44	1.21
ACME Female Tee				
77-353886	2" x 1-1/2" ACME	12.6	5.26	2.75
ACME Female Slip Tee				
77-353886	2" x 1-1/2" ACME	12.6	5.26	2.75
Female Elbow				
77-31888	2" x 2" FI NPT	7.68	5.26	1.5
ACME Female Elbow				
77-32386	2" x 1-1/2" ACME	7.68	5.26	1.6
Female Tee				
77-351888	2" x 2" FI NPT	12.6	5.26	2.55