

2" STANDARD PORT VALVE, SWIVEL x GASKET Part# 843106SQ

316 STAINLESS STEEL

INTENDED USE

This valve is used with Harco Swivel Tees and Swivel Saddles on PVC or PE mainlines to provide for isolation of 2" lateral lines and submains of either PVC or PE pipe.

CONFIGURATION AND SIZES


Angle globe valve with Harco Male Swivel inlet and restrained gasketed outlet in size 2". Equipped with a cross handle and stainless steel grip ring.

PRESSURE RATING

200 psi.

INSTALLATION

1. Lubricate the gasket in the mating female swivel joint and the inlet spigot of the valve with PVC pipe lubricant.
2. Rotate male thread "in" until joint "bottoms out".
3. Rotate male thread "out" to proper horizontal orientation for valve up to and no more than 360°.
4. Install beveled pipe in outlet bell after lubricating outlet gasket and pipe end. Remove wood wedge and tighten restraint bolt to 35 ft-lbs. Use internal stiffener in PE pipe.

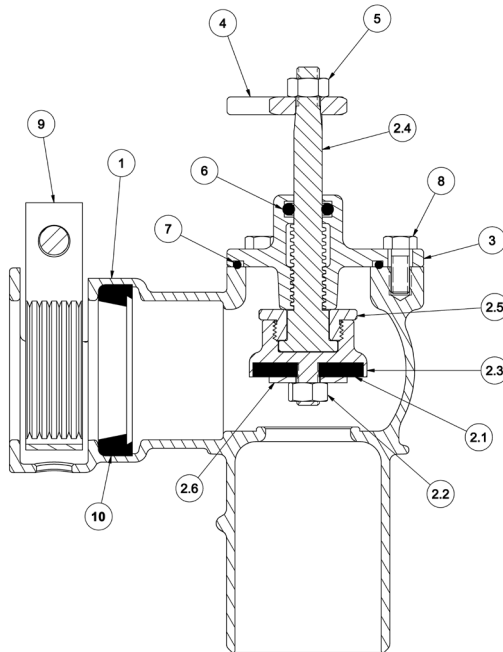

2" RESTRAINED
GASKETED BELL OUTLET


MALE SWIVEL INLET

FLOW RATE (GPM)	30	40	50	60	70
PRESSURE DROP (PSI)	0.1	0.2	0.6	1.1	1.9


ITEM	COMPONENT	MATERIAL	STANDARDS
1	BODY	GALL RESISTANT SS	UNS 21800
2.1	SEAL	EPDM †	ASTM D2000
2.2	NUT	316 SS	ASTM A193 GRADE B8M
2.3	SEAL CUP	316 SS	ASTM A276 GRADE 316
2.4	STEM	316 SS	ASTM A276 GRADE 316
2.5	RETAINER BUSHING	316 SS	ASTM A276 GRADE 316
2.6	RETAINING WASHER	316 SS	ASTM A276 GRADE 316
3	BONNET	GALL RESISTANT SS	UNS 21800
4	HANDLE	316 SS	ASTM A276 GRADE 316
5	NUT	316 SS	ASTM A193 GRADE B8M
6	STEM O-RING	EDPM † ‡	ASTM D2000
7	BONNET O-RING	EDPM †	ASTM D2000
8	BOLTS	316 SS	ASTM A193 GRADE B8M
9	GRIP RING	GALL RESISTANT SS	UNS 21800
10	GASKET	SBR	ASTM F477

† Peroxide Cured

‡ Permanently Lubricated

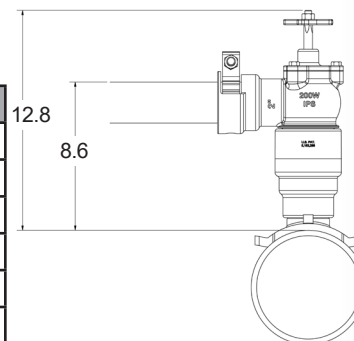

FOR PE

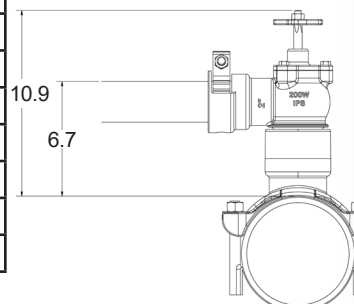

FOR PVC



Harco Fittings LLC
P.O. Box 10335 • Lynchburg, VA 24506-0335
Phone: (434) 845-7094 Fax: (434) 845-8562

sales@harcofittings.com
www.harcofittings.com

843106SQ - 20220427