

2" STANDARD PORT VALVE, GASKET x GASKET

316 STAINLESS STEEL

INTENDED USE

This valve is used to provide isolation of 2" lateral lines and submains of either PVC or PE pipe. It is especially useful as a replacement valve and for deep main lines.

CONFIGURATION AND SIZES


Angle globe valve with restrained gasketed inlet and outlet in size 2". Equipped with cross handle and ductile iron grip rings.

PRESSURE RATING

200 psi.

INSTALLATION

1. Install beveled spigots in valve bells after lubricating gaskets and beveled spigot ends with PVC pipe lubricant. Use internal stiffener in PE pipe.
2. Remove wood wedge and tighten restraint bolt to 35 ft-lbs after valve is aligned required.

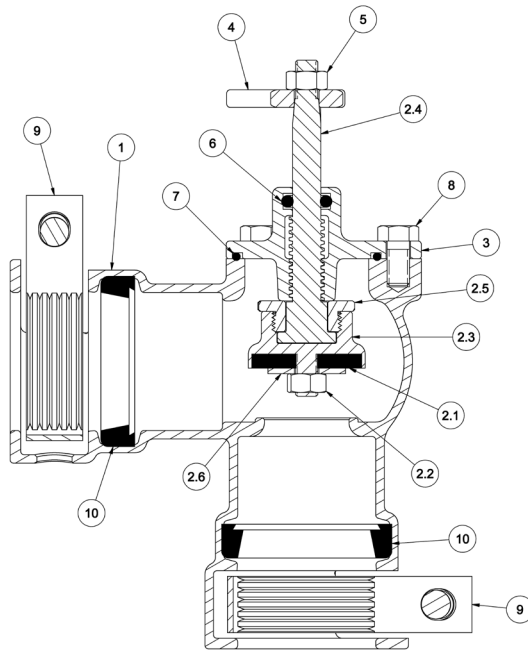


FLOW RATE (GPM)	30	40	50	60	70
PRESSURE DROP (PSI)	0.1	0.2	0.6	1.1	1.9

ITEM	COMPONENT	MATERIAL	STANDARDS
1	BODY	GALL RESISTANT SS	UNS 21800
2.1	SEAL	EPDM †	ASTM D2000
2.2	NUT	316 SS	ASTM A193 GRADE B8M
2.3	SEAL CUP	316 SS	ASTM A276 GRADE 316
2.4	STEM	316 SS	ASTM A276 GRADE 316
2.5	RETAINER BUSHING	316 SS	ASTM A276 GRADE 316
2.6	RETAINING WASHER	316 SS	ASTM A276 GRADE 316
3	BONNET	GALL RESISTANT SS	UNS 21800
4	HANDLE	316 SS	ASTM A276 GRADE 316
5	NUT	316 SS	ASTM A193 GRADE B8M
6	STEM O-RING	EDPM † ‡	ASTM D2000
7	BONNET O-RING	EDPM †	ASTM D2000
8	BOLTS	316 SS	ASTM A193 GRADE B8M
9	GRIP RING	DUCTILE IRON	UNS 21800
10	GASKET	SBR	ASTM F477

† Peroxide Cured

‡ Permanently Lubricated

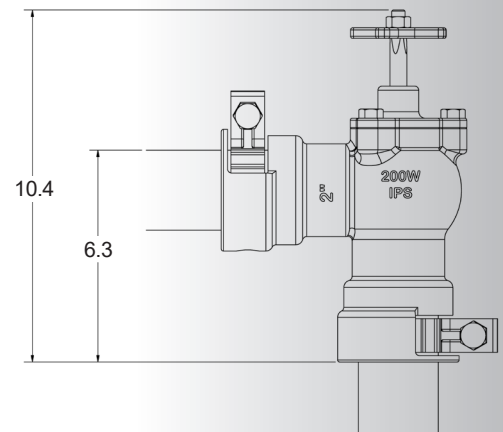

Harco Fittings LLC
P.O. Box 10335 • Lynchburg, VA 24506-0335
Phone: (434) 845-7094 Fax: (434) 845-8562

sales@harcofittings.com
www.harcofittings.com

SPVGG - 20220427