

PI 5 FFC / M.2 M-KEY — DESIGN REVIEW DRAFT

Separate reference board. Gen2 x1 target. Not fabricated or electrically validated.


External 5V feeds SSD only. FFC 5V is detection-only; DO NOT connect supplies.


HIGH-SPEED SIGNALS / HOST-SIDE PIN MAP




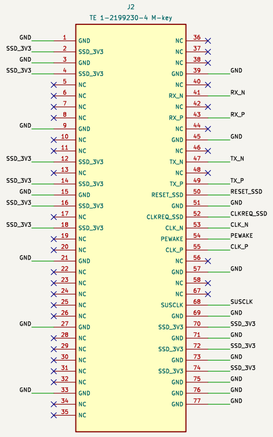

POWER / POWER-DOWN SIDEBAND ISOLATION






















PASSIVES — NET LABELS ARE ELECTRICAL CONNECTIONS

















































Optional SUSCLK input: oscillator selection and SSD requirements remain open.

Routing is supplied separately. Component/mechanical review pending. DRAFT ONLY.

Qizheng Sui — simulation-independent reference

Sheet: /
File: pi5_m2_reference.kicad_sch

Title: Pi 5 to M.2 M-key / DESIGN REVIEW DRAFT

Size: A2	Date: 2026-10-12	**Rev: 0.3.1**
KiCad E.D.A. 9.0.8		Id: 1/1