APP CRS	Rwy ldg	9501
274°	TDZE	1026
	Apt Elev	1026

RNAV (RNP) Z RWY 27
KANSAS CITY INTL (MCI)

For uncompensated Baro-VNAV systems, procedure NA below -20°C (-4°F) or above 54°C (130°F). For inop MALSR, increase RNP 0.15 all Cats visibility to 1¼ and RNP 0.30 all Cats visibility to 1⅝ . GPS required.

MALSR

MISSED APPROACH: Climb to 4000 on track 274° to WOOKE and on track 325° to BOWLR and hold.

D-ATIS	KANSAS CITY APP CON	INTERNATIONAL TOWER	GND CON	CLNC DEL	CPDLC
128.375	120.95 318.1	128.2 254.25	121.8	135.7	

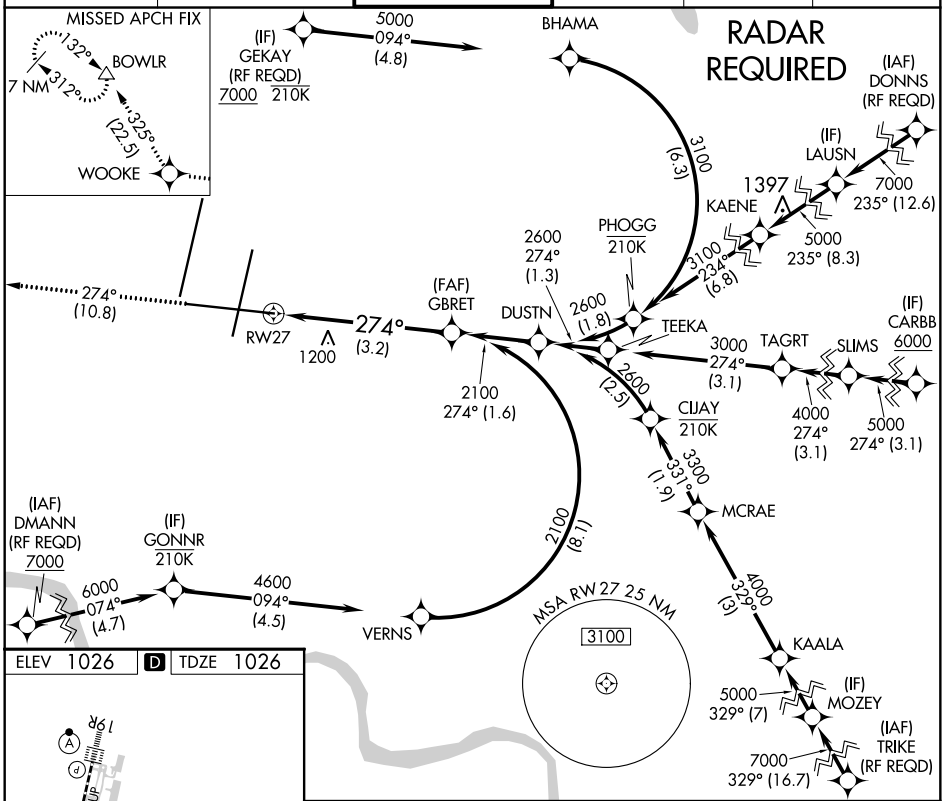

ELEV 1026	D	TDZE 1026

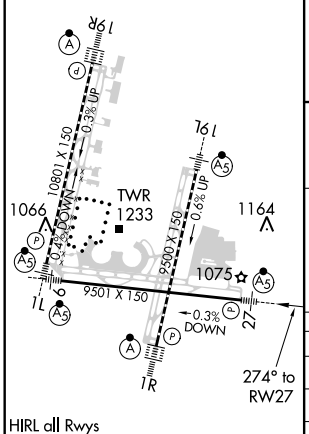

HIRL all Rwys
TDZ/CL Rwys 1L, 1R, 19R and 19L

4000	tr 274°	WOOKE	tr 325°	BOWLR

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 72).

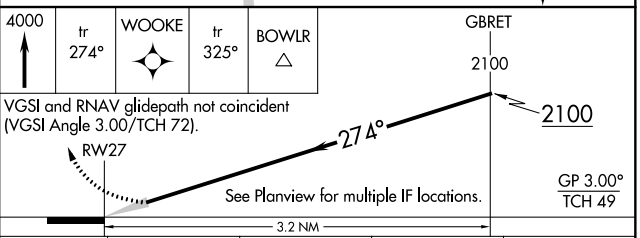

CATEGORY	A	B	C	D
RNP 0.15 DA	1410/45 384 (400-⅞)			
RNP 0.30 DA	1511/60 485 (500-1¼)			

AUTHORIZATION REQUIRED

NC-3, 27 JAN 2022 to 24 FEB 2022

NC-3, 27 JAN 2022 to 24 FEB 2022