


WAAS CH 86809 W27A	APP CRS 274°	Rwy Idg 12001 TDZE 875 Apt Elev 896
--	------------------------	--

RNAV (GPS) Y RWY 27

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP APCH - GPS. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C or above 54° C. **RVR 1800 authorized with use of FD or AP or HUD to DA.			MALSR 	MISSED APPROACH: Climb to 3000 direct SEMSE then via 218° track to AVIEW and hold.	
D-ATIS ARR 134.375 DEP 135.3	CINCINNATI APP CON 119.7 363.15 (090°-269°) 123.875 363.15 (270°-089°)		CINCINNATI TOWER 118.975 360.85 (RWY 18L/36R) 118.3 (RWYS 18C/36C, 09/27) 133.325 (RWY 18R/36L)		GND CON 121.7 CLNC DEL 127.175 CPDLC

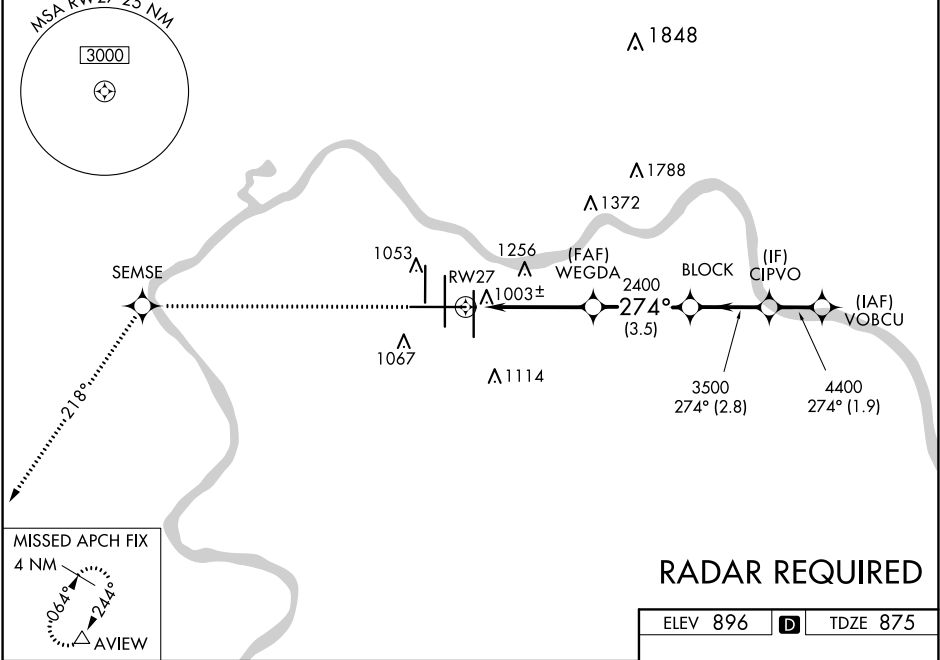

3000	SEMSE	tr 218°	AVIEW
*LNAV only.			
		WEGDA	VOBCU
		2400	5000
		3500	4400
		2400	GP 3.00° TCH 55
		1.5	3 NM
		3.5 NM	2.8 NM
		1.9 NM	
CATEGORY	A	B	C
LPV DA	**1075/24		200 (200-½)
LNAV/VNAV DA	1349/60		474 (500-1¼)
LNAV MDA	1420/24	545 (600-½)	1420/60 545 (600-1¼)
CIRCLING	1460-1	564 (600-1)	1560-1¾ 664 (700-1¾)
			1560-2 664 (700-2)

