

WAAS CH 97520 W34A	APP CRS 338°	Rwy Idg 9003 TDZE 161 Apt Elev 168
--	------------------------	---

RNAV (GPS) Z RWY 34
RICHMOND INTL (RIC)

RNP APCH.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1¼ SM and LNAV Cats C and D visibility to RVR 5500.

ALSF-2

MISSED APPROACH:
Climb to 2500 direct
IFPIG and hold.

ATIS
119.15 263.025




POTOMAC APP CON		
126.4	282.375	(001°-185°)
126.75	307.2	(186°-360°)

RICHMOND TOWER
121.1 257.8


GND CON
121.9 348.6

CLNC DEL
127.55 348.6

MISSED APCH FIX

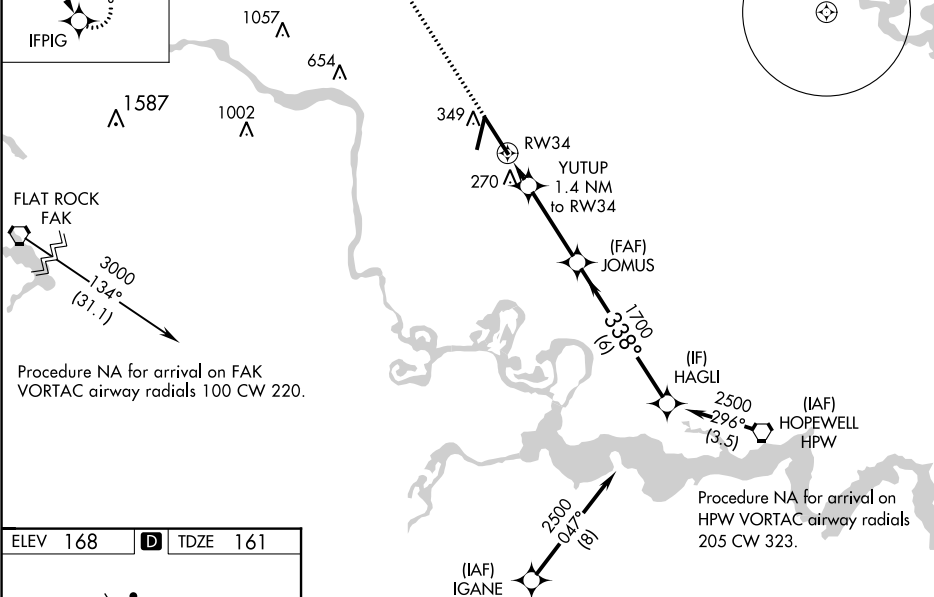

ELEV 168	D	TDZE 161
----------	----------	----------

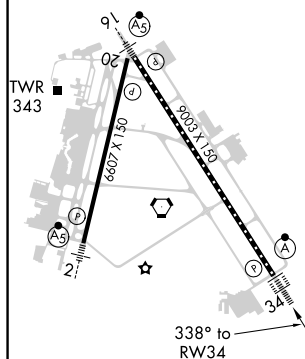

TDZ/CL Rwy 34
HIRL Rwys 2-20 and 16-34
REIL Rwy 20

