
WAAS Rwy Idg 10301 APP CRS CH 63019 TDŹE 1330 196° 1333 Apt Elev W19A

RNAV (GPS) Y RWY 19R WICHITA DWIGHT D EISÉNHOWER NTL (ICT)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For MALSR MISSED APPROACH: Climb to (A_5) inoperative MALSR, increase LNAV Cat C/D visibility to RVR 6000. 3600 direct CUTIK and hold. # RVR 1800 authorized with use of FD or AP or HUD to DA.

ATIS WICHITA APP CON WICHITA TOWER **GND CON** CLNC DEL 118.2 257.8 121.9 348.6 125.7 125,15 126.7 353.5

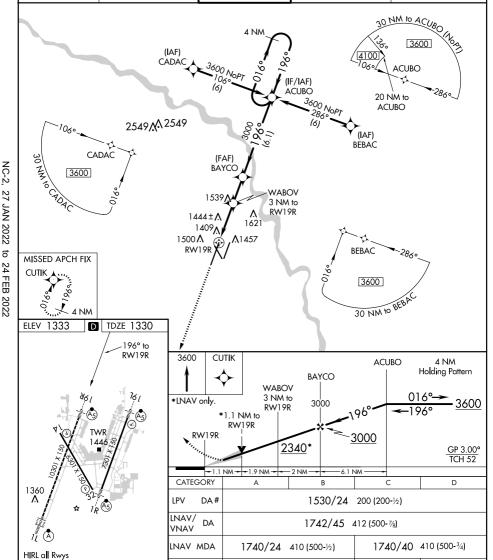

C CIRCLING

TDZ/CL Rwy 1L WICHITA, KANSAS Amdt 1C 05NOV20

REIL Rwys 14 and 32

647 (700-13/4) WICHITA DWIGHT D EISENHOWER NTL (ICT)

1980-13/4

1980-2

647 (700-2)

1800-1 467 (500-1)