
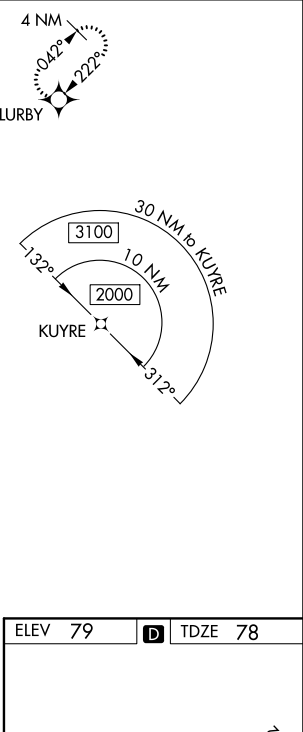



WAAS CH 56410 W04A	APP CRS 042°	Rwy Idg TDZE Apt Elev	7504 78 79
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 4
MONROE RGNL (MLU)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500. Circling ASR Rwy 14 NA at night. ** RVR 1800 authorized with use of FD or AP or HUD to DA.				MALSR A6	MISSED APPROACH: Climb to 3000 direct LURBY and hold.
ATIS 125.05	MONROE APP CON ★ 118.15 290.475	MONROE TOWER ★ 118.9 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.65	UNICOM 122.95

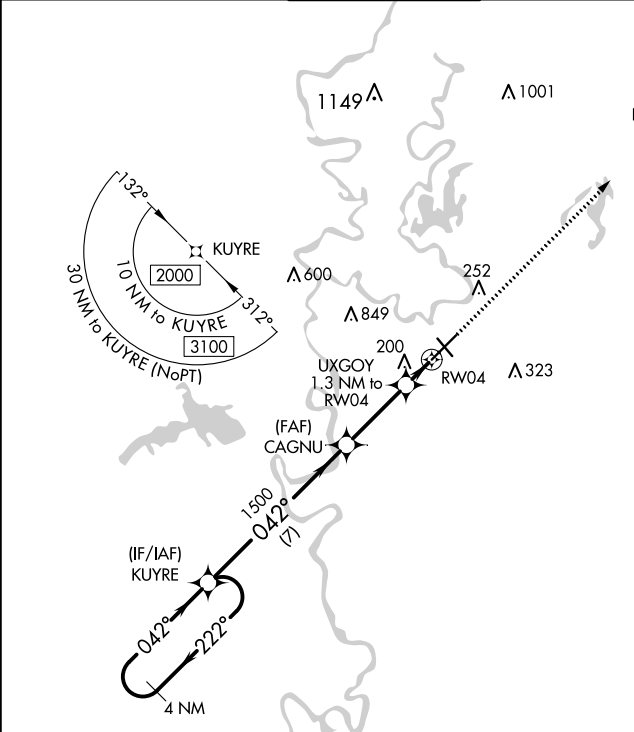

4 NM Holding Pattern KUYRE 2000 GP 3.00° TCH 50 CAGNU 1500 UXGOY 1.3 NM to RW04 RW04 *540 *LNAV only.			
CATEGORY	A	B	C
LPV DA **		278/24	200 (200-½)
LNAV/VNAV DA		383/24	305 (400-½)
LNAV MDA	460/24	382 (400-½)	460/35 382 (400-¾)
CIRCLING	580-1 501 (600-1)	740-1¾ 661 (700-1¾)	1160-3 1081 (1100-3)

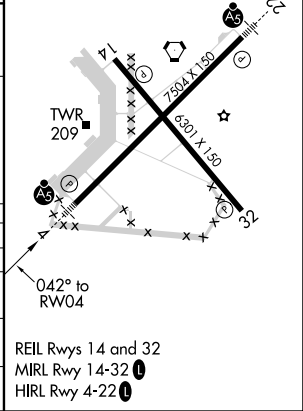

SC-4, 27 JAN 2022 to 24 FEB 2022

SC-4, 27 JAN 2022 to 24 FEB 2022