
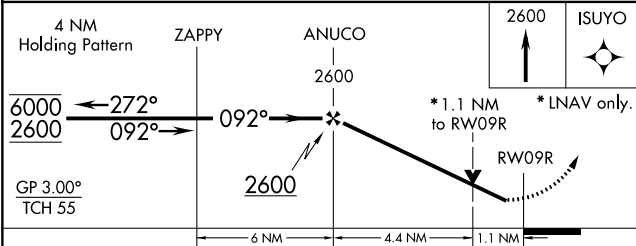


WAAS CH 60908 W09B	APP CRS 092°	Rwy Idg 8412 TDZE 790 Apt Elev 798
--	------------------------	---

RNAV (GPS) RWY 9R

SOUTH BEND INTL (SBN)

RNP APCH.			MALSF	MISSED APPROACH: Climb to 2600 direct ISUYO and hold.
Rwy 9R helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LPV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV Cat A/B visibility to RVR 5500 and Cat C/D to RVR 6000.				
ATIS 120.675	SOUTH BEND APP CON ★ 118.55 257.8	SOUTH BEND TOWER ★ 135.675 (CTAF) 0 257.8	GND CON 121.7	CLNC DEL 121.9

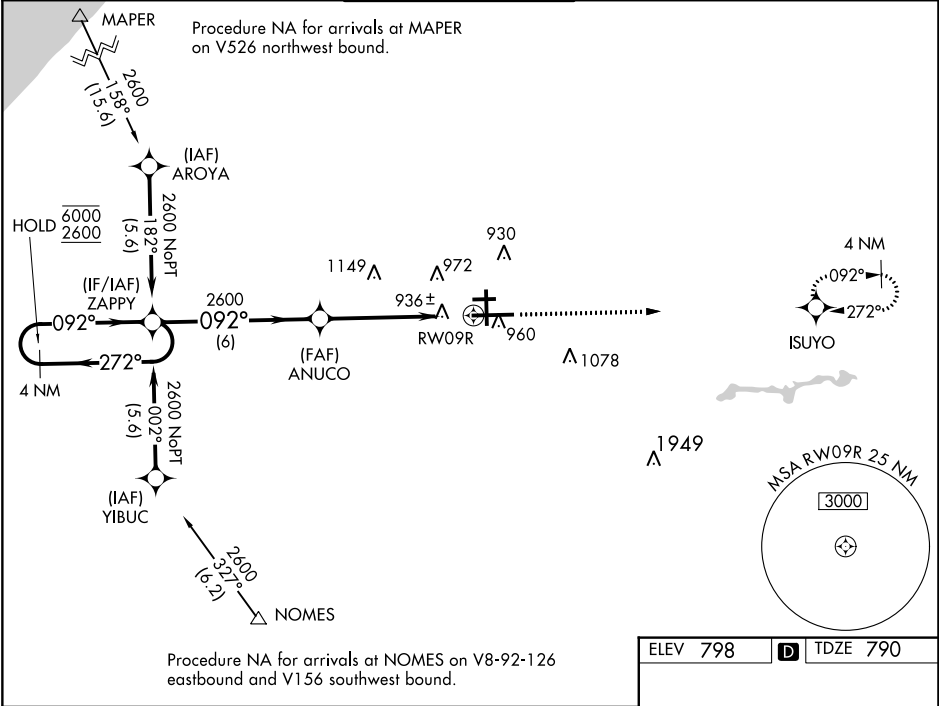

CATEGORY	A	B	C	D
LPV DA		990/40	200 (200-¾)	
LNAV/VNAV DA		1222/40	432 (500-¾)	
LNAV MDA		1200/40	410 (500-¾)	
CIRCLING	1280-1 482 (500-1)		1440-1¾ 642 (700-1¾)	1500-2¼ 702 (800-2¼)

