

HI-ILS or LOC RWY 19

JAL-436 [USAF] EGLIN AFB/DESTIN-FT WALTON BEACH(KVPS)

- * When ALS inop, increase CAT CDE RVR to 40 and vis to $\frac{3}{4}$ mile.
 ** When ALS inop, increase CAT CD RVR to 60 and vis to $1\frac{1}{8}$ miles,
 CAT E vis to $1\frac{1}{4}$ miles.




ALSF-1



MISSED APPROACH: Climb to 2200 on the DWG R-180 to TUFER/12 DME and hold.

Aircraft holding in excess of 230 KIAS
require RADAR monitoring.


Procedure not usable at times due to restricted area activity.

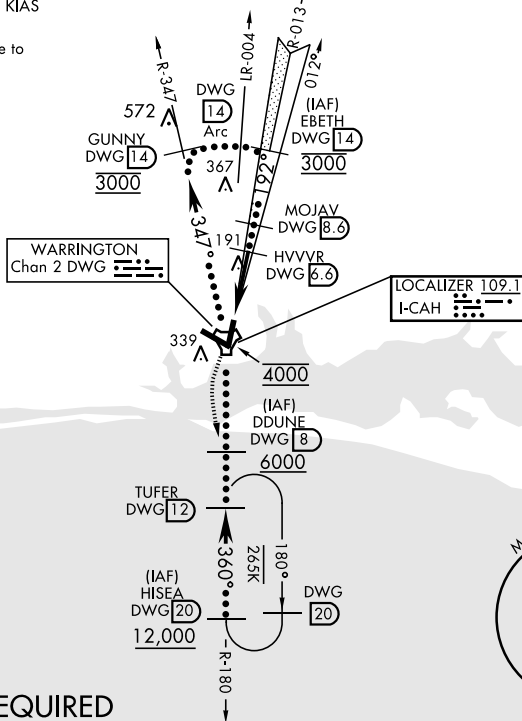

DME or RADAR REQUIRED

(For Localizer approach)

EMERG SAFE ALT 100 NM 3600

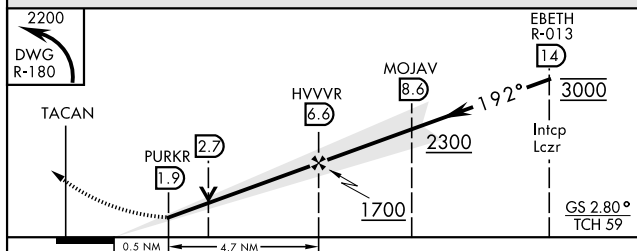

CATEGORY	C	D	E
S-ILS 19*	260/24	200	(200-½)
S-LOC 19**	480/40	420	(400-¾)
CIRCLING	760-2 676 (700-2)	760-2½ 676 (700-2½)	760-2½ 676 (700-2½)

[illegible]

HI-ILS or LOC RWY 19