


WAAS CH 99601 W22A	APP CRS 216°	Rwy Idg 12003 TDZE 637 Apt Elev 645
--	------------------------	--


RNAV (GPS) Z RWY 22L
DETROIT METRO WAYNE COUNTY (DTW)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C (14°F) or above 54°C (130°F). Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cat C/D visibility to 1½ SM. #RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR AS	MISSED APPROACH: Climb to 4000 direct HWLER and hold.
--	-------------	---

D-ATIS 133.675	DETROIT APP CON 124.05 284.0	METRO TOWER 128.125 317.725	GND CON 121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)	CLNC DEL 120.65	CPDLC
--------------------------	--	---------------------------------------	---	---------------------------	-------

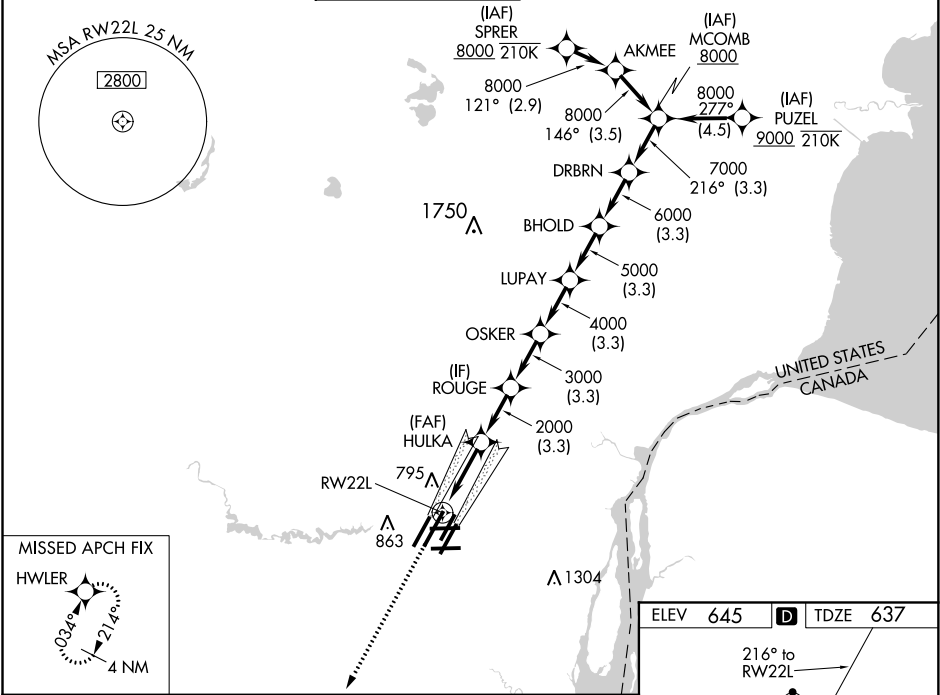

4000 ↑ HWLER	ELEV 645 D TDZE 637			
*LNAV only.	DRBRN MCOMB 8000			
	216° 7000			
	HULKA 2000			
	ROUGE 3000			
	OSKER 4000			
	LUPAY 5000			
	BHOLD 6000			
	GP 2.85° TCH 60			
	RW22L 2000			
	1.3 NM 3 NM 3.3 NM 3.3 NM 3.3 NM 3.3 NM 3.3 NM			
CATEGORY	A		B	
LPV DA #			837/24	
LNAV/VNAV DA			200 (200-½)	
LNAV MDA	1100/24 463 (500-½)		1100/50 463 (500-¾)	
CIRCLING	1180-1 535 (600-1)		1180-1½ 535 (600-½)	
			1240-2 595 (600-2)	

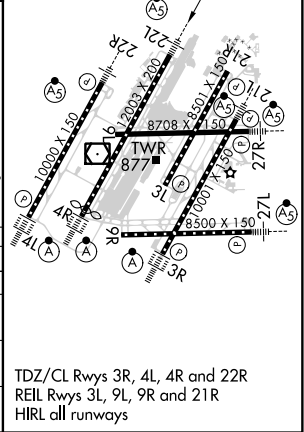

EC-1, 27 JAN 2022 to 24 FEB 2022

EC-1, 27 JAN 2022 to 24 FEB 2022